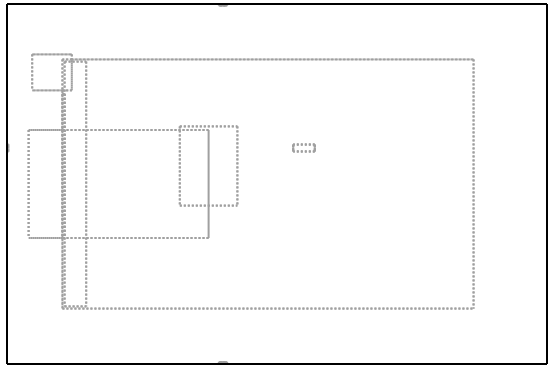

Graph revision AD - ga_side: Keys: dewax + fire furnace at 900 C (0.25 kW dewax heaters per the design row)
Graph revision AD - ga_side: Condensate pan under the shell racks routes reclaim to WAX_PATTERN N2
Graph revision AD - ga_side: General tolerance ISO 2768-m unless noted

Aqueous Solutions (owner) AQS-MFG-SHELL_BURNOUT-GA_SIDE
SHELL_BURNOUT fabrication drawing GA_SIDE (AQS-PLAN-006 M3;
Type: fabrication drawing (GA / nozzle orientation / part sheet) Rev 873eb50d Issued
Created: flow graph pipeline Approved: not approved (study)
Sheet 1 of 1 AQS-DWG-001