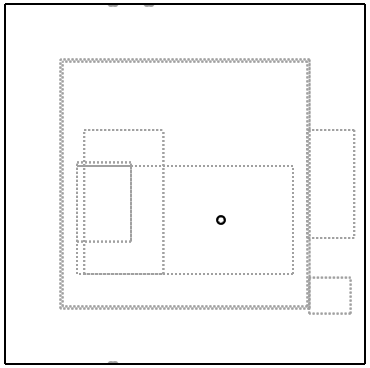

Graph revision AD - nozzle_orient: N1 -X face z 160: green shell in from SHELL_BUILD N2 (solids, bore not calculated)
Graph revision AD - nozzle_orient: N2 +X face z 600: fired shell out to INV_CAST N1 (solids)
Graph revision AD - nozzle_orient: N3 +Y face, x 600, z 600: DN15 wax condensate reclaim to WAX_PATTERN N2
Graph revision AD - nozzle_orient: N4 +Y face, x 700, z 600: DN15 unrecovered wax to the oil line
Graph revision AD - nozzle_orient: N5 -Y face, x 700, z 600: DN15 dewax/burnout off-gas (burned wax + steam)
Graph revision AD - nozzle_orient: N6 bottom (400,400): DN15 drain, flush at z 0; N7 top (400,400): DN15 vent at z
Graph revision AD - nozzle_orient: Heights/bore/rating per docs-authority/nozzles/SHELL_BURNOUT.csv; compass faces are the registered layout. Unit: millimetre

Aqueous Solutions (owner) AQS-MFG-SHELL_BURNOUT-NOZZLE_ORIENT
SHELL_BURNOUT fabrication drawing NOZZLE_ORIENT (AQS-PLAN-00
Type: fabrication drawing (GA / nozzle orientation / part sheet) Rev f1329fa5 Issued 2
Created: flow graph pipeline Approved: not approved (study)
Sheet 1 of 1 AQS-DWG-001