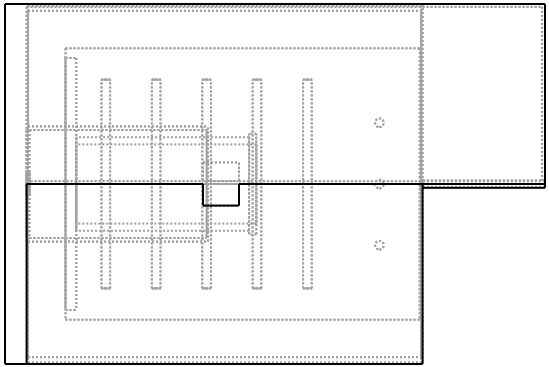

Graph revision AD - ga_side: Jacket walls t4 with the 15 mm cooling-water annulus (study fab-page value - hold, W12); the water circuit is loop hardware, not r
Graph revision AD - ga_side: Ceramic-fibre board between jacket and hot zone (study construction); 1300 C hot zone per the node design
Graph revision AD - ga_side: Jacket z 60..1160 on the plinth; door clamp studs in fasteners.csv; controls bay x 660.
Graph revision AD - ga_side: General tolerance ISO 2768-m unless noted

Aqueous Solutions (owner) AQS-MFG-SINTER-GA_SIDE
SINTER fabrication drawing GA_SIDE (AQS-PLAN-006 M3; graph R
Type: fabrication drawing (GA / nozzle orientation / part sheet) Rev 4da1a7ba Issued
Created: flow graph pipeline Approved: not approved (study)
Sheet 1 of 1 AQS-DWG-001