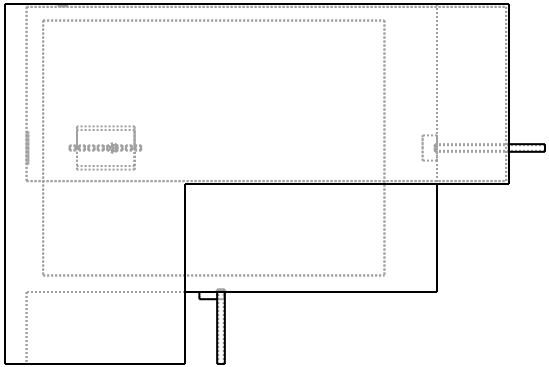

Graph revision AD - ga_side: Chamber shell t6 304L (study fab-page value - hold, W12), ceramic-fibre insulation t40 inside the vacuum boundary (duty section
Graph revision AD - ga_side: Chamber z 60..1200 on the plinth; lid clamp studs in fasteners.csv; PSU x 660..1000, 15 kW connected (node design); purchased
Graph revision AD - ga_side: The 2 kg design-case skull melt (node design) is drawn as a process-inventory solid, n
Graph revision AD - ga_side: General tolerance ISO 2768-m unless noted

Aqueous Solutions (owner) AQS-MFG-VAC_IND-GA_SIDE
VAC_IND fabrication drawing GA_SIDE (AQS-PLAN-006 M3; graph
Type: fabrication drawing (GA / nozzle orientation / part sheet) Rev 2772bddb Issued
Created: flow graph pipeline Approved: not approved (study)
Sheet 1 of 1 AQS-DWG-001