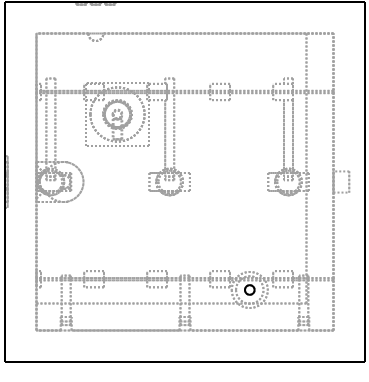


Graph revision AD - nozzle_orient: N1 +X face z 600: Ca-metal tap well, crest and discharge lip (open launder, solids - bore not calculated)
Graph revision AD - nozzle_orient: N2 -X face, y 400, z 160: DN15 Class 150, CaCl2 brine concentrate inlet, lance into the bath
Graph revision AD - nozzle_orient: N3 +Y face, x 598, z 600: DN15 Class 150, chlorine byproduct export (water-trea
Graph revision AD - nozzle_orient: N4 bottom face, (256,160): DN15 drain well, sump face z 50, flush at z 0
Graph revision AD - nozzle_orient: N5 top, DN15 on the DN50 riser at z 800; N6 top z 800: power terminal - a cable
Graph revision AD - nozzle_orient: N7 -X face, y 230, z 160: DN15 Class 150, CaCl2 brine concentrate in (process-c
Graph revision AD - nozzle_orient: N8 +Y face, x 566, z 600: DN15 Class 150, pot byproduct chlorine for the phosg

Aqueous Solutions (owner) AQS-MFG-CA_POT-NOZZLE_ORIENT
CA_POT fabrication drawing NOZZLE_ORIENT (AQS-PLAN-006 M3; g
Type: fabrication drawing (GA / nozzle orientation / part sheet) Rev c9e7f2bb Issued
Created: flow graph pipeline Approved: not approved (study)
Sheet 1 of 1 AQS-DWG-001