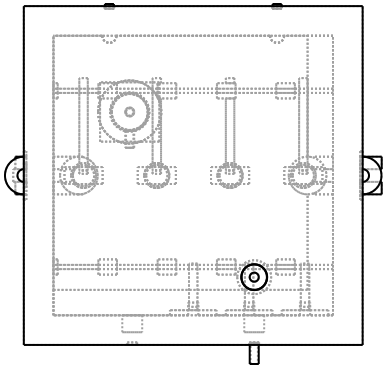


Graph revision AC - nozzle_orient: N1 +X face z 600: Mg-metal tap well, crest and discharge lip (open launder, solids - bore not calculated)
Graph revision AC - nozzle_orient: N5 -X face z 600: Mg-reductant tap to the Kroll retort (same launder form)
Graph revision AC - nozzle_orient: N3 -Y face, x 256, z 160: DN15 Class 150, Kroll retort MgCl2 return (net of drag-
Graph revision AC - nozzle_orient: N4 -Y face, x 544, z 160: DN15 Class 150, CaCl2-MgCl2 brine concentrate inlet, l
Graph revision AC - nozzle_orient: N2 +Y face, x 202, z 600: DN15 Class 150, chlorine return; N6 +Y face, x 598, z
Graph revision AC - nozzle_orient: N7 bottom face, (256,160): DN15 drain well, sump face z 50, flush at z 0
Graph revision AC - nozzle_orient: N8 top, DN15 on the DN80 riser at z 800

Aqueous Solutions (owner) AQS-MFG-MG_POT-NOZZLE_ORIENT
MG_POT fabrication drawing NOZZLE_ORIENT (AQS-PLAN-006 M3; g
Type: fabrication drawing (GA / nozzle orientation / part sheet) Rev 53abc177 Issued
Created: flow graph pipeline Approved: not approved (study)
Sheet 1 of 1 AQS-DWG-001