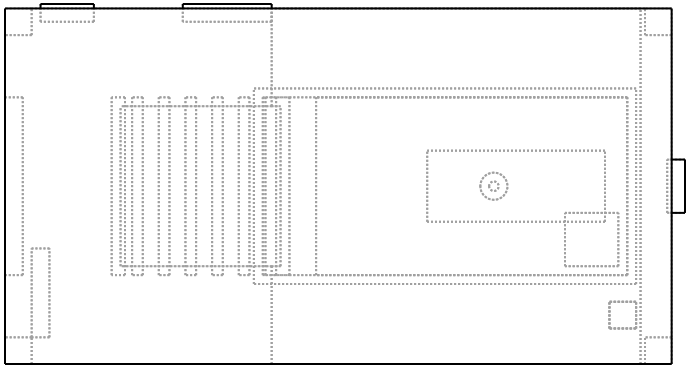

Graph revision AC - nozzle_orient: N1 -X face z 160: cast + shell in from INV_CAST N4 (solids, bore not calculated)
Graph revision AC - nozzle_orient: N2 +X face z 600: investment castings out (solids)
Graph revision AC - nozzle_orient: N3 +X face z 600: spent ceramic shell to the solids line (solids)
Graph revision AC - nozzle_orient: N4 +Y face z 600: reclaimed stucco/flour (solids); N5 +Y face z 600: spent silica
Graph revision AC - nozzle_orient: N6 bottom (400,400): DN15 drain, flush at z 0; N7 top on the mast at the z 1500
Graph revision AC - nozzle_orient: Heights/bore/rating per docs-authority/nozzles/SHELL_BREAK.csv; compass faces

Aqueous Solutions (owner) AQS-MFG-SHELL_BREAK-NOZZLE_ORIENT
SHELL_BREAK fabrication drawing NOZZLE_ORIENT (AQS-PLAN-006
Type: fabrication drawing (GA / nozzle orientation / part sheet) Rev 9f6518d0 Issued 2
Created: flow graph pipeline Approved: not approved (study)
Sheet 1 of 1 AQS-DWG-001