

# **OBSrange: A new tool for the precise remote location of Ocean Bottom Seismometers**

Joshua B. Russell<sup>1</sup>, Zachary Eilon<sup>2</sup>, and Stephen G. Mosher<sup>3</sup>

<sup>1</sup>Department of Earth and Environmental Sciences, Lamont-Doherty Earth Observatory of  
Columbia University, Palisades, NY, USA.

<sup>2</sup>Department of Earth Science, University of California Santa Barbara, Santa Barbara, CA,  
USA.

<sup>3</sup>Department of Earth and Environmental Sciences, University of Ottawa, Ottawa, Ontario,  
Canada.

## Abstract

As the marine geophysics community continues to instrument the seafloor, data quality and instrument recoverability rely on accurate estimates of instrument locations on the ocean floor. However, freely available software for this estimation does not currently exist. We present *OBSrange*, an open-source tool for robustly locating ocean bottom seismometers (OBS) on the seafloor using acoustic transponder ranging data. Available in both MATLAB and Python, the algorithm inverts two-way acoustic ranging travel-time data for instrument location, depth, and average water velocity and accounts for ship velocity, region-specific ray-bending, and a static GPS transponder offset. The tool provides comprehensive estimates of model parameter uncertainty including bootstrap uncertainties for all four parameters as well as an F-test grid search providing a 3D confidence ellipsoid around each station. We validate the tool using a synthetic travel-time dataset and find average horizontal location errors on the order of  $\sim 4$  m for an instrument at 5000 m depth. An exploration of survey geometries shows that the so-called “PACMAN” style survey pattern ~~of radius 1-Nm with long ship tracks towards and away from the instrument is optimal for resolving all parameters, including the trade-off between instrument depth and water velocity. A survey radius of~~ performs best at recovering horizontal instrument positions on the seafloor. Optimal survey size for resolving instrument location depends on water depth and desired precision and nominally ranges from 0.75-Nm is sufficient for accurate horizontal locations (to within 1 Nm at 5000 m water depth to  $\sim 5$  m) with diminishing improvement as radius is increased. Depth and water 0.25 Nm at 500 m depth. Radial tows toward and away from the instrument are crucial for resolving the depth-water velocity trade off perfectly for, and thus Circle surveys, and surveys should be avoided. Line surveys, common for active source experiments, are unable to resolve the instrument location orthogonal to the survey line; ~~if possible, both geometries should be avoided~~. We apply our tool to the 2018 Young Pacific ORCA deployment in the south Pacific producing an average RMS data misfit of 1.96 ms with an average instrument drift of  $\sim 170$  m. Observed drifts reveal a clockwise-rotation pattern of  $\sim 500$  km diameter that resembles a cyclonic mesoscale gyre observed in the geostrophic flow field, suggesting a potential ~~use for~~ application of accurate instrument drifts as a novel proxy for depth-integrated flow through the water column.

# 1 Introduction

The last two decades have seen a sea change in the longevity, distribution, and sophistication of temporary ocean bottom seismic installations. The proliferation of ocean bottom seismometer (OBS) deployments has opened up new possibilities for understanding the ocean basins (e.g. *Lin et al.*, 2016, *Takeo et al.*, 2016), continental margins (e.g. *Eilon and Abers*, 2017, *Hawley et al.*, 2016, *Janiszewski and Abers*, 2015, *Lynner and Bodmer*, 2017), and even inland submerged environments (e.g. *Accardo et al.*, 2017).

However, even straightforward OBS installations present several unique challenges. Foremost among these is the inability to directly measure the location of the sensor at the seafloor. Precise knowledge of station location is essential for almost all seismological analysis. While the location of the ship is known at the time of deployment, OBS instruments may drift by up to hundreds of meters from this point due to ocean currents and a non-streamlined basal profile.

For broadband OBS deployments, it has long been accepted practice to conduct an acoustic survey in order to triangulate the position of the instrument (*ie.*, *Creager and Dorman*, 1982). To accomplish this, ships send non-directional acoustic pulses into the water column. These are received by the OBS transponder which sends its own acoustic pulse in response. The time elapsed between the ship sending and receiving acoustic pulses is proportional to distance, which (for known ship location) may be used to locate the instrument. It is common for this analysis to be conducted by technicians at OBS instrument centers and provided latterly to PIs and data centers as station metadata. Some codes are proprietary intellectual property of the instrument centers, and others are available for a license fee.

However, standard station location algorithms to date are lacking in certain respects. Water sound speed and even water depth are often assumed *a priori*. Commonly, no ~~correction is made~~ corrections are made to account for the movement of the ship between sending and receiving, the relative offset between GPS and transponder location, or ray bending due to refraction through the water column. Robust uncertainty analysis, which would allow practitioners to gauge potential location errors, is either not conducted or communicated.

We present an ~~open-source~~ OBS locator software for use by the marine geophysics community that can account for ship velocity, GPS-transponder offset, and ray bending. Our efficient inversion algorithm provides station location in three dimensions and solves for depth-averaged water sound speed. We use statistical tools to provide robust uncertainties on the instrument location as well as water velocity. The code is available in both MATLAB and Python to promote accessibility (see Data and Resources). In this article, we present the theory behind our algorithm, validate the inversion using synthetic testing, compare its accuracy with a previous tool, and ~~demonstrate its utility with real data. Finally, we use the tool to~~ carefully test a variety

of survey patterns ~~and identify an optimal geometry~~ identifying optimal geometries for accurately recovering all model parameters, including the trade-off between depth and water velocity. Finally, we demonstrate its utility with real data from the 2018 Young Pacific ORCA (OBS Research into Convecting Asthenosphere) Experiment (Gaherty et al., 2018), revealing a network-wide clockwise-rotation that resembles a cyclonic mesoscale gyre. This study represents a first open-source tool for accurately locating instruments on the seafloor as well as a thorough investigation of survey ~~geometry~~ geometries that will serve to inform future OBS deployments.

## 2 Algorithm

### 2.1 The forward problem

Here we outline the forward and inverse problems for inverting acoustic ranging data for instrument location on the seafloor following Creager and Dorman (1982). We wish to locate an instrument which rests at unknown position and depth on the ocean floor (Figure 1). Taking the drop coordinates as the center of a Cartesian coordinate system in which  $x$  is positive towards East,  $y$  is positive towards North, and  $z$  is positive upwards from the sea surface, the instrument lies at location  $(x, y, z)$ . We account for Earth’s ellipticity when converting between geodetic and local ENU coordinates using the WGS84 reference ellipsoid (Agency and Mapping, 2000) and standard coordinate transformations (i.e., Hoffmann-Wellenhof et al., 2001). The time taken for an acoustic pulse to travel from the ship’s transponder to the instrument and back is a function of the sound speed in water ( $V_P$ ), and the location of the ship, as well as the “turn-around time” ( $\tau$ ) that corresponds to the (fixed) processing time between the OBS transducer receiving a ping and sending its response. If the shipboard transponder and GPS are not co-located and their relative positions are known, a heading-dependent correction is applied to the GPS position such that they do coincide. In detail, we can account for the possibility that if the ship is under way, its position changes between sending and receiving pings. Thus, the total travel time,  $T$ , is:

$$T = \frac{r_s + r_r}{V_P} + \tau, \quad (1)$$

where for a straight-ray approximation,

$$r_s = \sqrt{(x_s - x)^2 + (y_s - y)^2 + z^2} \quad (2)$$

$$r_r = \sqrt{(x_r - x)^2 + (y_r - y)^2 + z^2}. \quad (3)$$

Subscript “s” indicates the ship’s transponder sending a ping and “r” indicates the ship’s transponder receiving the OBS’s response. These positions are related by the velocity ( $\mathbf{u} = (u_x, u_y, 0)$ ) of the ship, which is estimated from the survey data by differencing neighboring survey points:

$$\begin{pmatrix} x_s \\ y_s \\ 0 \end{pmatrix} = \begin{pmatrix} x_r \\ y_r \\ 0 \end{pmatrix} - T \begin{pmatrix} u_x \\ u_y \\ 0 \end{pmatrix}. \quad (4)$$

It follows that, to a close approximation,

$$\begin{aligned} r_s &\approx r_r - (\mathbf{u} \cdot \hat{\mathbf{r}}_r) T \\ &= r_r - \delta r, \end{aligned} \quad (5)$$

where  $\hat{\mathbf{r}}_r$  is the unit-vector pointing from the instrument to the ship at the time of receiving. ~~If we know the distance  $\delta r$~~  By calculating the distance  $\delta r = (\mathbf{u} \cdot \hat{\mathbf{r}}_r) T$ , we can account for the send-receive timing offset related to a change in the ship’s position by computing a correction time,  ~~$\delta T = \delta r / V_P$ . Substituting this into~~  $\delta T_{\text{dopp}} = \delta r / V_P$ , which will be positive if GPS coordinates correspond to the receive location and negative if they correspond to the send location.

We can also account for ray-bending due to refraction through the water column by calculating an additional correction time,  $\delta T_{\text{bend}}$ , that is the difference in two-way travel time between the straight-ray approximation calculated through the depth-averaged water column and the value calculated by ray tracing through a 1D sound-speed profile. A velocity profile is selected from the 2009 World Ocean Atlas database decadal averages (see Data and Resources) for the appropriate survey location and month (determined by GPS location and time stamps in the data), or the user can specify their own. Rays are traced out to 4 km offset for  $\pm 200$  m about the nominal drop depth, and an evenly spaced mesh of  $\delta T_{\text{bend}}$  corrections is constructed. The corrections are then added to the raw travel times for the appropriate depth and offset to convert from bent to straight rays. This correction is most significant for stations in shallow water (less than  $\sim 1000$  m) at long offsets, in particular if there is a sharp velocity change at the thermocline, but is negligible ( $< 1$  ms) for deeper instruments and at shorter offsets (see Figures S1–S2, available in the electronic supplement to this article). With the addition of these corrections to equation (1), we have the two-way travel time is given by:

$$T + \delta T = \frac{2r_r}{V_P} + \tau, \quad (6)$$

where  $\delta T = \delta T_{\text{dopp}} + \delta T_{\text{bend}}$ .

## 2.2 The inverse problem

If the ship location and travel times between the OBS and ship are known, but the position of the OBS is not, equation (6) can be thought of as a non-linear inverse problem, of the form  $\mathbf{d} = g(\mathbf{m})$ , where  $g(\mathbf{m})$  represents the forward-model. In practice, a limited survey radius makes it difficult to uniquely solve for  $z$ ,  $V_P$ , and  $\tau$ . Since turn-around time is a parameter provided by the transponder manufacturer, we choose to fix  $\tau$  in order to reduce unnecessary trade-offs in the inversion and more precisely resolve depth and water velocity. Thus, the model contains four parameters:  $\mathbf{m} = \{x, y, z, V_P\}$ . The data,  $\mathbf{d}$ , are a vector of corrected travel times,  $T + \delta T$  (note that  $\delta T$  is itself a function of  $\mathbf{m}$ ; this will be adjusted iteratively). Uncorrected travel-time residuals predicted from the starting model with magnitude  $>500$  ms are considered anomalous and are removed before beginning the inversion. This type of problem can be solved iteratively using Newton's method (Menke, 2018):

$$\mathbf{m}_{k+1} = \mathbf{m}_k + [\mathbf{G}^T \mathbf{G}]^{-1} \mathbf{G}^T (\mathbf{d} - g(\mathbf{m}_k)) , \quad (7)$$

where  $\mathbf{G}$  is a matrix of partial derivatives:  $G_{ij} = \partial d_i / \partial m_j$ , as follows:

$$\frac{\partial d_i}{\partial x} = -\frac{2(x_i - x)}{V_P r_i} \quad (8)$$

$$\frac{\partial d_i}{\partial y} = -\frac{2(y_i - y)}{V_P r_i} \quad (9)$$

$$\frac{\partial d_i}{\partial z} = \frac{2z}{V_P r_i} \quad (10)$$

$$\frac{\partial d_i}{\partial V_P} = -\frac{2 r_i}{V_P^2} . \quad (11)$$

We use the drop coordinates and water depth (if available from multibeam) as a starting model, along with  $V_P = 1500$  m/s. We fix  $\tau = 13$  ms, which is the default value for all ITC and ORE Offshore and EdgeTech transponders and underwater communications transducers (Ernest Aaron, *pers. comm.*). There is some degree of trade-off between the water depth and the water velocity. Simplistically, if all survey measurements are made at a constant distance from the station (*e.g.*, if the survey is a circle centered on the station) then these parameters co-vary perfectly. As a result, the inverse problem is ill-posed and, like all mixed-determined problems, requires regularization. We damp perturbations in  $V_P$ , which is not likely

134 to vary substantially from 1500 m/s, and implement global norm damping to stabilize the inversion:

$$\mathbf{F} = \begin{bmatrix} \mathbf{G} \\ \mathbf{H} \\ \epsilon^{1/2}\mathbf{I} \end{bmatrix}, \quad \mathbf{f} = \begin{bmatrix} \mathbf{d} - g(\mathbf{m}) \\ \mathbf{0} \\ \mathbf{0} \end{bmatrix}, \quad (12)$$

135 where  $\mathbf{I}$  is the  $4 \times 4$  identity matrix,  $\epsilon = 10^{-10}$ ,  ~~$\mathbf{H} = (0, 0, 0, \gamma_{VP})$ ,  $\mathbf{H} = \text{diag}(\gamma_x, \gamma_y, \gamma_z, \gamma_{VP})$ ,  $\gamma_x = \gamma_y = \gamma_z = 0$ ,~~  
136 and  $\gamma_{VP} = 5 \times 10^{-8}$ . ~~These values for the damping parameters were determined by trial and error and are the~~  
137 ~~defaults in the code. They have been tested on many different survey geometries, and thus, should require~~  
138 ~~very little tuning for most applications.~~ The equation to be solved becomes:

$$\mathbf{m}_{k+1} = \mathbf{m}_k + [\mathbf{F}^T \mathbf{F}]^{-1} \mathbf{F}^T \mathbf{f}. \quad (13)$$

139 This equation is solved iteratively, until the root-mean-squared (RMS) of the misfit,  $e$ , (where  $e =$   
140  $T + \delta T - g(\mathbf{m})$ ) decreases by less than 0.1 ms compared to the previous iteration. This criterion is typically  
141 reached after  $\sim 4$  iterations.

## 142 2.3 Errors and uncertainty

143 In order to estimate the uncertainty in our model, we perform 1,000 bootstrap iterations on survey travel-  
144 time data with a balanced resampling approach (*Davison et al.*, 1986). In each iteration the algorithm inverts  
145 a random sub-sample of the true data set, with the constraint that all data points are eventually sampled  
146 an equal number of times. This approach reduces variance in bias and achieves robust uncertainty estimates  
147 in fewer iterations compared to traditional uniform sampling approaches (*Hung et al.*, 2011). Although  
148 balanced resampling provides empirical probability distributions of possible model parameters, it does not  
149 straightforwardly offer quantitative estimates of model uncertainty because the goodness of data fit for each  
150 run in the bootstrap iteration is ignored (that is, within each iteration, a model is found that best fits  
151 the randomly sub-sampled dataset, but in the context of the full dataset, the fit and uncertainty of that  
152 particular model may be relatively poor). For more statistically robust uncertainty estimates, we perform  
153 a grid search over  $(x, y, z)$  within a region centered on the bootstrapped mean location,  $(x_{\text{best}}, y_{\text{best}}, z_{\text{best}})$ .  
154 For each perturbed location,  $(x', y', z')$ , we use an F-test to compare the norm of the data prediction error to  
155 the minimum error, assuming they each have a  $\chi^2$  distribution. The effective number of degrees of freedom,  
156  $\nu$  can be approximated as

$$\nu \approx N_f - \text{tr}(\mathbf{F}\mathbf{F}_{\text{inv}}), \quad (14)$$

157 where  $\mathbf{F}_{\text{inv}} = [\mathbf{F}^T \mathbf{F}]^{-1} \mathbf{F}^T$ ,  $N_f$  is the length of vector  $\mathbf{f}$ , and  $\text{tr}()$  denotes the trace. Using the F-test, we  
 158 can evaluate the statistical probability of the true OBS location departing from our best-fitting location by  
 159 a given value.

160 Some care is required in implementing this grid search. Since  $z$  covaries with  $V_P$ , varying  $z$  quickly leads  
 161 to large errors in data prediction as  $|z' - z_{\text{best}}|$  increases if one holds  $V_P$  fixed. As a result, it appears as if the  
 162 gradient in the error surface is very sharp in the  $z$  direction, implying this parameter is very well resolved; in  
 163 fact, the opposite is true. We find the empirical covariance of  $z$  and  $V_P$  by performing principal component  
 164 analysis on the bootstrap model solutions. We then use the largest eigenvector to project perturbations in  
 165  $z$  within the grid search onto  $V_P$ , adjusting velocity appropriately as we progress through the grid search.

## 166 2.4 Model resolution and trade-offs

167 In order to quantitatively compare various survey configurations and assess their ability to recover the true  
 168 model parameters, we calculate the model resolution,  $\mathbf{R}$ , and correlation,  $\mathbf{C}$ , matrices. The  $M \times M$  model  
 169 resolution matrix is given by (Menke, 2018):

$$\mathbf{R} = \mathbf{G}_{\text{inv}} \mathbf{G}, \quad (15)$$

170 where  $\mathbf{G}_{\text{inv}} = [\mathbf{G}^T \mathbf{G} + \mathbf{H}^T \mathbf{H} + \epsilon \mathbf{I}]^{-1} \mathbf{G}^T$ . Since the resolution matrix depends only on the data kernel  
 171 and applied damping and is thus independent of the data themselves, it reflects strongly the chosen survey  
 172 geometry. Each model parameter is independently resolved when  $\mathbf{R} = \mathbf{I}$ . Since perfect resolution occurs  
 173 when  $\mathbf{R}$  is equal to the identity matrix, off-diagonal elements (or “spread”) indicate poor model resolution  
 174 and trade-offs between the respective parameters. The spread of the model resolution matrix is defined as  
 175 the squared  $L_2$  norm of the difference between  $\mathbf{R}$  and the identity matrix (Menke, 2018):

$$\text{spread}(\mathbf{R}) = \sum_{i=1}^M \sum_{j=1}^M [R_{ij} - \delta_{ij}]^2, \quad (16)$$

176 where  $\delta_{ij}$  is the Dirac delta function. Therefore, model resolution is perfect when  $\text{spread}(\mathbf{R}) = 0$ .

177 The model correlation matrix (or unit covariance matrix),  $\mathbf{C}$ , describes the mapping of error between  
 178 model parameters. Given the covariance matrix  $\Sigma_{\text{m}} = \mathbf{G}_{\text{inv}} \mathbf{G}_{\text{inv}}^T$ , the correlation matrix is defined as:

$$\mathbf{C} = \mathbf{D}^{-1} \Sigma_{\text{m}} \mathbf{D}^{-1}, \quad (17)$$

179 where  $\mathbf{D} = \text{diag}(\Sigma_{\text{m}})^{1/2}$  is the diagonal matrix of model parameter standard deviations. The off diagonal  
 180 elements of this unitless matrix indicate how model parameters trade off with one another in the inversion,



with negative numbers indicating negatively correlated parameters and vice versa.

## 3 Results

We summarize the results of synthetic testing and application to a real data set in order to demonstrate the robust features of *OBSrange*. All synthetic tests shown in this section were carried out at 5000 m depth unless noted otherwise. This depth is similar to the average depth of the Young Pacific ORCA Experiment, where the tool is applied in section 3.4, allowing for easier comparison. Furthermore, the magnitude of uncertainties generally decrease for shallow water (see Figures S7–S8, available in the electronic supplement to this article), and therefore, uncertainties reported here represent upper bounds for the algorithm.

### 3.1 Demonstration on synthetic data

We validated our algorithm by checking that it correctly recovers the (known) location of synthetic test stations. Synthetic two-way travel times were computed by interpolating the ship’s position (traveling at an average velocity of 8 kn) within a fixed survey pattern at one-minute intervals, sending straight-line rays to the instrument and back, and adding the turn-around time. This travel time includes the change in ship’s position between sending and receiving; since the position of the ship at the time it receives the acoustic pulse is itself dependent on the travel time, in constructing the synthetic dataset we iterated on this value until the time and position converged to give an error of  $< 10^{-6}$  s. Only the ~~location~~ two-way travel time, ship location, and absolute time at the moment the ship receives the acoustic pulse ~~was~~ were recorded for the inversion, mimicking data obtained during real surveys using equipment such as an EdgeTech deck box. We then added Gaussian random noise to the resultant travel times using a standard deviation of 4 ms, to account for measurement noise, errors in ship GPS location, and local changes in water velocity. Lastly, we randomly dropped out  $\sim 20\%$  of the travel time data points, simulating the occasional null return from the acoustic survey. This testing procedure was designed to mimic the idiosyncrasies of real acoustic surveys as closely as possible.

Figure 2 shows the result of an inversion at a single station at 5000 m depth using a 1 Nm radius “PACMAN” survey geometry. For this inversion, we included ~~a~~ the correction for a Doppler shift introduced by the ship’s motion, estimating ship velocity from the timing and location of survey points. The inversion was successful in locating the OBS station: the estimated location is ~~3.02~~ 3.0 m from the the true location (Figure 2). This misfit is extremely small in the context of  $\sim 320$  m of drift, a survey radius of  $\sim 1800$  m (1 Nm), and a water depth of  $\sim 5300$  m. ~~Moreover, the~~ true location falls well within the uncertainty bounds estimated from the F-test and the bootstrap analysis.

In order to obtain statistics on the general quality of the synthetic recovery, we performed this test for 10,000 synthetic OBS stations, as follows: For each iteration, a synthetic station location was determined relative to a fixed drop point by drawing x- and y-drifts from zero-centered Gaussian distributions with standard deviations of 100 m (only in rare cases are stations thought to drift further than  $\sim 200$  m). The depth, ~~turn-around time,~~ and average water velocity were similarly randomly selected, with mean values of 5000 m, ~~13 ms,~~ and 1500 m/s and standard deviations of 50 m, ~~3 ms,~~ and 10 m/s, respectively. The turn-around time is set to 14 ms and is perfectly accounted for. For tests of the basic location algorithm, we held the survey geometry constant, using the *PACMAN* configuration with a radius of 1 Nm (see Section 3.3).

The results of these tests show that on average our inversion is highly successful in correctly locating the OBS stations. The mean location errors in the x-, y-, and z-directions were 0.038 m, 0.152 m, and -0.599 m respectively, demonstrating there was no systematic bias in the locations. The mean error in water velocity was indistinguishable from zero, showing that its estimation was also not biased. The mean absolute horizontal location error was ~~2.31~~ 2.3 m, with a standard deviation of ~~1.22~~ 1.2 m. 95% of the absolute horizontal station location errors were less than ~~4.58~~ 4.6 m. There was no relationship observed between station drift (~~i.e.~~ i.e., the distance between the synthetic OBS station and the drop point) and the location error, indicating that as long as stations settle within the survey bounds they will be well located. A corollary to this observation is that location estimates should not be biased by incorrectly recorded drop locations.

We observed a strong trade-off between water velocity and depth, which was responsible for the somewhat larger standard error in station depth estimates, which was 9.6 m. This uncertainty is likely of negligible concern for most OBS practitioners, but if precise depths are important then a survey geometry that includes more tracks towards and away from the station would be preferable (in addition to verification using acoustic echo-sounders that implement precise water-velocity profiles from XBT data ~~).~~

### ~~3.2 Application to PacificArray deployment~~

~~We applied the location algorithm to acoustic surveys carried out during the Young Pacific ORCA (OBS Research into Convecting Asthenosphere) deployment in the central Pacific ocean during April and May of 2018 (Gaherty et al., 2018). The OBS array comprised 30 SIO broadband instruments each equipped with a Model ITC-3013 transponder and deployed from the R/V Kilo Moana in water depths of  $\sim 4400$ – $4800$  m. Acoustic surveys were carried out using an EdgeTech 8011M Acoustic Transeiver command and ranging unit, attached to a hull-mounted 12 kHz transducer. The relatively calm seas allowed for ideal survey geometry at almost all sites, with a ship speed of  $\leq 8$  knots at a maximum radius of  $\sim 1.3$  Nm.~~

An example station inversion, as well as the graphical outputs of the location software, is shown in Figures 6-8. Ship velocity is estimated from the survey data by differencing neighboring survey points. In theory, this could be used to correct Doppler shifts (Figure 6c) in travel time (as in the synthetic tests), but we found that this correction did not substantially improve data fit for real stations and so did not apply it to this data set, although it is included as an option in the location codes. The small RMS data misfit of  $\sim 1.6$  ms attests to the quality of the survey measurements and the appropriateness of our relatively simple location algorithm (Figure 6d). The southwestwards drift of  $\sim 340$  m (Figure 7) demonstrates that ocean currents can substantially displace the final OBS location from their surface drop point. The F-test 95% confidence bounds are 5-6 m in the horizontal directions and 10-12 m in depth (Figure 8). an accurate GPS-transponder offset correction).

The 30 stations in this array drifted an average distance of 170 m. The mean data RMS misfit was 1.96 ms and the estimated 95th percentile horizontal location error based on the bootstrap analysis was 1.13 m. The water depth estimated by the inversion was systematically shallower than that measured using the shipboard multibeam instrument, differing by an average value of 18.6 m. Assuming the multibeam depths, which are computed using a water sound speed profile that is validated daily by XBT measurements, are correct, this discrepancy indicates that the inversion systematically overestimates sound speed slightly.

Without accurate seafloor corroboration from an ROV, it is not possible to directly verify the locations of stations within the Pacific ORCA array. However, we obtain indirect support for the success of the location algorithm by considering the drift of all stations within this array (Figure 9). Taken together, the direction and magnitude of drift depicts a pattern of clockwise rotation with a minimum diameter of  $\sim 500$  km. This pattern is consistent with a meso-scale cyclonic gyre, with a direction, location, and approximate size that is consonant with large-scale patterns of geostrophic flow observed in this location roughly within the time frame of the deployment (see Figure S1, available in the electronic supplement to this article). The fact that we are able to discern this pattern from our estimated locations is a testament to the accuracy of the *OBSrange* algorithm. This observation also raises the intriguing possibility of using OBS instruments as ad hoc depth-integrated flow meters for the oceans.

### 3.2 Comparison to previous tools

We compared our location algorithm with a tool developed by engineers at Scripps Institution of Oceanography (SIO) that ~~has previously been~~ is commonly used to locate OBS on the seafloor. This unpublished tool, hereafter referred to as *SIOgs*, performs a grid search in  $x$ - $y$  holding  $z$  fixed at the reported drop-point depth and assuming a water velocity of 1500 m/s and turn-around time of ~~13-14~~ 14 ms. The grid search begins

with grid cells of 100×100 m and iteratively reduces their size to 0.1×0.1 m. In contrast to our algorithm, *SIOgs* does not account for: 1) the  ~~$\delta T$ -(Doppler)-correction~~ Doppler correction ( $\delta T_{\text{dopp}}$ ) due to the changing ship position between sending and receiving, 2) the ellipsoidal shape of the Earth when converting between ~~latitude-longitude~~ latitude-longitude and  $x$ - $y$ , 3) ~~a known GPS-transponder offset~~, 4) variations in  $z$  and  $V_p$ , and 45) automated identification and removal of low-quality travel-time data. Furthermore, *SIOgs* provides no information about uncertainty or resolution of model parameters.

To quantitatively compare our algorithm with *SIOgs*, as well as the importance of the 4-5 additional features that our algorithm includes, we performed 8-9 separate inversions of a synthetic dataset for a *PACMAN* survey geometry with 1 Nm radius and 4 ms of Gaussian noise added to the travel-time data (Figure 3). For the synthetic experiment, the instrument drifted 447 m from the drop point, settling to 5050 m depth with a water velocity of 1520 m/s and turn-around time of 14 ms. Relative to the GPS, the transponder was located 10 m closer to the ship’s bow and 10 m further starboard (a maximum offset of ~14 m). We inverted using the complete *OBSrange* algorithm (inversion 1 in Figure 3) as well as several variants where parameters were damped or removed to assess their importance; details of the inversions including the starting models are given in table 1. Our algorithm estimated the horizontal position of the instrument to within ~1.5 m of the true location with a mean data RMS misfit of 4.23.7 ms, while *SIOgs* (inversion 8) located it ~42 m from the true position with an RMS of 22.819.7 ms, far beyond the 95% F-test contour (Figure 3a). Our algorithm recovered the true depth and water velocity to within 53 m and 1 m/s ~~, respectively, even when assuming an incorrect turn-around time of 13 ms on average, respectively.~~

The *SIOgs* tool was very susceptible to anomalous travel-time data, which are a common occurrence in real survey data and are thought to result from out-of-plane acoustic reflections or multiples of earlier pulses. Inversion *SIOgs no QC* (9) included a single anomalous travel-time measurement ~~2000~~4000 ms from its true value, causing the station to be mislocated by ~~~130~~320 m with a travel-time residual RMS of ~~~193~~383 ms. We found that if several such erroneous travel-time data are included in the SIO inversion, a horizontal location misfit on the order of ~1000 m can result. Although such outliers can be manually discarded, they could potentially be overlooked. As mentioned, our method includes a quality control step based on travel-time residuals of the starting location that removes such anomalous residuals with magnitudes >500 ms (default value in the code).

~~Inversions using our method~~ *OBSrange* inversions that did not solve for  $z$  and/or  $V_p$  resulted in the largest instrument location errors. With depth held constant at 5000 m (~~*Fix-Z*~~inversion 6), the instrument was mislocated by ~~~8.5~~7.5 m and water velocity underestimated by ~14 m/s. Similarly, with  $V_p$  held constant (~~*Fix-V<sub>p</sub>*~~inversion 5), the instrument was located ~~~911~~911 m from its true position, and the estimated depth was ~~~7072~~7072 m too shallow. In the case where both depth and water velocity were held constant (~~*XY-only*~~inversion

7), we observed a location misfit of  $\sim 40$  m, similar to that of the *SIOgs* tool (8). The strong trade-off between depth and water velocity means that one cannot be confidently recovered without also solving for the other, and failing to solve for one (or both) results in larger location errors.

In addition to showing the full potential of *OBSrange*, we demonstrate the importance of accounting for Earth’s ellipsoidal shape when converting latitude and longitude to  $x$ - $y$  (inversion 3). The travel-time residuals of *SIOgs* (Figure 3b) display both a static shift from 0 ms as well as an azimuthal dependence. The shift of approximately -20 ms is a combination of the incorrectly assumed station depth, ~~water velocity,~~ ~~and turn-around time and~~ and water velocity and accounts for most of the data misfit. The azimuthal variation observed in the travel-time residuals of *SIOgs* is due to both the incorrect horizontal location of the instrument as well as the failure to account for Earth’s ellipsoidal shape when converting from geographic coordinates to  $x$ - $y$ . Failing to account for the ellipsoid produces a 2-theta azimuthal pattern in the residuals that becomes increasingly strong as survey radius increases and at lower latitudes. For this synthetic test with a survey radius of 1 Nm ( $\sim 1852$  m) at  $7.5 \sim 6^\circ$ S, the ellipsoid produced a  ~~$\sim 10$  m apparent maximum~~ apparent horizontal shift to the northern and southern ship positions. ~~The of  $\sim 10$  m~~ (see Figures S3, available in the electronic supplement to this article). The resulting 2-theta ellipsoid ~~anomaly had a peak-to-peak~~ amplitude travel-time anomaly had an RMS of  $\sim 5.5$  ms  $2.2$  ms with a mean of  $-1.3$  ms, indicating that failing to account for the ellipsoid leads to small biases that map directly into  $z$  and  $V_p$ . Correcting for this anomaly slightly improved ~~our the~~ ability to accurately recover station depth and water velocity; however, it did not significantly ~~effect the the~~ affect the horizontal location estimate, owing to the roughly symmetric survey pattern ~~—(i.e., the perturbation to travel times are nearly symmetric with respect to ship azimuth in~~ Figures S3–S4). For non-symmetric surveys, including those with a strong back-azimuthal variation in good acoustic returns, ~~the horizontal location bias that results~~ horizontal location biases resulting from improper ellipticity corrections ~~is likely to be more significant.~~ may be more significant.

Failing to account for the relative offset in shipboard GPS and transponder (with transponder located  $\sim 14$  m from the GPS toward the front-right of the ship) leads to biased  $z$  and  $V_p$  estimates (inversion 4). Instrument depth and water velocity are underestimated by  $\sim 28$  m and  $\sim 8$  m/s, respectively. The difference in transponder-to-instrument and GPS-to-instrument two-way travel times is nearly constant with ship azimuth for the *PACMAN* configuration (see Figure S5, available in the electronic supplement to this article) with a mean of  $\sim 3.4$  ms. This constant travel time offset is primarily mapped into  $z$ . Because the transponder is almost always further away than the GPS from the instrument, this results in a  $z$  estimate that is too shallow. Similarly, if the transponder had been located at the back-left of the ship, then it would have been closer than the GPS to the instrument and  $z$  would be estimated ~~too deep~~. This suggests that in principle, the GPS-transponder offset could be solved for; however, in practice there is significant trade off

between GPS-transponder offset, depth, and water velocity such that it would be difficult to resolve unless  $z$  and  $V_p$  are known. The horizontal uncertainties are still small ( $\sim 3$  m), even without this correction applied.

The “Doppler” corrections ( ~~$\delta T$~~   $\delta T_{\text{dopp}}$  in equation (6)) applied to the two-way travel times provided only a very small improvement to the estimated horizontal instrument locations ( ~~$\sim 3.52.7$~~  m improvement in mean horizontal location and  ~~$\sim 2.52.0$~~  m reduction in  $r_{xy}$  RMS misfit). ~~The~~; see inversion 2). Because this correction term is calculated from the ships radial velocity with respect to the instrument, it is small (magnitudes  $< 1.6$  ms) for the circular portions of the survey and relatively large ( $\sim 6$  ms) for the radial segments. Only a small portion of the *PACMAN* survey occurs along the radial direction (Figure 2a) and therefore, these corrections tend to have a small effect on model recovery. In practice, the effectiveness of these corrections depend strongly on the ~~accuracy-precision~~ of the shipboard GPS as well as ~~its position relative to the acoustic receiver. Their accuracy also depends on the ability to reconstruct the ship’s radial~~ an accurate reconstruction of ship velocity, which can be difficult to achieve if large swaths of the survey fail to return soundings.

### 3.3 Exploration of survey pattern geometries

In order to evaluate which survey patterns are optimal for accurately locating instruments on the seafloor, we conducted ~~17-19~~ synthetic surveys of varying geometry and size. For these tests, we attempted to mimic real-world experimental uncertainty as closely as possible. Each parameter ( $x$ ,  $y$ ,  $z$ ,  $V_p$ ) was treated as a Gaussian random variable with a predetermined mean and standard deviation (see Section 3.1 for means and standard deviations). ~~Additionally,  $\tau$  was varied with a mean value of 13 ms and standard deviation of 3 ms to simulate uncertainty in this assumed parameter.~~ For each survey configuration, we applied the *full OBSrange* algorithm (including corrections for Doppler and GPS-transponder offset) to 10,000 realizations drawn from these distributions in order to fully explore the limits of each survey type. The GPS-transponder offset is the same as in the previous section (*sim14* m). Synthetic data were calculated in the same way as in previous sections with  $\sim 20\%$  of the data points randomly removed. To further simulate realistic data loss due to “shadowing” effects associated with topography obstructing the acoustic propagation path, we removed three sectors of data with random central azimuth and half-width standard deviation of  $20^\circ$  for each realization (excluding *Line* surveys). All survey points  $< 100$  m from the drop point were retained. The precise uncertainties and optimal survey sizes as determined in this section are specific to an average water depth of 5000 m and scale down at shallower depths. Additional tests at 500 m and 2000 m average water depth are shown in Figures S7–S8 in the electronic supplement and demonstrate that uncertainties generally

decrease with decreasing water depth, and thus uncertainties stated in this section represent upper bounds for the algorithm.

The resulting RMS misfits for each model parameter and survey type are shown in Figure 4a–c. The most well-resolved parameter for all survey types is the horizontal location of the instrument on the seafloor,  $r_{xy}$ . With the exception of *Line* and *1.5 Nm Circle* surveys, all survey types resolve horizontal location to within 10–50 m. The *Line* surveys fail to resolve the instrument location along the direction orthogonal to the ship track (RMS  $\sim 700$  m) but succeed in resolving its location parallel to the line (RMS  $\sim 4$  m). This is also shown in plots of model resolution (Figure 5), where model parameter  $y$  is unresolved for a ship track parallel to the x-direction. The *PACMAN* survey with radius greater than 0.75–1 Nm performs (sim 9–12 km) and the 1 Nm *Diamond* survey perform best with horizontal RMS misfits of  $< 54$  m. Although the *PACMAN* and *Diamond* surveys perform nearly equally well in our synthetic test, we prefer the former since its quasi-circular pattern results in a smaller Doppler correction (i.e., the ship remains at a nearly constant radius from the instrument for most of the survey). The *PACMAN* survey recovers the horizontal location to within 10 m even for a survey with radius of 0.5 Nm.

Horizontal misfit decreases as survey radius increases instrument location is important for most applications, and its precision increases with survey radius. However, larger surveys require more time at each site and thus  $\tau$  are undesirable. The improvement in misfit with increasing survey radius size saturates at large radius, and the this diminishing return can be quantified by a trade-off parameter,  $\lambda$ , defined as the product between survey radius total survey length and horizontal misfit,  $\delta r_{xy}$  (Figure 4d). The ideal survey radius corresponding size for recovering horizontal location corresponds to a minimum in this parameter occurs at, which occurs at  $\sim 0.75$  Nm radius for the *PACMAN* survey geometry. The decrease in horizontal misfit at 5000 m depth. The saturation of horizontal misfit improvement with increasing radius for *PACMAN* surveys is given shown by  $\nabla r_{xy}$  in Figure 4e (see also Figure S2S6, available in the electronic supplement to this article). The rate of horizontal misfit improvement with increasing radius quickly approaches zero beyond a radius of 0.75–1 Nm.

Depth and water velocity are best resolved by the *PACMAN* geometry with radius  $\geq 1$  Nm, recovering  $z$  essentially equally well resolved by most survey geometries with uncertainties of 10–15 m and  $V_p$  to within 10 m and 32–3 m/s, respectively. Due to strong trade-offs, both depth and water velocity are poorly resolved by the, depending on survey size. This excludes *Line*, *Circle* as well as small ( $< 0.5$  Nm) 0.75 Nm *PACMAN* surveys, which exhibit strong  $z$ - $V_p$  trade-offs. This trade-off can be seen in the resolution and correlation matrices for the *Circle* (Figure 5). The radial portions of the *PACMAN* survey are key for successfully resolving the  $z$ - $V_p$  trade-off. The *Line* survey poorly estimates depth (RMS  $\sim 200$  m) but resolves water velocity to within  $\sim 5$  m/s.



The radial portions of the survey patterns are key for successfully resolving the  $z$ - $V_P$  trade-off, as evidenced by the poor performance by *Circle* surveys. The 1 Nm radius ~~*Cross*, *Diamond*, *PACMAN*~~ survey performs best overall, recovering horizontal position, depth, and water velocity to within 3 m, 10 m, and ~~*Triangle* survey geometries recover  $x$ ,  $y$ ,  $z$ , and  $V_P$  similarly well and are comparable in performance to *PACMAN* of radius 3 m/s, respectively.~~

### 3.4 Application to PacificArray deployment

We applied the location algorithm to acoustic surveys carried out during the Young Pacific ORCA deployment in the central Pacific ocean during April and May of 2018 (*Gaherty et al.*, 2018). The OBS array comprised 30 SIO broadband instruments each equipped with a Model ITC-3013 transponder and deployed from the R/V Kilo Moana in water depths of  $\sim 4400$ - $4800$  m. Acoustic surveys were carried out using an EdgeTech 8011M Acoustic Transceiver command and ranging unit, attached to a hull-mounted 12 kHz transducer. A GPS-transponder offset is not known, and therefore no correction is applied. The relatively calm seas allowed for ideal survey geometry at almost all sites, with a ship speed of  $\leq 8$  knots at a maximum radius of  $\sim 1.3$  Nm.

An example station inversion, as well as the graphical outputs of the location software, is shown in Figures 6-8. Ship velocity is estimated from the survey data by differencing neighboring survey points. In theory, this could be used to correct Doppler shifts (Figure 6c) in travel time (as in the synthetic tests), but we found that this correction did not substantially improve data fit for real stations and so did not apply it to this data set, although it is included as an option in the location codes. Furthermore, the ray-bending corrections,  $\delta T_{\text{bend}}$ , are negligible ( $< 0.01$  ms) at these water depths (see Figures S1-S2, available in the electronic supplement to this article) and change the estimated horizontal location, depth, and water velocity by less than 0.2 m, 0.5-0.75 Nm. ~~Of these alternative survey configurations, the *Diamond* performs best. However, for the same radius of 1 Nm, the *PACMAN* survey yields the lowest RMS misfits, outperforming all other geometries tested. Therefore, the *PACMAN* survey pattern with radius 0.75-1 Nm is the optimal geometry for accurately locating instruments on the seafloor. Even with  $\tau$  varying from the assumed value of 13 ms, we were able to resolve all parameters with high precision, suggesting that the inversion is robust to uncertainties in turn-around time less than m, and 0.3 m/s, respectively; thus, we choose not to apply the ray-bending correction here. The small RMS data misfit of  $\sim 3$  ms, 1.6 ms attests to the quality of the survey measurements and the appropriateness of our relatively simple location algorithm (Figure 6d). The southwestwards drift of  $\sim 340$  m (Figure 7) demonstrates that ocean currents can substantially displace the final OBS location from the surface drop point. The F-test 95% confidence bounds are 5-6 m in the~~



horizontal directions and 10–12 m in depth (Figure 8).

The 30 stations in this array drifted an average distance of 170 m. The mean data RMS misfit was 1.96 ms and the estimated 95th percentile horizontal location error based on the bootstrap analysis was 1.13 m. The water depth estimated by the inversion was systematically shallower than that measured using the shipboard multibeam instrument, differing by an average value of 18.6 m. Assuming the multibeam depths, which are computed using a water sound speed profile that is validated daily by XBT measurements, are correct, this discrepancy indicates that the inversion systematically overestimates sound speed slightly (see Section 4).

Without accurate seafloor corroboration from an ROV, it is not possible to directly verify the locations of stations within the Pacific ORCA array. However, we obtain indirect support for the success of the location algorithm by considering the drift of all stations within this array (Figure 9). Taken together, the direction and magnitude of drift depicts a pattern of clockwise rotation with a minimum diameter of  $\sim 500$  km. This pattern is consistent with a meso-scale cyclonic gyre, with a direction, location, and approximate size that is consonant with large-scale patterns of geostrophic flow observed in this location roughly within the time frame of the deployment (see Figure S10, available in the electronic supplement to this article). The fact that we are able to discern this pattern from our estimated locations is a testament to the accuracy of the *OBSrange* algorithm. This observation also raises the intriguing possibility of using OBS instruments as ad hoc depth-integrated flow meters for the oceans.

## 4 Discussion

A reliable tool for accurately locating instruments on the seafloor is paramount, given the growing number of ocean bottom deployments. We present the first such open-source OBS locator code that is freely available to the scientific community. One of the primary features of the tool is its ability to provide robust confidence bounds on the 3D instrument position on the seafloor, which will inform recovery cruise efforts as well as provide accurate station metadata, which essentially all seismic analyses rely on. Furthermore, this article represents the first systematic exploration of survey geometries that we are aware of, which will help streamline future OBS deployments.

~~The~~ At  $\sim 5000$  m water depth, most survey geometries recover depth and average sound speed velocity equally well. However, the *PACMAN* survey geometry with a radius of  $\sim 1$  Nm ~~is optimal for accurately recovering sufficiently recovers~~ all model parameters in the synthetic tests (Figure 4), including ~~the depth-water velocity trade-off. Typical horizontal locations errors for such a configuration are on the order of  $z$  and  $V_p$~~  to within 10 m and 3 m/s, respectively, and horizontal location to within  $\sim 43$  m. A radius of 0.75 Nm

is sufficient for accurate horizontal ~~location~~-locations (to within  $\sim 54$  m) but with increased ~~RMS error~~ uncertainty in instrument depth and water velocity. However, the smaller 0.75 Nm radius survey reduces the total survey duration by  $\sim 25\%$  compared to the 1 Nm survey ( $\sim 38$  min compared to  $\sim 50$  min for an average ship velocity of 8 kn). If depth ~~and water~~ velocity estimates are of lesser importance and/or time is limited, the smaller 0.75 Nm radius may be desirable. A survey radius larger than 1 Nm is likely not warranted, requiring more ship time at each site for little improvement in misfit. Additionally, failed acoustic returns are more likely to occur at greater distances from the instrument, resulting in data gaps which will negatively impact the inversion. Some ship captains prefer only to steam along straight lines; in such cases, the *Diamond* survey with 1 Nm radius is a viable alternative, given its comparable performance to the *PACMAN* geometry (Figure 4a-c). The radial legs of the survey where the ship travels toward and away from the instrument are crucial for resolving the depth-velocity trade-off. For this reason, the *Circle* configuration cannot independently resolve depth and water velocity and should be avoided.

The *Line* geometry warrants additional discussion as it is commonly used for locating OBS during active-source experiments because it is often the ~~fastest method, simplest pattern.~~ Parallel to the line, the instrument location is resolved quite well (to within  $\sim 4$  m). However, the instrument location perpendicular to the line cannot be resolved. This is evident from the resolution matrix as well as the synthetic bootstrap tests. ~~However, parallel to the line the instrument location is resolved quite well (to within  $\sim 4$  m).~~ The instrument depth is also poorly resolved with RMS of  $\sim 200$  m. In order to resolve both horizontal dimensions and depth, an alternative survey geometry with a range of ship-track azimuths ~~should~~ (or even two perpendicular lines crossing the instrument, such as the *Cross* or *Hourglass* geometry) may be used.

Optimal survey size scales down with decreasing water depth. Figures S7–S8 in the electronic supplement show the synthetic tests from Section 3.3 at 2000 m and 500 m. The optimal survey radius shrinks to 0.5 Nm at 2000 m water depth and 0.25 Nm at 500 m depth, respectively. Uncertainties decrease with decreasing water depth at the preferred survey radius as well as overall. This decrease in optimal survey size with decreasing water depth reduces the importance of the ray-bending corrections at shallow depth. Deviations from the straight ray approximation occur most strongly in shallow water at large offsets, especially if there is an abrupt drop in velocity at the thermocline (see Figures S1, available in the electronic supplement to this article). However, at 0.25 Nm offset for 500 m water depth the perturbation to the travel time is only  $\sim 0.06$  ms, significantly lower than experimental noise, even with the presence of a significant thermocline.

Observations of instrument drift from seafloor to seasurface are byproducts of the location algorithm if instrument drop points are precisely recorded. Figure 9 highlights both the precision of the *OBSrange* algorithm as well as the potential for using instrument drift as an oceanographic observation. A clockwise rotation pattern ~~is observed~~ in instrument drift is observed across the Young Pacific ORCA network that is consis-

tent with a large cyclonic mesoscale feature, providing novel point measurements of depth-integrated flow through the water column that could be used to calibrate models of the vertical shear (Ryan Abernathey, *pers. comm.*). Although there are certainly higher resolution methods of measuring shallow-most characteristics of the water column, such as using an acoustic Doppler current profiler (ADCP), observations tracking from the surface to seafloor may still prove useful. With the further proliferation of seafloor data providing broader spatial and temporal sampling, measurements data such as these could be used to estimate-verify models of vertical structure of the full water column. Furthermore, the The network-wide depth-averaged water velocity is  $\sim 1505$  m/s with standard deviation  $\sim 4.5$  m/s, consistent with the regional decadal average for the month of April ( $\sim 1509$  m/s) from the 2009 World Ocean Database Atlas database (see Data and Resources).

Accounting for a relative offset between the shipboard GPS and transponder may be important for correctly resolving depth and average sound speed for some combinations of survey geometry and GPS-transponder offset. The synthetic test in Section 3.2 shows that if the transponder and GPS are offset by  $\sim 14$  m and the survey pattern is such that the transponder is systematically positioned further than the GPS from the instrument by  $\sim 2.5$  m (in 3-dimensions),  $z$  may be underestimated by as much as  $\sim 28$  m. This bias may explain the  $\sim 18.6$  m shallowing of stations at Young Pacific ORCA compared to depths reported by the shipboard multibeam, where a GPS-transponder offset was not known and no correction was applied. Figure S9 in the electronic supplement shows results for the same synthetic tests from Section 3.3 without the GPS-transponder correction applied. While the PACMAN survey still performs best at recovering horizontal location, it poorly recovers depth and water velocity. However, anti-symmetric patterns (i.e. having both clockwise and counter-clockwise segments and ship tracks toward and away from the instrument) such as Hourglass and Cross2 accurately recover  $z$  and  $V_p$  by effectively canceling the offset anomaly along the anti-symmetric legs. The precise affect that an unaccounted for GPS-transponder offset will have on travel times is entirely dependent on the specific configuration of the GPS-transponder offset relative to the chosen survey pattern. For example, if the GPS and transponder were located at the front and back of the ship, respectively, the circular legs of the survey would be unbiased, with large biases along the radial legs. If the GPS-transponder offset cannot be determined before an experiment and accurate depth and sound speed are desired, an anti-symmetric survey pattern with clockwise/counter-clockwise and radial towards toward/away from the instrument may be used with a slight reduction in horizontal precision.

We find that the Doppler travel-time corrections only slightly improve RMS misfit-improve RMS travel-time misfit by only  $\sim 0.3$  ms ( $\sim 7\%$  reduction) for the synthetic tests-test (Figure 3) and do not improve RMS misfit for the real data. However, the test shows a reduction in horizontal errors of  $\sim 2$  m ( $\sim 40\%$ ) when using the correction, and therefore, we include the Doppler correction as an option in the code. One possible

reason why the corrections fail to improve the travel-time misfit for real data may simply be the inability to accurately estimate ship velocity resulting from poor GPS spatial precision and/or poor ~~spatial-temporal~~ spatiotemporal sampling along the ship tracks, especially when large data gaps are present. ~~Additionally, the algorithm does not include a travel-time correction to account for a possible offset in the GPS receiver and the acoustic transponder relative to the instrument (i.e. it is assumed that they are colocated). Let us consider a worst-case scenario where the GPS and transponder are at opposite ends of the ship and one is closer to the instrument by  $\sim 30$  m. For a 1 Nm radius survey with the instrument at 5 km depth, the travel-time difference due to the separation would be  $\sim 14$  ms. However, for quasi-circular geometries such as The *PACMAN*, this timing error will be static around the perimeter of the circle affecting primarily the depth and water velocity; Thus, it should not significantly effect the estimated horizontal instrument location.~~ survey pattern is quasi-circular and therefore the Doppler correction is quite small ( $< 2$  ms) along the majority of the survey (Figure 6c).

## 5 Conclusion

We present *OBSrange*, a new open-source tool for robustly locating OBS on the seafloor. ~~Two-way travel times~~ Acoustic ranging two-way travel-time data between the ship and OBS are inverted for horizontal instrument position, instrument depth, and depth-averaged water ~~velocity~~ sound speed. Our algorithm can account for travel time perturbations due to ship motion between sending and receiving, ray bending through the water column, and a static offset between the GPS and transponder. Uncertainties are calculated for all four parameters using bootstrap resampling, and an F-test grid search provides a 3D confidence ellipsoid around the station. The tool is validated using a synthetic travel-time dataset yielding typical horizontal location errors on the order of  $\sim 4$  m for 5000 m water depth. Various survey geometries are explored through synthetic tests, and we find that the *PACMAN* survey configuration ~~with is most successful at recovering horizontal location, even with an unaccounted for GPS-transponder offset. Optimal survey radius depends on water depth and desired precision ranging from 0.75–1 Nm at 5000 m water depth to  $\sim 1$  Nm radius is the optimal geometry for robustly recovering the true instrument position while minimizing the trade-off between depth and water velocity~~ 0.25 Nm at 500 m depth. The *Circle* configuration is unable to resolve depth and water velocity and should be avoided. The *Line* survey pattern, commonly used in short-period OBS deployments, recovers instrument location parallel to the line but has no resolution in the orthogonal direction. If instrument depth and/or water velocity are of particular importance, a survey pattern such as *PACMAN* is desirable, which contains long ship tracks toward and away from the instrument. If GPS-transponder offset is uncertain and cannot be measured, the *Cross2* or *Hourglass* patterns provide

~~the best resolution of~~ depth and water velocity ~~are of lesser importance and/or time is restricted, a PACMAN~~  
~~survey of radius  $\sim 0.75$  Nm is sufficient for resolving horizontal position to  $\sim 5$  m. The tool is applied.~~ We  
~~apply the tool~~ to the 2018 ~~Young Pacific ORCA~~ Young Pacific ORCA deployment yielding an average RMS  
data misfit of 1.96 ms and revealing a clockwise-rotation pattern in the instrument drifts with a diameter  
of  $\sim 500$  km that correlates with a cyclonic mesoscale feature. This observation further demonstrates the  
precision of *OBSrange* and suggests the possibility of utilizing instrument drift data as an oceanographic  
tool for estimating depth-integrated flow through the water column.

## 6 Data and Resources

The complete *OBSrange* code is available in both MATLAB and Python at [insert IRIS SeisCode link]. All  
2018 Young Pacific ORCA survey data are available upon request by contacting the author J.B. Russell.  
Geostrophic flow and dynamic sea level measurements are provided by Copernicus Marine Environment Mon-  
itoring Service (CMEMS) at [http://marine.copernicus.eu/services-portfolio/access-to-products/?option=com\\_csw&view=det](http://marine.copernicus.eu/services-portfolio/access-to-products/?option=com_csw&view=det).  
(last accessed October 2018). Ocean sound speed profiles compiled from the 2009 World Ocean ~~Database~~  
Atlas database by Brian Dushaw are available at <http://staff.washington.edu/dushaw/WOA/> (last accessed  
~~October 2018~~ February 2019).

## 7 Acknowledgments

The authors thank the captain, crew, and engineers of the R/V Kilo Moana who made the deployment  
possible as well as the Scripps Institution of Oceanography engineers aboard the vessel who provided the  
OBS instrumentation and whose expertise contributed greatly to the success of the Young Pacific ORCA  
deployment. This work was supported by NSF grant OCE-1658214 (Z. Eilon) as well as an NSF Graduate  
Research Fellowship DGE-16-44869 (J.B. Russell). The authors additionally thank Ernest Aaron for key  
conversations on the acoustic equipment as well as sharing the SIO location code written by Paul Georgief,  
Ryan P. Abernathey for guidance interpreting instrument drift in relation to ocean dynamics, and William  
Menke for insightful conversations on model resolution in the presence of prior constraints. Finally, we thank  
Leah Mosher for her assistance with Figure 1 of the article.

587 **Joshua B. Russell**  
588 **Department of Earth and Environmental Sciences**  
589 **Lamont-Doherty Earth Observatory of Columbia University**  
590 **61 Route 9W - PO Box 1000**  
591 **Palisades, New York 10964 U.S.A.**

592  
593 **Zachary Eilon**  
594 **Department of Earth Science**  
595 **2116 Webb Hall**  
596 **University of California Santa Barbara**  
597 **Santa Barbara, California 93106 U.S.A.**

598  
599 **Stephen G. Mosher**  
600 **Department of Earth and Environmental Sciences**  
601 **University of Ottawa**  
602 **Office Number 15034, 120 University Private**  
603 **Ottawa, Ontario**  
604 **Canada K1N 6N5**

## References


- Accardo, N. J., J. B. Gaherty, D. J. Shillington, C. J. Ebinger, A. A. Nyblade, G. J. Mbogoni, P. R. N. Chindandali, R. W. Ferdinand, G. D. Mulibo, G. Kamihanda, D. Keir, C. Scholz, K. Selway, J. P. O. Donnell, G. Tepp, R. Gallacher, K. Mtelela, J. Salima, and A. Mruma (2017), Surface wave imaging of the weakly extended Malawi Rift from ambient-noise and teleseismic Rayleigh waves from, *Geophysical Journal International*, *209*, 1892–1905, doi:10.1093/gji/ggx133.
- [Agency, N. I., and Mapping \(2000\), Department of Defense World Geodetic System 1984: its definition and relationships with local geodetic systems.](#)
- [Creager, K. C., and L. M. Dorman \(1982\), Location of Instruments on the Seafloor by Joint Adjustment of Instrument and Ship Positions, \*Journal of Geophysical Research\*, \*87\*, 8379–8388.](#)
- Davison, A., D. Hinkley, and E. Schechtman (1986), Efficient bootstrap simulation, *Biometrika*, *73*(3), 555–566.
- Eilon, Z. C., and G. A. Abers (2017), High seismic attenuation at a mid-ocean ridge reveals the distribution of deep melt, *Science Advances*, *3*, 1–8.
- Gaherty, J., Z. Eilon, D. Forsyth, and G. Ekström (2018), Imaging small-scale convection and structure of the mantle in the south pacific: A U.S. contribution to an international PacificArray, in *IRIS Workshop 2018*, HC7, Albuquerque, NM U.S.A.
- Hawley, W. B., R. M. Allen, and M. A. Richards (2016), Tomography reveals buoyant asthenosphere accumulating beneath the Juan de Fuca plate, *Science*, *353*(6306), 1–4.
- [Hoffmann-Wellenhof, B., H. Lichtenegger, and J. Collins \(2001\), \*Global Positioning System: theory and practice\*, fifth edit ed., 279–284 pp., Springer, Vienna, Springer-Verlag, New York..](#)
- Hung, W.-l., E. S. Lee, and S.-c. Chuang (2011), Balanced bootstrap resampling method for neural model selection, *Computers and Mathematics with Applications*, *62*(12), 4576–4581, doi:10.1016/j.camwa.2011.10.039.
- Janiszewski, H. A., and G. A. Abers (2015), Imaging the Plate Interface in the Cascadia Seismogenic Zone : New Constraints from Offshore Receiver Functions, *Seismological Research Letters*, *86*(5), 1261–1269, doi:10.1785/0220150104.

- Lin, P.-Y. P., J. B. Gaherty, G. Jin, J. A. Collins, D. Lizarralde, R. L. Evans, and G. Hirth (2016), High-resolution seismic constraints on flow dynamics in the oceanic asthenosphere, *Nature*, *535*(7613), 1–9, doi:10.1038/nature18012.
- Lynner, C., and M. Bodmer (2017), Mantle flow along the eastern North American margin inferred from shear wave splitting, *Geology*, *45*(10), 1–4, doi:10.1130/G38980.1.
- Menke, W. (2018), *Geophysical Data Analysis: Discrete Inverse Theory*, fourth edition ed., Elsevier.
- Takeo, A., H. Kawakatsu, T. Isse, K. Nishida, H. Sugioka, A. Ito, H. Shiobara, and D. Suetsugu (2016), Seismic azimuthal anisotropy in the oceanic lithosphere and asthenosphere from broadband surface wave analysis of OBS array records at 60 Ma seafloor, *Journal of Geophysical Research : Solid Earth*, *121*, 1927–1947, doi:10.1002/2015JB012429.Received.



Table 1: Details of the synthetic tests in Figure 7-3 for a *PACMAN* survey of radius 1 Nm and 5050 m instrument depth. Final model parameters for OBSrange inversions are the average of 1000 bootstrap iterations. Parameters that are held fixed during the inversion are denoted in italics and their final values omitted. Parameters  $x$  and  $y$  are displayed as distance from the drop location.

Model Name	method	Doppler correction	ellipsoid correction	GPS correction	remove bad data	x (m)	y (m)	z (m)	V <sub>p</sub> (m/s)	
(1) OBSrange	OBSrange	Yes	Yes	Yes	Yes	initial	0	0	-5000	1500
						final	199	-399	-5047	1519
						true	200	-400	-5050	1520
						RMS	1.9	2.2	9.9	2.7
(2) No Doppler	OBSrange	No	Yes	Yes	Yes	initial	0	0	-5000	1500
						final	200	-396	-5041	1518
						true	200	-400	-5050	1520
						RMS	1.9	4.6	12.4	3.4
(3) No Ellipsoid	OBSrange	Yes	No	Yes	Yes	initial	0	0	-5000	1500
						final	200	-399	-5055	1522
						true	200	-400	-5050	1520
						RMS	1.9	2.8	10.9	3.1
(4) No GPS	OBSrange	Yes	Yes	No	Yes	initial	0	0	-5000	1500
						final	198	-398	-5022	1512
						true	200	-400	-5050	1520
						RMS	2.8	3.4	30.1	8.8
(5) Fix- $V_p$	OBSrange	Yes	Yes	Yes	Yes	initial	0	0	-5000	1500
						final	192	-393	-4977	-
						true	200	-400	-5050	1520
						RMS	8.2	7.6	73.3	20.0
(6) Fix-Z	OBSrange	Yes	Yes	Yes	Yes	initial	0	0	-5000	1500
						final	194	-395	-	1506
						true	200	-400	-5050	1520
						RMS	5.8	5.4	50.0	13.6
(7) XY-only	OBSrange	Yes	Yes	Yes	Yes	initial	0	0	-5000	1500
						final	177	-367	-	-
						true	200	-400	-5050	1520
						RMS	26.0	34.6	50.0	20.0
(8) SIOgs	Grid Search	No	No	No	Yes	initial	0	0	-5000	1500
						final	177	-365	-	-
						true	200	-400	-5050	1520
						RMS	23.4	35.0	50.0	20.0
(9) SIOgs no QC	Grid Search	No	No	No	No	initial	0	0	-5000	1500
						final	508	-498	-	-
						true	200	-400	-5050	1520
						RMS	307.7	97.7	50.0	20.0

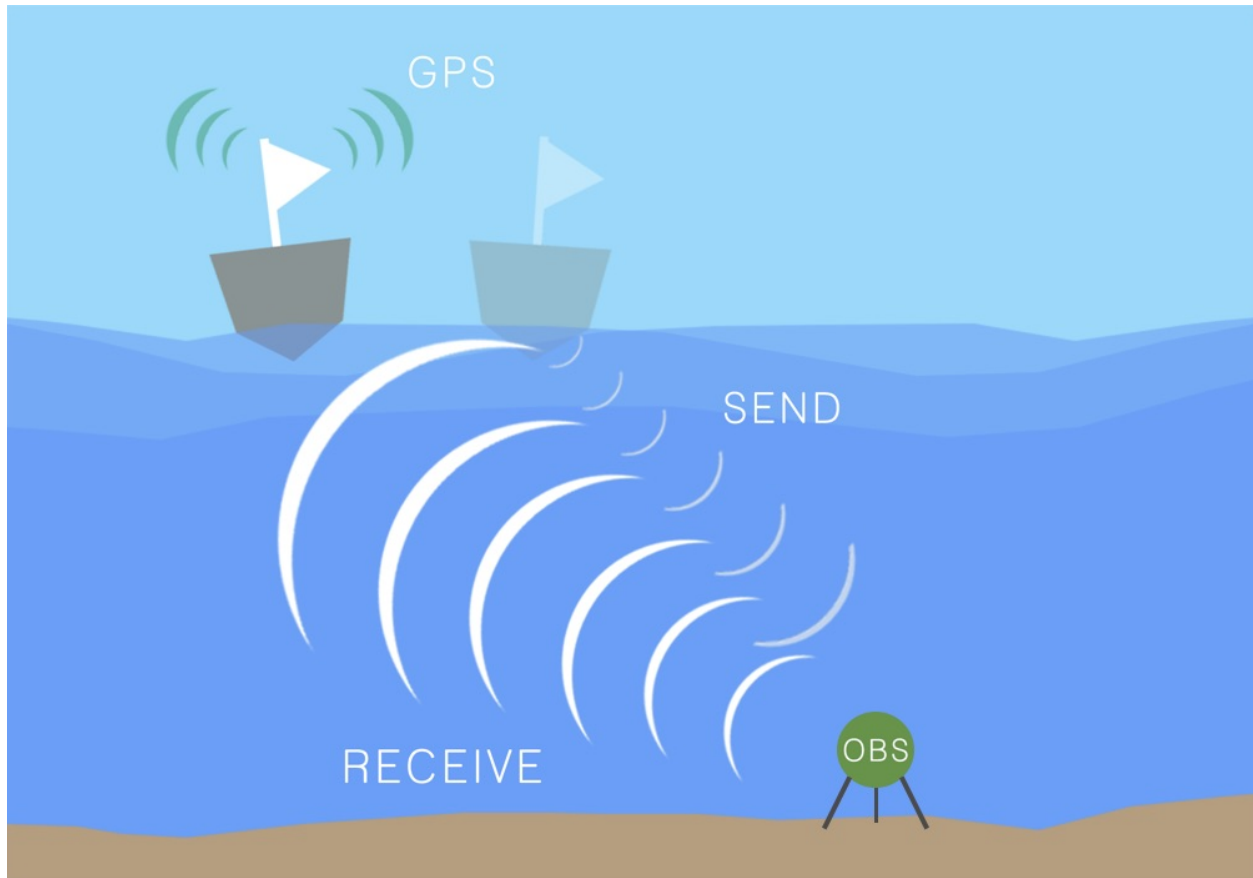

**Figure 1:** Schematic of the acoustic ranging procedure. A 12 kHz acoustic pulse is sent from ship to OBS. After a time  $\tau$ , the OBS returns the acoustic signal to the ship at its new position. The difference in these send- and receive-times is referred to as the “*Doppler*” correction,  $\delta T$ . From this schematic, it is clear that only ship tracks traveling toward or away from the instrument will result in a non-zero  $\delta T$ .

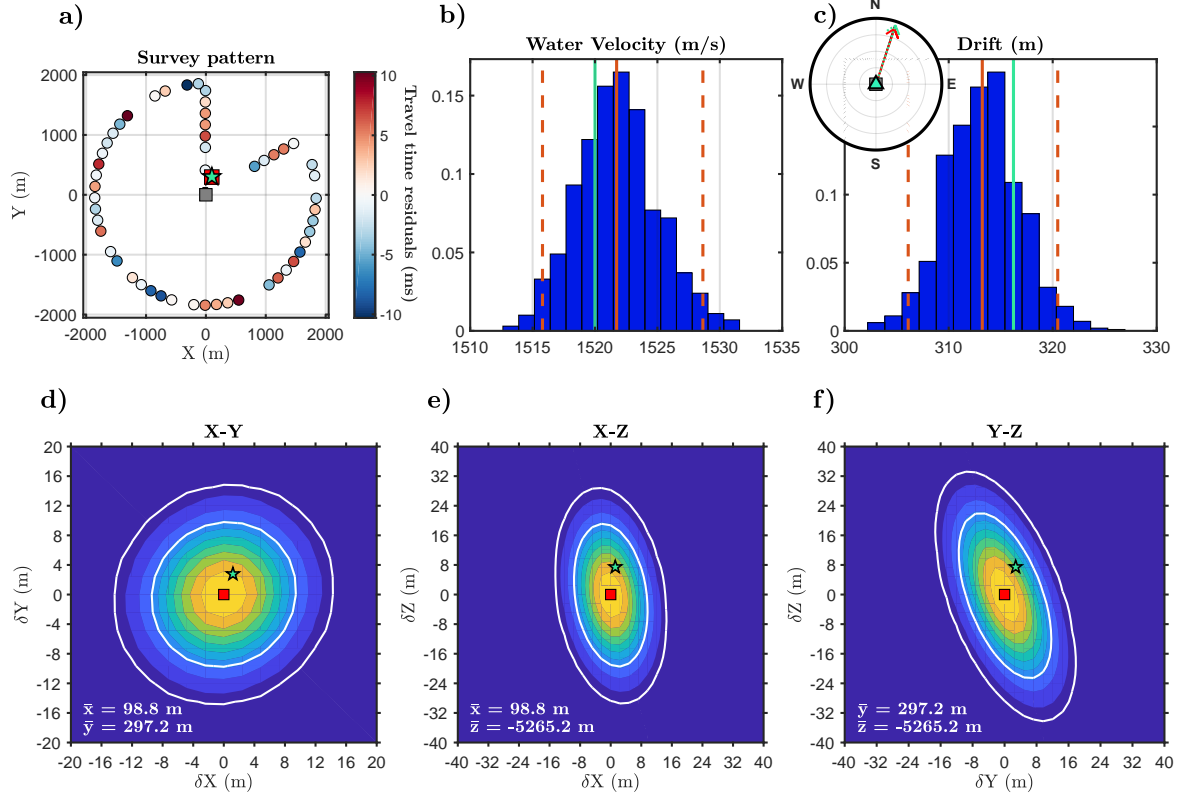


Figure 2: Test of location algorithm using synthetic data. —A comparison of calculated for a station at 5000 m depth using the true input values (green star and lines) with the inverted model parameters (red circle). The PACMAN survey pattern colored by travel-time residuals. The gray and red solid lines demonstrates that squares represent the drop location, depth, and water velocity are extremely well recovered final inversion, and the estimated uncertainties on these parameters are consonant with the actual misfit respectively. Top three plots show slices through The green star denotes the F-test surface, contoured by probability true location. Bottom two plots show b-c) Bootstrap histograms from a bootstrap analysis with 95th percentile values indicated by dashed red lines and the true value in green. Inset shows the direction of true (green dashed) and estimated (red) drift with respect to the starting location. d-f) Slices through the F-test surface with white lines showing 68% and 95% confidence. Symbols are the same as a). Comparison of the true input values with the inverted model parameters demonstrates that the location, depth, and water velocity are extremely well recovered, and the estimated uncertainties on these parameters are consonant with the actual misfit.

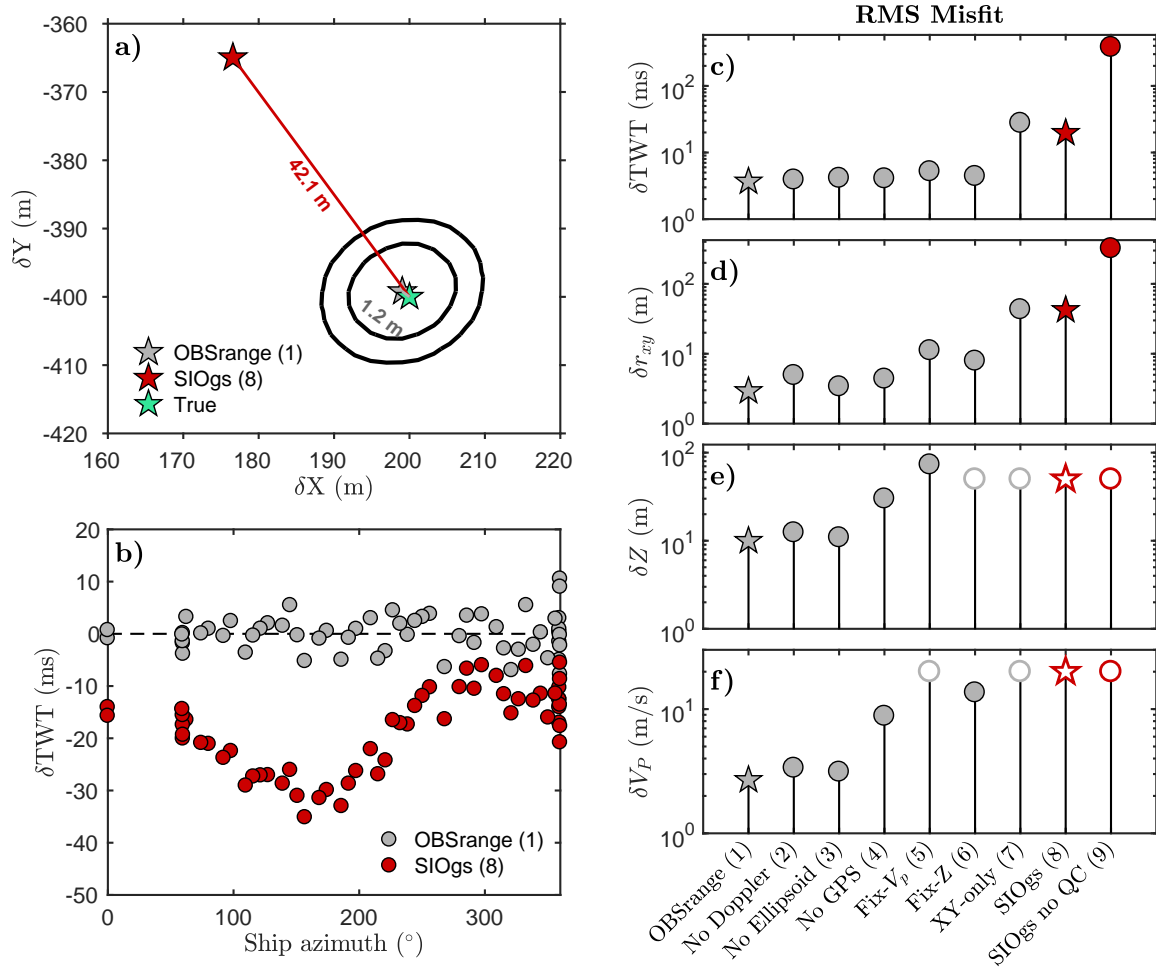


Figure 3: Synthetic test of OBSrange performance (gray symbols) compared with the SIO tool (red symbols) for a *PACMAN* survey of radius 1 Nm [at 5050 m depth](#). a) Map view comparing the OBSrange and ~~SIO~~ [SIOgs](#) inverted instrument locations with the true location in green. Black contours show the 68% and 95% confidence from the OBSrange F-test. b) Two-way travel time (TWT) residuals for both methods as a function of ship azimuth from the true station location. c) TWT and d-f) model parameter RMS misfits for ~~8~~ [the 9](#) inversions, where closed symbols represent parameters that are solved for in the inversion and open symbols are parameters that remain fixed throughout the inversion. The horizontal instrument location misfit is given by  $\delta r_{xy} = \sqrt{\delta x^2 + \delta y^2}$ . Stars in c-f mark the inversion results shown in a) and b). See table 1 for details of each inversion.

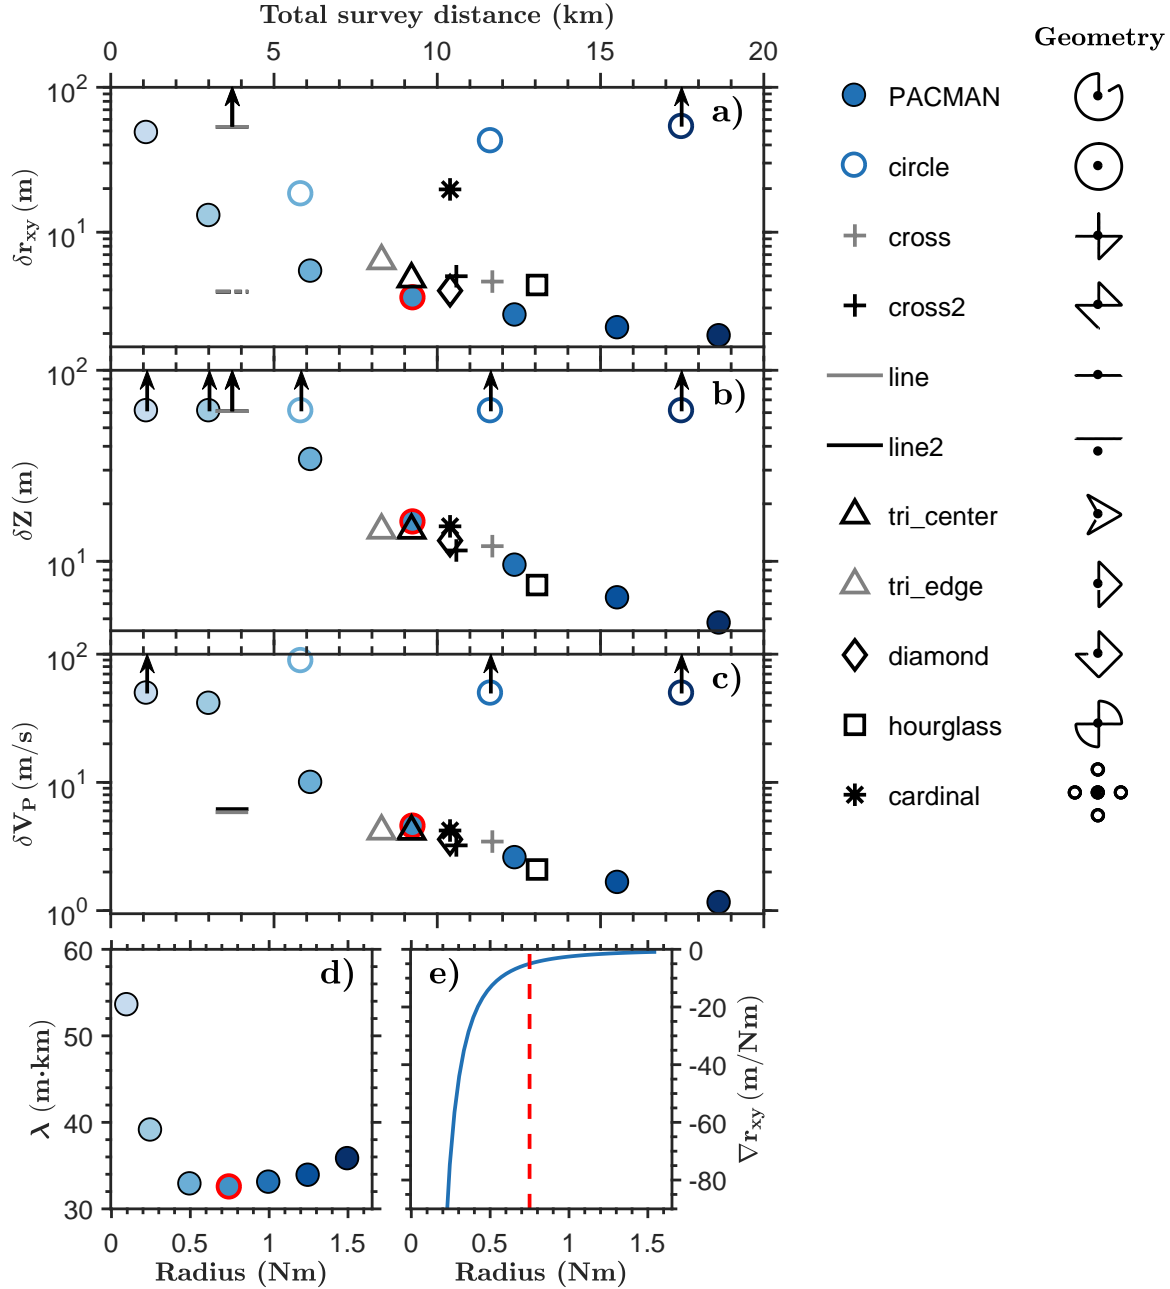


Figure 4: **a-c)** RMS model parameter misfits for Test of 10,000 synthetic survey realizations of various survey geometries and sizes for an instrument at a nominal depth of 5000 m. Blue filled circles represent PACMAN surveys ranging from 0.1–1.5 Nm. Circle surveys (blue open circles) are of radius 0.5 Nm, 1 Nm, and 1.5 Nm. All other surveys (black and gray symbols) are for 1 Nm radius. The “optimal” PACMAN survey is circled in red (see d). **a-c)** RMS model parameter misfits for each survey with varying radii respect to total survey length: PACMAN, Circle, Cross, Line, Triangle, Diamond, LineHourglass, and TriangleCardinal where Cardinal comprises multiples pings overhead and at 4 cardinal points. Each survey geometry is shown to the left-right of its respective legend entry. Horizontal instrument location misfit is again given by  $\delta r_{xy} = \sqrt{\delta x^2 + \delta y^2}$ . **d)** Quantification of diminishing improvement as radius of PACMAN survey is increased, where  $\lambda$  is the product between survey radius and  $\delta r_{xy}$ . The lowest (ideal)–“optimal” value of  $\lambda$  occurs at a radius of 0.75 Nm (circled in red). **e)** Change in the rate of improvement of horizontal location misfit with increasing PACMAN survey radius ( $\nabla r_{xy}$ ), where the red dashed line indicates minimum  $\lambda$  (see Figure S6, available in the electronic supplement to this article). Improvements in horizontal misfit become negligible-small as radius increases beyond 0.75–1 Nm.

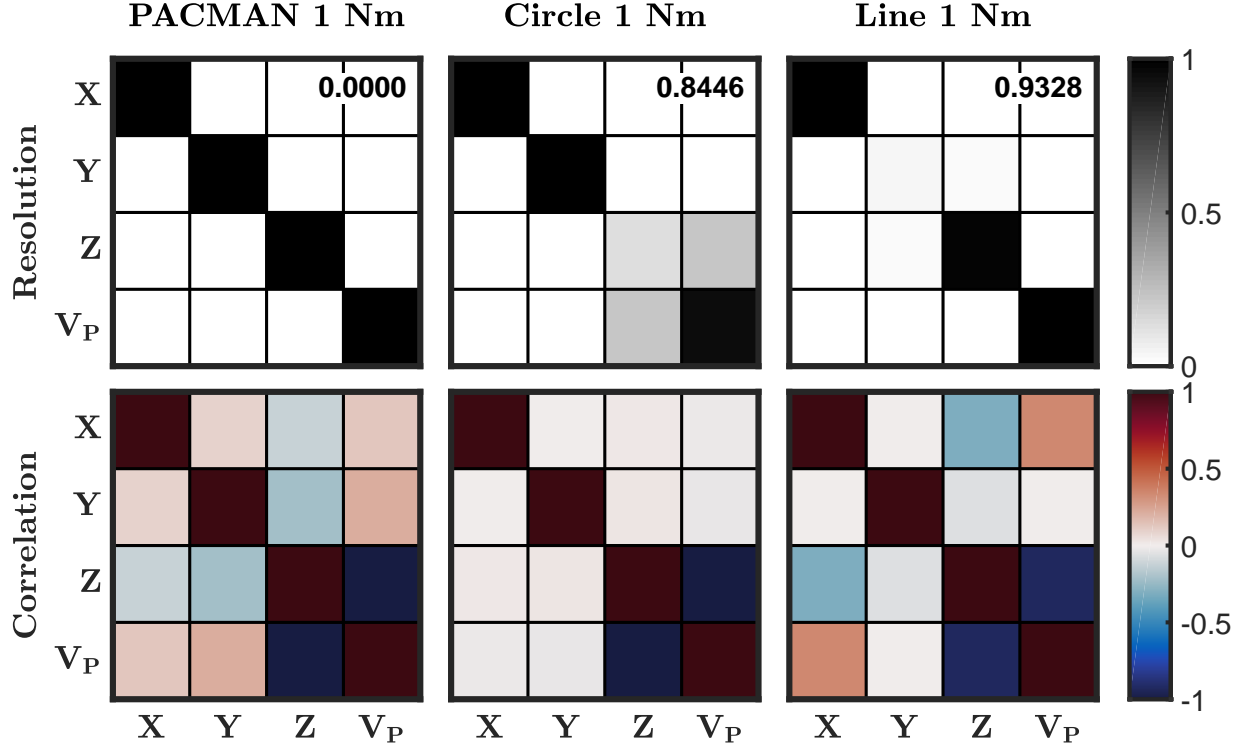


Figure 5: Model resolution and correlation matrices for 3 survey configurations of radius 1 Nm: (left) *PACMAN*, (center) *Circle*, and (right) *Line*. The *Line* survey is parallel to the x-direction.  $\text{spread}(\mathbf{R})$  is listed at the top right of each resolution matrix. A spread of zero signifies good model resolution for all parameters.

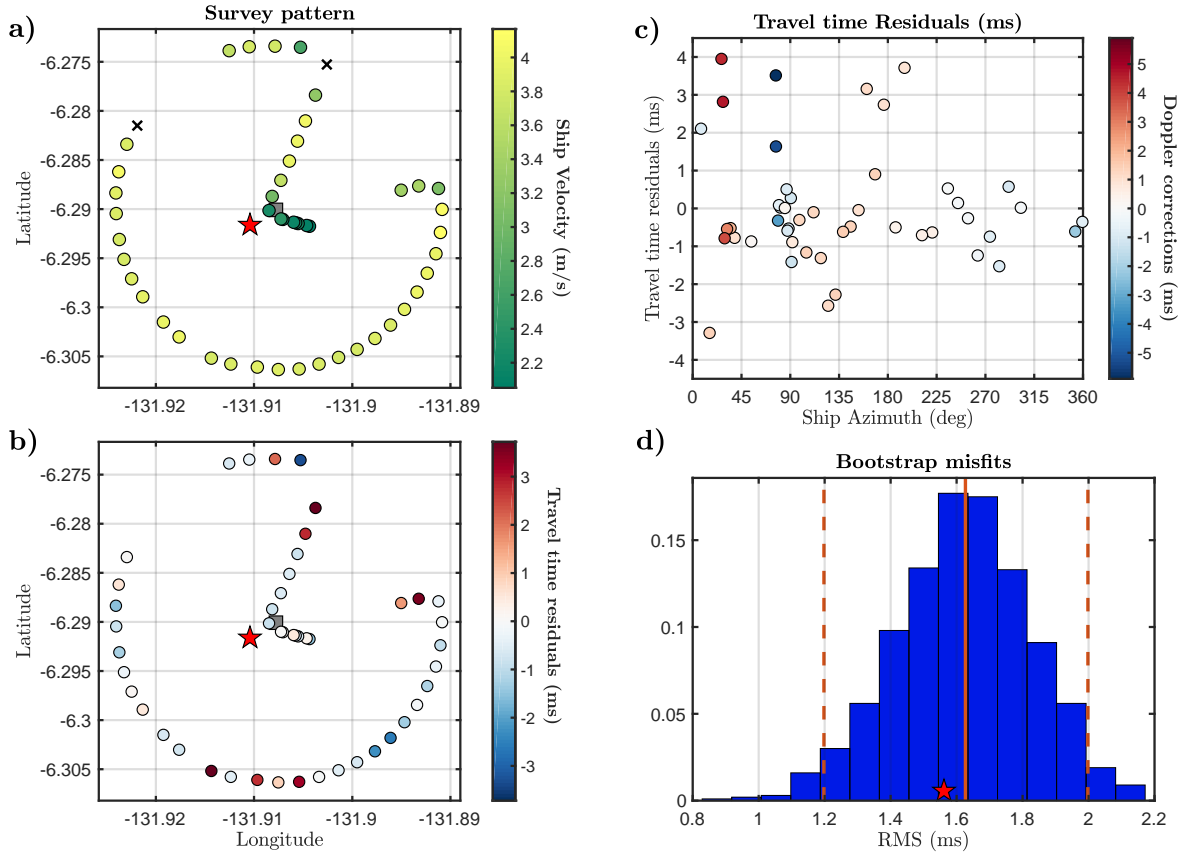


Figure 6: Example inversion at station EC03 in the 2018 Young Pacific ORCA deployment. a) Map view of acoustic survey; colored circles are successful acoustic range measurements, black crosses are bad measurements rejected by automatic quality control (greater than 500 ms from predicted travel time), grey square is drop location, red star is final location. b) Map view of data residuals based on travel times computed using bootstrap mean station location. c) Data residuals plotted as a function of azimuth, colored by the computed Doppler correction (not used in this inversion). d) Histogram of data RMS from the bootstrap; the RMS of the final model is shown as a red star.

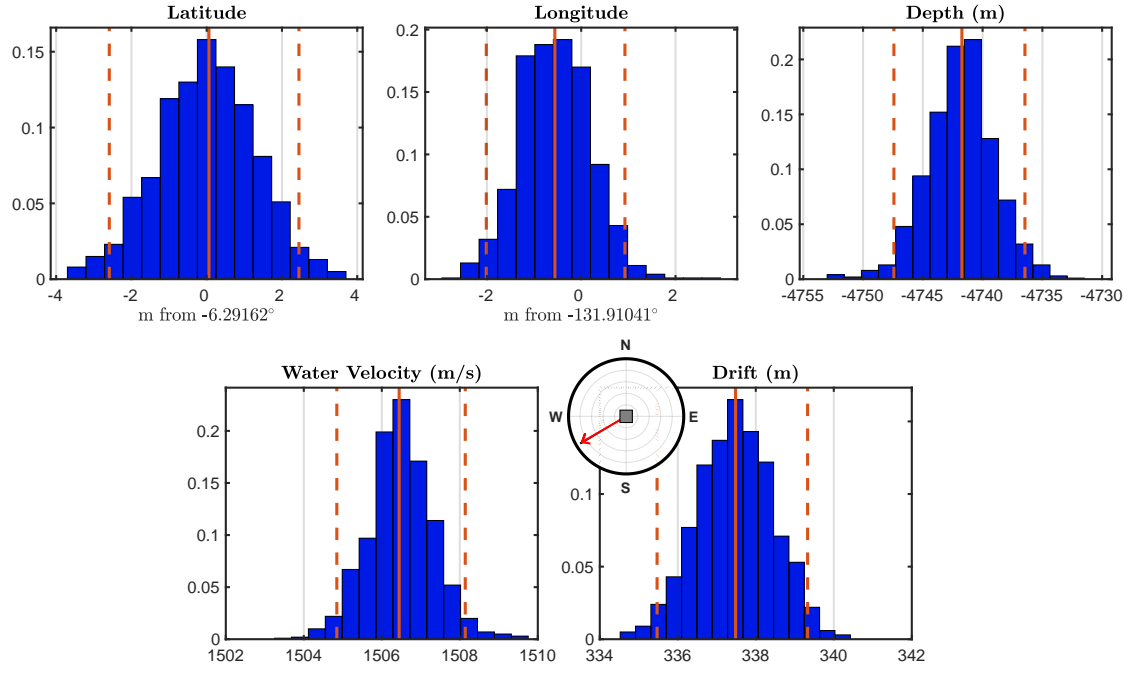


Figure 7: Histograms of model parameters from the bootstrap inversion of station EC03 in the 2018 Young Pacific ORCA deployment. Red solid line shows mean value, while dashed lines indicate 95th percentiles. Latitude and longitude are plotted in meters from the mean point, for ease of interpretation. The inset plot shows the mean drift azimuth from the drop location (grey square).



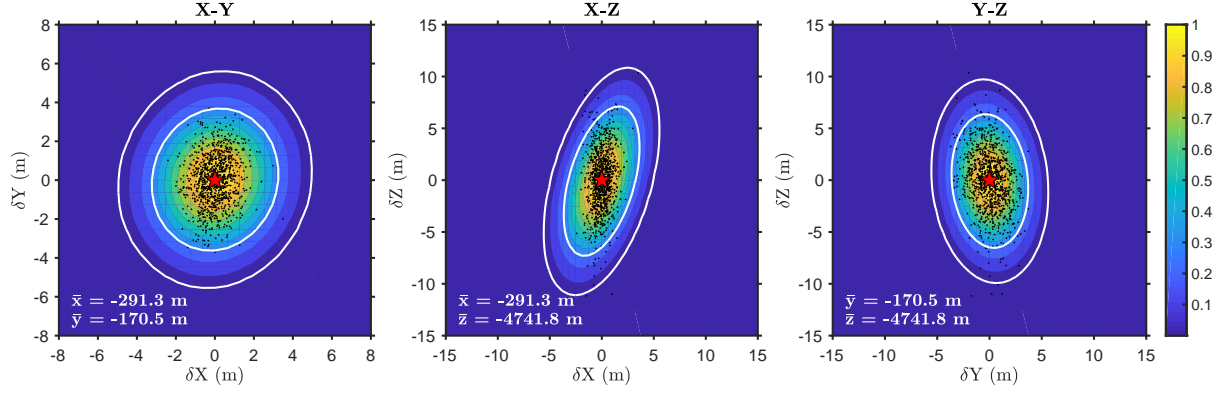


Figure 8: Three orthogonal slices through the F-test probability volume for station EC03 in the 2018 Young Pacific ORCA deployment, contoured by probability of true station location relative to the best fitting inverted location  $(\bar{x}, \bar{y}, \bar{z})$ , indicated by the red star. White contours show 68% and 95% contours. Black dots show individual locations from the bootstrap analysis (Figure 7).

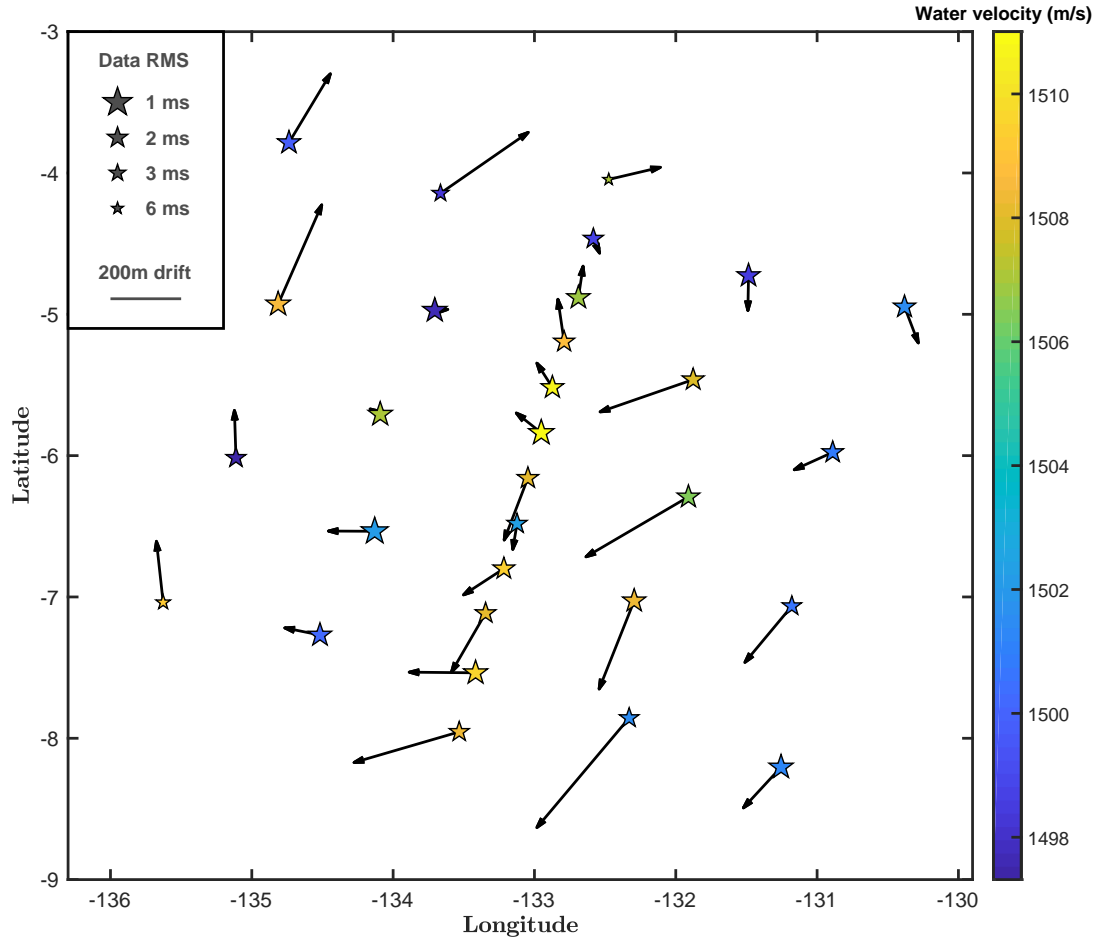


Figure 9: Pacific ORCA deployment, showing drift directions and magnitudes of each OBS instrument relative to their drop points, as well as the water velocity at each location. Note that drift arrows are not to geographic scale. The systematic clock-wise pattern of drift within the water column resembles a meso-scale cyclonic feature moving through this region approximately during the deployment (see Figure S1, available in the electronic supplement to this article). Station symbol sizes are inversely scaled to acoustic travel time data misfit.