

DEPARTMENT OF MECHANICAL AND INDUSTRIAL
ENGINEERING

TMM4540 - INDUSTRIAL ICT ENGINEERING DESIGN AND
MATERIALS, SPECIALIZATION PROJECT

Scope Study of Latency for Remote Control in ATO

Author:

Einar Thingstad Myhrvold

Student number:

543951

Supervisor:

Nils O.E. Olsson

Date: 16.12.2025

Preface

Information about me and relevant history, about the project and a thank you to Nils and other contributors.

This article was written for the subject TMM4540 - Industrial ICT Engineering Design And Materials, Specialization Project.

I have had no previous experience about ATO. But subject & knowledge from ...Insert subjects... has been used.

Abstract

A short summary of what the paper contains and why I have written about it.

Table of Contents

List of Figures	v
List of Tables	v
1 Introduction	1
1.1 Purpose	1
1.1.1 Research Questions	1
1.2 Digitalization in Railway	1
1.3 System Overview	1
1.3.1 Components	1
2 Method	2
2.1 Research Methodology	2
2.2 Literature Review Strategy	2
2.2.1 Search Strategy and Databases	2
2.2.2 Inclusion Criteria	2
2.2.3 Search Queries and Refinement	3
2.3 Supporting Tools	3
2.4 Validity	4
2.5 Reliability	4
3 Theory	5
3.1 ATO	5
3.2 GoA	5
3.3 ERTMS	6
3.4 ETCS	7
3.4.1 Levels	7
3.4.2 Modes	8
3.5 Cellular communications	8
3.5.1 5G URLLC	8
3.5.2 GSM-R	8
3.5.3 FRMCS	8
3.5.4 Wi-Fi	9
3.6 ERTMS/ATO	9
3.7 Latency	9

3.7.1	Latency Measurements	10
3.8	Regulations	10
3.8.1	WP41 - Validation Criteria Tramways	11
3.8.2	3GPP TS 22.289	11
4	Related Work	13
4.1	Train Control	13
4.1.1	ATO-Cargo Project	13
4.1.2	Jürgensen 2025	13
4.1.3	Kozarevic 2025	14
4.1.4	Mejías 2024	14
4.1.5	FP2R2Dato, EuropesRail 2024 D41.2	14
4.1.6	FP2R2Dato, EuropesRail 2023 D5.4 - Chapter 12	14
4.1.7	Brandenburg 2023	15
4.2	Car Control	15
4.2.1	Ouden 2022	15
4.2.2	Sato 2021	15
4.2.3	Nakamura 2021	15
4.2.4	Jernberg 2024	15
4.2.5	Kaknjo 2018	16
4.2.6	Neumier 2019	16
4.2.7	Kang 2018	16
4.3	Drone Control	16
4.3.1	N. González 2023	16
4.3.2	Larsen 2022	16
4.3.3	Böhmer 2020	17
4.4	Crane Control	17
4.4.1	Brunnström 2020	17
4.5	Ethics	17
4.6	Cybersecurity	17
5	Results and discussion	18
5.1	Human factors results	18
5.1.1	Adaptation to stable latency.	23
5.2	Comparing latency for different vehicles	23
5.2.1	Calculation of latency	25

5.3	Threshold for acceptable latency	25
5.4	Tools and protocols for remote control	25
5.5	Theory v. Practical test	27
5.6	Future work	27
6	Conclusion	28
	Bibliography	29

List of Figures

1	GoA	6
2	ETCS Level 1	7
3	ETCS Level 2	7
4	ERTMS/ATO solution	9

List of Tables

1	Inclusion Criteria for Literature Review	3
2	Summary of Refined Search Queries.	3
3	Summary of Refined Search Queries.	3
4	Grades of Automation (GoA), summary based on IEC and industry sources.	5
5	Some regulations from 3GPP TS 22.289 Rel-17	12
6	Human evaluation of Signal Attributes and Latency	20
7	Different Latency Measured and Thresholds used	24
8	Tools evaluation of Latency	26

1 Introduction

Introduction to the paper and theories that are going to be used.

1.1 Purpose

What is the purpose of this paper. Why are we doing it. Find a way to effectively measure, validate and evaluate latency for remote train operation systems. Establish acceptable latency thresholds that ensure safety and performance. Identify key factors influencing latency and propose optimization strategies.

1.1.1 Research Questions

What are we hoping to answer and/or achieve during this paper To achieve the purpose of this paper, the research questions listed below was created to help.

1. RQ1: How is latency evaluated for railway and other industries?
2. RQ2: What parameters influence latency in remote train operation systems?
3. RQ3: How can we test different video streaming protocols and their impact on real-time performance of remote train operation systems?

1.2 Digitalization in Railway

Railway digitalization evolved from early computer-assisted signalling and centralized traffic control, through modern Automatic Train Protection (ATP) systems, to full ERTMS/ETCS deployments and traffic management platforms. Recent steps have focused on communication-based train control (CBTC) in metros, ETCS rollout on mainlines, and the integration of predictive maintenance and data analytics tools. Projects such as national ETCS rollouts, the UK East Coast Digital Programme, and research initiatives like ATO-Cargo exemplify a shift from isolated automation pilots to system-wide modernization that combines ATO, interoperability standards (TSIs), and remote supervision concepts [1, 2].

1.3 System Overview

A section to go threw the system as it stands.

1.3.1 Components

A overview of the components in use. Also mentioning alternatives to the ones we have in use.

2 Method

2.1 Research Methodology

The following sections detail the methodological approach and structured review process used to address the research questions of this study. This methodology is designed to ensure a robust foundation for the evaluation of latency for remote train operations.

As of a scoping study described by Arksey [3] the process followed the steps of deciding research questions before moving over to identifying relevant studies. The research questions has been slightly modify to adapt to the information available and what was discover during the reseach fase. All the papers and studies was also selected before charting data, comparing, summarizing and reporting on the results. As altso mentioned in [3], one point of a scope study is to identify research gaps in the existing literature. Which was very useful and ended up being most of the focus for this paper.

This study uses a Mixed Methods approach. Which includes combining two types of information: qualitative (ideas, experiences, and opinions) and quantitative (numbers and statistics). This method is chosen because using both together gives us a complete picture, where relying on only one type of data would not be enough [4].

The study utelizes convergent parallel design for this. Which entails collecting and analyzing the numbers and the opinions at the same time. Then comparering the results from both to see how they fit together and explain our final findings [5]. The results from technical performance testing (quantitative) are thus validated and enriched by the practical feedback received from user trials (qualitative), leading to more actionable conclusions.

2.2 Literature Review Strategy

The literature review was conducted to establish a comprehensive theoretical and evidential basis for the research. The process was guided by the principle of Evidence-Based Standards to ensure methodological rigor and focus [6].

2.2.1 Search Strategy and Databases

A multi-platform search approach was utilized to retrieve a wide array of high-quality sources. The primary databases included:

- Scopus: For retrieving peer-reviewed, high-impact scientific articles.
- Google Scholar: For broader academic and institutional literature.
- *Andre kilder/databaser*

While maintaining a strong reliance on peer-reviewed scientific material, relevant non-academic reports and industry publications were also considered to provide a comprehensive perspective, with all information traced to reliable sources. Espacially theoretical part of the background research has benefitted from non-academic sources.

2.2.2 Inclusion Criteria

To ensure the study is based on the most relevant and current information, specific criteria were applied to filter the search results. Given the rapid pace of technological change, a focus was placed on recent publications. Where modern papers have refrenced to older papers, I have include some as to say and show where certain numbers are comming from and how they have influenced results.

Table 1: Inclusion Criteria for Literature Review

ID	Inclusion Criteria (IC)
IC1	Publication Date: Between 2020-2025
IC2	Language: Written in English
IC3	Document Type: Primarily "Article", "Conference Paper" or "Thesis"

I did not include a specific keyword criteria because of the exploratory nature of the research questions. Instead, broad search terms were used initially, with relevance determined through title and abstract screening against the inclusion criteria.

2.2.3 Search Queries and Refinement

Initial broad queries were executed and subsequently refined to focus on specific research gaps, such as the intersection of video communication and system latency. For example, Table 2 illustrates a query targeting the core technological elements of the study.

Table 2: Summary of Refined Search Queries.

Search Query	Initial Hits	Filtered Hits
"Remote" "Train operation" OR "Train control"	12 900	5 380
"Automatic" "Train operation" OR "Train control"	17 600	11 900
"Vehicle" "streaming" "protocols" "real-time" "performance"	36 800	17 400
"Ethics" "Remote" "Control" "Vehicle"	298 000	34 200
"Cybersecurity" "Remote" "Control" "Vehicle"	42 600	21 600
"Latency awareness" "Remote" "Control"	460	294

For more detailed searches and for finding reports to compare with, the following queries in Table 3 stands for the majority of papers.

Table 3: Summary of Refined Search Queries.

Search Query	Initial Hits	Filtered Hits
"Remote" "Latency" "Operation" OR "Control"	841 000	83 000
"Remote" "Latency" "Operation" OR "Control" "Railway"	11 800	6 580
"Remote" "Latency" "Threshold" "Operation" OR "Control"	245 000	33 700
"Remote" "Latency" "Threshold" "Operation" OR "Control" "Railway"	4 350	2 530

The results of the query clearly show a minor part of the total remote control "community" specialize in railway operation. There is also possible to see a trend showing that it has become increasingly more popular in recent years as around half of the papers are from the last 5 years.

2.3 Supporting Tools

Several digital tools as mentioned below were used for this paper. The main purpose of the usage was to enhance clarity, assisting in latex, and in general increase quality. Specifics include writing reference list in correct format. Structuring sentences and paragraphs. Checking for typos and grammatical errors.

- OpenAI's ChatGPT: Employed as a helpful resource for LaTeX formatting suggestions, generating structured content (tables and lists), translating between Norwegian and English,

and reviewing text for synonyms and restructuring ideas to ensure arguments were effectively communicated.

- Google Gemini: Used for simialar fields as ChatGPT, but also for general proofreading, and refining sentence structure and tone to maintain a high standard of academic writing.
- Visual Studio Code: was used as the main LaTeX editor because of its powerful extensions for LaTeX support, syntax highlighting, and version control integration. *Other tools*

2.4 Validity

As for finding papers, I have tried different setups and keywords to make sure they give the wanted output. An example is to use just "Train" instead of "Railway" will give alot more results as it will includes all reports talking about training personel or computers. Or if you restrict to "Train Control" the results drop signifaicantly, loosing important papers for this topic. It is difficult to determine if the aspects I have focused on is the best and correct way to compare and find a good solution. However, as I will also discuss in Chapter 5 "Results and Discussion", many of the other vehicle industires have decided to focus on the same aspects.

2.5 Reliability

This report takes a varying span of reports from different industries before trying to compare. By the amount of papers read, and the amount of papers used, I belive to have found a pretty general results in the theme of latency and threshold that any other will be able to duplicate, even with none of the same reports. As this is very broad examination of the topic the general result should be reproducible. For the subject of how we can test and evaluate tools and protocol, other people will be able to come to a different conclusion as it is more personal and decided from spesific prevoius examples.

3 Theory

3.1 ATO

Automatic Train Operation (ATO) describes systems that automate driving tasks normally performed by a human driver. ATO implementation range from assisting the driver with speed guidance, optimized speed profiles and other information to fully unattended operation where starting, cruising, stopping and door control are automatic. The primary goals are improved punctuality, energy efficiency and safe, repeatable performance [7]. *In freight-specific research such as the ATO-Cargo project, ATO is combined with existing train protection systems (for example ETCS Level 2) and a Remote Supervision and Control Centre (RSC) to allow remote human oversight and intervention during degraded operation or faults [2].*

3.2 GoA





The Grade of Automation (GoA) classifies how much of the train operation is automated. Standards such as IEC 62290 and industry reports [8] describe the commonly used levels from GoA 0 to GoA 4. The table below summarises the practical meaning of each level.

GoA	Meaning / operator role
GoA 0	On-sight, manual operation without automatic protection.
GoA 1	Automatic Train Protection (ATP) Manual driving with assisted protection routines. Human driver performs traction, braking and door tasks while safety limits are done automatic. That includes track speed, safe routing and safe separation.
GoA 2	Semi-automated (STO). ATO handles start/stop and trajectory control between stations; a driver remains onboard for door operation, obstacle response and degraded mode handling.
GoA 3	Driverless (DTO). No driver needed for normal operation. Staff may be on board for passenger assistance and emergencies. ATO handle operational tasks including avoiding collision with obstacles and persons.
GoA 4	Unattended Train Operation (UTO). Fully automated operation without staff onboard. Remote supervision and controls are required for special incidents.

Table 4: Grades of Automation (GoA), summary based on IEC and industry sources.

Remote Train Operations (RTO), as we will discuss in this paper, is a part of stage GoA 3 as a disruption management handling system and as a safety system for GoA 4 if it were to fail. [9]

GoA also changes and updates regularly because of new technology added that shifts the definition. The figure below is UITP’s definition of how GoA is graded.

Grade of Automation	Type of train operation	Setting train in motion	Stopping train	Door closure	Operation in event of disruption
GoA1 	ATP* with driver	Driver	Driver	Driver	Driver
GoA2 	ATP and ATO* with driver	Automatic	Automatic	Driver	Driver
GoA3 	Driverless	Automatic	Automatic	Train attendant	Train attendant
GoA4 	UTO	Automatic	Automatic	Automatic	Automatic

*ATP - Automatic Train Protection; ATO - Automatic Train Operation

Figure 1: UITP’s simple definition of GoA

Source: [10]

The formal definitions and required functions per level are described in IEC 62290 and discussed in CBTC Solutions as well as UITP [8, 10, 11].

3.3 ERTMS

The European Rail Traffic Management System (ERTMS) is the standardized signalling and control framework developed to improve interoperability, safety, and capacity across European railways. Its introduction replaces diverse national signalling systems with a unified architecture consisting primarily of the European Train Control System (ETCS) and a digital radio communication layer (GSM-R, and in the future FRMCS). According to the European Union Agency for Railways, ERTMS is designed to harmonize train control and supervision across borders while enabling higher automation levels and modern traffic management solutions. [12]

The shift toward ERTMS is the result of decades of signalling evolution from mechanical and relay-based interlocking to computer-based systems. Early interlocking systems (mechanical, relay, and later electronic) require local signal interpretation and fixed block sections, limiting both network capacity and flexibility. [13]

ERTMS is built around ETCS, which operates in multiple “levels” depending on how information is transmitted.

1. **Level 1:** Uses Eurobalises for spot transmission and may coexist with lineside signals.
2. **Level 2:** Adds a continuous data connection via GSM-R to a Radio Block Centre (RBC), removing dependence on optical signals and enabling real-time supervision.
3. **Level 3:** Removes track-based train detection and relies on train integrity confirmation, reducing infrastructure needs.

Norway’s national program adopts ERTMS Level 2 across the entire network, using axle counters as train detection and preparing for future migration to Level 3. The system architecture in the Bane NOR program material shows a fully digital backbone connecting interlockings, RBCs, the Traffic Management System (TMS), and onboard ETCS equipment. [14]

3.4 ETCS

The European Train Control System (ETCS) is a signalling and train protection element developed and included in the ERTMS initiative. ETCS provides movement authorities and intermittently or continuously supervises train speed and braking to ensure safe train separation. It replaces or complements national trackside signals by delivering standardized information to onboard equipment, enabling safer and more interoperable cross-border operation [12, 15].

3.4.1 Levels

ETCS is commonly described with levels that express how information is exchanged:

- **Level 0:** Applies to trains equipped for ETCS, but there is no ETCS trackside. Effectively going back to regular control and legacy signalling.
- **Level STM:** Applies to trains equipped for ETCS, but runs on tracks with national system with ATP. Allowing ETCS to interface for the ATP
- **Level 1:** Spot transmission threw Eurobalises providing intermittent movement authorities and speed control while legacy signalling remain in place.

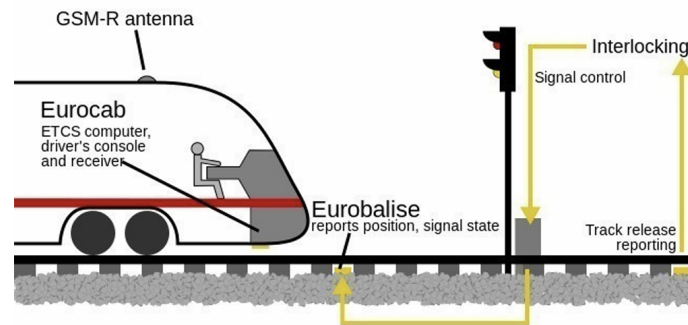


Figure 2: Train following regular signal with assisted speed and position with balises

Source: [15]

- **Level 2:** Continuous radio exchange to Radio Block Centre (RBC), typically via GSM-R or a successor. Movement authority is provided by the RBC. Eurobalises, if used, are primarily for precise positioning. Legacy signalling system are no longer needed and optional.

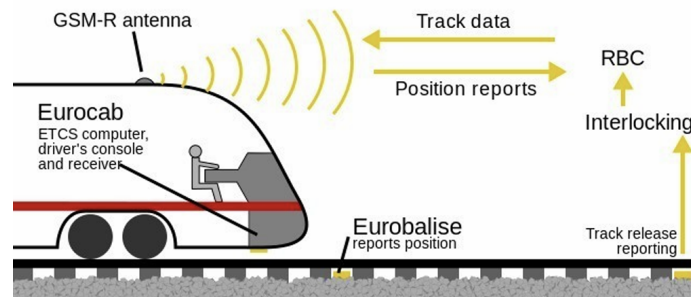


Figure 3: Train operating speed and signal with RBC threw GSM-R signal

Source: [15]

[15].

3.4.2 Modes

ETCS defines different operational modes such as Full Supervision, On-Sight, Staff Responsible, Shunting, and Automatic Driving. Modes determine how the onboard equipment supervises movement authority and interacts with ATO where present. Automatic Driving mode is used when conditions for ATO are satisfied and ETCS provides the required movement and track data while Full Supervision is when ETCS is supplied with all possible train and track data needed [15].

3.5 Cellular communications

A very import part of latency for operating a train remotly will be cellular communication. It is extremely vital to have a stable and good source of communication between the remote operator and the train.

3.5.1 5G URLLC

5G is built up by OFDM, Orthogonal Frequency Division Multiplexing wich divides "Spectrum" into small subcarriers. 5G is designed to support three different service categories, one of which is Ultra-Reliable and Low-Latency Communications (URLLC). URLLC is a communication service characterized by the need to successfully deliver packets with strict requirements in terms of availability, latency, and reliability. This capability is essential for providing connectivity to new services and applications from vertical domains, such as autonomous driving and factory automation. [16, 17]

URLLC could be crucial for supporting emerging applications like wireless control and automation in industrial factory environments. For the specific use case of Remote Control, the required key performance indicators are an end-to-end latency of 5 ms and a reliability of 99.999%. Remote control applications often involve closed-loop control applications, like the use of collaborative robots in a factory, which require URLLC services. [16, 17]

3.5.2 GSM-R

The Global System for Mobile Communications - Railway (GSM-R) serves as the unified radio communication platform for ERTMS, designed to take over from incompatible legacy analog systems with a standardized digital solution. Its operation is crucial for the railway system as it functions as the essential data carrier for ETCS, facilitating the continuous and real-time supervision of the train movement. [18, 19]

GSM-R is built upon the commercial GSM standard, the system operates within a dedicated harmonized frequency band, with 876-880 MHz uplink and 921-925 MHz downlink, and utilizes a linear network of base stations to ensure continuous connectivity for trains traveling at speeds up to 500 km/h. GSM-R employs Time Division Multiple Access (TDMA) to organize radio resources and primarily relies on circuit-switched connections to guarantee dedicated bandwidth for critical transmissions. [18, 19]

3.5.3 FRMCS

FRMCS or Future Railway Mobile Communication System is product of International Union of Railways (UIC) to find a successor for GSM-R as it was getting older. FRMCS is built upon 3GPP standards with 5G URLLC and other more modern techonology. FRMCS is set to replace GSM-R as the unified radio communication for ERTMS and will be a huge part of the future of railway technology.[20, 21]

3GPP Rel-16 define video quality for railway operations. And is already used for setup of remote control by CAF. Mejias mention that the minimum requirments mentioned int the report is of

H.264 codec, 320x240 resolution at 10 fps, but a recommended 1920x1080 at 30 FPS [22]. This will evolve as we get closer to acquiring FRMCS in the system used today.


3.5.4 Wi-Fi

Wi-Fi is a wireless communication technology following the standards of IEEE 802.11 that enables data transmission across networks. It operates across specific frequency bands such as 2.4 GHz and 5 GHz and the technology has evolved to support high speed data transfer and robust connectivity through advanced methods like beamforming, which strengthens wireless connections by targeting specific devices rather than broadcasting signals. [23, 24]

In the domain of vehicular control, Wi-Fi functions by establishing Local Area Networks (LAN) that allow for the secure transmission of real-time control commands and audiovisual feeds, demonstrating in some specific single-access point configurations a lower median latency compared to LTE and 5G cellular networks. Although primarily associated with general data networking, the principles of Wi-Fi signal extension are relevant to railway logistics with the concept of relay chains. Wireless networks can employ repeating nodes to extend the operational range of remote monitoring and control systems to trains far away from the operator. [23, 24]

3.6 ERTMS/ATO

Because of the international rollout of ERTMS, ATO will have to follow along. ERA has designed a solution to have an integrated ERTMS/ATO solution as you can see in the figure below. It showcase how ETCS can be independent, but for ATO to be operational it is crucial for ETCS to guarantee safety.

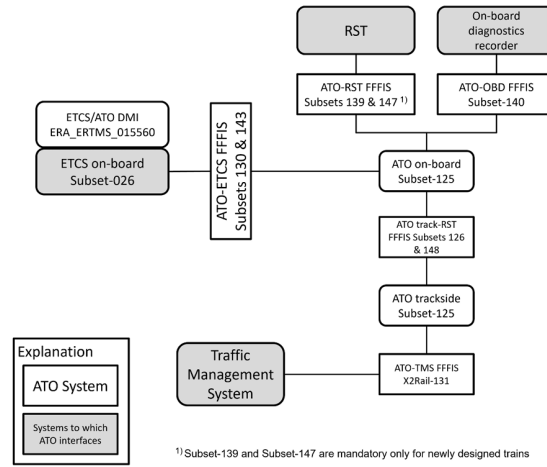

¹⁾ Subset-139 and Subset-147 are mandatory only for newly designed trains
Figure 1: ERTMS/ATO System Architecture for GoA2

Figure 4: Architecture of ERA's ERTMS/ATO solution

Source: [12]

Showcasing different ATO working together with different responsibility and how they communicate with each other [12].

3.7 Latency

Latency is the time delay between when a command or data packet is sent and when it is received or acted upon. In railway automation, latency is critical for control loops, including brake initiation

following an emergency command, and for ensuring the onboard ATO and remote systems remain synchronized.

The impact of latency, such as excessive one-way delay or variable delay can degrade braking calculations, delay alarm propagation, and reduce the margin available for safe intervention. For real-time safety commands systems are designed with strict latency and reliability budgets and use prioritized and redundant communication channels.

3.7.1 Latency Measurements

There is many ways to measure and structure latency. Some of the most commonly referred to are:

- **Round-Trip Time (RTT):** Refers to the total time it takes for a data packet to travel from the source to the destination and back again to the source. It is commonly used to assess the overall latency of a network connection.
- **One-Way Delay (OWD):** Refers to the time it takes for a data packet to travel from the source to the destination in one direction. This measurement is particularly important for applications requiring real-time responsiveness, such as train control systems.
- **Glass to Glass (G2G):** Refers to the total latency from the moment a signal is generated until the corresponding action is observed. This measurement includes image capture, encoding, transmission, decoding and displaying.
- **End to End (E2E):** E2E can vary depending on papers, but most refers to the total latency from the initial source of a command or data packet to its final destination, including all intermediate processing and transmission steps. This measurement includes G2G as well as operator response time, sending control signals, transmission time and system processing delays.

Following the different structure of latency measurements, there is different protocols and methods to get these measurements. Many have been posted and created through Request for Comments (RFC) which is a series of publications from Internet Engineering Task Force (IETF) and other institutions working on standardization of the web. Many of these RFC's has been backed further by institutions as International Telecommunication Union (ITU) and Institute of Electrical and Electronics Engineers (IEEE). [25, 26].

Table these protocols to match structure above Internet Control Message Protocol (ICMP): With ICMP we can use two effective methods, Ping and Traceback. Both return the Round-Trip Time(RTT) latency but in different ways. Ping sends data packets to a specified destination, and report the time it takes before a the same data packets is received. Traceback also sends data packets waiting for return, but tracks routes and notifies if certain routes use to long time. [27].

Two-Way Active Measurement Protocol (TWAMP) and One-Way Active Measurement Protocol (OWAMP): Protocols designed for measuring one-way and two-way latency, often used in network performance testing. *Needs more depth* [25].

Need more protocols we can use

Test tools. Measurements are typically expressed in milliseconds and include metrics for delay variation and loss.

3.8 Regulations

Check master til Emilia om hva hun found av rules

Railway automation must satisfy national and EU regulatory frameworks. In the EU, the *Technical Specifications for Interoperability* (TSIs) notably the Control-Command and Signalling (CCS) TSI

— define safety and interoperability requirements for ETCS, ATO interfaces and signalling subsystems. The European Union Agency for Railways (ERA) provides technical guidance, variables coordination and ERTMS documentation [1, 12].

National authorities, for example the Norwegian Railway Directorate and the Norwegian Railway Authority, implement national legislation, issue national safety rules, and specify how EU TSIs map to national processes; operators must demonstrate compliance with both national rules and applicable TSIs for approval and operation [28, 29]. For freight ATO trials (such as ATO-Cargo), project teams must prepare evidence on safety, human factors (remote supervision ergonomics), communication performance and conformity with the CCS TSI and national rules before trials are permitted [1, 2].

From [12] 8.2 ATO 2: Supervision and regulation 8.2.1 ATO 2.1 - Supervise train operations During ATO operation, it shall be possible to: • Supervise train location by monitoring trains automatically using train identification and status (including delay information) to recognise deviations from normal operation as soon as possible; 8.2.2 ATO 2.2 - Manage the train service During ATO operation, it shall be possible to: • Input the journey profile from the planning system; • Start the journey profile; • Dynamically modify the journey profile in real time to take account of changes in operating conditions including: disruption management; re-routing; re-timing. • Adapt the train's journey profile to meet any update of the operational timetable; • Regulate trains to avoid bunching of trains and to reduce delays to trains in the case of disturbances; • Dispatch ATO trains to harmonise the starting of ATO trains, corresponding to results of train regulation and ensuring connecting services; • Operate both ATO and non-ATO trains simultaneously.

I think this could be very useful: Commission Regulation (EU) 2016/919 of 27 May 2016 on the technical specification for interoperability relating to the "control-command and signalling" subsystems of the rail system in the European Union

3.8.1 WP41 - Validation Criteria Tramways

WP41 is a collection of test cases and validation criteria for remote driving of tramways. It is delivered by Sporveien Trikken AS with the assistance of CAF, UITP and FP2R2Dato in the Europe's Rail program and contains detailed plan and procedures for testing remote control of tramways. Which includes functionality of electric circuits implemented, TCMS, CERES actions, and safety supervision. Its a standardisation for defining Key Performance indicators and how they should be measured including: Solution QoE (1-5), Image Quality (1-5), Image latency (ms), Availability (Failure rate). Since remote control will come in the light and collaboration with Europe's Rail program. A similar design validation criteria should be expected and produced for railway infrastructure as well, which makes the WP41 a good resource on possible future regulations for RTO. [30]

3.8.2 3GPP TS 22.289

3GPP TS 22.289 is a technical specification report. Done by 3GPP in the works with UIC and European Telecommunications Standards Institute (ETSI), which among other list performance requirements for main lines[20, 31]. These requirements are set to ensure safe and good communications for the future of railway, but as mentioned in the report it is of now only target values. GoA3 and GoA4 is mentioned with the necessary high level of communications needed for operation. Here they also mention video-based remote control as a part of GoA3/GoA4 and put them in the same category for "Very Critical Video Communication".

Relevant information from table in 3GPP TS 22.289 about requirements for FRMCS can be seen in Table 5

Table 5: Some regulations from 3GPP TS 22.289 Rel-17

Scenario	End2End Latency	Reliability	Speed limit	Data rate	Traffic density
Very Critical Video Communication	≤ 100 ms	99,9%	500 km/h	10 Mbps up to 20 Mbps	Up to 1 Gbps/km
	≤ 10 ms	99,9%	40 km/h	10 Mbps up to 30 Mbps	Up to 1 Gbps/km

In the table we can see end to end latency being mentioned, and they have defined it as the same as G2G [31] End-to-end latency: the time that takes to transfer a given piece of information unidirectional from a source to a destination, measured at the communication interface, from the moment it is transmitted by the source to the moment it is successfully received at the destination.

The work of 3GPP, TS 22.289, is not yet considered in ERA's TSI CCS and therefore not completely applied. Yet it is still to be expected to be the regulations of future work and something to keep in mind under future development. [1]

4 Related Work

Experiences from other similar fields, remote controlled cars, drones, cranes and other remote controlled trains. These experiences and papers tests viable aspects for the project of ATO, mainly focusing on the remote controlled

4.1 Train Control

As showed in Table 3 there is only a handful of papers connected to Railway control compared to the rest. Therefore have I selected a few of the papers discussing latency, ATO and remote control of exactly trains.

4.1.1 ATO-Cargo Project

The ATO-Cargo project, led by the German Aerospace Center (DLR) in cooperation with DB Cargo AG, Digitale Schiene Deutschland (DSD), and ProRail B.V., focuses on developing and testing highly automated technologies for freight trains. The goal is to enhance rail freight efficiency by optimizing speed profiles, improving route utilization, and increasing competitiveness with road transport [2].

A key component of the project is the integration of an Automatic Train Operation (ATO) unit on locomotives in combination with the European Train Control System (ETCS) Level 2. This setup allows for real-time automation while maintaining human oversight. In case of system malfunctions or degraded operation, human operators at a Remote Supervision and Control Centre (RSC) can take over tasks such as remote monitoring, diagnosis, and manual control.

The project also emphasizes human factors engineering, ensuring that the RSC is ergonomically designed for operator efficiency and safety. For this project, researchers have employ virtual reality tools to simulate realistic control room environments and train personnel for future remote supervision tasks. Tests are being conducted on Betuweroute, a freight only railway, linking Rotterdam and the Ruhr region to validate the technical and operational readiness of this automation concept. The ultimate goal is to establish a European reference model for automated freight train operation [2].

4.1.2 Jürgensen 2025

The report by Jürgensen focuses on developing a functional remote control system for autonomous rail vehicles, using the REAKTOR project as the primary use case. Its main purpose is to enable safe human intervention during intermediate automation stages and to act as a fallback solution during fully autonomous GoA 4 operations. The report frames remote control as a crucial safety mechanism, both during prototype development and as an operational safeguard in future autonomous traffic scenarios [32].

The work develops a complete client-server architecture for remote driving, consisting of a Web Client for user interaction, a server coordinating data exchange, and a vehicle-side component interfacing with the autonomous controller. The system enables control over speed, and braking while providing a livestream from onboard cameras. The thesis additionally evaluates the type of cellular network needed for stable operations and includes a case study of network quality along the Malente - Lütjenburg track [32].

Overall, the paper concludes that a remote control system is essential for autonomous rail, but its reliable operation depends heavily on network latency and coverage. Full-scale deployment requires improved cellular infrastructure, ideally 5G, to ensure continuous low-latency transmission [32].

4.1.3 Kozarevic 2025

The report by Kozarević aims to develop a remote control fallback system for autonomous rail vehicles, with a strong focus on identifying what functionality a remote operator must have in order to safely intervene when autonomy becomes unavailable. The main purpose of the work is to ensure that a human operator can reliably take over control in a downgraded mode. The thesis explores this by narrowing down required features and by analysing user needs, system safety conditions, and operational constraints for future automated railway environments.[33]

The work proceeds by starting from a broad set of functions that a driver normally performs and reducing them to the subset that is strictly necessary for remote operation. The thesis focuses on determining which controls, displays, and sensory feedback elements a remote fallback system must include and evaluates the role of human factors, describing how situational awareness degrades when control is exercised remotely. The thesis ends talking about how remote fallback operation is feasible but requires a carefully reduced function set tailored to remote conditions. [33]

4.1.4 Mejías 2024

The paper by Mejías et al. [22] examines how video streaming can support remote train driving, focusing on keeping latency low enough for safe operation. The authors compare RTSP and WebRTC in a test setup that imitates an onboard camera system sending video over a 5G network to a remote operator. A key part of the work is a method for measuring true end-to-end latency by embedding timestamps directly into each frame. They also develop a simple adaptive bitrate mechanism that reacts to jitter and packet loss to keep the video usable under degrading network conditions. Tests in two laboratory setups show how latency grows as bandwidth drops and how bitrate adaptation delays freezing and pixelation under poor network conditions.

4.1.5 FP2R2Dato, EuropesRail 2024 D41.2

This deliverable D41.2 from Europe’s Rail and FP2R2Dato project presents the testing results and assessments from the first remote driving demo for tramways. Its main purpose is to document how the system behaved during the initial demonstration phase, where auxiliary, static, and dynamic tests were performed on a modified SL18 tram in Oslo. The work focuses on verifying whether the new remote driving and command functions were correctly integrated, safe and aligned with the defined use cases. All tests were done with a structured procedure with reports, and acceptance criteria where each test case was evaluated as compliant or not. The document also includes KPI assessments such as image quality, latency, operator experience, availability, and productivity impact. Overall, the results show that the demonstrator reached the target and that the remote driving solution works reliably across the tested scenarios [34].

4.1.6 FP2R2Dato, EuropesRail 2023 D5.4 - Chapter 12

Chapter 12 in the deliverable D5.4 describes how remote driving should operate when faults occur in the remote control chain. The purpose is to define use cases for degraded remote control conditions, such as poor visibility, weak communication links, sensor failures, or loss of track information. These use cases outline how a remote driver should react and what operational limits apply when the supporting systems no longer provide full-quality information. The chapter does not aim to solve the failures but to describe expected driver actions and system behaviour in each degraded mode [35].

The deliverable also describes allowed latency by comparing it to a previous drone test, where it does calculations of speed and creates a allowed speed limit depending on latency experienced [35].

4.1.7 Brandenburger 2023

Brandenburger et al. [9] present exploratory studies on how video quality affects a remote driver's ability to perceive information and react in time. The purpose of the work is to understand how bitrate, frame rate, and stimulus type influence perception accuracy and reaction speed when supervising trains through video feeds. The authors ran two small-scale studies where participants identified either light signals or distance markers in short video clips of varying quality. Results showed a clear trend: higher bitrate generally improved accuracy and reduced response time, while frame rate showed no meaningful effect. Distance markers were consistently identified faster and more reliably than light signals. Overall, the work provides early evidence that bitrate is the more critical parameter for supporting remote train operation.

4.2 Car Control

4.2.1 Ouden 2022

The paper [36] investigates how remote driving performs over commercial 4G and 5G networks. Its purpose is to evaluate whether current mobile networks can support safe remote control of vehicles at low speeds. The authors design a complete remote-driving architecture with vehicles, remote stations, fleet management, and a 5G mobile-edge setup. They test the system both in Hardware-in-the-Loop simulations and in real field trials using straight-line braking and slalom manoeuvres. The study measures position accuracy, reaction time effects, and communication latency, comparing 4G and 5G performance. Results show that 5G halves network latency compared to 4G and that overall network performance is sufficient for remote driving below 40 km/h, although total reaction delay is still dominated by video processing and human reaction time rather than the network itself.

Going to hold on Sato and Nakamura too see if needed

4.2.2 Sato 2021

Base of 150 ms buffer time of 150, 200, 400. (ignoring base)

Showing latency improved performance on every latency The improvement increased as well for higher latency 150 200 400 14-3, 8-6, 7-6

4.2.3 Nakamura 2021

Samme som de andre, sim med lagt på latency.

4.2.4 Jernberg 2024

[37] - Evaluates Latency by performance, (people) Sim

- Voysys - G2G - Average delay of 88.8 ms and added conditions of +100 - 188 ms and +200 - 288 ms - 50km/h and 70km/h (Try to keep speedlimits) - driver was not given a latency

+100 and +200 was chosen because of Neumeier result. Reference Neumeier et al. (2019) stated that 300 ms might be manageable for trained operators but in some conditions during their simulator study there were tendencies that even smaller latencies affected the performance of the operator negatively.

That was: H1/P1: Car pulling over into your lane. H2/P2: Car crossing from opposing lane threw your lane. H3/P3: Car with "vikeplikt" does not stop in crossing. H4/P4: Child runs into traffic from behind a bus. H5/P5: Bicycal in lane that driver needs to pass in oppsing lane.

According to Jernberg [37], when performing a study with more naturalistic driving scenarios, speed and type of task is significant for results as well as latency. They also adapt to circumstances, adjusting speed and safety margins.

4.2.5 Kaknjo 2018

[38] - Evaluate latency by performance, (different tools) IRL,

- G2G - Time stamps - H.264 - MJPEG - RTSP (Real Time Streaming protocol) - TCP/UDP

Found MJPEG to be 300 ms lower latency than H.264. However it found H.264 to demand less bandwidth 50-380Kbps as it compresses more extensive than MJPEG 4.6-5Mbps. Found deterioration in performance in latencies above 300 ms and increase in errors during control for latencies larger than 500 ms.

4.2.6 Neumier 2019

[39] - Evaluate latency by performance, (people) Sim

- Round-Trip Time (RTT) - Average delay of 67 ms and added conditions of +100 +300 +500 - Was given the ca. latency

Talks about how participants leave the car lane significantly more with higher latency, even though with stable high latency. But: "In the Parking scenario, even no differences for whatever latency could be revealed" Scenarios, was driving with turns, and one parking. No hazards except latency.

4.2.7 Kang 2018

[40] - Evaluate latency by performance, (different tools) IRL,

- 3 different resolutions (320x240, 640x480, 1280x960) - 3 different bitrate (0.5Mbps, 1Mbps, 4Mbps) - LTE and WiFi - Video and camera catching timestamps

4.3 Drone Control

4.3.1 N. González 2023

[41] - Evaluation tools for latency, - People tested

URLLC 4K quality res 1080 x 720, at 30 FPS H.264 encoded

LTE server, LTE direct, WiFi - avg packet delay = 500 ms, 42 ms 4 ms Can activate low latency mode. Connection requirements of 100 ms for video streaming, set by 3GPP TS 22.829 for unmanned aerial vehicles Found added latency of around 180 ms start causing lower MOS / QoE, and steady deterioration making it 1, lowest grade at around 460 ms concludes with a e2e of 250 ms is viable for service usability.

4.3.2 Larsen 2022

[42] - Evaluation latency on performance, (tools) IRL

5G URLLC network H.264

$$Le_{2e} = L_{propagation} + L_{processing} + L_{serialization}$$
$$L_{propagation} = \text{distance} / v \text{ in medium}$$
$$L_{serialization} = \text{datasize} / R \text{ transmission rate}$$

$L_{2e} = nL_{proc} + (n+1)L_{ser} + L_{prop} + L_Q$ n = switches along the network $n+1$ = number of links L_Q = queuing latency.

0.5 Mbps video rate in uplink and a 60 Hz update rate in downlink. Further, we assume that the higher quality video for inspection require 8 Mbps.

4.3.3 Böhmer 2020

[43] - Evaluation latency on performance, (tools) IRL

Predictably Reliable Real-time Transport (PRRT) protocol [A. Schmidt, "Cross-layer latency-aware and -predictable data communication 2019] The Crazyflie is controlled by Bitcraze's application layer protocol called Crazy Real-Time Protocol (CRTP)

Raspberry Pi including WiFi 2.4GHz due to Raspberry Pi constraints timestamps by controller to drone: $tp1 - \text{packet1} - \text{drone}$ $tr1 - \text{response1} - \text{drone}$ $tp2 - \text{packet2} - \text{drone}$ $tr2 - \text{response2} - \text{drone}$

the Crazyradio communication path using the traditional radio link the PRRT communication path with the Python bridge, and the PRRT communication path with the Rust bridge.

$IPT = tp2 - tp1$ (Time between packets) $RTT = tr1 - tp1$ (Round-trip time)

4.4 Crane Control

4.4.1 Brunnström 2020

[44] - Evaluate latency on performance, (Humans) Sim

To study QoE. - VR. - 270 angle HMD video threw 4 cameras on crane. Mission is to offload a truck full of logs. Tested with different delays for display and joystick. Baseline was 25 ms for display and 80 ms for joystick. - Display, 5, 10, 20, 30 - 25, 30, 35, 45, 55 - Joystick, 10, 20, 50, 100, 200, 400, 800 - 80, 90, 100, 130, 180, 280, 480, 880

Comfort of the subject was not affected by joystick delay, but the display delayed had an negative effect of Comfort quality. Why this could be discussed alot. Might have to do with VR and a more moving image. 480 ms gave a mild reduction in effect and quality of the work at hand but at 880 it was a major decrease in effect and operatbility.

4.5 Ethics

Who is responsible. Fully automated, or remote driver. What obligation do we have in a project like this.

<https://www.tandfonline.com/doi/full/10.1080/01441647.2020.1862355>

4.6 Cybersecurity

How we can protect the system from attacks. What regulations are in place. "[CYB] CLC/TS 50701:2023, Railway applications - Cybersecurity" used in [35]

5 Results and discussion

Results in 2 parts. 1. part analyse 2. part future steps

5.1 Human factors results

Discuss how a high stable latency could be more acceptable than a low unstable latency due to info found in Theory, Human Factors.

Its important to include how humans act in different scenarios, as regardless of the systems, the remote operator will always be a constant high latency of atleast 500 - 1000 ms [36]. And how they react to a possible system latency will also be crucial for the full remote operation.

Table 6: Human evaluation of Signal Attributes and Latency

Vehicle	Paper	Published	Method	Task	Slight performance downgrade	Major performance downgrade	Test subjects
Railway	Brandernburger [9]	2023	Sim w/ Real image, Differentiation in bitrate and FPS to find responsetime	React to light signals / distance marker	6 Mbps	1 Mbps	31 subjects, Novize train drivers, Age 42 SD 19
	Paper E	2022	X	X	X		
Car	Ouden 2022 [36]	2022	Sim, Artifical latency of $0, 10 \pm 3$ ms, 20 ± 5 ms and packet loss	Drive slalom and parking	Packet loss at 1%	Packet loss 2%	-
	Jernberg 2024 [37]	2024	Sim, Artificial latency of +100, +200 on base 89 ms	Adapt to Hazards	280 ms for lane bypassing	-	30 subjects, Experience drivers or gamers. Age 35 SD 11
	Neumier 2019 [39]	2019	Sim, Artifical latency of +100, +300, +500 on base 97 ms	Drive slalom and parking	300 ms	500 ms	28 subjects, Experienced drivers. Age 27 SD 7
Drone	N. González 2023 [41]	2023	IRL, Artificial latency of +25, +50, +100, +200, +300, +500 on base 53 ms and packet loss	Fly drone	0.2% packet loss or 250 ms	0.3% packet loss or 300 ms	-
	Paper B	X	XX	XX	XX		
Crane	Brunnström 2020 [44]	2020	IRL, Artificial latency of +10, +20, +50, +100, +200, +400, +800 on base 80 ms	Offload lumber from truck	480 ms	880 ms	18 subjects, Experienced log lifters and novice, Age 40 SD 9
	Paper B	X	XX	XX	XX		

[22] - Evaluate latency depending on parameters / tools Compare: - RTSP - WebRTC Web Real time communication as their Real-time Transport Protocol (RTP) protocol. - E2E - H.264

Methodology for latency measurement. Network Time Protocol (NTP) is necessary to synchronize sender and receiver. Server obtains the TS1 when image is captured. Adds it to the RTP packets generated after the encoding. Player retrieves the timestamp (TS1) from the RTP packets and compares it with the current time TS2 when the image is being displayed. To do this, you must retrieve it from the package before the decoder and compare it with the image coming out of the decoder.

1 Capture: the camera captures an image together with the timestamp. The timestamp is added to the metadata of the image. 2 Encoding: the image is encoded into a H.264 bit stream. The metadata is maintained unaltered along the encoding process. 3 Encapsulation: the H.264 video stream is encapsulated into RTP payload. The capture timestamp is extracted from the metadata and added to the RTP header. For this, it is required both the RTP standard header and its RFC 8286 extension. 4 Sender: RTP packets are sent on the communication channel. In the case of RTSP, the player opens a connection with the sender. For WebRTC, a negotiation between the sender and receiver is performed through the signaling server to determine the communication route.

The player receives the RTP packets through RTSP or WebRTC and calculates the latency: 1 Receiver: it receives the RTP packets through the channel established with the media server. 2 Decapsulation: the original H.264 content is extracted from the RTP payload. In addition, the timestamp contained in the RTP header is extracted and added as metadata of the H.264 content. 3 Decoding: the H.264 content is decoded to retrieve the uncompressed image. The metadata is maintained unaltered along the decoding process. 4 Displaying: the image is displayed. Moreover, the timestamp is extracted from the metadata and subtracted from the current time to obtain the End-to-End latency. This is shown to the remote driver, who will consider it during the operations.

BITRATE Change bitrate regarding quality of output (jitter or packet loss). Bitrate vary between 5Mbps, 3.5Mbps, 2Mbps. A change of 2% packet loss and 500Hz / 1000Hz jitter.

implementation. GStreamer framework. (Open source) Pylon source from Basler element that capture of camera images and timestamps. H.264 NVidia en/de coder. Provided by NVIDIA graphics cards. It is the key to enable bitrate adaption. RTP H.264 pay/depay. For packaging encoded video signal into RTP packets, and RTP includes timestamp in header.

WebRTCbin. Allows communication via WebRTC, peer2peer, must connect to signaling server responsible for negotiation. RTSP server/client. Manage connection and send/receive data.

Camera, Media server on Jetson Xavier (Either WebRTC or RTSP), Network equipment (switch or laptop simulating a router, allowing to evaluate against bandwidth degradation). Computer as player and receiver.

Results E2E, time after capture to the time before display S2S, time in front of camera to time displayed on player image

Measurements for each camera and alternating available bandwidth. When enough bandwidth results in 150 ms S2S and 175 ms E2E Bandwidth of 10 results in 570 ms - 1000 ms or pixelation freezing in both S2S and E2E

RTSP Difference in S2S and E2E is approx 70 ms - 100 ms which is image capturing and displaying.

WebRTC is faster E2E but not S2S

RTSP with rate control Allows the bandwidth to go past 7 Mbps that was issue before, although with high latency. Adjust itself back up again. Also we can see a shift in latency between latency when increased bitsize of video.

D41.2 - Testing reports & assessment Results of the remote driving of tramways demonstrator. [34] - Finds actually latency

Image latency - G2G, (capturing processing, compression, transmission, reception, decompressing, displaying) - Oslo to Berlin - Two atomic clocks on phones. - Measured to be 340 - 380 ms (Always under 400 ms)

Auxiliary circuit tests, - Driver safety - Remote wake up - R driving loop - R control commands - R ... Static functional tests, - Start Tram, CERES, - CERES do step 1.2.3...

Dynamis functional tests, - CERES Local brake test - CERES Remote Brake test - C Drive 5km/h - C Drive 100% don't break max speed - C loose communication. - C DSD brake sequence - C Local driver break priority over remote.

Reaction Time, reduction in time needed to perform specific tram operations, fleet management and preparation, start-up and shut-down procedures, maintenance tasks, shunting. Time reduction in these processes are efficiency improvements. [9] - Evaluates latency by performance, (human) IRL

Test of human factors and reliable communications via 5g "Limited literature on:" "Positive effect of bitrate on quality", "Stalling has worse effect on QoExperience, if bitrate is higher" "Higher frame rate not linked to information assimilation, but increased user enjoyment"

Tested with three different levels of bitrate 1, 6, 24 Mbps 5, 15, 25 FPS Stimulus Light signal, Distance marker

Measurements Response accuracy Response speed

Study 1: Higher bitrate -> faster answers, more correct Higher FPS -> same speed on answer, same amount of correct Study 2: Higher bitrate -> same speed on answers, more correct Higher FPS -> same speed on answer, same amount of correct

Bitrate is more important (source 5 in PP: <https://dl.acm.org/doi/abs/10.1145/2072298.2072351>) Stimulus type: Distance marker signs where answered faster and more correct than light signals 5000 -> 3000 speed, and 0.51 -> 0.58 and 0.61 -> 0.69

This is promising new with the implementation of ERTMS as the only input stimulus in signalling threw camera and video stream will be signs as the remote control operator will get the ETCS directly in the control room. After certain bitrate less helpful

[36] - Evaluates Latency by performance, (people) IRL

- Evaluate Latency threshold on SIMulation

- 4G and 5G - 4 times 120 angle camera - H.264 - Split latency up into Control and video and does - min, mean, 95%ile, max latency in ms

- Speed of 10, 20, 30 and 40km/h 100 manual test runs for benchmark 180 runs of RC with 4G 300 runs of RC with 5G One Trip Latency." Every unit was time synchronized with a GPS-PPP source. Packets logged using tcpdump.

Includes a test that results in at 300ms, you get loss of performance, and at 1000ms the delay becomes unfeasible.

Did not find resonable difference in the latencies of straight acceleration test.

[37] "However, it also seems to be the case that remote operators adapt to the circumstances they find themselves in; for example, they drive with a safety margin reducing risks to their personal chosen limit and do not override the barriers of their own choice."

"The reaction time in H1 (a car cutting in into the ego lane) increased more for each latency condition than the offset in time that the manipulation created. This suggests that even an unperceived increase in latency (based on subjective ratings) is affecting the participants in a way that makes them less observant of their surroundings. Combined with a self-reported decline in performance and control as the latency increases, a conclusion could be that the added mental workload is turning the primary driving task into a distraction in itself, by forcing the operator to

devote an unusual amount of attention just to maintain speed and lane position.”

5.1.1 Adaptation to stable latency.

Jernberg(2024) ”Fixed latency seems to be better than varied latency” (Davis et al., 2010, Gnatzig et al., 2013)

Gorsich et al. (2018) found that a higher latency results in more inaccurate behavior, with a drastic decrease starting at a latency of 600 ms, and Gnatzig et al. (2013) found that a constant latency of 500 ms was unproblematic for drivers when the vehicle was steadily kept at 30 km/h on their track. [37]

(Neumier 2019) Could not confirm that fixed latency resultet in any better result than varied latency. Could not confirm ”Kang et al” [40] who stated that fixed latency leads to better driving performance than varying. [39]

In the event of offloading a truck with a crane, the participants where exposed to constant levels of latency, and showing that delaly of joystick all the way up to 480 ms was basicly irrelevant for QoE and the results of task done pr time. However a delay of 880 significantly reduced the performance overall by atleast halving the rating on the scores (1-5). [44]

5.2 Comparing latency for different vehicles

After reading threw an reasearch paper on the topic of how latency treshold are set. It became apparent to me that very few have done enhanced research on this very topic for railway remote control. Papers such as XX, who mentions anything about the maximum latency before loosing performance reference sources of other vehicles and their tests of remote control.

Table 7: Different Latency Measured and Thresholds used

Vehicle	Paper	Release year	Method	Latency found	Threshold used	Threshold Source
Railway	Jürgensen 2025 [32]	2025	X	X	Ouden [36]	Neumeier [39] Drone Own test
	Kozarevic	2025	Method	Latency found	300 - 500 ms	
	FP2R2Dato D5.4 [35]	2023	-	-	500 ms	
	FP2R2DATO[34]	2024	G2G, synchronized phone clocks	340 - 380 ms	-	
Car	Ouden 2022 [36]	2022	E2E, Video and Control, 5G. Time synchronized with a GPS-PPP source.	G2G: 95 ms + 5 - 26 ms (95%) max: 500 ms + 43 ms	300 - 1000 ms	Neumeier [39]
	Paper B	year	L1	L2	Method	Source
Drone	Paper A	X	X	XX	X	
Crane	Paper A	2020	X	XX	X	

In the case of XX who reference Jernberg 2024 and their findings of. Jernberg goes into details of the hazards and proxy hazards that the driver were facing. As mentioned in Section 4 "Related Work" [37] How in control of the vehicle were you during the drive (1-5) Baseline 3.7, 100ms 3.5, 200ms 2.9

The most referenced remote control latency effect paper, Neumeier's paper XX, talks about how participants leave the car lane significantly more with higher latency, even though with stable high latency. But: "In the Parking scenario, even no differences for whatever latency could be revealed" [39] Scenarios, was driving with turns, and one parking. No hazards except latency.

[34] D41.2 - Testing reports & assessment Results of the remote driving of tramways demonstrator. Image latency - G2G, (capturing processing, compression, transmission, reception, decompressing, displaying) - Oslo to Berlin - Two atomic clocks on phones. - Measured to be 340 - 380 ms (Always under 400 ms)

[32] - Finds actual latency in project - Uses Car threshold to evaluate

Is a project in "Remote Control for Rail Vehicles" where they test a remote control train for a short track from "X" to "X" in Germany. Here they do "this" and found "that".

Says that at 300ms, you get loss of performance, and at 1000ms the delay becomes unfeasible. And references: "Design and Evaluation of Remote Driving Architecture on 4G and 5G Mobile Networks" (Ouden, 2022) [36] Which references (Lane, 2002) and (Neumeier, 2019) [33] - Finds actual latency in project - Uses Car / Drone threshold to evaluate Talks about the dangers of latency in high speed vehicles. Comparing it to drone operations. Reference drone and says 100 ms Reference Chen?, and Neumeier, 170 ms and 300 ms have minimal impact on remote operators.

5.2.1 Calculation of latency

The measurements and therefore the calculations of latency is not easily done. Since it's a fluctuating measurement that varies a lot depending on the components in the system used, the way to calculate varies on what the persons want to find.

Very difficult from related works: Real time video latency: [38] Here, the time of the visual event in front of the camera is denoted as $T1$ and the time when the event was detected on the receiving end as $T2$. The start of frame processing is denoted as $T3$. $TVL = (T1 - T1) - (T2 - T3) = T3 - T1$

5.3 Threshold for acceptable latency

Maybe include calculations of speed of train, compare to the previous and discuss a possible latency threshold. End in that research on specifically train drivers on railway should be tested.

Use this report [35]

5.4 Tools and protocols for remote control

Table 8: Tools evaluation of Latency

Vehicle	Paper	Published	Method	Tools	Major findings
Railway	Mejías 2024 [22]	2024	Method		
	Paper C	2023	X	X	X
Car	Kaknjo 2018 [38]	2018	X	X	X
	Kang 2018 [40]	2018	X	X	X
	Paper C	2023	X	X	X
Drone	N. González 2023 [41]	2023	Video in front of camera	LTE server, LTEdirect WifiDirect	500 ms for LTEs and 42 ms for LTED, 4 ms for Wifid
	Larsen 2022 [42]	2022	X	X	X
	Böhmer 2020 [43]	2020	X	X	X
Crane	Paper A	X	X	X	X
	Paper B	X	X	X	X

5.5 Theory v. Practical test

Compare from the PreDraft of what expected result and hopes were, and discussing them with the information of what happend in the test and measurments.

5.6 Future work

- MJPEG vs H.264

- Offshore or other remote controlled vehicles that can shead light or contribute to remote control railway.

Differnt aspects of latency *What is the difference* Fixed, static v dynamic.

6 Conclusion

Conclusion needs to be drawn up to RQ and try to give a little closure of what the paper discussed.

Bibliography

- [1] European Union Agency for Railways (ERA). *Technical Specifications for Interoperability (TSIs)*. European Union Agency for Railways (ERA), 2016. URL: https://www.era.europa.eu/domains/technical-specifications-interoperability_en (visited on 20th Oct. 2025).
- [2] German Aerospace Center (DLR). *ATO-Cargo – Automatic Train Operation Technologies for Cargo*. Institute of Transportation Systems, German Aerospace Center (DLR), 2025. URL: <https://www.dlr.de/en/ts/research-transfer/projects/ato-cargo> (visited on 8th Oct. 2025).
- [3] Hilary Arksey and Lisa O’Malley. ‘Scoping studies: towards a methodological framework’. In: *International Journal of Social Research Methodology* (2005). URL: <https://www.tandfonline.com/doi/abs/10.1080/1364557032000119616> (visited on 9th Dec. 2025).
- [4] John W. Creswell. *Research Design: Qualitative, Quantitative, and Mixed Methods Approaches*. 4th. SAGE Publications, 2014. URL: https://www.ucg.ac.me/skladiste/blog_609332/objava_105202/fajlovi/Creswell.pdf (visited on 15th Oct. 2025).
- [5] Tegan George. *Mixed Methods Research — Definition, Guide & Examples*. 2021. URL: <https://www.scribbr.com/methodology/mixed-methods-research/> (visited on 15th Oct. 2025).
- [6] Wendy Lim et al. ‘Evidence-Based Guidelines — An Introduction’. In: *Hematology. American Society of Hematology Education Program 2008* (2008), pp. 26–30. URL: <https://www.ashpublications.org/hematology/article/2008/1/26/95823/Evidence-Based-Guidelines-An-Introduction> (visited on 15th Oct. 2025).
- [7] I. P. Milroy. ‘Aspects of Automatic Train Control’. PhD thesis. Loughborough University, 1980. URL: https://repository.lboro.ac.uk/articles/thesis/Aspects_of_automatic_train_control/9537395/1/files/17166803.pdf (visited on 27th Sept. 2025).
- [8] CBTC Solutions Inc. *Grades of Automation (GoA) Explained*. 2023. URL: <https://www.cbtc solutions.ca/goa> (visited on 1st Oct. 2025).
- [9] Niels Brandenburger, Friedrich Maximilian Strauß and Anja Naumann. *Effects of Video Quality on Perception and Reaction Time in Video-based Remote Train Control*. DLR, 2023. URL: https://elib.dlr.de/194929/1/PresentationHFES2023_DLR.pdf (visited on 5th Dec. 2025).
- [10] International Association of Public Transport (UITP). *World Report on Metro Automation*. UITP, 2018. URL: <https://www.uitp.org/publications/world-report-on-metro-automation/> (visited on 15th Oct. 2025).
- [11] International Electrotechnical Commission (IEC). *IEC 62290-1:2025 -Railway applications - Urban guided transport management and command/control systems - Part 3: System requirements specification*. IEC, 2025. URL: <https://online.standard.no/nb/nek-iec-62290-3-2025>.
- [12] European Union Agency for Railways (ERA). *ERTMS*. Tech. rep. European Union Agency for Railways (ERA). URL: https://www.era.europa.eu/domains/infrastructure/european-rail-traffic-management-system-ertms_en (visited on 9th Oct. 2025).
- [13] Kjell Holter. *ERTMS and the History of Signalling, Part 1*. 2025. URL: <https://www.banenor.no> (visited on 10th Dec. 2025).
- [14] Kjell Holter. *ERTMS and the Digital Railway, Part 2*. 2025. URL: <https://www.banenor.no> (visited on 10th Dec. 2025).
- [15] Directorate-General for Mobility European Commission and Transport. *ETCS Levels and Modes*. 2023. URL: https://transport.ec.europa.eu/transport-modes/rail/ertms/what-ertms-and-how-does-it-work/etcs-levels-and-modes_en (visited on 9th Oct. 2025).
- [16] S. Akhila and Hemavathi. ‘5G Ultra-Reliable Low-Latency Communication: Use Cases, Concepts and Challenges’. In: (2023). URL: <https://ieeexplore.ieee.org/document/10112312> (visited on 22nd Nov. 2025).
- [17] Zexian Li et al. ‘5G URLLC: Design challenges and system concepts’. In: (2018). URL: <https://ieeexplore.ieee.org/document/8491078> (visited on 15th Oct. 2025).
- [18] Aleksander Sniady and Jose Soler. ‘An overview of GSM-R technology and its shortcomings’. In: (2012). URL: <https://ieeexplore.ieee.org/document/6425256> (visited on 23rd Nov. 2025).

-
- [19] Ruisi He et al. ‘High-Speed Railway Communications: From GSM-R to LTE-R’. In: (2016). URL: <https://ieeexplore.ieee.org/document/7553613> (visited on 23rd Nov. 2025).
 - [20] UIC. ‘FRMCS Future Railway Mobile Communication System Telecoms & Signalling’. In: (2025). URL: <https://uic.org/rail-system/telecoms-signalling/frmcs>.
 - [21] Dan Mandoc. ‘FRMCS Definition Specification and Standardization Activities ERA UIC FRMCS Definition’. In: (2019). URL: https://www.era.europa.eu/system/files/2022-11/4-3-dan_mandoc_era_uic_frmcs_definition_16102019_en.pdf.
 - [22] Daniel Mejías et al. *Towards Railways Remote Driving: Analysis of Video Streaming Latency and Adaptive Rate Control*. 2024. URL: <https://ieeexplore.ieee.org/document/10597107> (visited on 6th Dec. 2025).
 - [23] Oscar Amador, Maytheewat Aramrattana and Alexey Vinel. ‘A Survey on Remote Operation of Road Vehicles’. In: (2022). URL: <https://ieeexplore.ieee.org/document/9984654> (visited on 23rd Nov. 2025).
 - [24] Arvind Kumar Pandey and Warish Patel. ‘A Smart Vehicle Control Remotely using Wifi’. In: (2022). URL: <https://ieeexplore.ieee.org/document/10047780> (visited on 23rd Nov. 2025).
 - [25] International Telecommunication Union (ITU). *ITU-T G.1051 – Latency Measurement and Methodologies*. Tech. rep. International Telecommunication Union, 2023. URL: https://www.itu.int/rec/dologin_pub.asp?lang=e&id=T-REC-G.1051-202303-I!!PDF-E&type=items (visited on 20th Oct. 2025).
 - [26] TechTarget. *Request for Comments (RFC) Definition*. 2024. URL: <https://www.techtarget.com/whatis/definition/Request-for-Comments-RFC> (visited on 9th Nov. 2025).
 - [27] DNSstuff. *Network Latency Test Tools: Measuring Ping, Traceroute, and Delay*. 2024. URL: <https://www.dnsstuff.com/network-latency-test-tools> (visited on 8th Nov. 2025).
 - [28] Norwegian Railway Authority (Statens jernbanetilsyn). *Regulations on Vehicles on the National Railway Network (Unofficial Translation)*. 2013. URL: https://www.sjt.no/globalassets/00_generell/english/pdf-files/unofficial-translation-kjoretoyforskrift-en.pdf (visited on 20th Oct. 2025).
 - [29] Bane NOR. *Network Statement / Access Conditions 2025*. 2025. URL: <https://oppslagsverk.banenor.no/en/network-statement/2025/access-conditions/> (visited on 20th Oct. 2025).
 - [30] Dusan Patrick Klogo, Daria Kuzmina and Nacho Celaya Vela. *D41.1 - Collection of test cases and validation criteria*. 2023. URL: <https://ec.europa.eu/research/participants/documents/downloadPublic?documentIds=080166e508af73fc&appld=PPGMS> (visited on 8th Dec. 2025).
 - [31] ETSI. *ETSI TS 122 289 V17.0.0 LTE 5G Mobile communication system for railways 3GPP TS 22.289 version 17.0.0 Release 17*. Tech. rep. 2022. URL: https://www.etsi.org/deliver/etsi.ts/122200.122299/122289/17.00.00.60/ts_122289v170000p.pdf.
 - [32] Simon Jürgensen. ‘Remote Control for Rail Vehicles’. PhD thesis. University of Kiel, 2025. URL: <https://rtsys.informatik.uni-kiel.de/~biblio/downloads/theses/sij-bt.pdf> (visited on 15th Oct. 2025).
 - [33] Emilia Salvesen Kozarevic. ‘Developing Remote Control as a Fallback System: An Iterative Approach’. PhD thesis. NTNU, 2025.
 - [34] Nacho Celaya Vela et al. *D41.2 - Testing reports and assessment*. CAF et al., 2024. URL: <https://rail-research.europa.eu/wp-content/uploads/2025/02/D41.2-Testing-reports-assessment.pdf> (visited on 7th Dec. 2025).
 - [35] Inzirillo Francesco et al. *D5.4 - Documentation of use cases for Remote Driving*. FP2R2DATO and Europe’s Rail, 2023. URL: <https://rail-research.europa.eu/wp-content/uploads/2025/07/D5.4-%E2%80%93Documentation-of-use-cases-for-Remote-Driving.pdf> (visited on 8th Dec. 2025).
 - [36] J. Ouden, V. Ho and T. Smagt. ‘Design and Evaluation of Remote Driving Architecture on 4G and 5G Mobile Networks’. In: (2022). URL: <https://www.frontiersin.org/journals/future-transportation/articles/10.3389/ffutr.2021.801567/full> (visited on 5th Dec. 2025).
 - [37] C. Jernberg, A. Sjöberg and P. Karlsson. ‘The effect of latency, speed and task on remote operation’. In: *Transportation Engineering* 15 (2024). URL: <https://www.sciencedirect.com/science/article/pii/S2590198224001386> (visited on 15th Oct. 2025).
-

-
- [38] Admir Kaknjo et al. ‘Real-Time Video Latency Measurement between a Robot and Its Remote Control Station: Causes and Mitigation’. In: *Wireless Communications and Mobile Computing* (2018). URL: https://www.researchgate.net/publication/329369713_Real-Time_Video_Latency_Measurement_between_a_Robot_and_Its_Remote_Control_Station_Causes_and_Mitigation (visited on 15th Oct. 2025).
- [39] Stefan Neumeier et al. ‘Teleoperation: The Holy Grail to Solve Problems of Automated Driving? Sure, but Latency Matters’. In: (2019). URL: <https://dl.acm.org/doi/pdf/10.1145/3342197.3344534> (visited on 15th Oct. 2025).
- [40] Lei Kang et al. ‘Augmenting Self-Driving with Remote Control: Challenges and Directions’. In: (2018). URL: <https://dl.acm.org/doi/pdf/10.1145/3177102.3177104> (visited on 5th Dec. 2025).
- [41] N. González et al. *A quality of experience model for live video in first-person-view drone control in cellular networks*. 2023. URL: <https://www.sciencedirect.com/science/article/pii/S1389128623005340> (visited on 8th Dec. 2025).
- [42] Larsen et al. *Xhaul Latency Dimensioning of 5G Drone Control*. 2022. URL: <https://ieeexplore.ieee.org/abstract/document/9836059> (visited on 8th Dec. 2025).
- [43] Marlene Böhmer et al. *Latency-aware and -predictable Communication with Open Protocol Stacks for Remote Drone Control*. 2020. URL: <https://ieeexplore.ieee.org/abstract/document/9183573> (visited on 8th Dec. 2025).
- [44] Kjell Brunnströma et al. *Latency impact on Quality of Experience in a virtual reality simulator for remote control of machines*. 2020. URL: <https://www.sciencedirect.com/science/article/pii/S0923596520301648> (visited on 7th Dec. 2025).