

Lecture 3 — Forms of Energy and Calculating Work

CBE 20260 — Spring 2026

Prof. Edward Maginn

Table of contents

1	Last class	1
1.1	What you should be able to do after this lecture	1
2	Review of Mechanical Work	2
3	Other kinds of work	3
3.1	Expansion & Contraction Work (Piston-Cylinder)	3
3.2	Flow Work (PV work)	6
3.3	Shaft Work	8
4	Internal Energy (U)	8
4.1	Maxwell-Boltzmann distribution and molecular kinetic energy	9
4.1.1	Effect of temperature on the distribution	11
4.1.2	Connection to internal energy	11
5	Heat (Q) vs. Work (W)	11

1 Last class

- Systems, boundaries, other definitions
- Different forms of energy
- First Law
- Calculating work

1.1 What you should be able to do after this lecture

By the end of class you should be able to:

1. **Calculate work** for: displacement of objects in external fields; expansion and contraction (piston and cylinder problems); fluid flow

2. Describe what **internal energy** is
 3. Apply the **Maxwell-Boltzmann equation** to compute molecular kinetic energy
 4. Describe what **heat** is, and how it differs from work and energy.
 5. Apply an **energy balance** to a closed system
-

2 Review of Mechanical Work

As defined in the previous lecture, **Work** (W) is the energy transfer associated with a force acting through a distance.

$$W = \int \vec{F} \cdot d\vec{x} \quad (1)$$

In this course (IUPAC convention), we define work done **on** the system as positive ($W > 0$). Work done **by** the system (energy leaving) is negative ($W < 0$).

It is straightforward to calculate work when objects are lifted (or dropped) in a gravitational field.

Consider the example in Fig. 1:

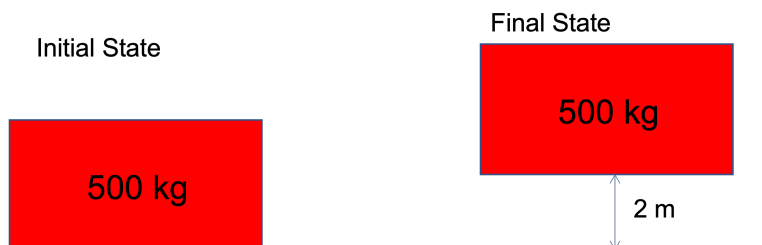


Fig. 1: Work for raising a mass

System: Block of mass 500 kg

Direction of force: $\vec{F}$ is in the +h direction. We must push *on* the system upward for it to move.
 $F = mg$

Displacement: 2 m in the +h direction

Expectation: The process of lifting the system (block) will raise its potential energy. We therefore expect work to be *positive*, since by our convention, positive work corresponds to adding energy to the system.

Do the calculation

$$W = \int_0^{2m} mgdh = (500\text{kg}) \cdot (9.8\text{m/s}^2) * (2\text{m}) = 9800\text{J}$$

Comment

Work was done *on* the block (somehow) and it resulted in an increase in the potential energy of the block. We know from the First Law that this energy had to come from somewhere. Clearly, the block won't just jump up 2 m on its own, so something is missing in the image!

3 Other kinds of work

In addition to moving objects up and down (we can call this “external field” work, W_{ef}), there are three other important kinds of work.

1. **Expansion-contraction work** (W_{ec}): Typically a fluid expanding or contracting to raise or lower a piston or move an object.
2. **Flow work** (W_f): Associated with fluids flowing into and out of something.
3. **Shaft work** (W_s): Work associated with some mechanical device; we often represent it as an agitator or impeller attached to a shaft, hence the name. Common examples of equipment that involve shaft work are pumps, compressors, turbines, and mixers.

3.1 Expansion & Contraction Work (Piston-Cylinder)

A very common form of work in thermodynamics is the expansion or compression of a gas in a piston-cylinder device.

Consider a gas contained within a cylinder with a moveable piston, such as that in Fig. 2.

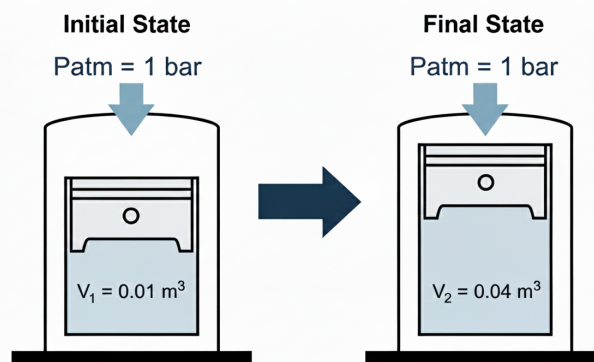


Fig. 2: Expansion of a gas in a piston-cylinder device

Let's consider the case shown here, where the gas expands from some initial volume V_1 to a larger volume V_2 .

System: gas in cylinder.

Surroundings: piston, walls of cylinder, air outside, etc.

What are the forces on the system? Consider a free body diagram, as shown in Fig. 3.

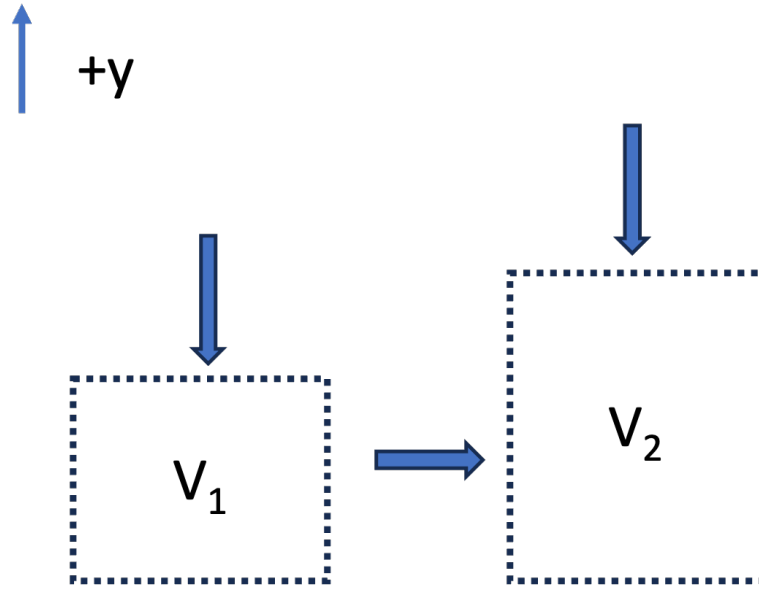


Fig. 3: Free body diagram of gas in a piston-cylinder

- The atmosphere exerts a pressure P_{atm} against a piston area A_p . The force is $F_{atm} = -P_{atm}A_p$ (the negative sign means it is in the negative y-direction).
- The mass of the piston exerts a force downward $F_p = -m_p g$
- If the piston moves upward, the walls of the piston will have frictional resistance with the cylinder walls. This will result in a negative force downward, F_f . The exact form of F_f is complex.
- If the piston moves a distance dy :

1. **Force:** $F_{atm} = -(P_{atm}A_p) - (m_p g) - F_f$
2. **Displacement:** dy
3. **Volume Change:** $dV = A_p dy$

The work of expansion is thus

$$W = \int_{V_1}^{V_2} -P_{atm} dV - \int_{V_1}^{V_2} (m_p g / A_p) dV - \int_{V_1}^{V_2} (F_f / A_p) dV \quad (2)$$

If we make simplifying assumptions that the system is frictionless and the piston mass is negligible, the

$$W = - \int_{V_1}^{V_2} P_{atm} dV \quad (3)$$

If the atmospheric pressure is constant, then

$$W = -P_{atm}(V_2 - V_1) \quad (4)$$

Notice that if the gas was compressed by an external atmospheric pressure P_{atm} , the equations are exactly the same, and we still get Eq. 4, except:

- **Expansion** ($dV > 0$): $W < 0$ (Energy leaves system).
- **Compression** ($dV < 0$): $W > 0$ (Energy enters system).

Expansion into a Vacuum

What would be the work associated with a gas expanding against a vacuum, as in Fig. 4? (We remove the first stop and the piston goes up until it strikes the top stop).

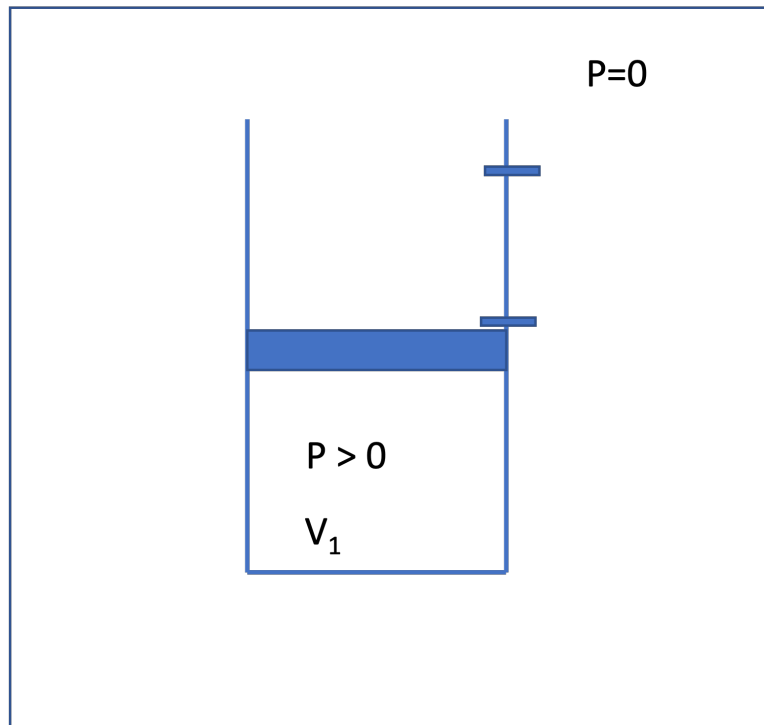


Fig. 4: Expansion of a gas against a vacuum

The equation is the same as we derived earlier. Neglecting friction and the mass of the piston, the work is

$$W = - \int P_{ext} dV = -P_{ext}(V_2 - V_1) = 0 \quad (5)$$

That is, *no work* is done, because there is no force opposing the expansion. The energy of the gas does not change for this case, even though the volume of the gas does change. This is an interesting result and we will come back to this concept later when talking about *reversible processes*.

3.2 Flow Work (PV work)

We have analyzed “expansion-contraction” for a *closed* system, $W_{ec} = -\int P_{ext} dV$, but work is also associated with fluid flow.

The key idea is that **pressure forces do work to push fluid across the control surface**. That work is called **flow work**.

Consider steady flow through a pipe segment, as shown in Fig. 5.

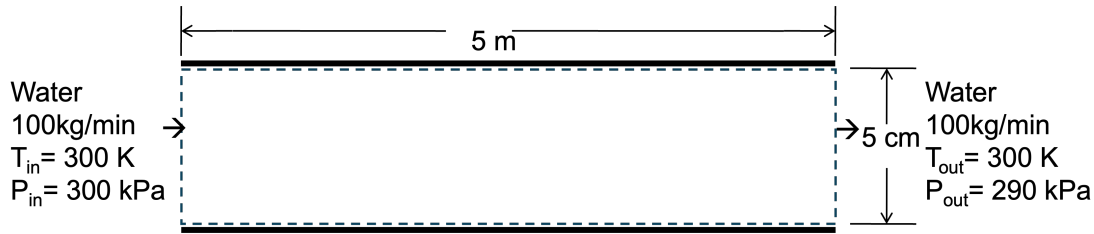


Fig. 5: Control volume (system) is the fluid in the pipe; pressure forces act on inlet/outlet faces.

Focus on a thin “slug” of fluid crossing the inlet; this is the system. See Fig. 6. The surrounding upstream fluid exerts a pressure force on the inlet face to push the fluid into the pipe:

$$F_{in} = P_{in}A \quad (6)$$

where the sign is positive because the force is in the direction of displacement dx . The slug is pushed a distance dx into the control volume, where A is the cross sectional area of the pipe.

$$dW_{in} = F_{in} dx = (P_{in}A) dx = (P_{in}A) (dV/A) = P_{in} dV \quad (7)$$

where $dV = A dx$ is the volume of the slug.

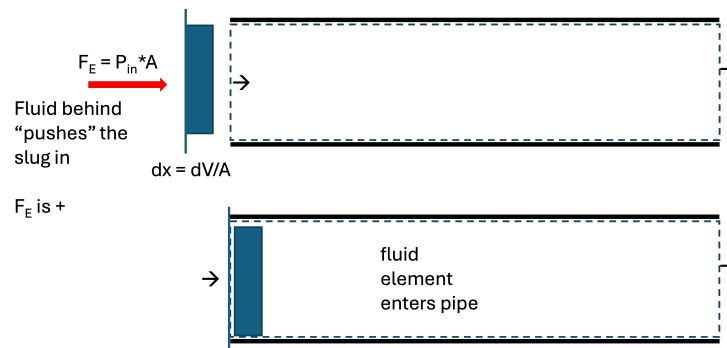


Fig. 6: A “slug” of fluid (the system) is pushed into the pipe.

Integrating Eq. 7 and dividing by time gives the **rate** of inlet flow work:

$$\dot{W}_{in} = P_{in} \dot{V}_{in}$$

where ($\dot{V}$) is the volumetric flow rate at the inlet plane.

At the outlet, a pressure force also acts on the control surface. The fluid element has to push against the downstream fluid to “leave” the pipe. This force is therefore in the negative x direction.

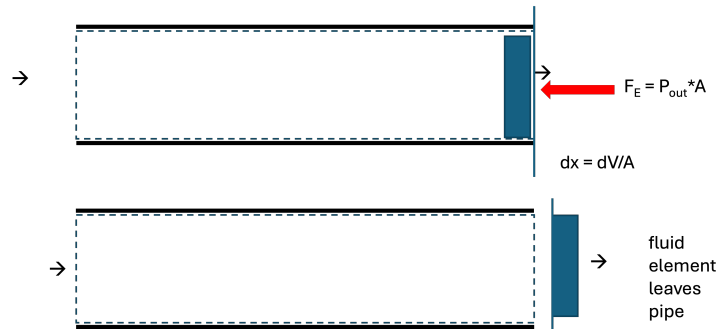


Fig. 7: A “slug” of fluid (the system) pushes out of the pipe.

$$\dot{W}_{out} = -P_{out} \dot{V}_{out}$$

So the **net flow work rate** is

$$\dot{W}_f = \dot{W}_{in} + \dot{W}_{out} = P_{in} \dot{V}_{in} - P_{out} \dot{V}_{out} \quad (8)$$

Note: Flow work is evaluated **at the planes where flow crosses the control surface**

Worked example

Let's solve for the flow work associated with the system shown in Fig. 5. Water flows through a pipe at $\dot{m} = 100$ kg/min, with $P_{in} = 300$ kPa and $P_{out} = 290$ kPa. Assume liquid water is incompressible with $\rho = 1000$ kg/m³.

Volumetric flow rate:

$$\dot{V} = \frac{\dot{m}}{\rho} = \frac{100 \text{ kg/min}}{1000 \text{ kg/m}^3} = 0.10 \text{ m}^3/\text{min}$$

Inlet flow work rate:

$$\dot{W}_{in} = P_{in} \dot{V} = (300 \text{ kPa})(0.10 \text{ m}^3/\text{min}) = 30,000 \text{ J/min}$$

Outlet flow work rate:

$$\dot{W}_{out} = -P_{out} \dot{V} = -(290 \text{ kPa})(0.10 \text{ m}^3/\text{min}) = -29,000 \text{ J/min}$$

Net flow work rate:

$$\dot{W}_f = 1,000 \text{ J/min} \approx 16.7 \text{ W}$$

Interpretation: because ($P_{in} > P_{out}$), **net work must be supplied to push the water through the control volume** (with our sign convention). This would typically be supplied by a pump, but you could imagine if the pipe was not level, gravity could supply the needed work.

3.3 Shaft Work

Energy can also be transferred via a rotating shaft (e.g., a turbine, pump, mixers, or engine crankshaft). Windmills and water wheels convert the kinetic energy of a flowing fluid into shaft work.

For a constant torque τ rotating through an angle θ :

$$W_s = \tau\theta \quad (9)$$

or in terms of power ($\dot{W}$) and angular velocity (ω):

$$\dot{W}_s = \tau\omega \quad (10)$$

We typically don't compute shaft work using Eq. 9 or Eq. 10, but we instead use other thermodynamic properties to "back calculate" W_s , or we are given W_s as a design variable. More on this later...

4 Internal Energy (U)

Imagine we have two blocks of the same mass and same material sitting next to each other, as in Fig. 8.

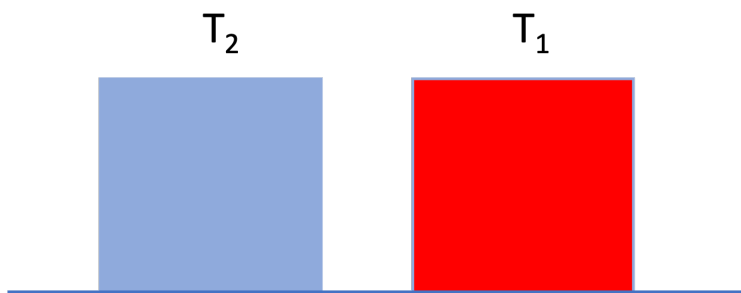


Fig. 8: Hot and cold blocks of the same mass and materials.

Neither block is moving and they are at the same height. The only difference is that block 1 is hotter than block 2 ($T_1 > T_2$). Even though the two blocks have the same macroscopic potential and kinetic energy, we intuitively guess that block 1 has "more energy" than block 2.

To account for this, we define a property called **Internal Energy** (U), which represents the sum of all microscopic forms of energy within the system. This includes:

- **Molecular Kinetic Energy:** Translation, rotation, and vibration of molecules (related to temperature).
- **Molecular Potential Energy:** Intermolecular forces between the molecules (related to things like phase and density).

Thus, we can write the total energy of a closed system as

$$E_{total} = U + KE_{macro} + PE_{macro}$$

We often drop the “macro” subscripts, remembering that KE and PE apply to the overall kinetic and potential energy of the system. All the “microscopic” kinetic and potential energy is lumped into U .

For many situations of interest in chemical engineering, changes in internal energy are much, much larger than changes in macroscopic potential or kinetic energy. Thus, often we can make the approximation that $\Delta E \approx \Delta U$.

4.1 Maxwell–Boltzmann distribution and molecular kinetic energy

Internal energy arises from microscopic degrees of freedom. For gases (and, to a good approximation, liquids at moderate conditions), an important contribution comes from **molecular kinetic energy** associated with random thermal motion.

At thermodynamic equilibrium, **molecular velocities are not all the same**. Instead, they are distributed according to the **Maxwell–Boltzmann distribution**, which specifies the probability that a molecule has a speed between (v) and $(v + dv)$.

For a gas of molecules of mass (m) at temperature (T) , the speed distribution is

$$f(v) = 4\pi v^2 \left(\frac{m}{2\pi k_B T} \right)^{3/2} \exp \left(-\frac{mv^2}{2k_B T} \right) \quad (11)$$

where:

- k_B is Boltzmann’s constant, and
- $f(v) dv$ is the fraction of molecules with speeds in the interval $([v, v + dv])$. Eq. 11 is plotted in Fig. 9 for water at different temperatures.

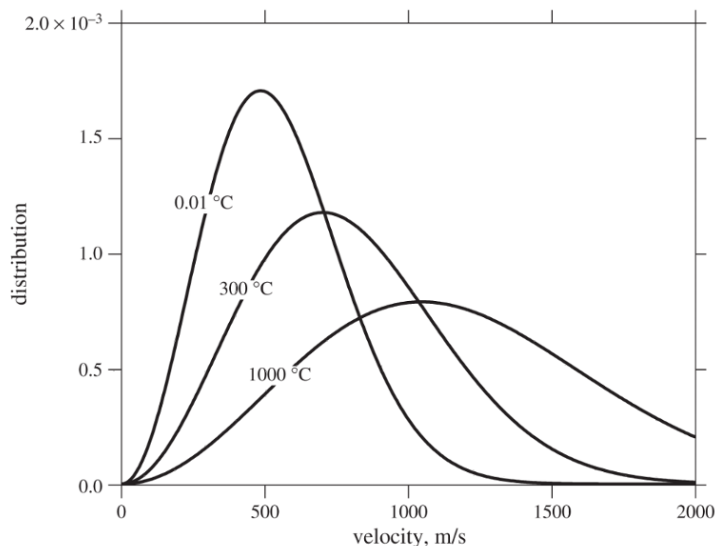


Fig. 9: The Maxwell-Boltzmann distribution of water molecule velocities at different temperatures.

Several important molecular-scale averages follow directly from this distribution:

- **Average molecular speed**

$$\langle v \rangle = \left(\frac{8k_B T}{\pi m} \right)^{1/2}$$

- **Average squared molecular speed**

$$\langle v^2 \rangle = \frac{3k_B T}{m}$$

The average *translational kinetic energy* of a molecule is therefore

$$\left\langle \frac{1}{2} m v^2 \right\rangle = \frac{3}{2} k_B T$$

This result is fundamental: **temperature is a direct measure of the average molecular kinetic energy**. So in Fig. 8, block 1 has more internal energy than block 2 because it is hotter and thus its molecules have greater kinetic energy than the molecules of block 2.

Interactive Example

I have prepared an interactive Jupyter Notebook that allows you to model the distribution of molecular velocities as a function of temperature and species.

Note: This example is available as an interactive Jupyter Notebook on the course website.

4.1.1 Effect of temperature on the distribution

Fig. 9 shows that as temperature increases:

- The distribution **shifts to higher velocities**
- The distribution **broadens**, meaning a wider range of molecular speeds
- Both the average speed $\langle v \rangle$ and average kinetic energy increase

In Fig. 9, you can see that increasing temperature moves the peak to the right and lowers it while preserving the total area under the curve (the number of molecules).

Key physical point: Even at a fixed temperature, some molecules are moving much faster than average, while others are much slower. Thermodynamic properties emerge from *ensemble averages*, not from individual molecular behavior.

4.1.2 Connection to internal energy

Because the average molecular kinetic energy scales linearly with temperature, the **translational contribution to internal energy for an ideal gas depends only on temperature**.

On a molar basis,

$$U_{\text{trans}} = \frac{3}{2}RT$$

Additional contributions to internal energy (rotation, vibration, intermolecular potential energy) become important for real gases and liquids (we will talk about this later), but the Maxwell–Boltzmann distribution provides the foundational link between **microscopic motion** and **macroscopic thermodynamic properties**.

5 Heat (Q) vs. Work (W)

What happens if we bring the hot and cold blocks into contact, as in Fig. 10?

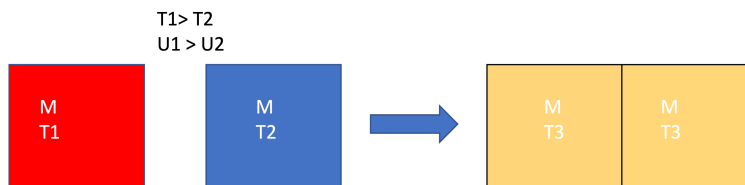


Fig. 10: Hot and cold blocks of the same mass and materials brought together eventually reach the same temperature.

we know from experience that the temperatures will equalize, and $T_3 = \frac{1}{2}(T_1 + T_2)$ for blocks of the same material and equal mass. Also, $\underline{U}_3 = \frac{1}{2}(\underline{U}_1 + \underline{U}_2)$

Why does this happen? The “fast” molecules of block 1 hit the slower molecules of block 2 when they are in contact. Kinetic energy is transferred from the hotter atoms to the colder atoms. This occurs at the interface, but the hot atoms at the surface collide with other atoms in the interior of the block. We say that **heat** is **conducted** from the hot block to the cold block. This process, of exchanging energy through molecular collisions of atoms at different temperatures, is called **heat**.

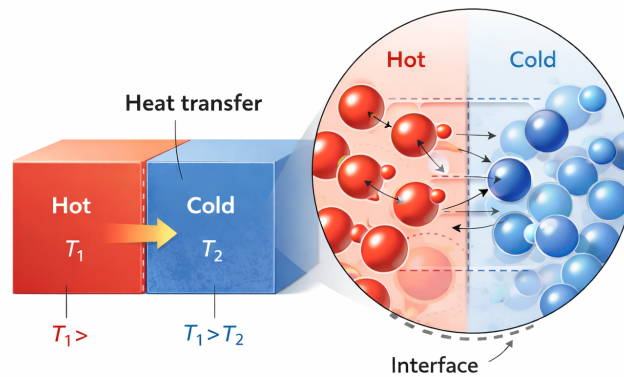


Fig. 11: Heat is energy transferred between two systems due to molecular collisions of atoms with different kinetic energies (i.e. temperatures).

Heat: Energy transferred as a result of a temperature difference, with energy going from hot to cold (see Fig. 11).

So there are two modes of energy transfer:

1. **Work (W):** Energy transfer driven by a **Force** acting through a distance. It is an *orderly* transfer of energy, typically facilitated by some type of device.
2. **Heat (Q):** Energy transfer driven strictly by a **Temperature Difference** (ΔT). It is a *random* transfer of energy that occurs without any kind of device.

Heat and Work are not equivalent; as we will see, work is more “valuable” than heat.

The overall closed-system energy balance can thus be written as:

$$\Delta E = \Delta U + \Delta E_{KE} + \Delta E_{PE} = Q + W \quad (12)$$

All this says is that there can be interactions with the surroundings via heat and work, which can result in changes in the three types of energy of the system. Note that W can involve expansion/contraction or shaft work. Since the system is closed, there is no flow work. The time-dependent energy balance for a closed system (consistent with eqn 3.34 in your text is)

$$\frac{d}{dt} \left[M \left(\hat{U} + \frac{v^2}{2} + gh \right) \right] = \dot{W}_s + \dot{W}_{EC} + \dot{Q} \quad (13)$$

where the dots over the work and heat symbols indicate a rate (energy/time or power).

Note that in Eq. 12 and Eq. 13, the extensive energy change is considered (in Eq. 13, mass M is multiplied by specific energy units). Be careful about units in all calculations!

Eq. 12 can also be written for the surroundings. The net result is that

$$(Q + W)_{sys} = -(Q + W)_{surr}$$

and thus the First Law is

$$\Delta E_{sys} + \Delta E_{surr} = 0$$

.