Classic Steel®

ISO 9001:2008 Certified
Certificate No. FM 509124

Steel Fire Doors / Steel Doors

CLASSIFIED c UL us R25577

c UL us LISTED R25758

BSI British Standard BS 476 Part 20 :1987 BS 476 Part 22 :1987

Thai Industrial Standard TIS 1220-2541

Swinging Type

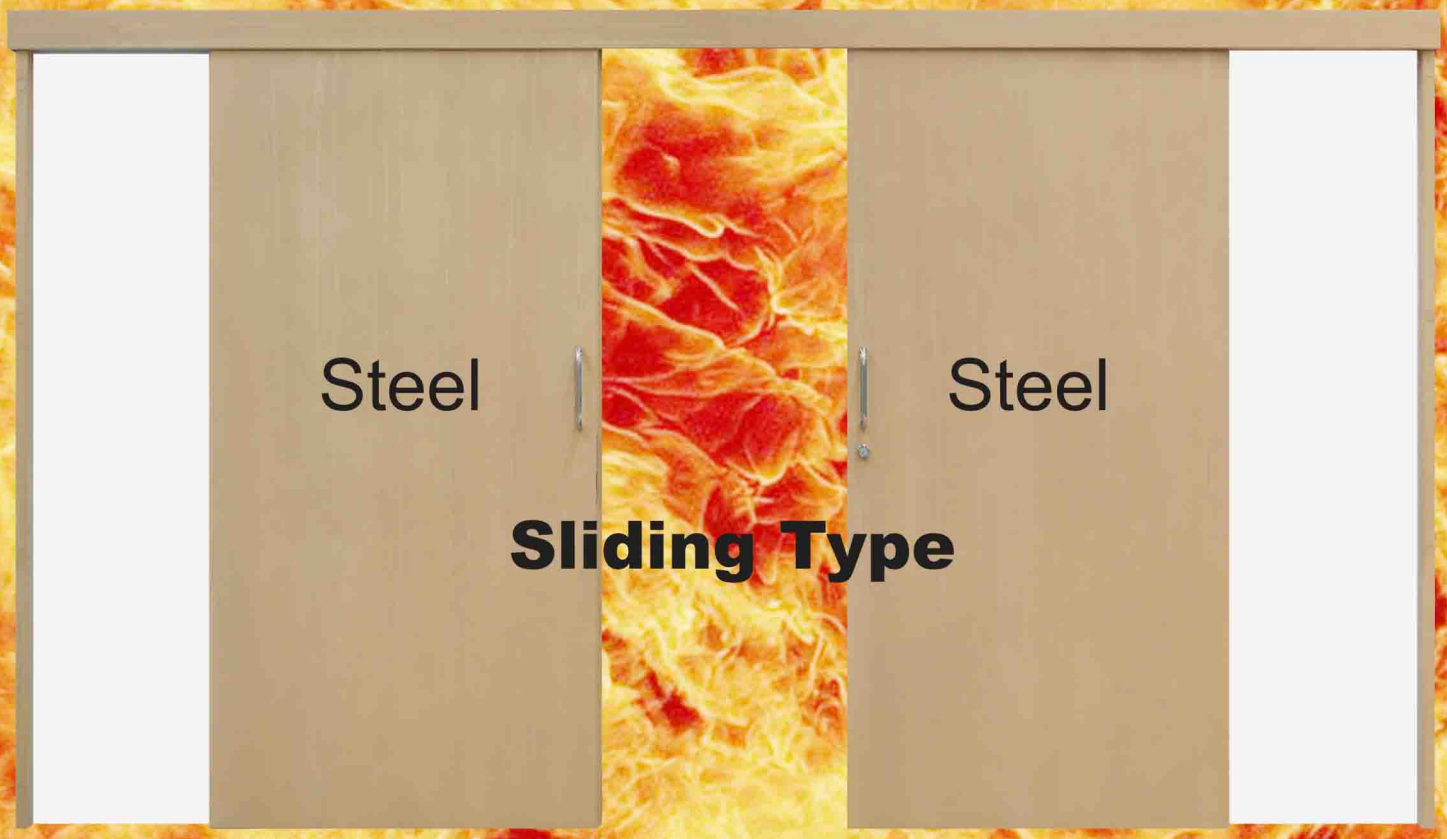

Sliding Type

Steel Fire Doors / Steel Doors

Swinging Type

Type : FRD, 3 Hr Fire Rated by

CLASSIFIED C UL US R25577

C UL US LISTED R25758

Thai Industrial Standard TIS 1220-2541

Type : CSD, 2 Hr Fire Rated by

BSI British Standard BS 476 Part 20 :1987 BS 476 Part 22 :1987

Thai Industrial Standard TIS 1288-2538

Type : SFD, 1 Hr Fire Rated by

BSI British Standard BS 476 Part 20 :1987 BS 476 Part 22 :1987

Thai Industrial Standard TIS 1288-2538

Type : NFD, Steel Doors fabricated

in accordance with

Thai Industrial Standard TIS 1288-2538

Double Door,
Flush Style with Vision Panel,
Powder Finish
(Matt White Color)

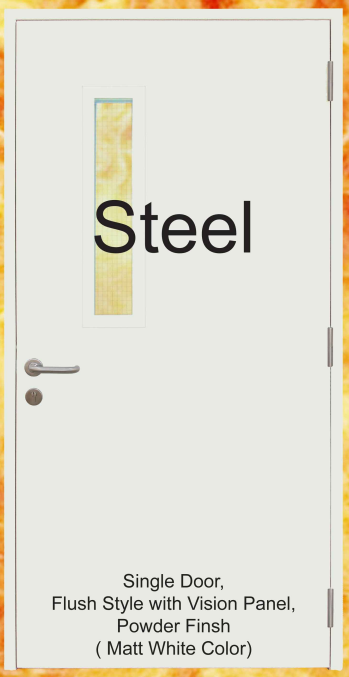

Single Door,
Flush Style with Vision Panel,
Powder Finsh
(Matt White Color)

Single Door,
Flush Style with Wood Grain Finish

(Maple Color)

Single Door,
Embossed Style with Wood Grain Finish

(Golden Teak Color)

Single Door,
Embossed Style with Wood Grain Finish

(Oak Color)

Installation Instruction for Swinging Door

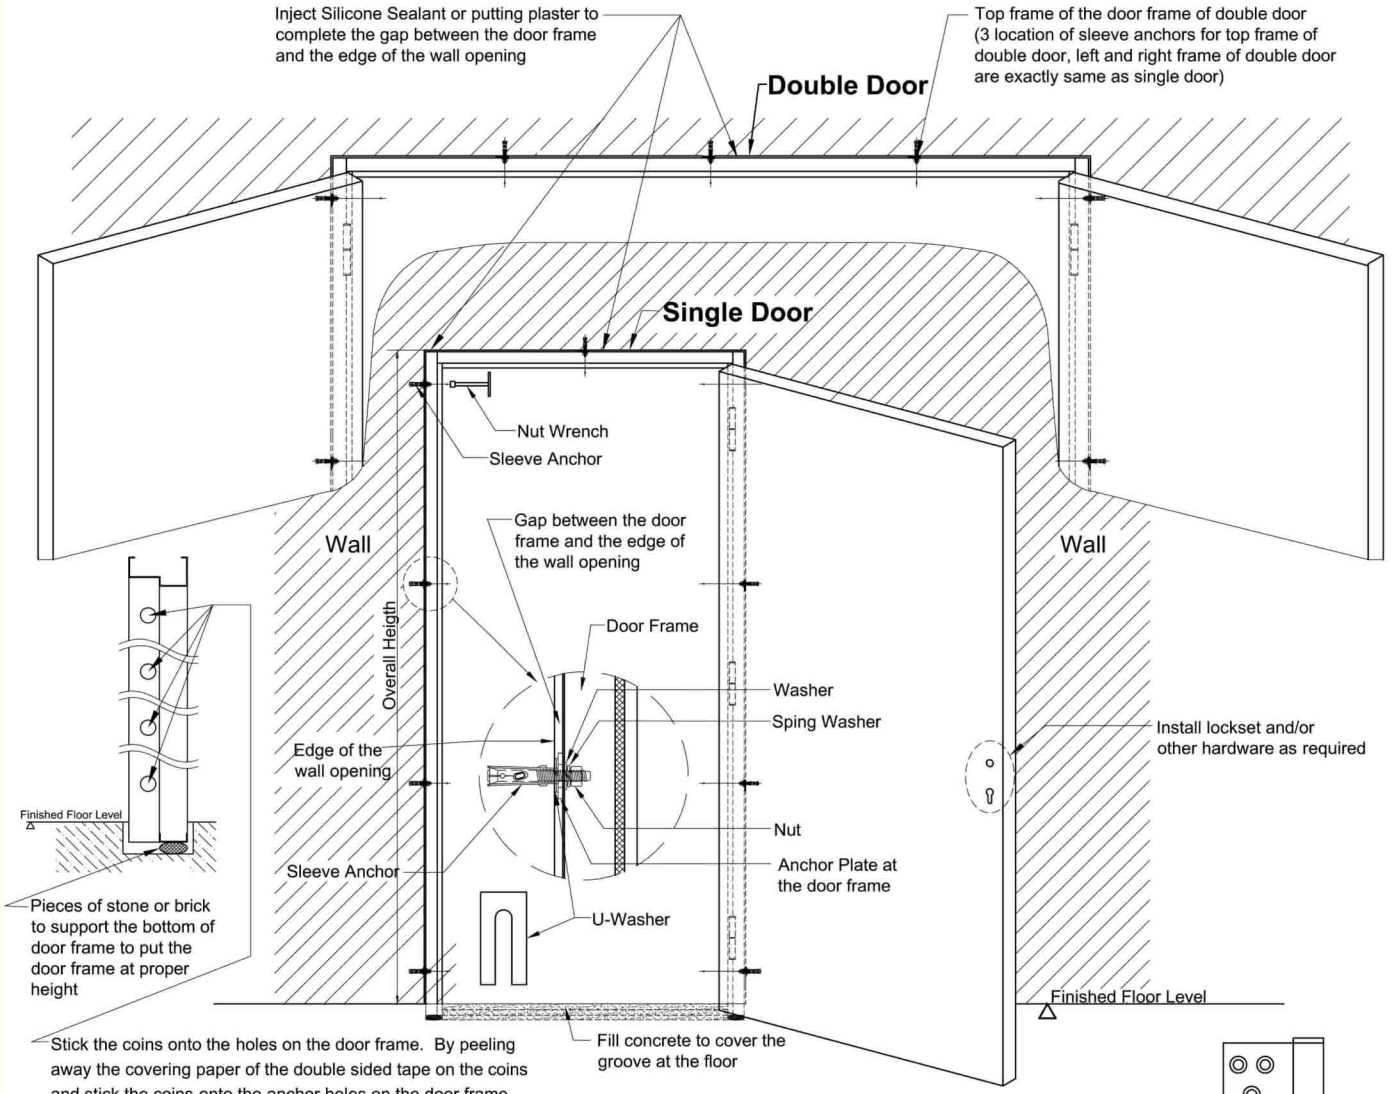

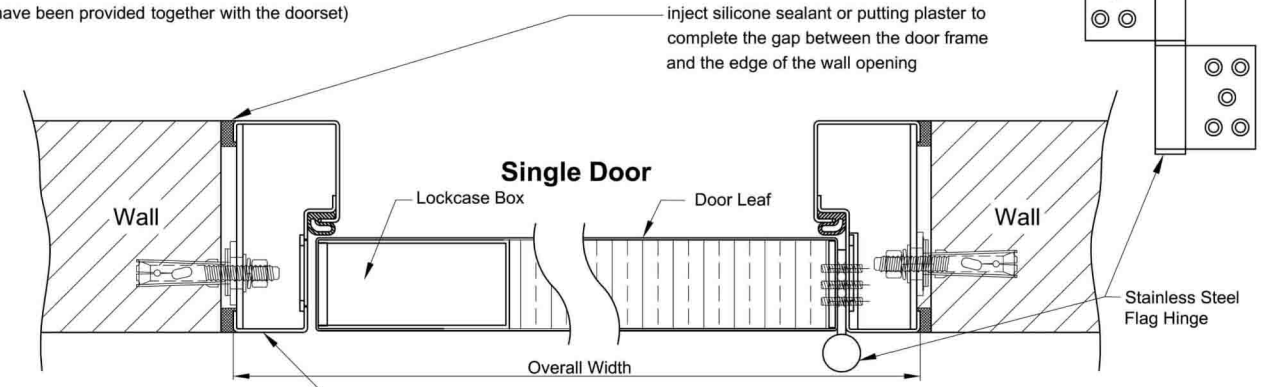

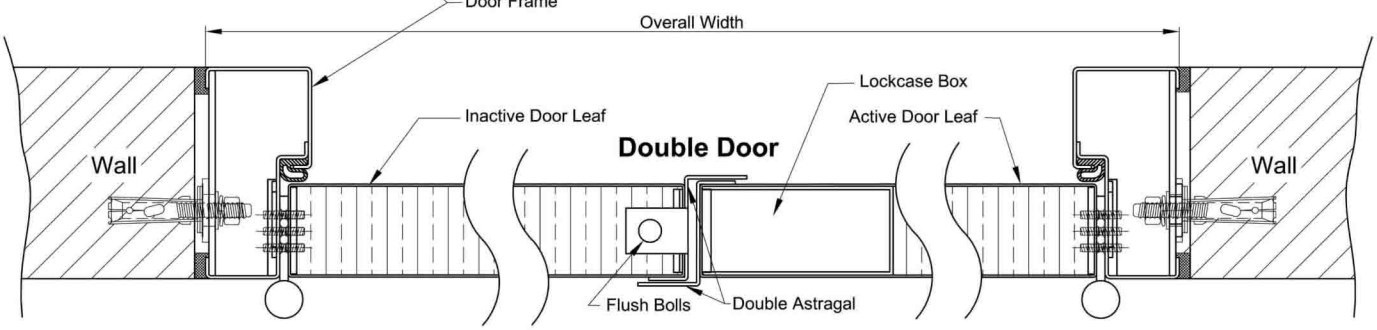

Coins, Sleeve Anchors and U-Washer have been provided together with the doorset

Steel Doors
Sliding Type

No Bottom Rail

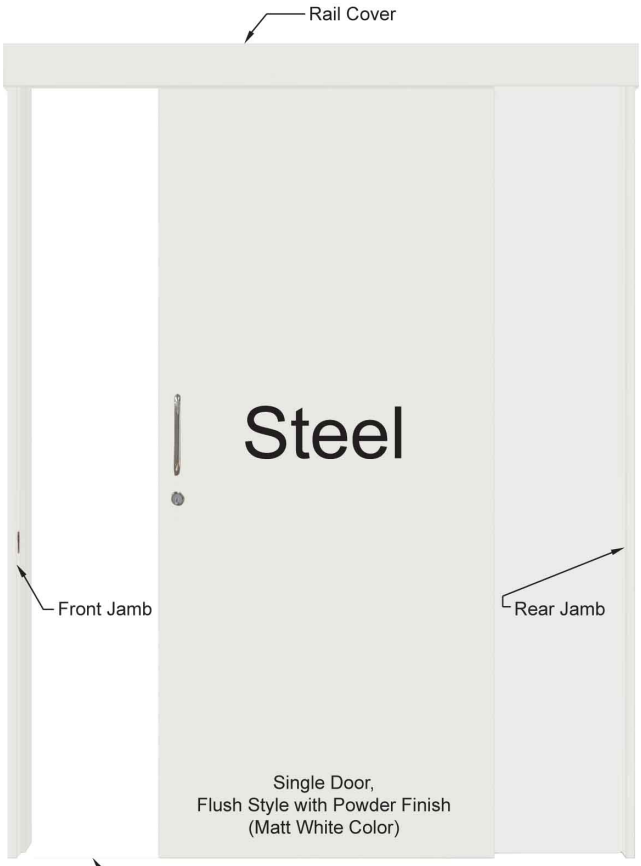

No Bottom Rail

No Bottom Rail

Installation Instruction for Sliding Door

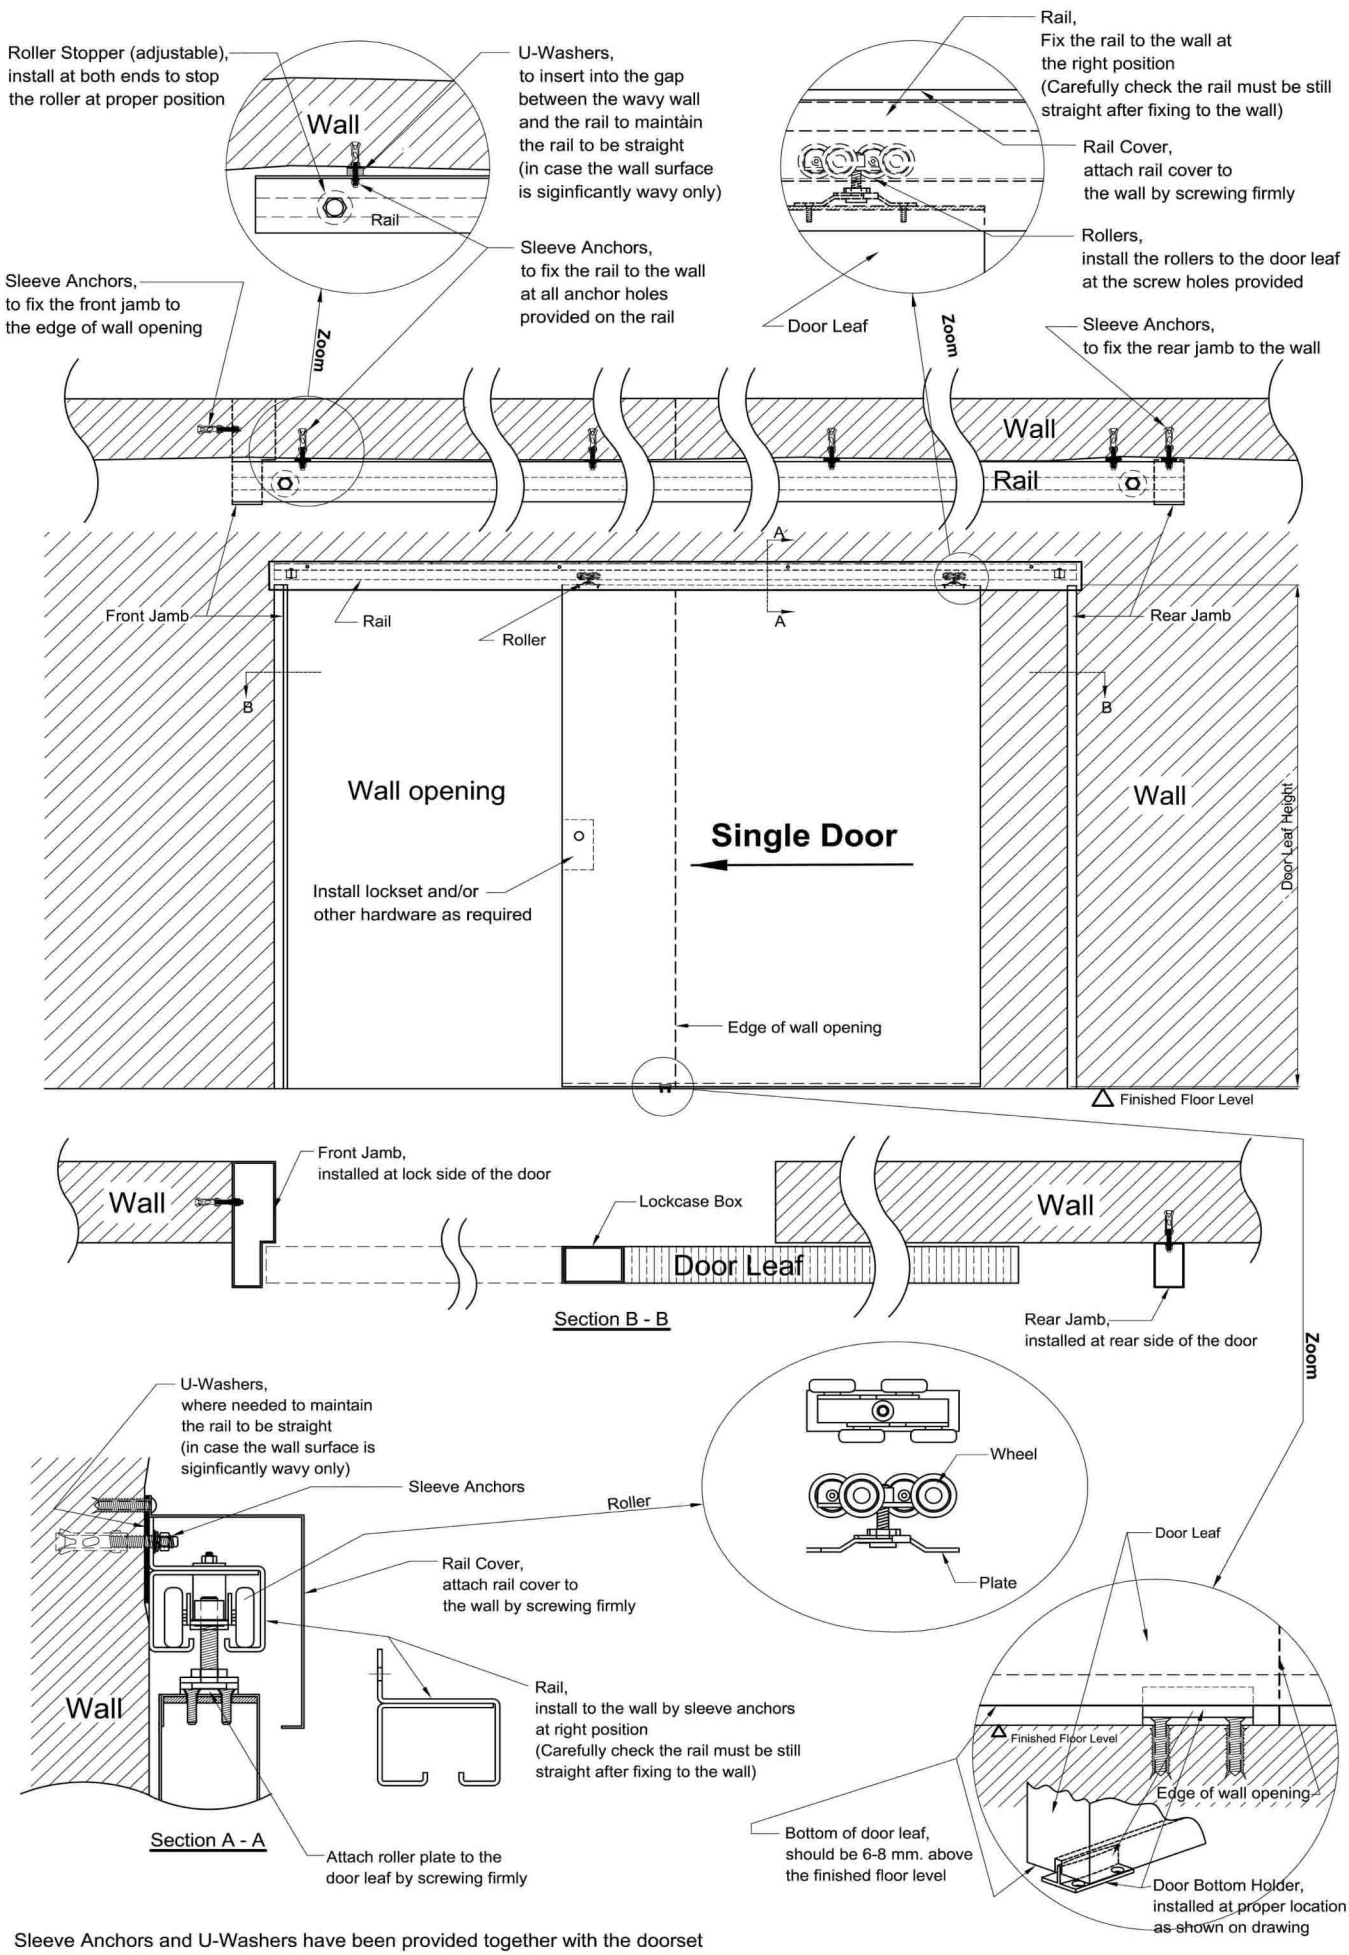

Sleeve Anchors and U-Washers have been provided together with the doorset

Steel Frames

Standard Door Frame,
Single Rebate without rubber bumper



Door Frame Size : 50 mm x 100 mm
(Standard Size)

Standard Door Frame,
Single Rebate with rubber bumper

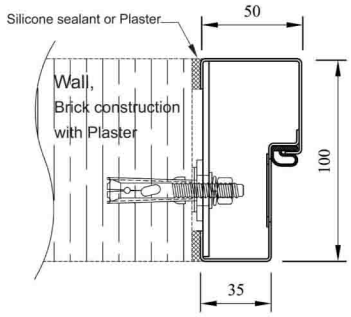

Door Frame Size : 50 mm x 100 mm
(Standard Size)

Door Frame,
Single Rebate with architrave at pull side

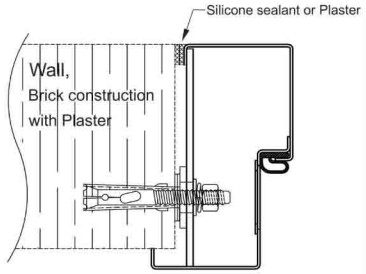

Door Frame Size : Made to order

Door Frame,
Single Rebate with architrave at push side

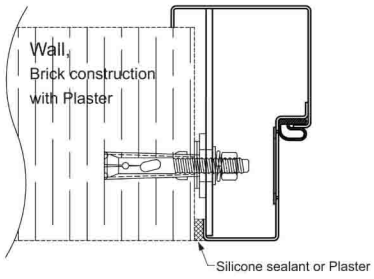

Door Frame Size : Made to order

Door Frame,
Double Rebate without rubber bumper

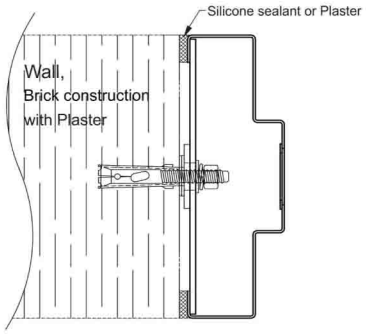

Door Frame Size : Made to order

Door Frame,
Double Rebate with rubber bumper

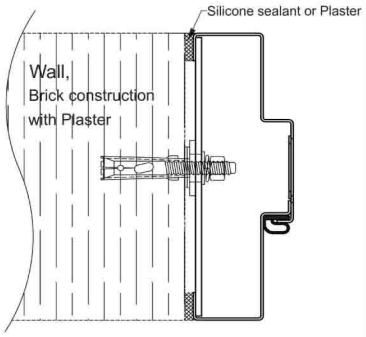

Door Frame Size : Made to order

Door Frame,
Double Rebate with architrave at pull side

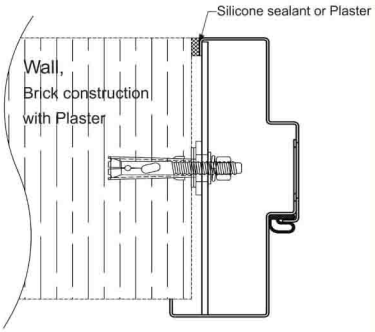

Door Frame Size : Made to order

Door Frame,
Double Rebate with architrave at push side

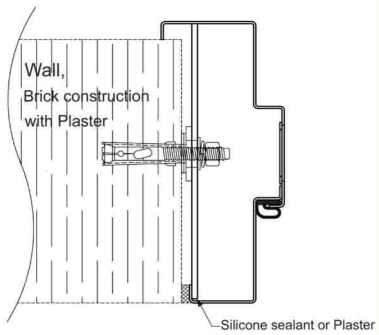

Door Frame Size : Made to order

Door Frame,
Knock Down Type for Modular House



Door Frame Size : Made to order

Vision Panel of door leaf
with visible glazing bead

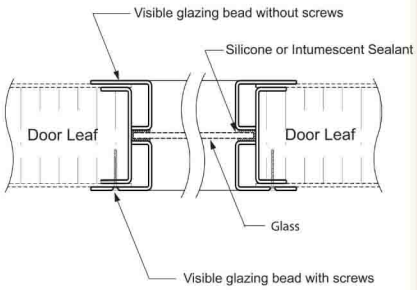

Door Frame Size : Made to order

Vision Panel of door leaf
without visible glazing bead

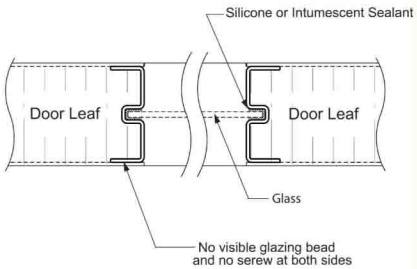

Door Frame Size : Made to order

Window Frame

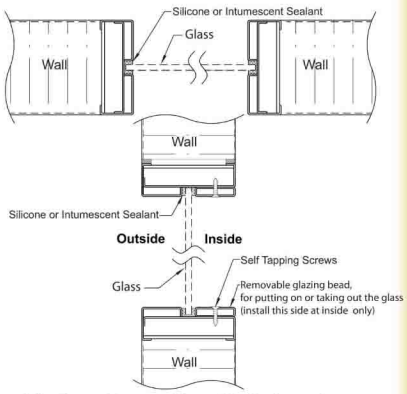

Windown Frame Size : Made to order

Door Hardware (OPTION)

Panic Exit Device, Rim Type, Aluminum Finish

Swinging Fire Door Closer, 3 Hr Fire Rated, NHO, Regular Arm, 180°, 60-85 Kgs,Silver Finish

Swinging Fire Door Closer, 3 Hr Fire Rated, NHO, Regular Arm, 180°, 60-150 Kgs,Silver Finish (Heavy Duty Type)

Exit Lock, Satin StainLess Steel Lever Handle

Panic Exit Device, Vertical Rod Type, Aluminum Finish

Satin Stainless Steel Handle with Plate-SS304

Polished Stainless Steel Handle without Plate-SS304

Security Mortise Lock for Swinging Door, Single Cylinder with Knob with auxiliary deadbolt to open from inside only, Satin Stainless Steel Handle-SS304 (Heavy Duty Type)

Mortise Lock for Swinging Door, Single Cylinder with Knob, Satin Stainless Steel Handle-SS304

Mortise Lock for Sliding Door, Single Cylinder with Knob (Heavy Duty Type)

Mortise Lock for Sliding Door, Single Cylinder with Knob

Nylon Wheel Set for Sliding Door

How to Order

X-XXX-X-X

Door Type :-

Swinging Type :-

FRD = Steel Fire Door - 3 Hr Fire Rated
CSD = Steel Fire Door - 2 Hr Fire Rated
SFD = Steel Fire Door - 1 Hr Fire Rated
NFD = Steel Door

Sliding Type :-

SLD = Steel Sliding Door

Finish :-

P = Powder
W = Wood Grain
R = Primer Only

Door Number :-

S = Single Door
D = Double Door

Size :-

Swinging Type (Overall Size - mm)

Width x Height = Overall Width (Outer Width of door frame) x Overall Height (Height from finished floor level to top of door frame)

Sliding Type (Door Leaf Size - mm)

Width x Height = Width of door leaf x Height of door leaf

Door Style :-

00 = Flush
OG = Flush with Ordinary Glass 6 mm thk
WG = Flush with Wired Glass 6 mm thk
FG = Flush with Fire Rated Glass
0L = Flush with Louver
OL = Flush with Ordinary Glass 6 mm thk and Louver
WL = Flush with Wired Glass 6 mm thk and Louver
05 = Embossed 5 Panels
11 = Embossed 11 Panels

Opening Direction (Top View) :-

Swinging Type

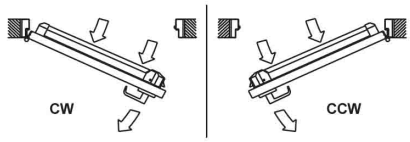

CW = Door Leaf (active door leaf in case of double door) is opened to ClockWise direction

CCW = Door Leaf (active door leaf in case of double door) is opened to CounterClockWise direction

Sliding Type

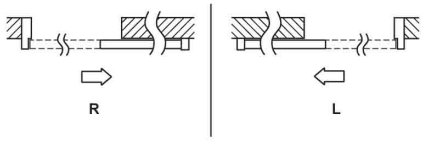

R = Door Leaf (active door leaf in case of double door) is slid to open to Right side

L = Door Leaf (active door leaf in case of double door) is slid to open to Left side

Example :

FRD-S11W-900x2200-CW = Steel Fire Door, 3 Hr Fire Rated, Single Door, Embossed Style 11 Panels, Wood Grain Finish, Overall Width 900 mm x Overall Height 2200 mm, Door Leaf is opened to ClockWise direction.

CSD-D00P-1500x2100-CCW = Steel Fire Door, 2 Hr Fire Rated, Double Door, Flush Style, Powder Finish, Overall Width 1500 mm x Overall Height 2100 mm, Active Door Leaf is opened to CounterClockWise direction.

SFD-SOGR-1000x2100-CCW = Steel Fire Door, 1 Hr Fire Rated, Single Door, Flush Style, with Ordinary Glass 6 mm thk, Primer Only, Overall Width 1000 mm x Overall Height 2100 mm, Door Leaf is opened to CounterClockWise direction.

SLD-D00W-1500x2100-R = Steel Sliding Door, Double Door, Flush Style, Wood Grain Finish, Width of Door Leaf 1500 mm (both doors) x Height of Door Leaf 2100 mm, Door Leaf is slid to open to Right side.

We, **PCJ INDUSTRIES** CO.,LTD., was established in 1998, specialize in production of Steel Fire Doors, Air Outlets, Duct Dampers, Duct Silencers and Cable Trunks. Most of our products have been certified by several organizations for standardization, i.e. : **(Underwriters Laboratories Inc.), (British Standards Institution), (Thai Industrial Standards Institute), (Air Diffusion Council), (Standards Australia). Moreover, our company has been certified by (International Organization for Standardization), ISO 9001 : 2008 as well.** We have our own factory established on our own land, area 40,000 sq.m.(approx.), in Kaengkhoi, Saraburi, Thailand.

Our Policy has always been, and will continue to be, the production and On Time-Every Time Schedule Delivery of Quality, Reliability and Competitively Priced Products. We have invested for instruments, machines and we have experience engineer teams take full time to research and develop our product lines continuously, including new product designs to meet worldwide market demands.

Our products have been distributed to many countries worldwide :-

and will be distributed to a lot more countries in the future.

PCJ INDUSTRIES CO.,LTD.
พีซีเจ อุตสาหกรรม บจก.

199/24-25 Vibhavadeerangsit Road, Samsennai, Payathai, Bangkok 10400, Thailand
Tel : +66 2 2701938, +66 2 2781604, +66 2 2790859, +66 2 2794166, +66 2 6160184, +66 2 6160185
Fax : +66 2 6160071 Email : sales@pcjindustries.co.th Website : www.pcjindustries.co.th

ISO 9001 : 2008 Certified
Certificate No. FM 509124

Printed in Thailand
0 1 0 4 1 2