


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:12.000V I:1.4631A P:14.300W PF:0.8203 Freq:60.01Hz Lamp Flux:1065.43x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 74.51 lm/W
MODEL		I _{max} (cd)	4513	S/MH(C0/180)		0.47
NOMINAL POWER(W)		LOR(%)	100.0	S/MH(C90/270)		0.35
RATED VOLTAGE(V)		TOTAL FLUX(lm)	1065.4	η UP,DN(C0-180)		0.1,56.3
NOMINAL FLUX(lm)	1065.43	CIE CLASS	DIRECT	η UP,DN(C180-360)		0.1,43.5
LAMPS INSIDE	1	η up (%)	0.2	CIBSE SHR NOM		0.00
TEST VOLTAGE(V)		η down (%)	99.8	CIBSE SHR MAX		0.30

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

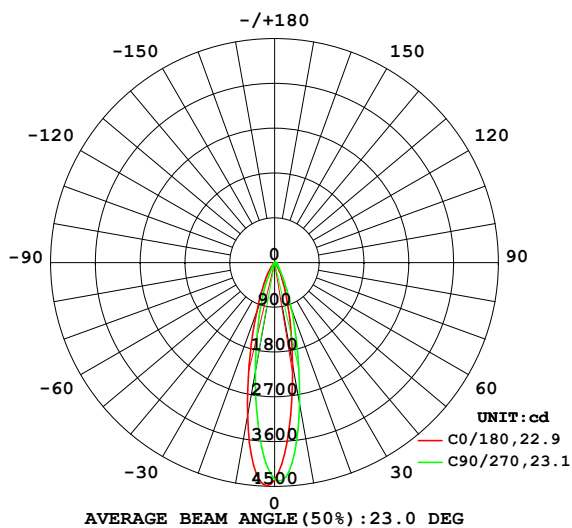

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

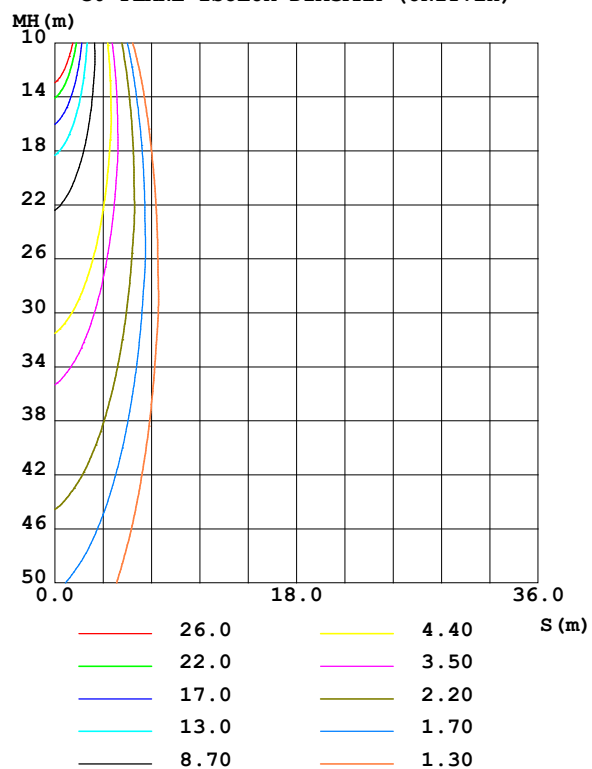

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-19

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	2094	2239	2890	3249	3140	2879	2251	1963	0- 10	321.6	321.6	30.2,30.2
20	653.8	665.1	991.7	1065	1069	913.2	713.2	565.0	10- 20	422.4	744.0	69.8,69.8
30	203.1	198.6	318.1	304.2	337.6	128.3	65.16	66.50	20- 30	199.8	943.8	88.6,88.6
40	45.94	82.41	123.4	107.1	69.32	20.98	8.268	13.64	30- 40	69.42	1013	95.1,95.1
50	13.85	41.24	56.79	51.12	20.48	0.9641	0	0.1595	40- 50	28.83	1042	97.8,97.8
60	1.569	16.97	29.77	23.51	3.548	0.0023	0	0	50- 60	13.76	1056	99.1,99.1
70	0.3756	3.823	13.63	7.152	0.4943	0	0	0	60- 70	5.962	1062	99.7,99.7
80	0.0589	0.6466	2.023	0.9705	0.2035	0	0	0	70- 80	1.613	1063	99.8,99.8
90	0	0.3428	0.6841	0.4986	0	0	0	0	80- 90	0.3109	1064	99.8,99.8
100	0	0.0378	0.3450	0.1542	0	0	0	0	90-100	0.1384	1064	99.9,99.9
110	0	0	0.0325	0	0	0	0	0	100-110	0.0317	1064	99.9,99.9
120	0	0	0	0	0	0	0	0	110-120	0.0002	1064	99.9,99.9
130	0	0	0	0	0	0	0	0	120-130	0	1064	99.9,99.9
140	0.2422	0.2140	0.1036	0.0750	0.2663	0.3342	0.4919	0.5814	130-140	0.0678	1064	99.9,99.9
150	0.5614	0.5946	0.5200	0.4798	1.101	1.232	1.454	1.559	140-150	0.3855	1064	99.9,99.9
160	0.6998	0.7463	0.7579	0.7360	1.983	2.059	2.147	2.145	150-160	0.5619	1065	100,100
170	0.7095	0.7393	0.7487	0.7146	1.961	1.972	1.894	1.799	160-170	0.3947	1065	100,100
180	1.197	1.183	1.047	0.9580	1.186	1.195	1.070	0.9943	170-180	0.1158	1065	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 1030.5 lm

%lum = 96.7%

%lamp = 96.7%

Conical surface Flux(120deg): 1055.9 lm

%lum = 99.1%


%lamp = 99.1%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:Allen
 Test Date:2026-01-19

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity:45%
 Test Distance:2.900m [K=0.8783]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:12.000V I:1.4631A P:14.300W PF:0.8203 Freq:60.01Hz Lamp Flux:1065.43x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

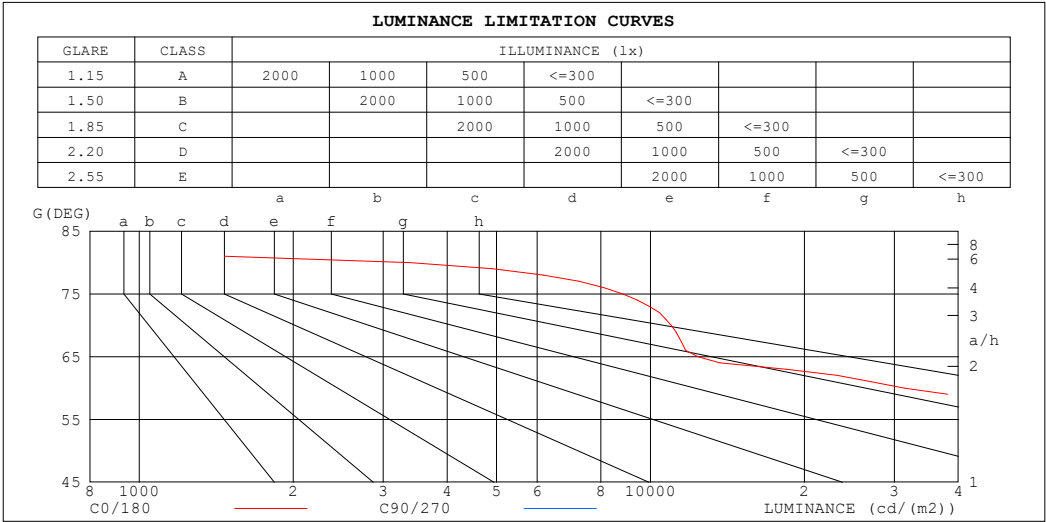

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	0	93430
80	3392	116475
75	8829	246088
70	10983	398584
65	12391	498436
60	31387	595496
55	99426	713135
50	215438	883525
45	353023	1154086


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-19

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:12.000V I:1.4631A P:14.300W PF:0.8203 Freq:60.01Hz		
Lamp Flux:1065.43x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.12	1.10	1.08	1.10	1.08	1.07	1.06	1.05	1.03	1.02	1.01	1.00	.99	.98	.97	.96
2.0	1.06	1.03	1.00	1.05	1.02	.99	1.01	.99	.97	.98	.97	.95	.96	.94	.93	.91
3.0	1.01	.97	.94	.00	.96	.93	.97	.94	.92	.95	.92	.90	.93	.91	.89	.87
4.0	.96	.92	.89	.95	.91	.88	.93	.90	.87	.91	.88	.86	.90	.87	.85	.84
5.0	.92	.88	.84	.91	.87	.84	.90	.86	.83	.88	.85	.82	.87	.84	.82	.81
6.0	.89	.84	.81	.88	.83	.80	.86	.83	.80	.85	.82	.79	.84	.81	.79	.78
7.0	.85	.81	.77	.85	.80	.77	.83	.80	.77	.82	.79	.76	.81	.78	.76	.75
8.0	.82	.77	.74	.82	.77	.74	.81	.77	.74	.80	.76	.74	.79	.76	.73	.72
9.0	.79	.75	.72	.79	.75	.72	.78	.74	.71	.77	.74	.71	.76	.73	.71	.70
10.0	.77	.72	.69	.76	.72	.69	.76	.72	.69	.75	.71	.69	.74	.71	.69	.68

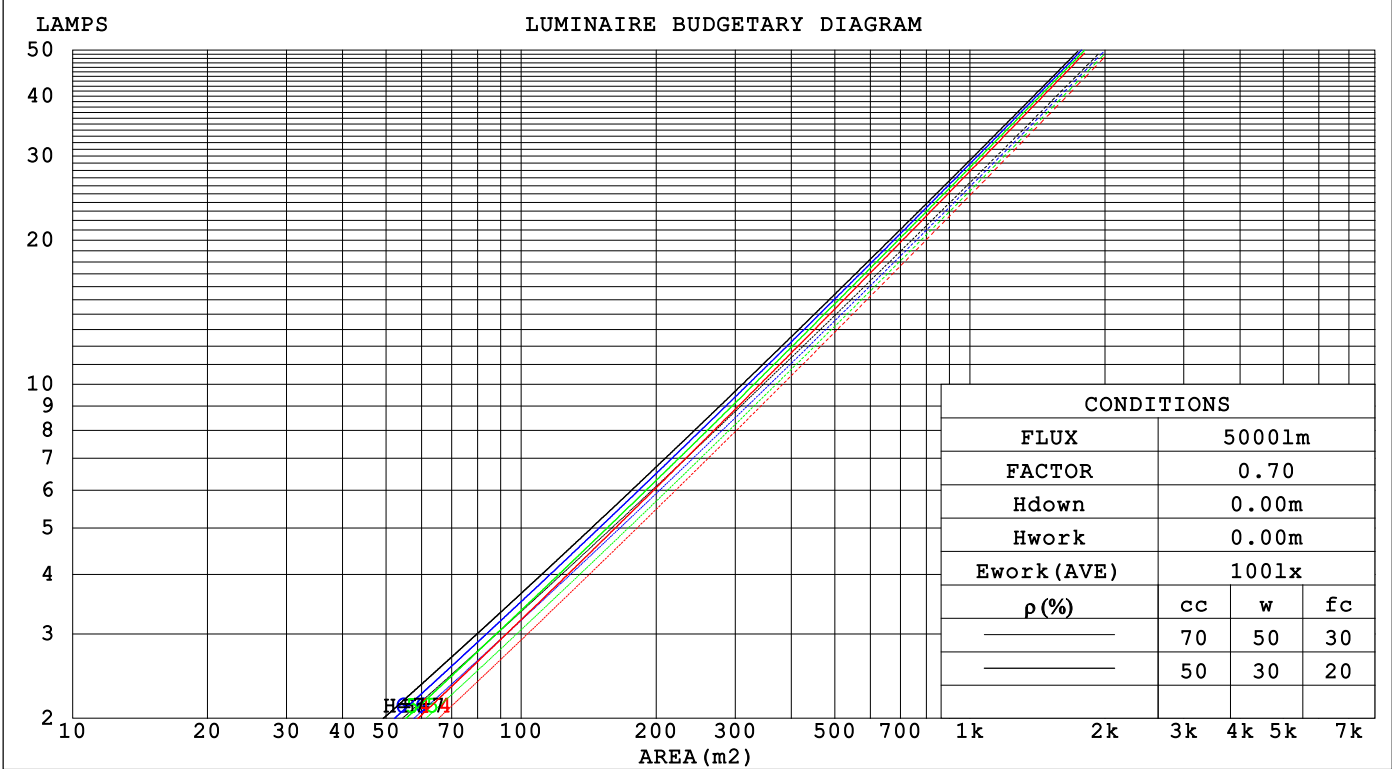

C Range: 0 - 360DEG

C Interval: 22.5DEG

Test Speed: HIGH

Temperature:25.3℃

Operators:Allen

Test Date:2026-01-19

γ Range: 0 - 180DEG

γ Interval: 1.0DEG

Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459

Humidity:45%

Test Distance:2.900m [K=0.8783]

Remarks:

WEC AND CCEC

Test:U:12.000V I:1.4631A P:14.300W PF:0.8203 Freq:60.01Hz Lamp Flux:1065.43x1 lm					
NAME:		TYPE:		WEIGHT:	
SPEC.:		DIM.:		SERIAL No.:	
MFR.:		SUR.:		Shielding Angle:	

pcc	80%			70%			50%			30%			10%			0														
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
pfc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Wall Exitance Coefficients(WEC)														
0.0																														
1.0	.149	.085	.027	.142	.081	.026	.130	.075	.024	.118	.068	.022	.108	.062	.020															
2.0	.140	.077	.023	.134	.074	.023	.124	.069	.021	.114	.064	.020	.105	.060	.019															
3.0	.131	.070	.021	.126	.068	.020	.118	.064	.019	.110	.060	.018	.102	.057	.017															
4.0	.123	.064	.019	.119	.062	.018	.112	.059	.018	.105	.056	.017	.099	.054	.016															
5.0	.116	.059	.017	.113	.058	.017	.107	.056	.016	.101	.053	.016	.095	.051	.015															
6.0	.110	.055	.016	.107	.054	.016	.102	.052	.015	.097	.050	.015	.092	.048	.014															
7.0	.105	.052	.015	.102	.051	.015	.097	.049	.014	.093	.048	.014	.089	.046	.014															
8.0	.100	.049	.014	.098	.048	.014	.093	.047	.013	.089	.045	.013	.086	.044	.013															
9.0	.095	.046	.013	.093	.046	.013	.090	.044	.013	.086	.043	.012	.083	.042	.012															
10.0	.091	.044	.012	.090	.043	.012	.086	.042	.012	.083	.041	.012	.080	.040	.012															

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.170	.159	.148	.146	.136	.128	.100	.094	.088	.057	.054	.051	.018	.017	.017	
2.0	.153	.134	.118	.131	.115	.102	.090	.080	.071	.052	.046	.042	.017	.015	.014	
3.0	.139	.115	.095	.119	.099	.083	.082	.069	.058	.047	.040	.034	.015	.013	.011	
4.0	.127	.099	.078	.109	.086	.068	.075	.060	.048	.043	.035	.028	.014	.011	.009	
5.0	.117	.087	.065	.101	.076	.057	.069	.053	.040	.040	.031	.024	.013	.010	.008	
6.0	.108	.078	.055	.093	.067	.048	.064	.047	.034	.037	.028	.020	.012	.009	.007	
7.0	.101	.069	.047	.087	.060	.041	.060	.042	.029	.035	.025	.017	.011	.008	.006	
8.0	.095	.063	.041	.082	.055	.036	.056	.038	.025	.033	.023	.015	.011	.007	.005	
9.0	.089	.057	.036	.077	.050	.031	.053	.035	.022	.031	.021	.013	.010	.007	.004	
10.0	.084	.053	.032	.073	.046	.028	.050	.032	.020	.029	.019	.012	.010	.006	.004	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-19

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:12.000V I:1.4631A P:14.300W PF:0.8203 Freq:60.01Hz Lamp Flux:1065.43x1 lm										
NAME:					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.:					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	26.7	27.4	26.9	27.6	27.7	31.0	31.7	31.2	31.8	32.0
3H	26.5	27.2	26.8	27.4	27.6	31.4	32.1	31.7	32.3	32.5
4H	26.5	27.1	26.7	27.3	27.5	31.5	32.1	31.8	32.4	32.6
6H	26.4	27.0	26.7	27.2	27.5	31.5	32.1	31.7	32.3	32.5
8H	26.3	26.9	26.6	27.2	27.4	31.4	32.0	31.7	32.3	32.5
12H	26.3	26.8	26.6	27.1	27.4	31.4	31.9	31.7	32.2	32.5
4H 2H	27.0	27.6	27.3	27.9	28.1	30.9	31.5	31.1	31.7	32.0
3H	26.9	27.4	27.2	27.7	28.0	31.4	32.0	31.7	32.2	32.5
4H	26.8	27.3	27.1	27.6	27.9	31.5	32.0	31.8	32.3	32.6
6H	26.7	27.1	27.0	27.4	27.8	31.4	31.9	31.8	32.2	32.6
8H	26.6	27.0	27.0	27.4	27.7	31.4	31.8	31.8	32.2	32.5
12H	26.6	26.9	27.0	27.3	27.7	31.4	31.8	31.8	32.1	32.5
8H 4H	26.7	27.1	27.1	27.5	27.8	31.3	31.8	31.7	32.1	32.5
6H	26.6	26.9	27.0	27.3	27.8	31.3	31.6	31.7	32.0	32.5
8H	26.5	26.9	27.0	27.3	27.7	31.3	31.6	31.7	32.0	32.4
12H	26.5	26.7	26.9	27.2	27.7	31.2	31.5	31.7	31.9	32.4
12H 4H	26.6	27.0	27.1	27.4	27.8	31.3	31.7	31.7	32.0	32.4
6H	26.5	26.9	27.0	27.3	27.7	31.2	31.6	31.7	32.0	32.4
8H	26.5	26.8	27.0	27.2	27.7	31.2	31.5	31.7	31.9	32.4
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 2.2 / - 4.9					+ 1.4 / - 1.5				
1.5H	+ 2.3 / - 4.0					+ 2.4 / - 1.4				
2.0H	+ 2.9 / - 7.2					+ 2.5 / - 2.2				

CIE Pub.117, 1065 lm Total Lamp Luminous Flux Correct ($8\log(F/F_0) = 0.2$)
Area: 0.0001 m²

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-19

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:12.000V I:1.4631A P:14.300W PF:0.8203 Freq:60.01Hz Lamp Flux:1065.43x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	88	82	79	88	82	79	87	82	78	75
0.80	96	90	87	95	90	86	94	89	86	82
1.00	100	95	91	99	94	91	98	94	90	86
1.25	104	99	95	103	98	95	101	97	94	90
1.50	106	102	99	105	101	98	103	100	97	93
2.00	109	105	102	107	104	101	105	102	100	94
2.50	111	107	104	109	106	103	106	103	101	95
3.00	112	109	106	110	107	105	107	105	103	96
4.00	114	111	109	112	110	108	108	107	105	98
5.00	115	113	111	113	111	110	109	108	107	99
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3℃
 Operators: Allen
 Test Date: 2026-01-19

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity: 45%
 Test Distance: 2.900m [K=0.8783]
 Remarks:

ISOCANDELA DIAGRAM


Test:U:12.000V I:1.4631A P:14.300W PF:0.8203 Freq:60.01Hz Lamp Flux:1065.43x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

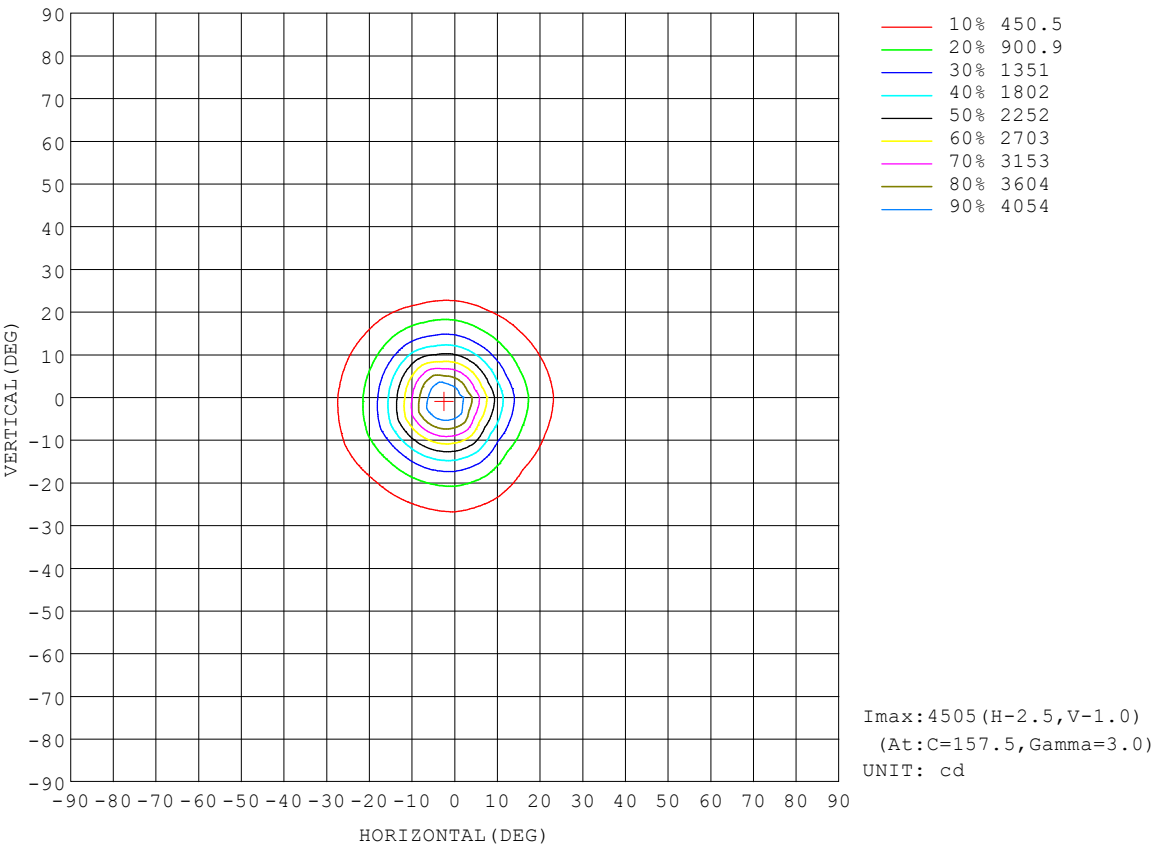

C Range: 0 - 360DEG	γ Range: 0 - 180DEG
C Interval: 22.5DEG	γ Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Temperature:25.3℃	Humidity:45%
Operators:Allen	Test Distance:2.900m [K=0.8783]
Test Date:2026-01-19	Remarks:

AAI Figure

Test:U:12.000V I:1.4631A P:14.300W PF:0.8203 Freq:60.01Hz Lamp Flux:1065.43x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

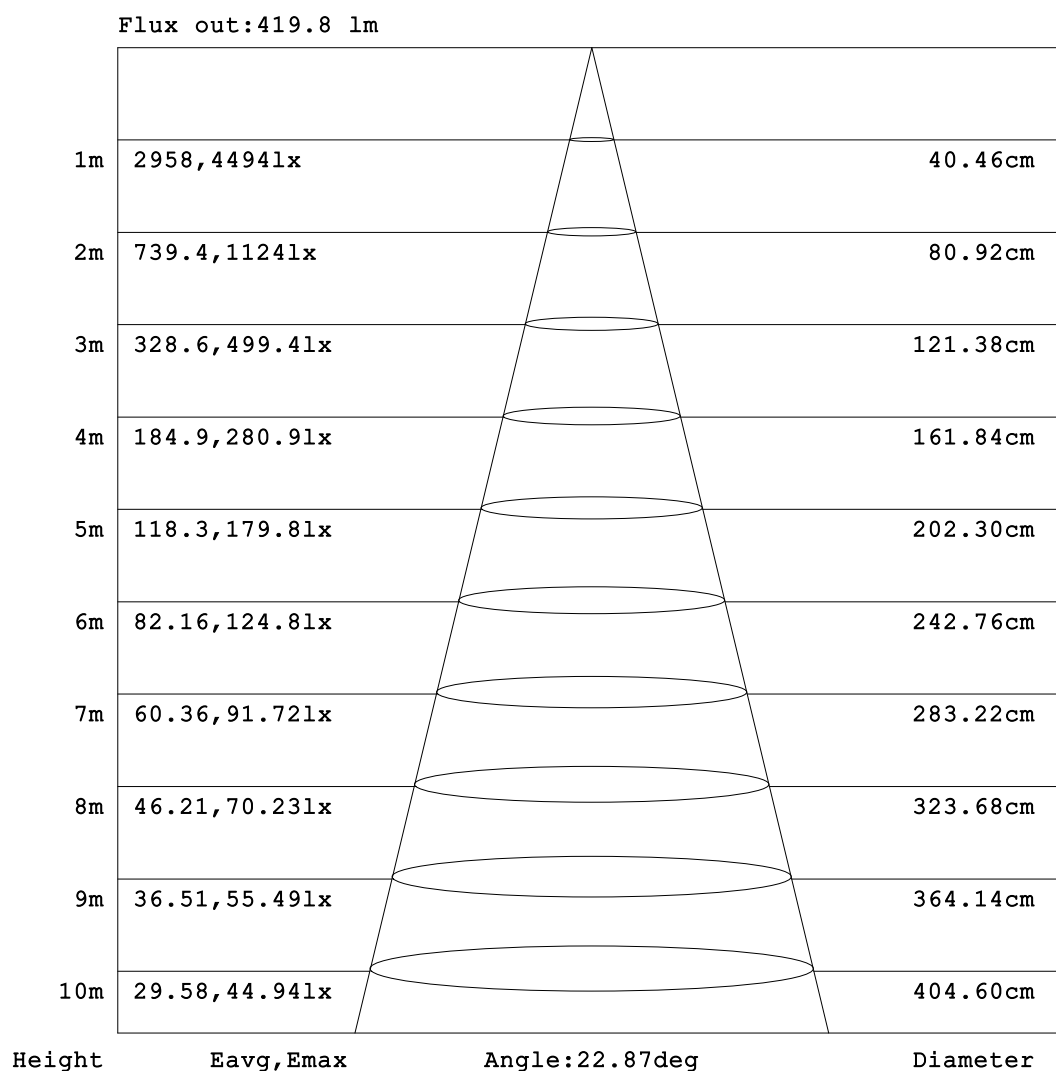


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3℃
 Operators: Allen
 Test Date: 2026-01-19

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity: 45%
 Test Distance: 2.900m [K=0.8783]
 Remarks:


ISOLUX DIAGRAM

Test:U:12.000V I:1.4631A P:14.300W PF:0.8203 Freq:60.01Hz Lamp Flux:1065.43x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

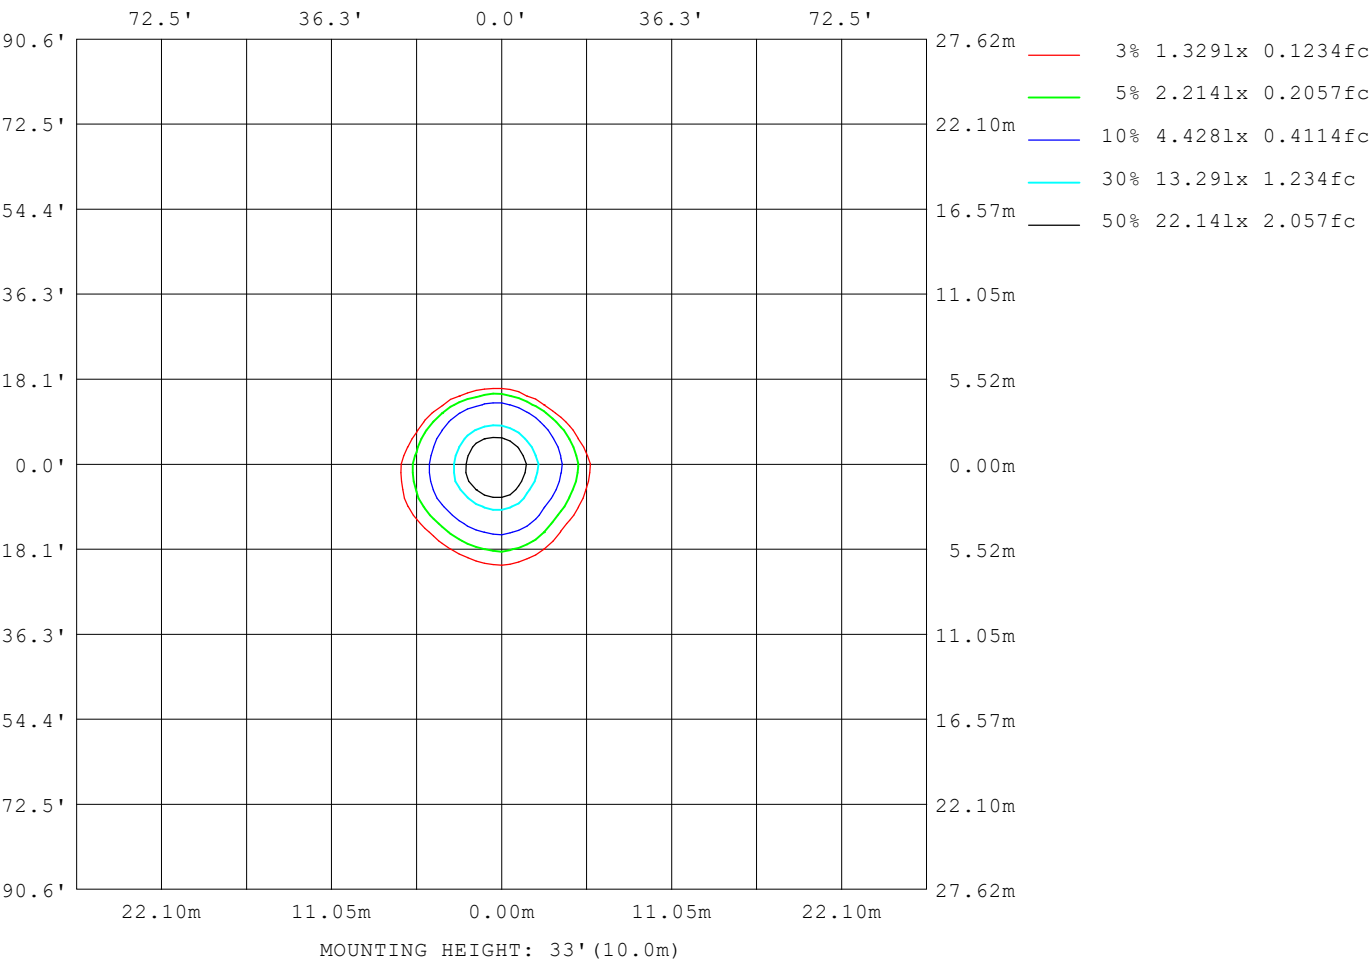

C Range: 0 - 360DEG C Interval: 22.5DEG Test Speed: HIGH Temperature:25.3℃ Operators:Allen Test Date:2026-01-19	γ Range: 0 - 180DEG γ Interval: 1.0DEG Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459 Humidity:45% Test Distance:2.900m [K=0.8783] Remarks:
--	---

Planar Illuminance Curve

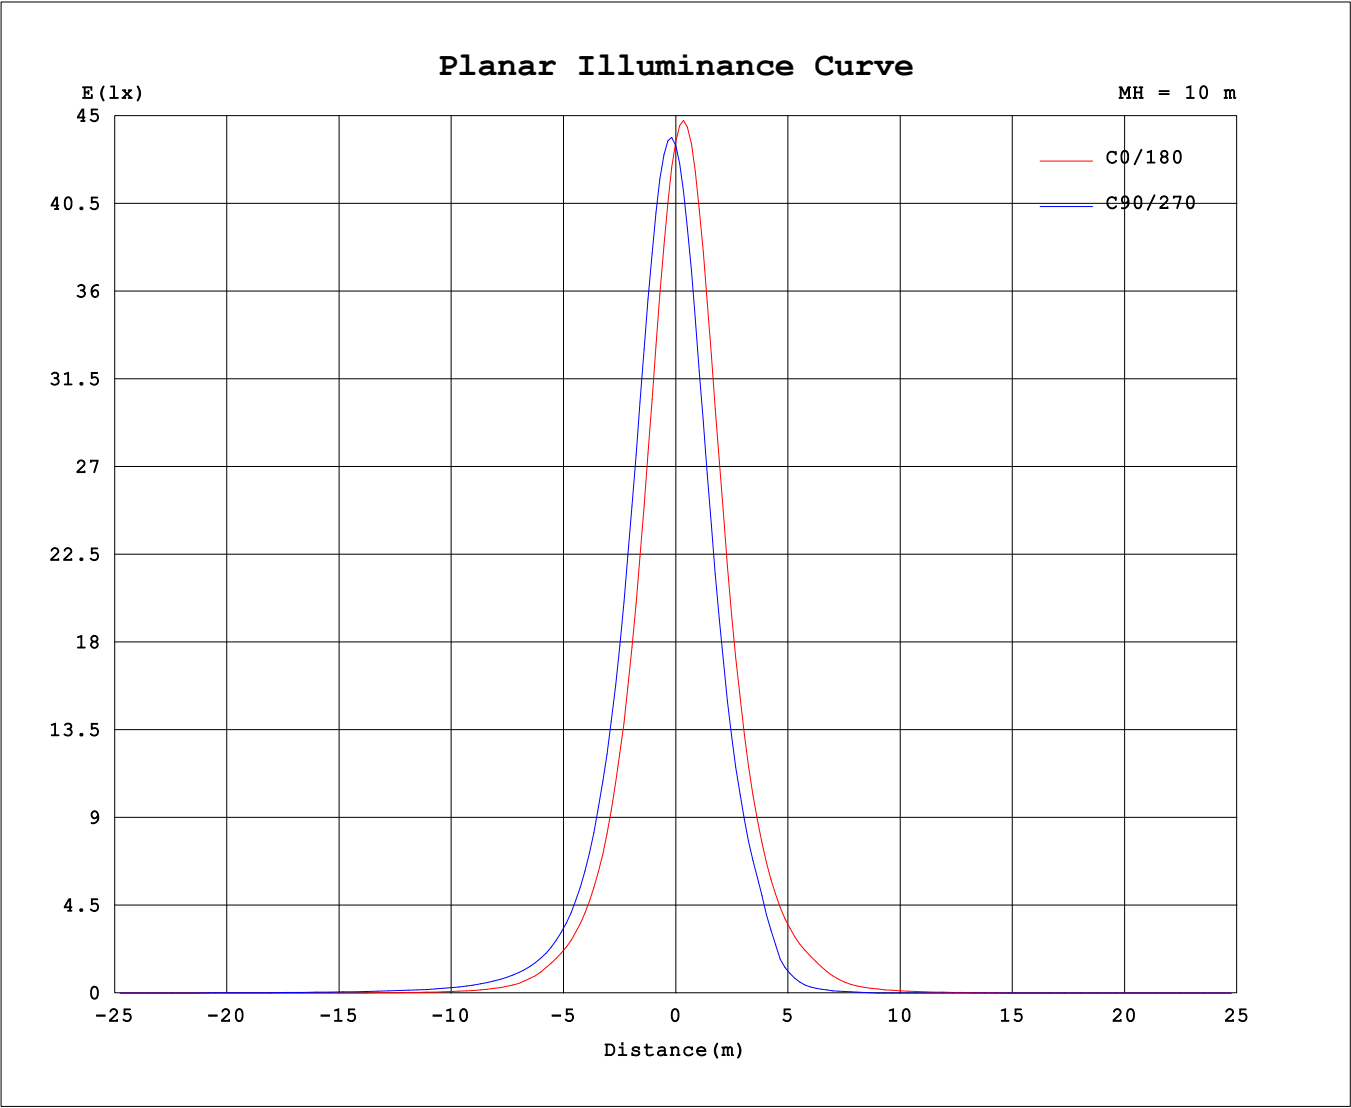

C Range: 0 - 360DEG	γ Range: 0 - 180DEG
C Interval: 22.5DEG	γ Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Temperature:25.3℃	Humidity:45%
Operators:Allen	Test Distance:2.900m [K=0.8783]
Test Date:2026-01-19	Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.000V I:1.4631A P:14.300W PF:0.8203 Freq:60.01Hz Lamp Flux:1065.43x1 lm																	
NAME:									TYPE:						WEIGHT:		
SPEC.:									DIM.:						SERIAL No.:		
MFR.:									SUR.:						Shielding Angle:		

Table--1

UNIT: cd

γ (DEG)	C (DEG)																
	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5	
0	4368	4368	4380	4384	4347	4320	4295	4290	4368	4368	4380	4384	4347	4320	4295	4290	
5	3360	3405	3523	3896	4049	4198	4315	4396	4261	4190	4062	3683	3494	3336	3221	3161	
10	2094	2126	2239	2674	2890	3087	3249	3362	3140	3038	2879	2446	2251	2074	1963	1931	
15	1200	1201	1252	1575	1751	1863	1962	2069	1909	1803	1686	1416	1288	1142	1070	1076	
20	654	638	665	871	992	1028	1065	1173	1069	979	913	788	713	605	565	586	
25	365	345	354	478	556	555	564	631	591	526	448	304	235	187	204	301	
30	203	196	199	269	318	305	304	351	338	222	128	78.6	65.2	54.4	66.5	111	
35	91.2	121	124	162	192	177	174	203	162	77.9	43.3	28.8	23.8	23.0	29.0	45.9	
40	45.9	70.3	82.4	105	123	111	107	125	69.3	34.5	21.0	10.9	8.27	8.13	13.6	23.7	
45	25.0	43.1	58.7	71.9	81.6	74.4	71.9	67.6	35.8	18.9	7.66	1.16	0.71	0.82	2.79	11.6	
50	13.8	26.4	41.2	51.9	56.8	53.2	51.1	40.2	20.5	7.89	0.96	0.00	0.00	0.00	0.16	2.98	
55	5.70	15.6	27.6	38.6	40.9	39.4	35.7	24.4	10.5	1.55	0.04	0.00	0.00	0.00	0.02	0.65	
60	1.57	7.93	17.0	27.7	29.8	29.1	23.5	14.2	3.55	0.31	0.00	0.00	0.00	0.00	0.00	0.24	
65	0.52	2.78	9.46	17.9	21.1	19.6	14.1	6.85	1.10	0.22	0.00	0.00	0.00	0.00	0.00	0.14	
70	0.38	1.06	3.82	10.3	13.6	11.6	7.15	2.31	0.49	0.10	0.00	0.00	0.00	0.00	0.00	0.00	
75	0.23	0.53	1.36	4.39	6.37	5.35	2.63	0.84	0.37	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.06	0.38	0.65	1.39	2.02	1.72	0.97	0.57	0.20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.22	0.50	0.74	0.81	0.78	0.65	0.42	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.07	0.34	0.60	0.68	0.64	0.50	0.24	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
95	0.00	0.00	0.18	0.43	0.52	0.48	0.33	0.07	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
100	0.00	0.00	0.04	0.26	0.35	0.30	0.15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
105	0.00	0.00	0.00	0.10	0.18	0.14	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
110	0.00	0.00	0.00	0.00	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
135	0.02	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.03	0.06	0.13	0.15	0.18	0.20	0.20	
140	0.24	0.24	0.21	0.13	0.10	0.09	0.08	0.07	0.27	0.29	0.33	0.45	0.49	0.54	0.58	0.58	
145	0.45	0.47	0.46	0.38	0.35	0.33	0.31	0.28	0.64	0.68	0.75	0.90	0.96	1.02	1.07	1.08	
150	0.56	0.59	0.59	0.55	0.52	0.50	0.48	0.45	1.10	1.15	1.23	1.40	1.45	1.51	1.56	1.56	
155	0.67	0.70	0.72	0.69	0.68	0.67	0.66	0.63	1.61	1.64	1.73	1.87	1.91	1.94	1.97	1.96	
160	0.70	0.72	0.75	0.76	0.76	0.75	0.74	0.71	1.98	1.99	2.06	2.13	2.15	2.15	2.14	2.11	
165	0.69	0.72	0.74	0.75	0.75	0.74	0.72	0.70	2.07	2.07	2.10	2.11	2.10	2.08	2.05	1.99	
170	0.71	0.73	0.74	0.75	0.75	0.74	0.71	0.70	1.96	1.96	1.97	1.92	1.89	1.85	1.80	1.73	
175	0.83	0.84	0.84	0.79	0.77	0.76	0.75	0.73	1.67	1.68	1.67	1.55	1.51	1.46	1.40	1.33	
180	1.20	1.20	1.18	1.07	1.05	0.99	0.96	0.91	1.19	1.20	1.20	1.10	1.07	1.05	0.99	0.96	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-19

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks: