


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:12.000V I:2.6633A P:27.000W PF:0.8724 Freq:60.01Hz Lamp Flux:1984.02x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 73.48 lm/W			
MODEL		I _{max} (cd)	4982	S/MH(C0/180)	0.61
NOMINAL POWER(W)		LOR(%)	100.0	S/MH(C90/270)	0.51
RATED VOLTAGE(V)		TOTAL FLUX(lm)	1984.0	η UP,DN(C0-180)	0.1,55.8
NOMINAL FLUX(lm)	1984.02	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,44.0
LAMPS INSIDE	1	η up (%)	0.2	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)		η down (%)	99.8	CIBSE SHR MAX	0.55

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

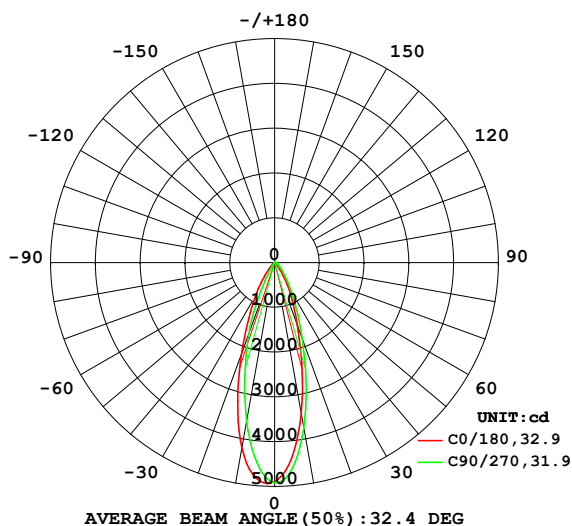

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

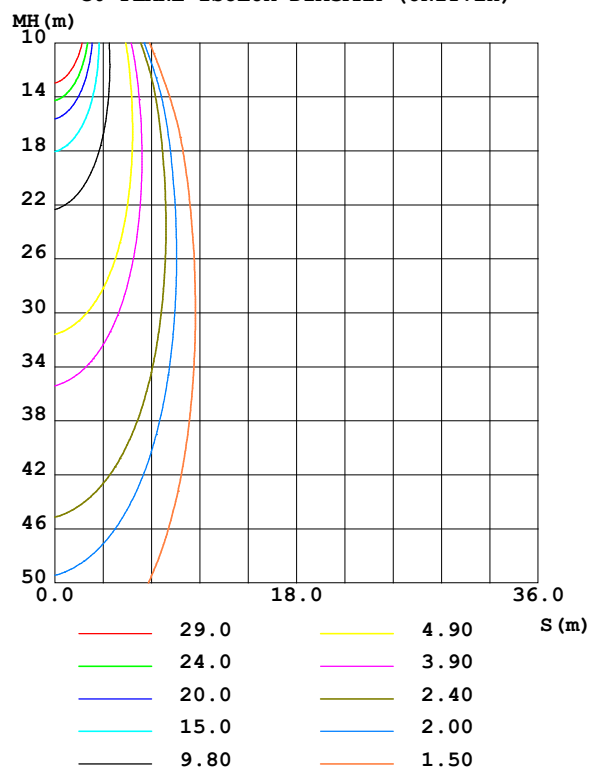

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-19

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	3431	3530	3753	4104	4218	3935	3608	3486	0- 10	409.9	409.9	20.7,20.7
20	1496	1574	1808	2064	2161	1969	1688	1538	10- 20	747.0	1157	58.3,58.3
30	568.0	576.4	748.8	754.1	855.2	448.5	313.9	295.7	20- 30	494.9	1652	83.3,83.3
40	136.5	234.7	321.4	280.5	218.7	55.93	29.14	36.61	30- 40	200.4	1852	93.4,93.4
50	30.73	101.2	146.2	120.2	49.27	2.467	0	1.476	40- 50	78.44	1931	97.3,97.3
60	4.057	37.71	68.60	47.42	8.288	0.3077	0	0.2533	50- 60	32.73	1963	99,99
70	1.253	8.970	27.39	13.43	1.539	0	0	0	60- 70	12.90	1976	99.6,99.6
80	0.4564	1.899	4.049	2.267	0.8076	0	0	0	70- 80	3.338	1980	99.8,99.8
90	0	1.150	1.916	1.453	0	0	0	0	80- 90	0.8821	1980	99.8,99.8
100	0	0.3911	1.064	0.6083	0	0	0	0	90-100	0.4568	1981	99.8,99.8
110	0	0	0.3127	0.0002	0	0	0	0	100-110	0.1436	1981	99.9,99.9
120	0	0	0	0	0	0	0	0	110-120	0.0113	1981	99.9,99.9
130	0.0741	0.0163	0	0	0.0509	0.1127	0.1623	0.1843	120-130	0.0137	1981	99.9,99.9
140	0.6055	0.5419	0.4439	0.4115	0.7842	0.8958	1.005	1.114	130-140	0.2683	1981	99.9,99.9
150	1.081	1.085	1.002	0.9418	2.035	2.198	2.371	2.501	140-150	0.7500	1982	99.9,99.9
160	1.509	1.535	1.509	1.455	3.256	3.351	3.476	3.518	150-160	0.9652	1983	100,100
170	1.647	1.656	1.639	1.585	3.334	3.352	3.351	3.274	160-170	0.7077	1984	100,100
180	2.513	2.484	2.406	2.261	2.493	2.494	2.413	2.296	170-180	0.2305	1984	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 1900.2 lm

%lum = 95.8%

%lamp = 95.8%

Conical surface Flux(120deg): 1963.3 lm

%lum = 99.0%


%lamp = 99.0%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:Allen
 Test Date:2026-01-19

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity:45%
 Test Distance:2.900m [K=0.8783]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:12.000V I:2.6633A P:27.000W PF:0.8724 Freq:60.01Hz Lamp Flux:1984.02x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

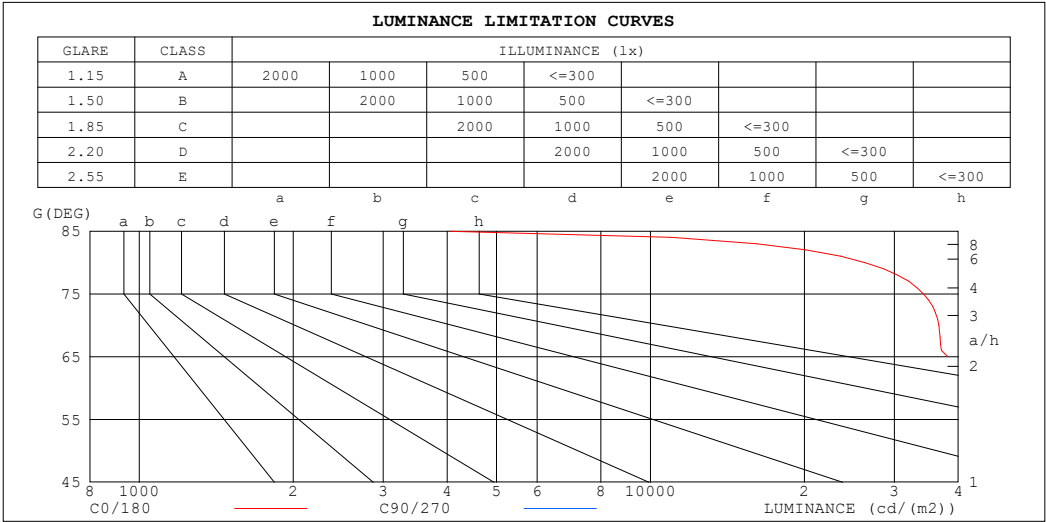

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	4040	254575
80	26285	233153
75	34226	455029
70	36634	800957
65	38146	1092860
60	81144	1371939
55	226838	1745448
50	478069	2275080
45	907163	3044429


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-19

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:12.000V I:2.6633A P:27.000W PF:0.8724 Freq:60.01Hz		
Lamp Flux:1984.02x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.12	1.09	1.07	1.09	1.07	1.06	1.05	1.04	1.02	1.02	1.00	.99	.98	.97	.96	.95
2.0	1.05	1.01	.98	1.03	.00	.97	.00	.97	.95	.97	.95	.93	.94	.93	.91	.89
3.0	.99	.94	.91	.98	.93	.90	.95	.92	.89	.93	.90	.87	.90	.88	.86	.85
4.0	.94	.89	.85	.92	.88	.85	.90	.87	.84	.88	.85	.83	.87	.84	.82	.80
5.0	.89	.84	.80	.88	.83	.80	.86	.82	.79	.85	.81	.78	.83	.80	.78	.76
6.0	.85	.79	.76	.84	.79	.75	.82	.78	.75	.81	.77	.74	.80	.76	.74	.73
7.0	.81	.75	.72	.80	.75	.72	.79	.74	.71	.78	.74	.71	.77	.73	.70	.69
8.0	.77	.72	.68	.77	.72	.68	.75	.71	.68	.75	.71	.68	.74	.70	.67	.66
9.0	.74	.69	.65	.73	.68	.65	.72	.68	.65	.72	.68	.65	.71	.67	.65	.63
10.0	.71	.66	.63	.70	.66	.62	.70	.65	.62	.69	.65	.62	.68	.65	.62	.61

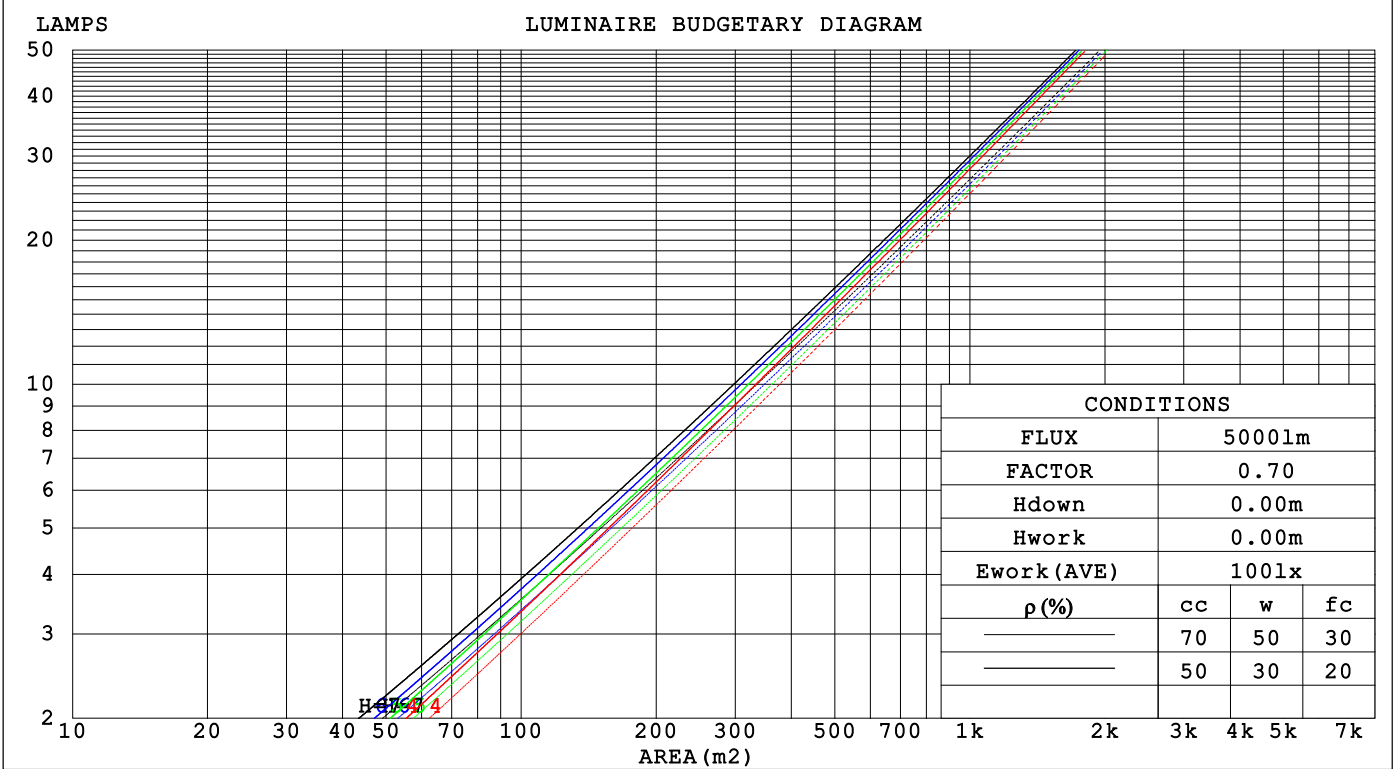

C Range: 0 - 360DEG

C Interval: 22.5DEG

Test Speed: HIGH

Temperature:25.3℃

Operators:Allen

Test Date:2026-01-19

γ Range: 0 - 180DEG

γ Interval: 1.0DEG

Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459

Humidity:45%

Test Distance:2.900m [K=0.8783]

Remarks:

WEC AND CCEC

Test:U:12.000V I:2.6633A P:27.000W PF:0.8724 Freq:60.01Hz Lamp Flux:1984.02x1 lm					
NAME:		TYPE:		WEIGHT:	
SPEC.:		DIM.:		SERIAL No.:	
MFR.:		SUR.:		Shielding Angle:	

pcc	80%			70%			50%			30%			10%			0														
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
pfc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Wall Exitance Coefficients(WEC)														
0.0																														
1.0	.162	.092	.029	.155	.088	.028	.142	.082	.026	.131	.075	.024	.120	.070	.022															
2.0	.153	.084	.026	.147	.081	.025	.137	.076	.024	.127	.071	.022	.118	.067	.021															
3.0	.145	.077	.023	.140	.075	.023	.131	.071	.022	.123	.067	.021	.115	.064	.020															
4.0	.137	.071	.021	.133	.069	.021	.125	.066	.020	.118	.063	.019	.111	.060	.018															
5.0	.130	.066	.019	.126	.065	.019	.120	.062	.018	.113	.060	.018	.108	.058	.017															
6.0	.123	.062	.018	.120	.061	.017	.114	.059	.017	.109	.057	.017	.104	.055	.016															
7.0	.117	.058	.016	.115	.057	.016	.110	.055	.016	.105	.054	.016	.100	.052	.015															
8.0	.112	.055	.015	.110	.054	.015	.105	.053	.015	.101	.051	.015	.097	.050	.015															
9.0	.107	.052	.014	.105	.051	.014	.101	.050	.014	.097	.049	.014	.094	.048	.014															
10.0	.103	.049	.014	.101	.049	.014	.097	.048	.013	.094	.047	.013	.091	.046	.013															

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.171	.159	.147	.147	.136	.127	.100	.094	.088	.058	.054	.051	.018	.017	.017	
2.0	.155	.134	.116	.133	.115	.100	.091	.080	.070	.053	.046	.041	.017	.015	.013	
3.0	.142	.115	.093	.121	.099	.081	.083	.069	.057	.048	.040	.033	.015	.013	.011	
4.0	.131	.100	.076	.112	.086	.066	.077	.060	.047	.045	.035	.028	.014	.011	.009	
5.0	.121	.088	.064	.104	.076	.055	.072	.053	.039	.041	.031	.023	.013	.010	.008	
6.0	.113	.078	.054	.097	.068	.047	.067	.048	.033	.039	.028	.020	.013	.009	.006	
7.0	.106	.071	.046	.091	.061	.040	.063	.043	.028	.037	.025	.017	.012	.008	.006	
8.0	.100	.064	.040	.086	.056	.034	.060	.039	.024	.035	.023	.015	.011	.008	.005	
9.0	.095	.059	.034	.082	.051	.030	.057	.036	.021	.033	.021	.013	.011	.007	.004	
10.0	.090	.054	.030	.078	.047	.027	.054	.033	.019	.031	.020	.011	.010	.006	.004	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-19

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:12.000V I:2.6633A P:27.000W PF:0.8724 Freq:60.01Hz Lamp Flux:1984.02x1 lm										
NAME:			TYPE:			WEIGHT:				
SPEC.:			DIM.:			SERIAL No.:				
MFR.:			SUR.:			Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	29.3	30.1	29.5	30.3	30.4	33.0	33.9	33.3	34.0	34.2
3H	29.1	29.9	29.4	30.1	30.3	33.3	34.1	33.5	34.2	34.4
4H	29.0	29.8	29.3	30.0	30.2	33.3	34.0	33.6	34.2	34.5
6H	28.9	29.6	29.2	29.9	30.1	33.2	33.9	33.5	34.2	34.4
8H	28.9	29.6	29.2	29.8	30.1	33.2	33.9	33.5	34.1	34.4
12H	28.9	29.5	29.2	29.8	30.0	33.2	33.8	33.5	34.1	34.3
4H 2H	29.4	30.1	29.7	30.3	30.6	32.9	33.6	33.2	33.8	34.1
3H	29.3	29.9	29.6	30.2	30.4	33.2	33.8	33.5	34.1	34.4
4H	29.2	29.7	29.5	30.0	30.3	33.2	33.8	33.6	34.1	34.4
6H	29.1	29.6	29.4	29.9	30.3	33.2	33.7	33.5	34.0	34.3
8H	29.0	29.5	29.4	29.8	30.2	33.1	33.6	33.5	33.9	34.3
12H	29.0	29.4	29.4	29.8	30.2	33.1	33.5	33.5	33.9	34.3
8H 4H	29.1	29.5	29.5	29.9	30.3	33.1	33.5	33.5	33.9	34.3
6H	29.0	29.4	29.4	29.8	30.2	33.0	33.4	33.4	33.8	34.2
8H	28.9	29.3	29.4	29.7	30.1	33.0	33.3	33.4	33.7	34.2
12H	28.9	29.2	29.3	29.6	30.1	32.9	33.2	33.4	33.7	34.1
12H 4H	29.0	29.5	29.4	29.8	30.2	33.0	33.4	33.4	33.8	34.2
6H	28.9	29.3	29.4	29.7	30.1	33.0	33.3	33.4	33.7	34.2
8H	28.9	29.2	29.4	29.6	30.1	32.9	33.2	33.4	33.7	34.1
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 2.4 / - 6.2					+ 1.6 / - 2.0				
1.5H	+ 3.0 / - 5.2					+ 2.6 / - 1.9				
2.0H	+ 3.2 / - 7.2					+ 3.1 / - 3.0				

CIE Pub.117, 1984 lm Total Lamp Luminous Flux Correct ($8\log(F/F_0) = 2.4$)
Area: 0.0001 m²

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-19

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:12.000V I:2.6633A P:27.000W PF:0.8724 Freq:60.01Hz Lamp Flux:1984.02x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	87	81	77	87	81	77	86	80	77	73
0.80	95	89	85	94	89	85	93	88	85	81
1.00	99	94	90	98	93	90	97	93	89	85
1.25	103	98	95	102	97	94	100	96	93	89
1.50	106	101	98	105	100	97	102	99	96	92
2.00	109	104	101	107	103	100	104	101	99	94
2.50	110	106	103	109	105	103	106	103	101	95
3.00	112	108	106	110	107	105	107	104	102	96
4.00	114	111	109	112	109	107	108	106	105	98
5.00	115	113	111	113	111	109	109	108	106	99
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3℃
 Operators: Allen
 Test Date: 2026-01-19

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity: 45%
 Test Distance: 2.900m [K=0.8783]
 Remarks:

ISOCANDELA DIAGRAM


Test:U:12.000V I:2.6633A P:27.000W PF:0.8724 Freq:60.01Hz Lamp Flux:1984.02x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

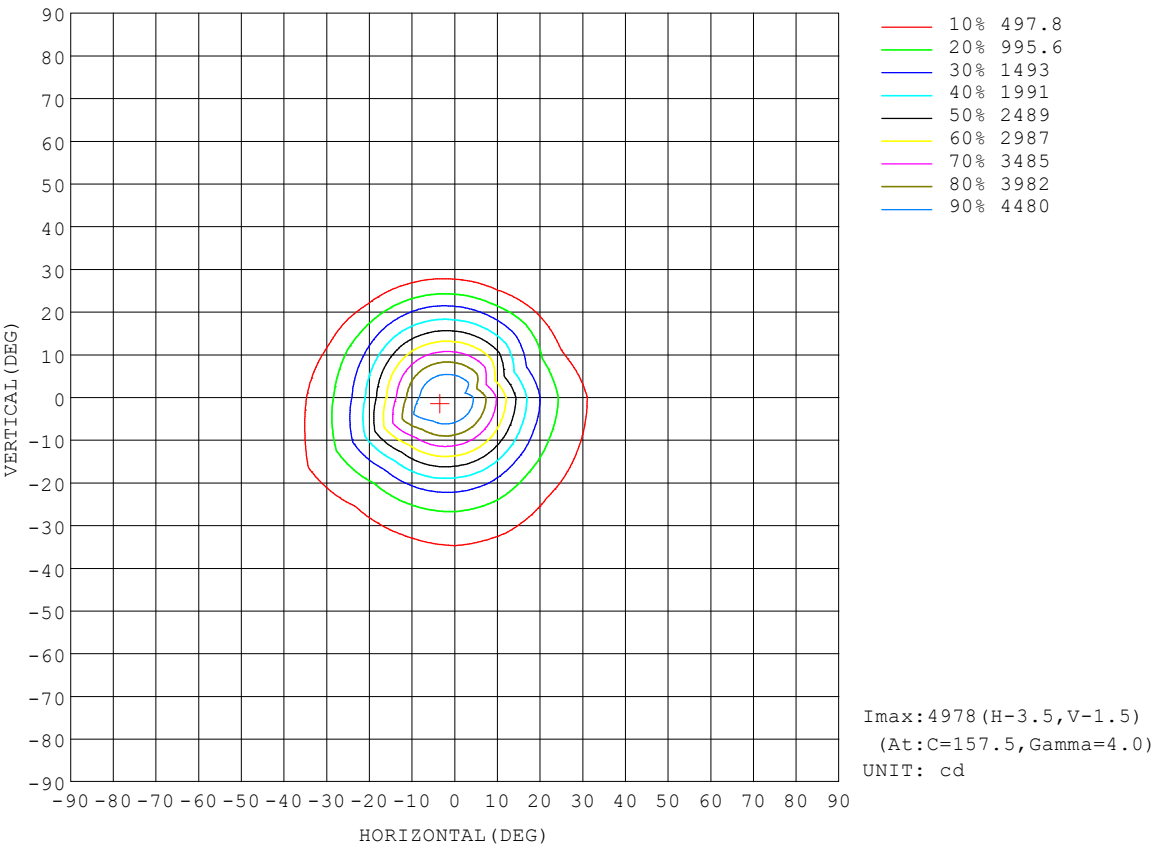

C Range: 0 - 360DEG	γ Range: 0 - 180DEG
C Interval: 22.5DEG	γ Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Temperature:25.3℃	Humidity:45%
Operators:Allen	Test Distance:2.900m [K=0.8783]
Test Date:2026-01-19	Remarks:

AAI Figure

Test:U:12.000V I:2.6633A P:27.000W PF:0.8724 Freq:60.01Hz Lamp Flux:1984.02x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

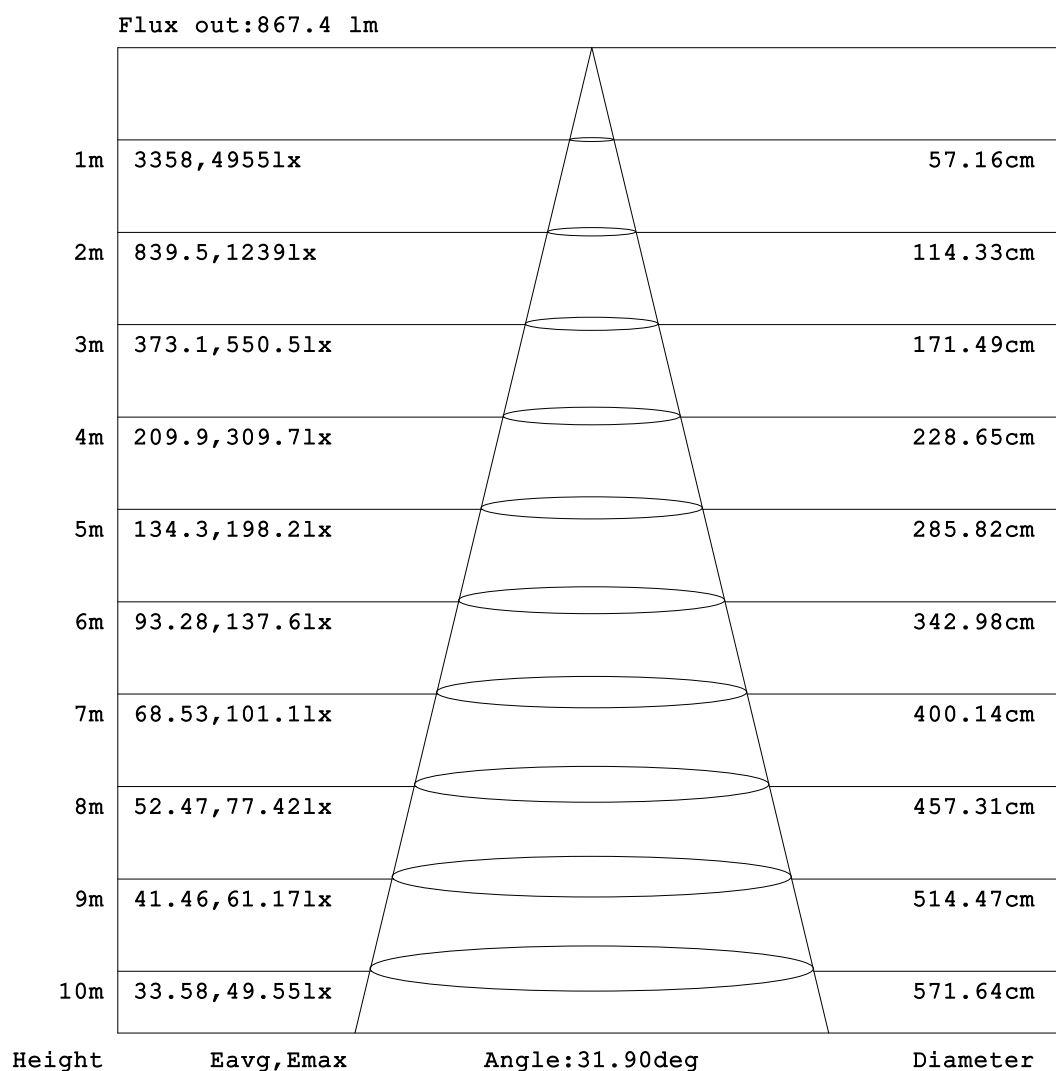


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-19

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

ISOLUX DIAGRAM


Test:U:12.000V I:2.6633A P:27.000W PF:0.8724 Freq:60.01Hz Lamp Flux:1984.02x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

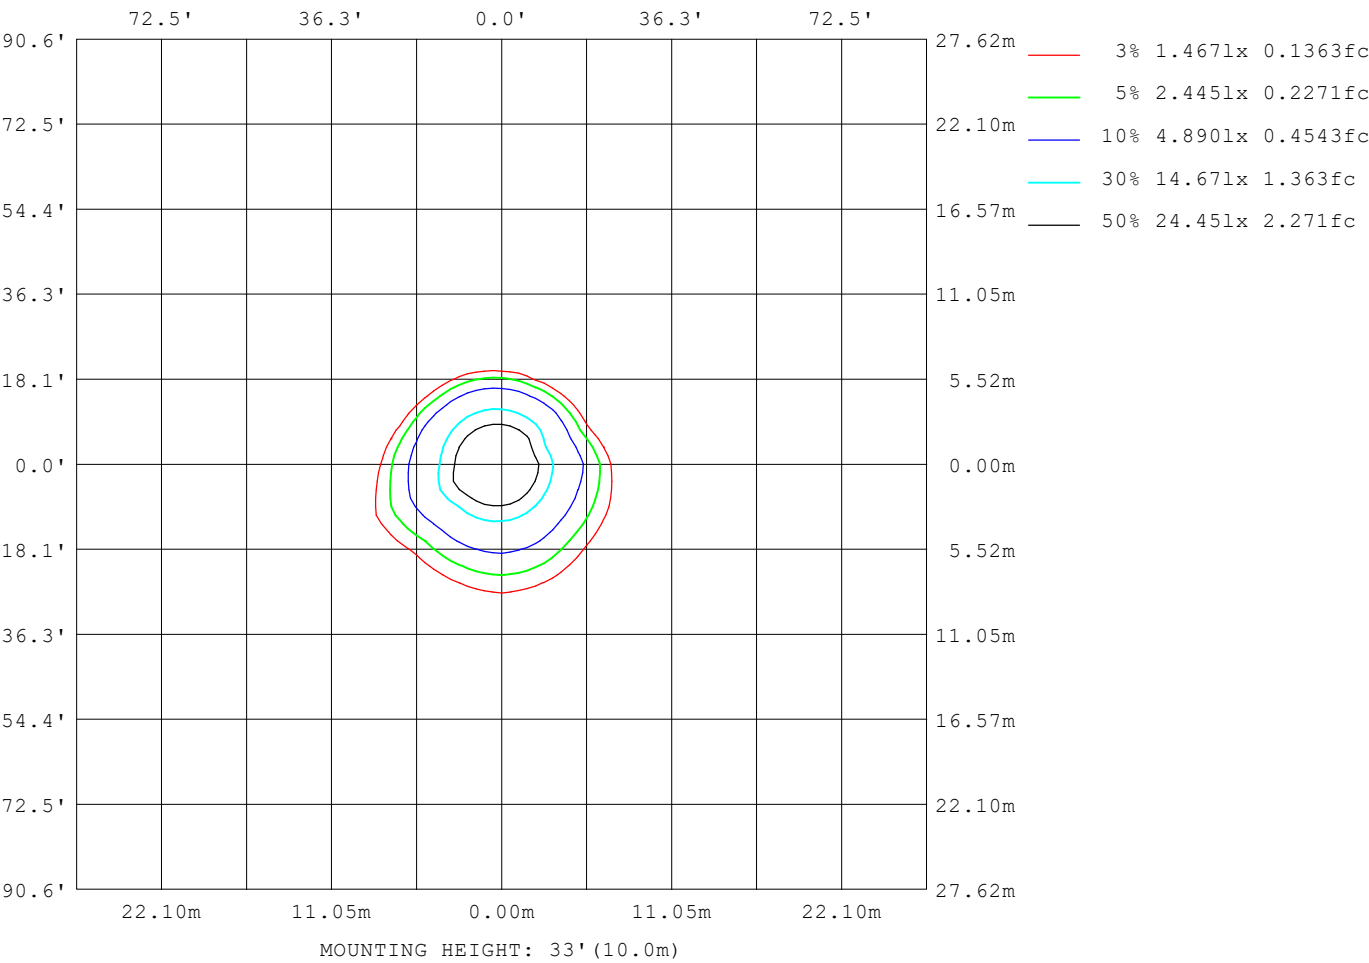

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-19

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

Planar Illuminance Curve

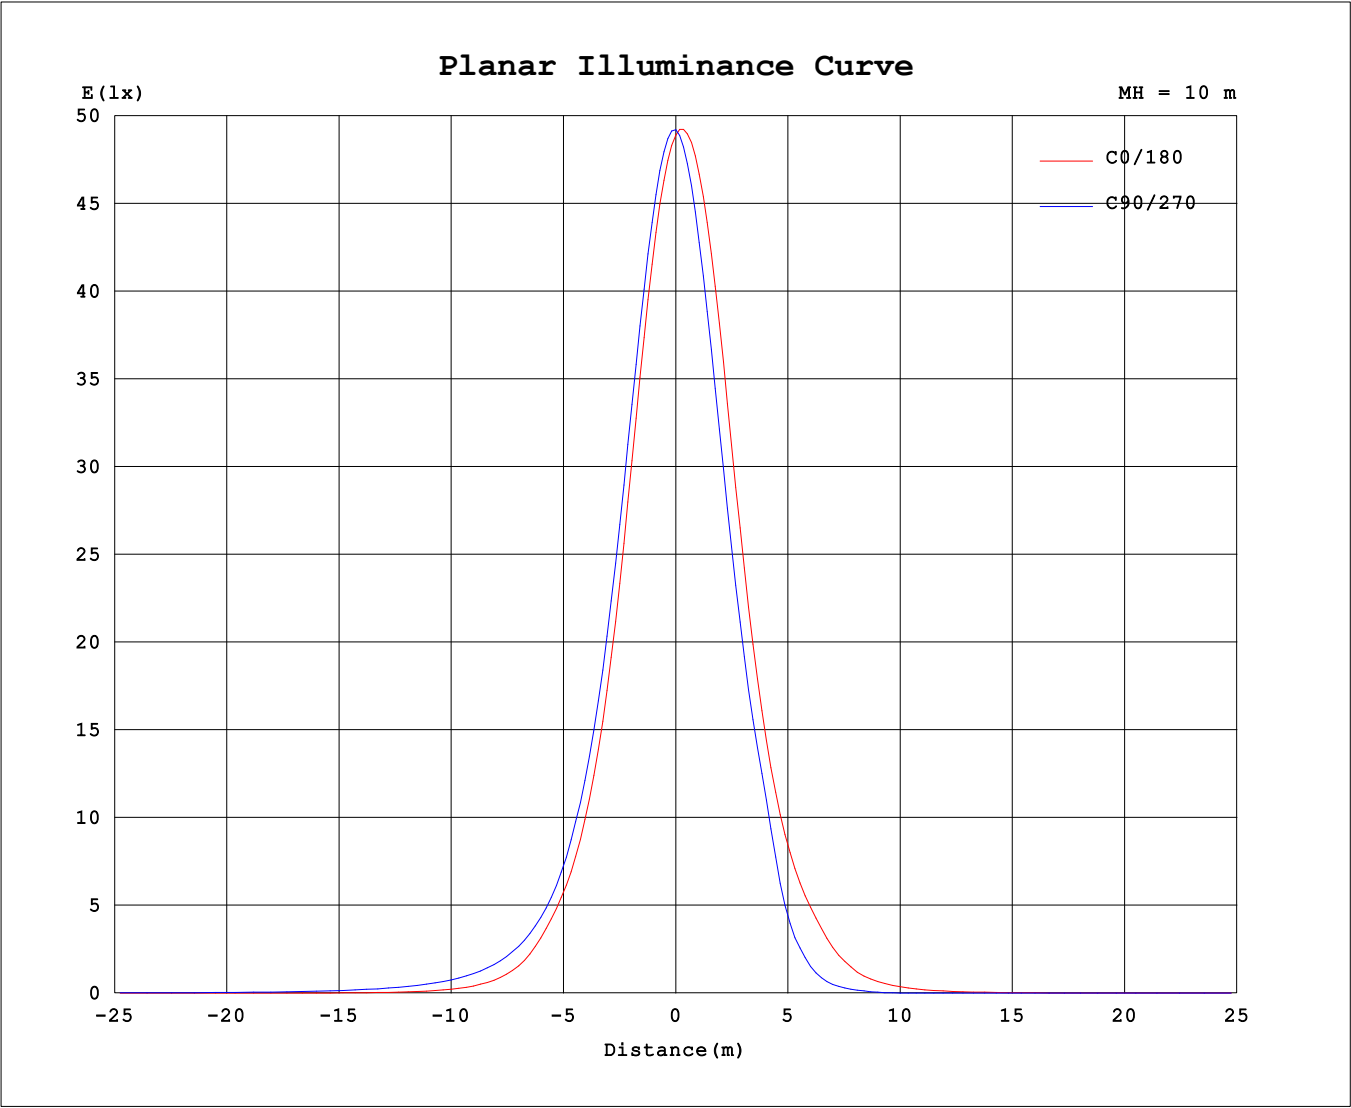

C Range: 0 - 360DEG	γ Range: 0 - 180DEG
C Interval: 22.5DEG	γ Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Temperature:25.3℃	Humidity:45%
Operators:Allen	Test Distance:2.900m [K=0.8783]
Test Date:2026-01-19	Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.000V I:2.6633A P:27.000W PF:0.8724 Freq:60.01Hz Lamp Flux:1984.02x1 lm																	
NAME:									TYPE:						WEIGHT:		
SPEC.:									DIM.:						SERIAL No.:		
MFR.:									SUR.:						Shielding Angle:		

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	4890	4892	4895	4908	4920	4920	4925	4800	4890	4892	4895	4908	4920	4920	4925	4800			
5	4385	4415	4453	4517	4603	4712	4801	4968	4826	4770	4687	4585	4503	4448	4432	4076			
10	3431	3461	3530	3627	3753	3919	4104	4539	4218	4106	3935	3743	3608	3531	3486	3029			
15	2351	2375	2472	2597	2719	2889	3086	3636	3198	3091	2936	2737	2581	2498	2437	2009			
20	1496	1493	1574	1711	1808	1932	2064	2542	2161	2059	1969	1826	1688	1595	1538	1255			
25	931	907	952	1088	1175	1223	1282	1634	1369	1272	1164	988	842	740	786	707			
30	568	555	576	691	749	746	754	1013	855	658	449	380	314	251	296	311			
35	283	348	360	445	487	463	452	630	476	261	157	118	92.7	77.7	94.6	122			
40	137	201	235	291	321	294	281	398	219	104	55.9	38.5	29.1	26.0	36.6	50.2			
45	64.1	114	158	195	215	193	183	228	104	44.7	17.5	4.74	2.84	2.90	9.72	20.7			
50	30.7	63.0	101	134	146	132	120	123	49.3	17.4	2.47	0.07	0.00	0.07	1.48	4.97			
55	13.0	34.4	63.4	91.7	100	90.8	76.2	67.4	23.3	3.83	0.39	0.02	0.00	0.02	0.38	1.21			
60	4.06	17.0	37.7	61.0	68.6	63.1	47.4	36.0	8.29	1.06	0.31	0.00	0.00	0.00	0.25	0.86			
65	1.61	6.82	20.2	37.2	46.2	40.2	27.1	17.7	2.92	0.85	0.05	0.00	0.00	0.00	0.00	0.60			
70	1.25	2.87	8.97	19.4	27.4	22.2	13.4	7.04	1.54	0.56	0.00	0.00	0.00	0.00	0.00	0.18			
75	0.89	1.63	3.54	8.23	11.8	10.1	5.23	2.87	1.23	0.09	0.00	0.00	0.00	0.00	0.00	0.00			
80	0.46	1.27	1.90	3.05	4.05	3.63	2.27	1.78	0.81	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
85	0.04	0.86	1.55	2.05	2.22	2.14	1.83	1.42	0.31	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
90	0.00	0.47	1.15	1.71	1.92	1.82	1.45	1.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
95	0.00	0.14	0.74	1.28	1.51	1.39	1.03	0.55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
100	0.00	0.00	0.39	0.85	1.06	0.96	0.61	0.17	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
105	0.00	0.00	0.11	0.47	0.65	0.57	0.26	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
110	0.00	0.00	0.00	0.17	0.31	0.25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
115	0.00	0.00	0.00	0.00	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04			
130	0.07	0.05	0.02	0.00	0.00	0.00	0.00	0.00	0.05	0.08	0.11	0.14	0.16	0.18	0.18	0.30			
135	0.28	0.26	0.22	0.17	0.14	0.13	0.12	0.06	0.33	0.37	0.41	0.45	0.49	0.53	0.55	0.75			
140	0.61	0.58	0.54	0.49	0.44	0.42	0.41	0.28	0.78	0.83	0.90	0.95	1.00	1.07	1.11	1.38			
145	0.88	0.89	0.86	0.81	0.76	0.73	0.71	0.60	1.38	1.44	1.53	1.61	1.67	1.75	1.81	2.07			
150	1.08	1.10	1.09	1.04	1.00	0.97	0.94	0.82	2.04	2.08	2.20	2.30	2.37	2.45	2.50	2.75			
155	1.34	1.35	1.36	1.33	1.30	1.28	1.24	1.08	2.73	2.75	2.87	2.97	3.03	3.09	3.13	3.30			
160	1.51	1.53	1.54	1.52	1.51	1.49	1.46	1.37	3.26	3.27	3.35	3.42	3.48	3.50	3.52	3.49			
165	1.57	1.60	1.60	1.60	1.59	1.57	1.54	1.47	3.42	3.42	3.45	3.50	3.52	3.52	3.50	3.37			
170	1.65	1.66	1.66	1.65	1.64	1.62	1.58	1.57	3.33	3.34	3.35	3.36	3.35	3.32	3.27	3.06			
175	1.93	1.93	1.92	1.89	1.84	1.82	1.79	1.65	3.04	3.04	3.04	3.02	2.99	2.92	2.87	2.56			
180	2.51	2.51	2.48	2.43	2.41	2.31	2.26	2.02	2.49	2.50	2.49	2.46	2.41	2.36	2.30	2.06			

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-19

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks: