
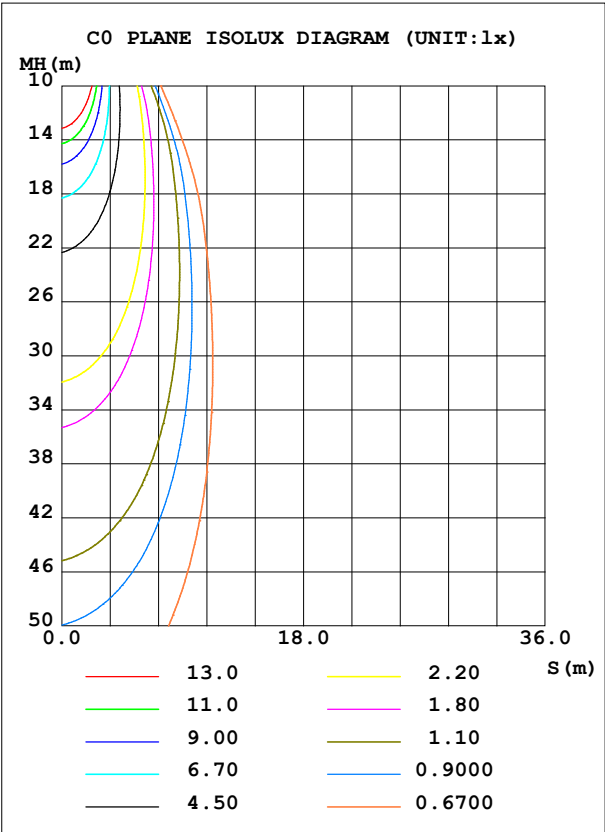


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.000V I:1.4452A P:14.200W PF:0.8210 Freq:60.01Hz Lamp Flux:1007.65x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 70.96 lm/W
MODEL		Imax (cd)	2295	S/MH(C0/180)		0.64
NOMINAL POWER(W)		LOR(%)	100.0	S/MH(C90/270)		0.51
RATED VOLTAGE(V)		TOTAL FLUX(lm)	1007.6	η UP,DN(C0-180)		0.1,59.1
NOMINAL FLUX(lm)	1007.65	CIE CLASS	DIRECT	η UP,DN(C180-360)		0.1,40.8
LAMPS INSIDE	1	η up (%)	0.2	CIBSE SHR NOM		0.50
TEST VOLTAGE(V)		η down (%)	99.8	CIBSE SHR MAX		0.60

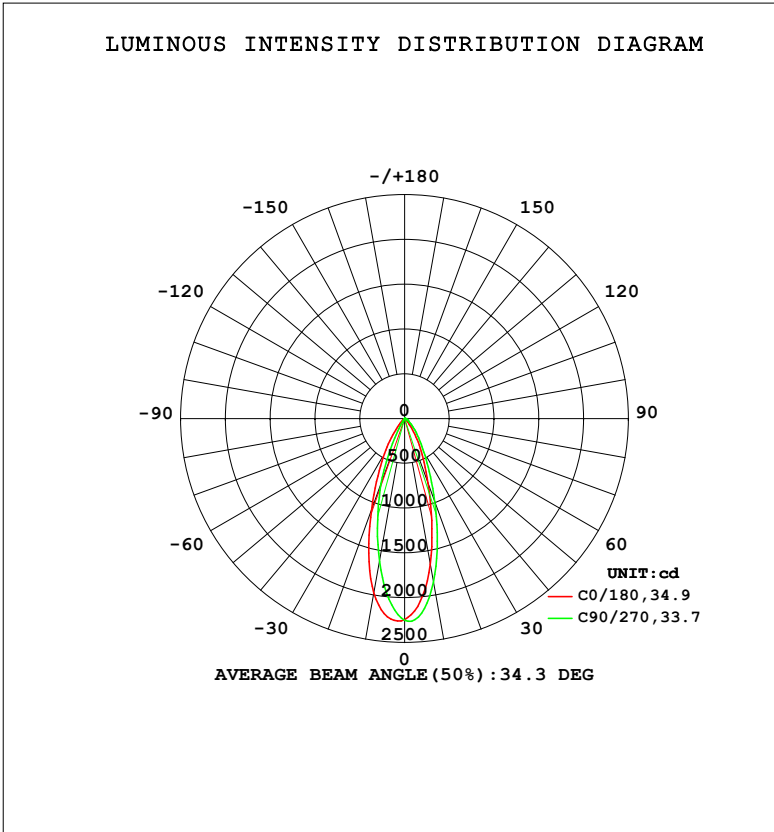

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-19

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1651	1687	1855	2067	1981	1850	1622	1494	0- 10	190.6	190.6	18.9,18.9
20	770.6	813.7	987.4	1229	1083	990.0	778.6	659.9	10- 20	366.7	557.3	55.3,55.3
30	308.4	316.1	435.1	503.6	454.4	245.6	134.5	105.4	20- 30	258.8	816.1	81,81
40	76.92	132.9	194.8	189.8	122.7	32.54	10.93	12.69	30- 40	114.0	930.1	92.3,92.3
50	16.06	55.75	89.40	79.36	27.59	1.185	0	0.1553	40- 50	46.44	976.5	96.9,96.9
60	2.100	19.74	40.94	30.52	4.241	0.0706	0	0.0002	50- 60	19.36	995.9	98.8,98.8
70	0.5898	4.692	16.74	9.539	0.7433	0	0	0	60- 70	7.651	1004	99.6,99.6
80	0.1594	0.9459	2.619	1.622	0.3420	0	0	0	70- 80	2.125	1006	99.8,99.8
90	0	0.5315	0.9877	0.7857	0	0	0	0	80- 90	0.4710	1006	99.8,99.8
100	0	0.1165	0.5349	0.3296	0	0	0	0	90-100	0.2255	1006	99.9,99.9
110	0	0	0.1041	0	0	0	0	0	100-110	0.0639	1006	99.9,99.9
120	0	0	0	0	0	0	0	0	110-120	0.0022	1006	99.9,99.9
130	0	0	0	0	0	0	0.0142	0.0634	120-130	0.0009	1006	99.9,99.9
140	0.1982	0.1615	0.0813	0.0383	0.2988	0.3548	0.4684	0.5900	130-140	0.0848	1006	99.9,99.9
150	0.4260	0.4234	0.3587	0.3094	0.8954	0.9757	1.123	1.249	140-150	0.3146	1007	99.9,99.9
160	0.6510	0.6569	0.6264	0.5798	1.467	1.515	1.600	1.619	150-160	0.4261	1007	100,100
170	0.7298	0.7305	0.7202	0.6914	1.512	1.522	1.512	1.448	160-170	0.3152	1008	100,100
180	1.152	1.150	1.045	0.9430	1.142	1.143	1.062	0.9622	170-180	0.1024	1008	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 958.37 lm

%lum = 95.1%

%lamp = 95.1%

Conical surface Flux(120deg): 995.87 lm

%lum = 98.8%


%lamp = 98.8%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:Allen
 Test Date:2026-01-19

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity:45%
 Test Distance:2.900m [K=0.8783]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:12.000V I:1.4452A P:14.200W PF:0.8210 Freq:60.01Hz Lamp Flux:1007.65x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

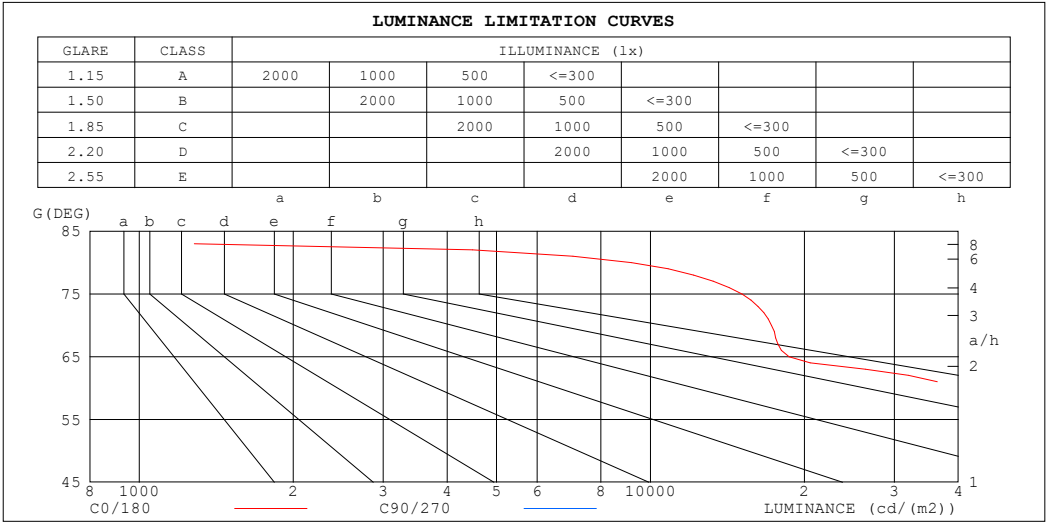

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	0	132910
80	9180	150808
75	15111	291162
70	17244	489444
65	18681	643179
60	41991	818788
55	116865	1056699
50	249921	1390811
45	497016	1860919


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-19

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:12.000V I:1.4452A P:14.200W PF:0.8210 Freq:60.01Hz		
Lamp Flux:1007.65x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.11	1.09	1.07	1.09	1.07	1.05	1.05	1.04	1.02	1.01	1.00	.99	.98	.97	.96	.94
2.0	1.04	1.01	.98	1.03	.99	.97	.99	.97	.94	.97	.94	.92	.94	.92	.90	.89
3.0	.98	.94	.90	.97	.93	.89	.94	.91	.88	.92	.89	.87	.90	.87	.85	.84
4.0	.93	.88	.84	.92	.87	.83	.90	.86	.82	.88	.84	.81	.86	.83	.81	.79
5.0	.88	.83	.79	.87	.82	.78	.85	.81	.78	.84	.80	.77	.82	.79	.76	.75
6.0	.83	.78	.74	.83	.78	.74	.81	.77	.73	.80	.76	.73	.79	.75	.72	.71
7.0	.79	.74	.70	.79	.74	.70	.77	.73	.70	.76	.72	.69	.75	.72	.69	.68
8.0	.76	.70	.67	.75	.70	.67	.74	.70	.66	.73	.69	.66	.72	.68	.66	.65
9.0	.72	.67	.64	.72	.67	.63	.71	.66	.63	.70	.66	.63	.69	.66	.63	.62
10.0	.69	.64	.61	.69	.64	.61	.68	.64	.60	.67	.63	.60	.67	.63	.60	.59

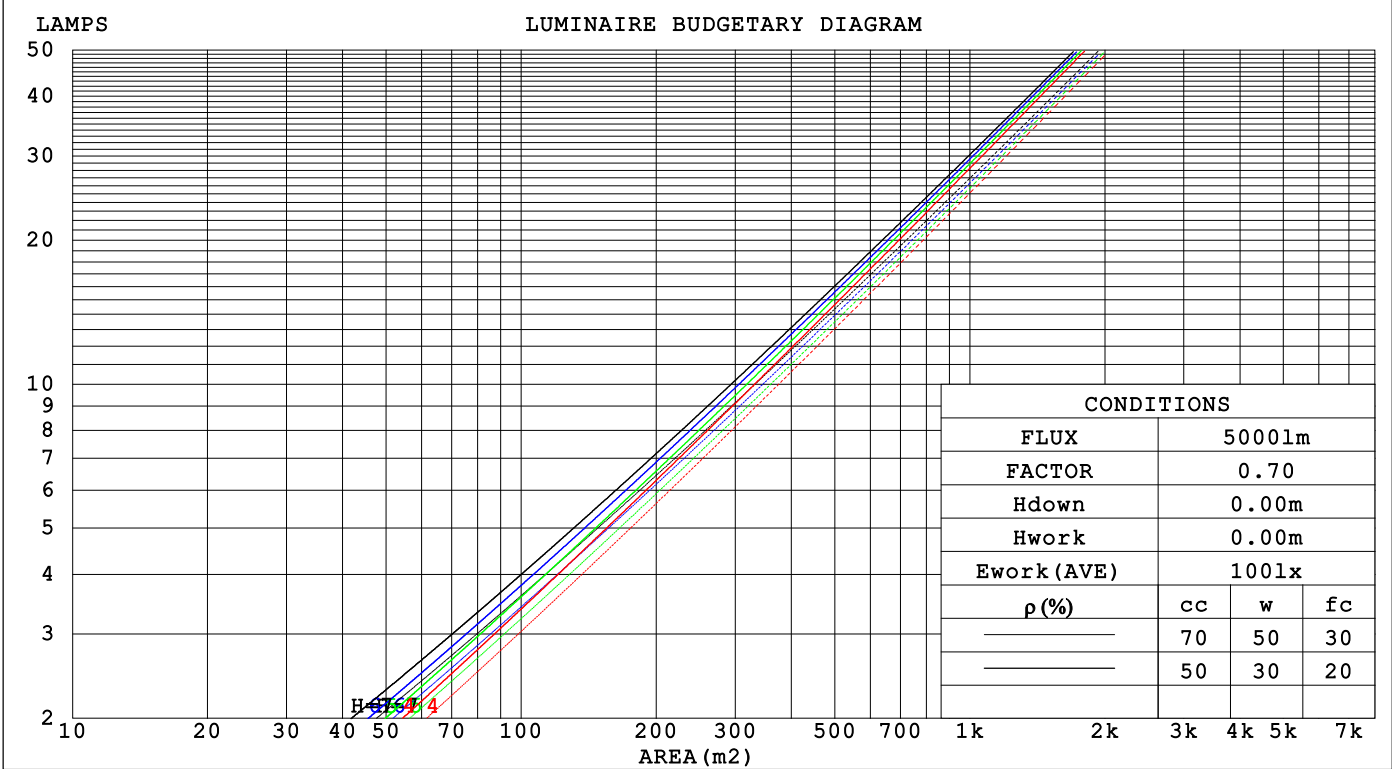

C Range: 0 - 360DEG

C Interval: 22.5DEG

Test Speed: HIGH

Temperature:25.3℃

Operators:Allen

Test Date:2026-01-19

γ Range: 0 - 180DEG

γ Interval: 1.0DEG

Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459

Humidity:45%

Test Distance:2.900m [K=0.8783]

Remarks:

WEC AND CCEC

Test:U:12.000V I:1.4452A P:14.200W PF:0.8210 Freq:60.01Hz Lamp Flux:1007.65x1 lm					
NAME:		TYPE:		WEIGHT:	
SPEC.:		DIM.:		SERIAL No.:	
MFR.:		SUR.:		Shielding Angle:	

pcc	80%			70%			50%			30%			10%			0														
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
pfc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Wall Exitance Coefficients(WEC)														
0.0																														
1.0	.166	.094	.030	.159	.091	.029	.146	.084	.027	.135	.078	.025	.124	.072	.023															
2.0	.157	.086	.026	.152	.083	.026	.141	.078	.024	.131	.074	.023	.122	.069	.022															
3.0	.149	.079	.024	.144	.077	.023	.135	.073	.022	.127	.069	.021	.119	.066	.020															
4.0	.141	.073	.021	.137	.072	.021	.129	.068	.020	.122	.065	.020	.115	.063	.019															
5.0	.133	.068	.020	.130	.067	.019	.123	.064	.019	.117	.062	.018	.111	.059	.018															
6.0	.127	.064	.018	.124	.063	.018	.118	.060	.018	.113	.058	.017	.107	.057	.017															
7.0	.121	.060	.017	.118	.059	.017	.113	.057	.016	.108	.056	.016	.104	.054	.016															
8.0	.115	.056	.016	.113	.056	.016	.108	.054	.015	.104	.053	.015	.100	.051	.015															
9.0	.110	.053	.015	.108	.053	.015	.104	.052	.015	.100	.050	.014	.097	.049	.014															
10.0	.106	.051	.014	.104	.050	.014	.100	.049	.014	.097	.048	.014	.094	.047	.014															

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.172	.159	.147	.147	.136	.126	.100	.094	.087	.058	.054	.051	.019	.017	.016	
2.0	.155	.134	.115	.133	.115	.100	.091	.080	.070	.053	.046	.041	.017	.015	.013	
3.0	.142	.115	.093	.122	.099	.080	.084	.069	.056	.048	.040	.033	.016	.013	.011	
4.0	.131	.100	.076	.113	.086	.066	.077	.060	.046	.045	.035	.027	.014	.011	.009	
5.0	.122	.088	.063	.105	.076	.055	.072	.053	.039	.042	.031	.023	.013	.010	.008	
6.0	.114	.078	.053	.098	.068	.046	.068	.048	.033	.039	.028	.019	.013	.009	.006	
7.0	.107	.071	.045	.092	.061	.039	.064	.043	.028	.037	.025	.017	.012	.008	.005	
8.0	.101	.064	.039	.087	.056	.034	.060	.039	.024	.035	.023	.014	.011	.008	.005	
9.0	.096	.059	.034	.083	.051	.030	.057	.036	.021	.033	.021	.013	.011	.007	.004	
10.0	.091	.054	.030	.079	.047	.026	.055	.033	.019	.032	.020	.011	.010	.006	.004	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-19

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:12.000V I:1.4452A P:14.200W PF:0.8210 Freq:60.01Hz Lamp Flux:1007.65x1 lm										
NAME:			TYPE:			WEIGHT:				
SPEC.:			DIM.:			SERIAL No.:				
MFR.:			SUR.:			Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	29.8	30.7	30.0	30.8	31.0	34.2	35.0	34.4	35.2	35.4
3H	29.7	30.5	29.9	30.6	30.8	34.4	35.2	34.7	35.4	35.6
4H	29.6	30.3	29.9	30.5	30.8	34.5	35.2	34.7	35.4	35.6
6H	29.5	30.2	29.8	30.4	30.7	34.4	35.1	34.7	35.3	35.6
8H	29.5	30.1	29.8	30.4	30.6	34.4	35.0	34.7	35.3	35.5
12H	29.4	30.1	29.7	30.3	30.6	34.3	35.0	34.6	35.2	35.5
4H 2H	30.0	30.7	30.2	30.9	31.2	34.0	34.8	34.3	35.0	35.2
3H	29.8	30.5	30.1	30.7	31.0	34.3	35.0	34.6	35.2	35.5
4H	29.7	30.3	30.1	30.6	30.9	34.4	34.9	34.7	35.2	35.5
6H	29.6	30.1	30.0	30.5	30.8	34.3	34.8	34.7	35.2	35.5
8H	29.6	30.1	30.0	30.4	30.8	34.3	34.7	34.7	35.1	35.5
12H	29.5	30.0	29.9	30.3	30.7	34.2	34.7	34.6	35.0	35.4
8H 4H	29.6	30.1	30.0	30.5	30.8	34.2	34.7	34.6	35.0	35.4
6H	29.5	29.9	30.0	30.3	30.8	34.2	34.6	34.6	35.0	35.4
8H	29.5	29.8	29.9	30.3	30.7	34.1	34.5	34.6	34.9	35.3
12H	29.4	29.7	29.9	30.2	30.7	34.1	34.4	34.6	34.8	35.3
12H 4H	29.6	30.0	30.0	30.4	30.8	34.2	34.6	34.6	35.0	35.4
6H	29.5	29.8	29.9	30.3	30.7	34.1	34.5	34.6	34.9	35.3
8H	29.4	29.7	29.9	30.2	30.7	34.1	34.4	34.5	34.8	35.3
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 2.4 / - 6.5					+ 1.6 / - 2.0				
1.5H	+ 3.1 / - 5.3					+ 2.5 / - 2.1				
2.0H	+ 3.3 / - 7.2					+ 3.2 / - 3.2				

CIE Pub.117, 1008 lm Total Lamp Luminous Flux Correct ($8\log(F/F_0) = 0.0$)
Area: 0.0001 m²

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-19

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:12.000V I:1.4452A P:14.200W PF:0.8210 Freq:60.01Hz Lamp Flux:1007.65x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	87	80	76	86	80	76	85	80	76	73
0.80	94	88	84	94	88	84	92	87	84	80
1.00	99	93	89	98	93	89	96	93	89	85
1.25	103	98	94	102	97	94	100	96	93	89
1.50	106	101	97	104	100	97	102	99	96	91
2.00	108	104	101	107	103	100	104	101	99	93
2.50	110	106	103	108	105	102	105	103	100	94
3.00	112	108	105	110	107	104	106	104	102	96
4.00	114	111	109	112	109	107	108	106	105	97
5.00	115	113	111	113	111	109	109	107	106	98
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3℃
 Operators: Allen
 Test Date: 2026-01-19

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity: 45%
 Test Distance: 2.900m [K=0.8783]
 Remarks:

ISOCANDELA DIAGRAM


Test:U:12.000V I:1.4452A P:14.200W PF:0.8210 Freq:60.01Hz Lamp Flux:1007.65x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

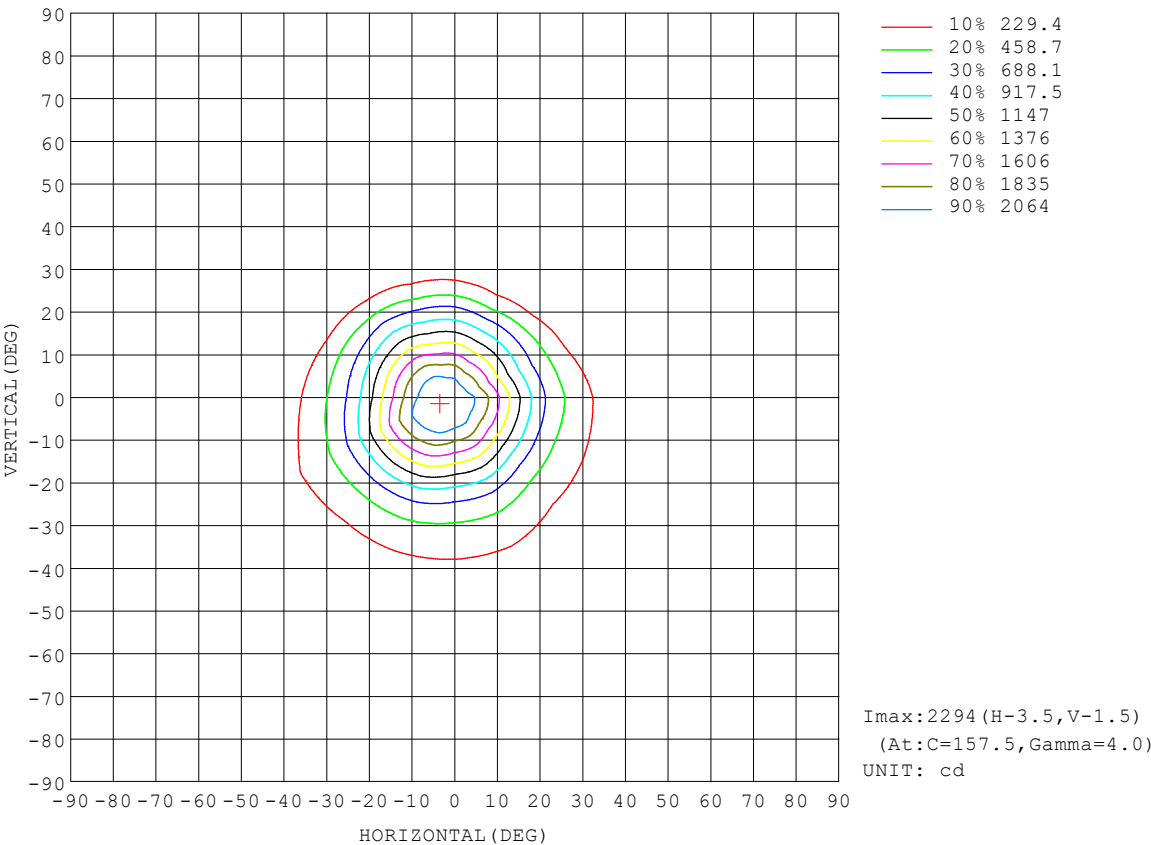

C Range: 0 - 360DEG C Interval: 22.5DEG Test Speed: HIGH Temperature:25.3℃ Operators:Allen Test Date:2026-01-19	γ Range: 0 - 180DEG γ Interval: 1.0DEG Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459 Humidity:45% Test Distance:2.900m [K=0.8783] Remarks:
--	---

AAI Figure

Test:U:12.000V I:1.4452A P:14.200W PF:0.8210 Freq:60.01Hz Lamp Flux:1007.65x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

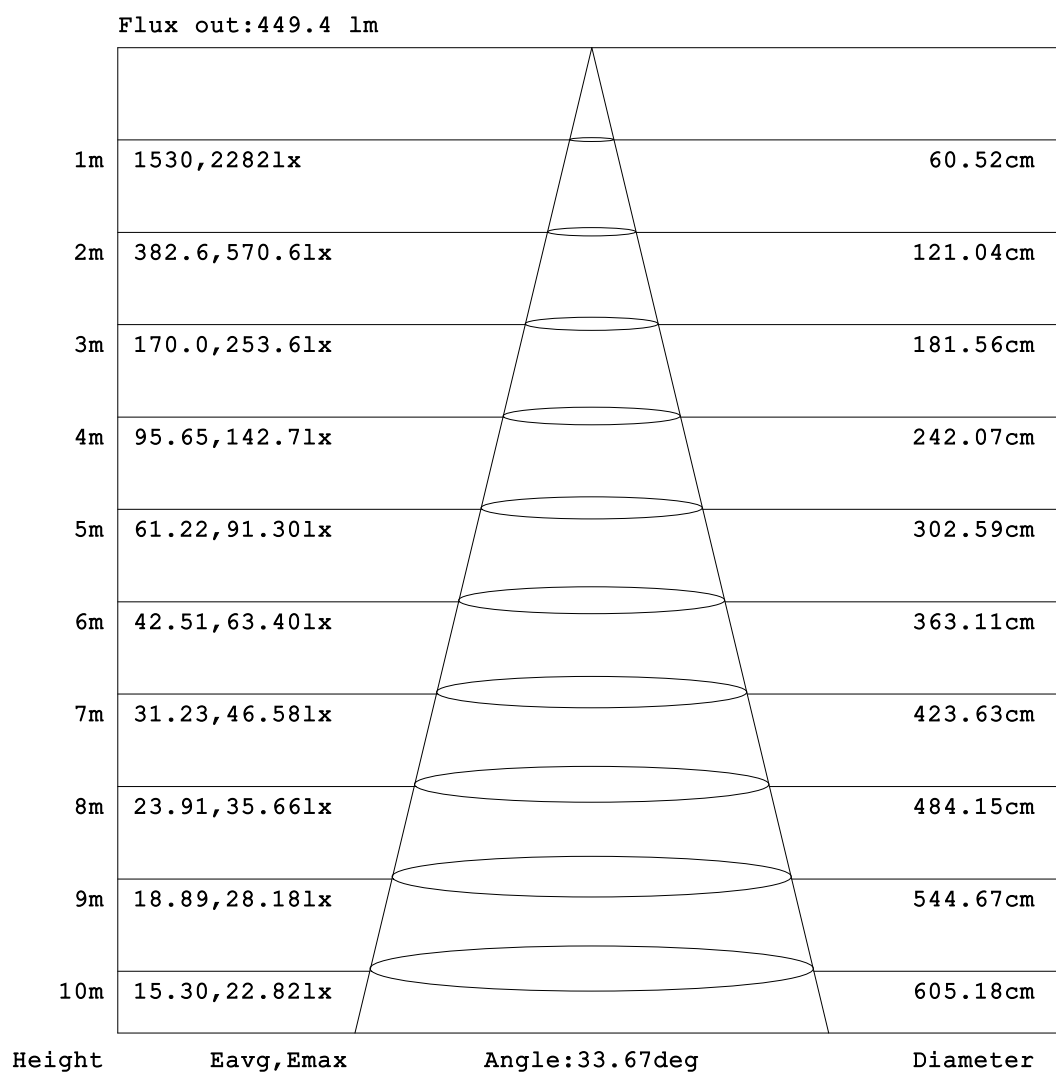


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:Allen
 Test Date:2026-01-19

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity:45%
 Test Distance:2.900m [K=0.8783]
 Remarks:

ISOLUX DIAGRAM


Test:U:12.000V I:1.4452A P:14.200W PF:0.8210 Freq:60.01Hz Lamp Flux:1007.65x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

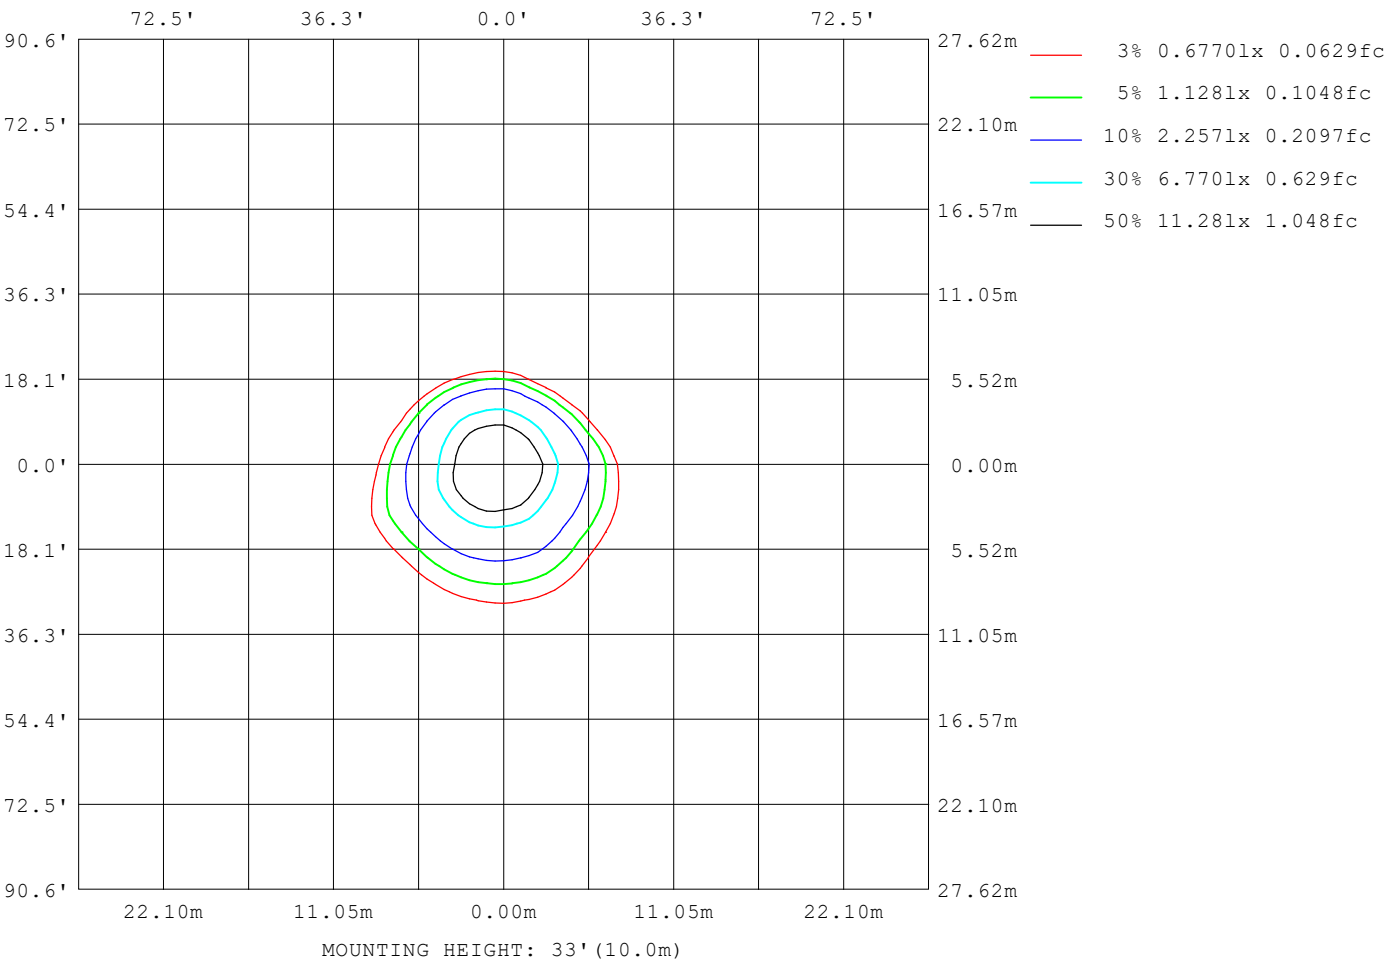

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-19

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

Planar Illuminance Curve

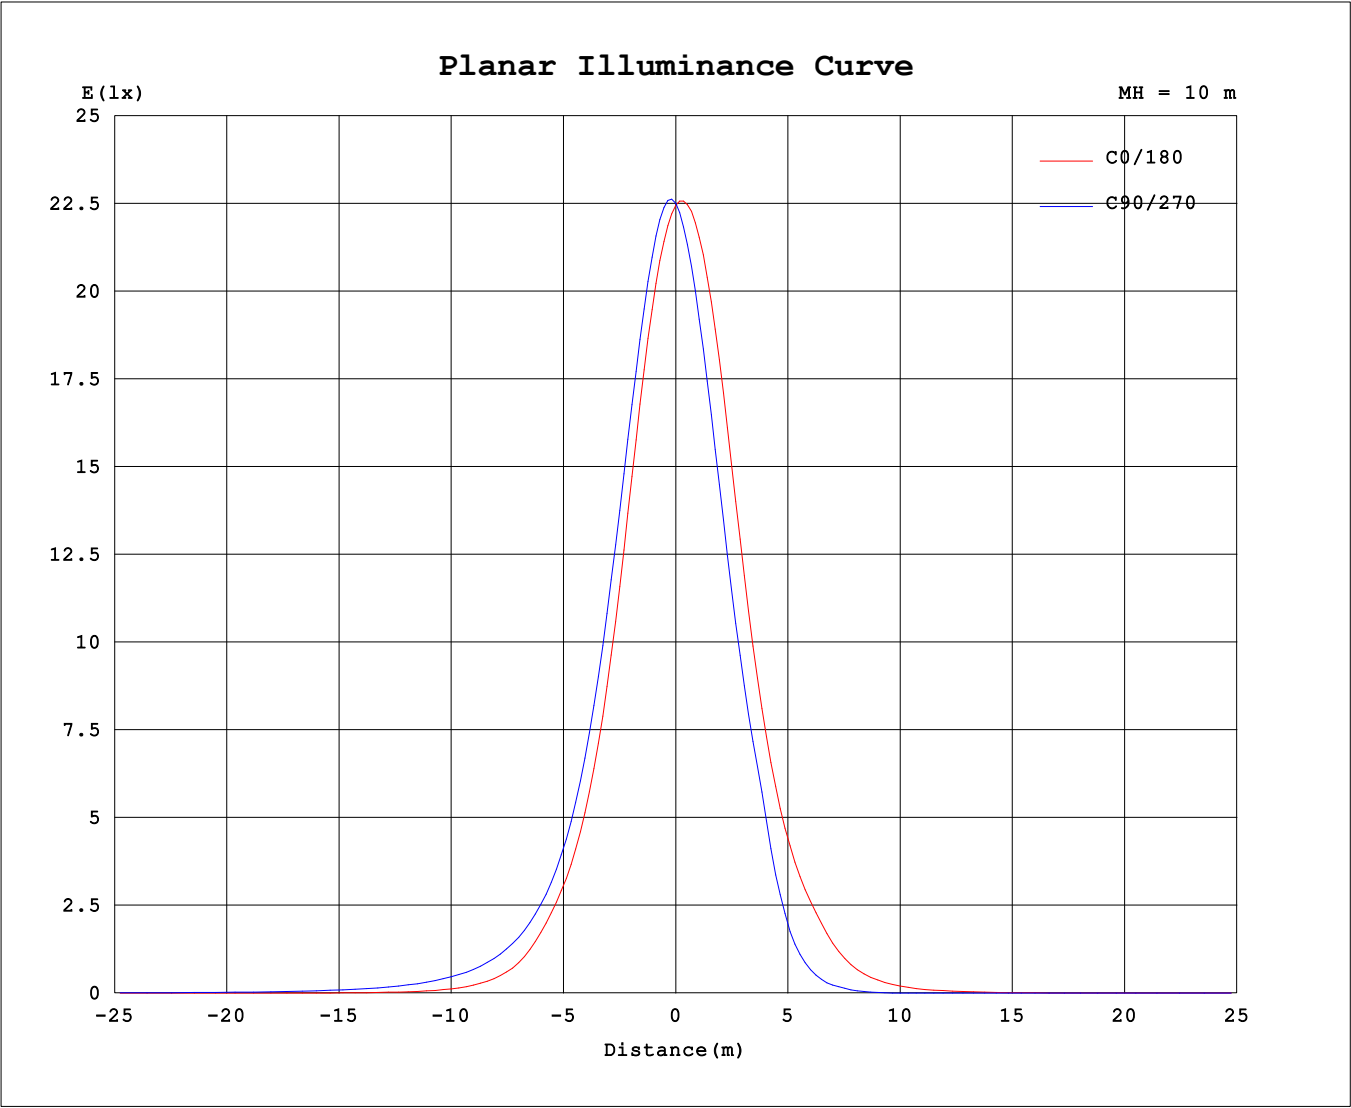

C Range: 0 - 360DEG	γ Range: 0 - 180DEG
C Interval: 22.5DEG	γ Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Temperature:25.3℃	Humidity:45%
Operators:Allen	Test Distance:2.900m [K=0.8783]
Test Date:2026-01-19	Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.000V I:1.4452A P:14.200W PF:0.8210 Freq:60.01Hz Lamp Flux:1007.65x1 lm																	
NAME:									TYPE:						WEIGHT:		
SPEC.:									DIM.:						SERIAL No.:		
MFR.:									SUR.:						Shielding Angle:		

Table--1

UNIT: cd

C (DEG) γ (DEG)	C (DEG)																			
	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5				
0	2245	2247	2252	2253	2251	2219	2218	2219	2245	2247	2252	2253	2251	2219	2218	2219				
5	2046	2057	2073	2152	2182	2246	2272	2288	2221	2196	2157	2061	2025	1932	1928	1930				
10	1651	1662	1687	1808	1855	1998	2067	2118	1981	1928	1850	1683	1622	1506	1494	1485				
15	1176	1185	1230	1366	1417	1589	1686	1749	1555	1501	1426	1238	1170	1059	1038	1018				
20	771	770	814	945	987	1142	1229	1272	1083	1037	990	843	779	665	660	659				
25	493	482	510	623	658	758	811	845	708	664	608	432	378	267	303	384				
30	308	302	316	409	435	483	504	542	454	363	246	165	134	88.7	105	170				
35	159	192	201	270	290	306	307	346	260	147	89.6	53.7	41.5	29.8	35.5	69.9				
40	76.9	114	133	180	195	196	190	223	123	58.7	32.5	15.6	10.9	6.51	12.7	28.7				
45	35.1	61.5	88.1	121	132	129	122	131	58.0	25.2	9.28	1.35	0.86	0.42	2.04	10.9				
50	16.1	33.8	55.7	81.5	89.4	85.2	79.4	68.9	27.6	9.12	1.19	0.00	0.00	0.00	0.16	2.51				
55	6.70	17.8	34.0	55.4	60.6	57.8	49.7	37.2	12.3	1.92	0.12	0.00	0.00	0.00	0.09	0.57				
60	2.10	9.00	19.7	36.5	40.9	39.6	30.5	19.2	4.24	0.48	0.07	0.00	0.00	0.00	0.00	0.38				
65	0.79	3.53	10.7	22.2	27.2	25.7	17.8	9.52	1.46	0.37	0.00	0.00	0.00	0.00	0.00	0.24				
70	0.59	1.46	4.69	12.1	16.7	15.0	9.54	3.67	0.74	0.21	0.00	0.00	0.00	0.00	0.00	0.01				
75	0.39	0.79	1.83	5.25	7.54	7.49	4.06	1.47	0.57	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
80	0.16	0.59	0.95	1.87	2.62	2.80	1.62	0.88	0.34	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
85	0.00	0.37	0.75	1.06	1.16	1.17	0.98	0.69	0.07	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
90	0.00	0.16	0.53	0.88	0.99	0.97	0.79	0.46	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
95	0.00	0.00	0.31	0.65	0.78	0.76	0.56	0.21	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
100	0.00	0.00	0.12	0.41	0.53	0.52	0.33	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
105	0.00	0.00	0.00	0.20	0.30	0.29	0.12	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
110	0.00	0.00	0.00	0.03	0.10	0.10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.05	0.06	0.06				
135	0.04	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.07	0.09	0.11	0.18	0.20	0.27	0.29	0.28				
140	0.20	0.19	0.16	0.10	0.08	0.04	0.04	0.04	0.30	0.32	0.35	0.44	0.47	0.56	0.59	0.58				
145	0.33	0.33	0.31	0.26	0.24	0.20	0.20	0.19	0.59	0.62	0.66	0.76	0.79	0.90	0.93	0.92				
150	0.43	0.43	0.42	0.38	0.36	0.32	0.31	0.30	0.90	0.92	0.98	1.09	1.12	1.22	1.25	1.24				
155	0.56	0.56	0.56	0.52	0.50	0.46	0.44	0.43	1.22	1.23	1.29	1.39	1.43	1.49	1.51	1.50				
160	0.65	0.66	0.66	0.63	0.63	0.60	0.58	0.57	1.47	1.47	1.52	1.57	1.60	1.62	1.62	1.59				
165	0.69	0.70	0.70	0.69	0.68	0.66	0.64	0.63	1.54	1.55	1.57	1.59	1.60	1.58	1.57	1.54				
170	0.73	0.74	0.73	0.72	0.72	0.71	0.69	0.69	1.51	1.52	1.52	1.52	1.51	1.47	1.45	1.41				
175	0.88	0.88	0.87	0.81	0.79	0.75	0.74	0.74	1.38	1.39	1.39	1.33	1.31	1.24	1.21	1.18				
180	1.15	1.15	1.15	1.06	1.05	0.96	0.94	0.93	1.14	1.15	1.14	1.08	1.06	0.99	0.96	0.94				

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-19

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks: