


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:12.000V I:1.4688A P:14.300W PF:0.8226 Freq:60.00Hz Lamp Flux:939.076x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 65.67 lm/W			
MODEL		Imax (cd)	1473	S/MH(C0/180)	0.78
NOMINAL POWER(W)		LOR(%)	100.0	S/MH(C90/270)	0.62
RATED VOLTAGE(V)		TOTAL FLUX(lm)	939.08	η UP,DN(C0-180)	0.1,58.9
NOMINAL FLUX(lm)	939.076	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,41.0
LAMPS INSIDE	1	η up (%)	0.1	CIBSE SHR NOM	0.75
TEST VOLTAGE(V)		η down (%)	99.9	CIBSE SHR MAX	0.75

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

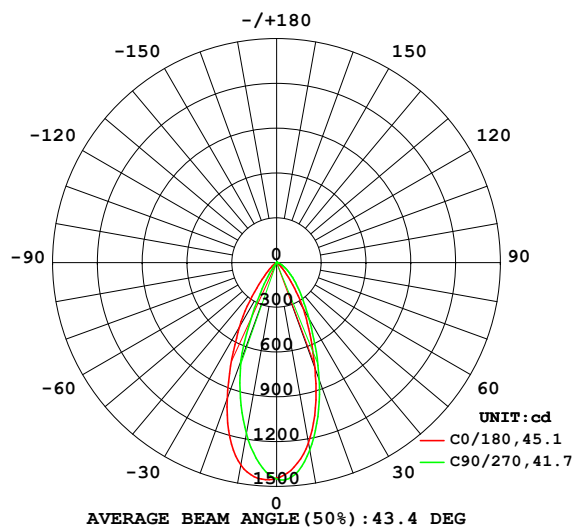

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

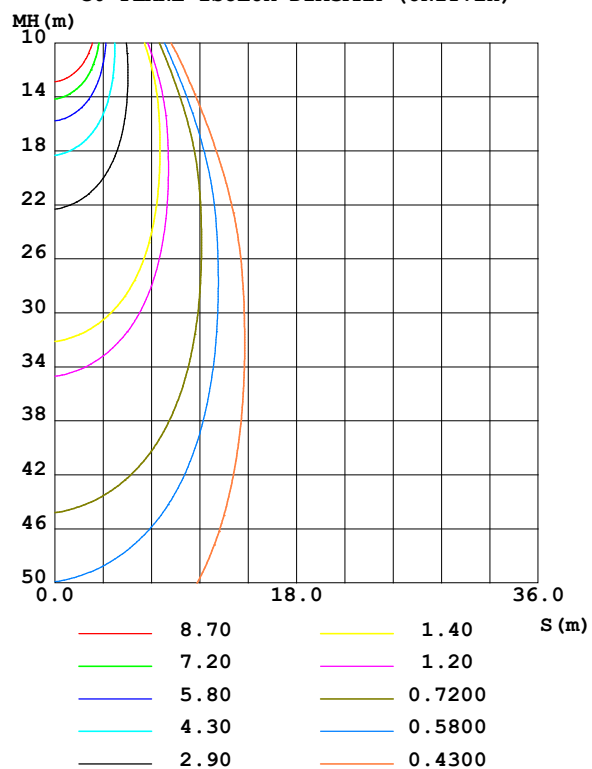

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-19

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1228	1229	1278	1368	1379	1296	1166	1179	0- 10	129.4	129.4	13.8,13.8
20	752.6	787.6	836.1	979.7	970.3	897.9	702.6	738.7	10- 20	293.9	423.3	45.1,45.1
30	360.1	398.5	433.7	541.4	497.8	336.8	168.0	210.6	20- 30	265.9	689.3	73.4,73.4
40	113.1	189.1	227.4	250.7	169.1	53.61	17.92	28.51	30- 40	142.5	831.7	88.6,88.6
50	24.38	85.91	120.1	111.6	42.18	1.546	0	0.4353	40- 50	64.35	896.1	95.4,95.4
60	2.696	29.27	58.12	40.43	5.965	0.1872	0	0.1080	50- 60	27.91	924.0	98.4,98.4
70	0.8530	6.153	22.89	10.83	1.078	0	0	0	60- 70	10.48	934.5	99.5,99.5
80	0.2599	1.291	3.278	1.812	0.5292	0	0	0	70- 80	2.622	937.1	99.8,99.8
90	0	0.7313	1.325	1.031	0	0	0	0	80- 90	0.6154	937.7	99.9,99.9
100	0	0.1846	0.6982	0.4045	0	0	0	0	90-100	0.2975	938.0	99.9,99.9
110	0	0	0.1558	0	0	0	0	0	100-110	0.0837	938.1	99.9,99.9
120	0	0	0	0	0	0	0	0	110-120	0.0036	938.1	99.9,99.9
130	0	0	0	0	0	0.0001	0.0299	0.0465	120-130	0.0008	938.1	99.9,99.9
140	0.1630	0.1151	0.0498	0.0428	0.2735	0.3133	0.4047	0.4416	130-140	0.0720	938.2	99.9,99.9
150	0.3447	0.3198	0.2661	0.2417	0.7171	0.7648	0.8841	0.9216	140-150	0.2463	938.4	99.9,99.9
160	0.5536	0.5449	0.5064	0.4813	1.114	1.143	1.225	1.252	150-160	0.3290	938.7	100,100
170	0.6627	0.6499	0.6304	0.6114	1.179	1.185	1.201	1.195	160-170	0.2523	939.0	100,100
180	1.007	1.006	0.9436	0.9049	0.9961	0.9919	0.9422	0.9129	170-180	0.0880	939.1	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 870.38 lm

%lum = 92.7%

%lamp = 92.7%

Conical surface Flux(120deg): 923.99 lm

%lum = 98.4%


%lamp = 98.4%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:Allen
 Test Date:2026-01-19

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity:45%
 Test Distance:2.900m [K=0.8783]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:12.000V I:1.4688A P:14.300W PF:0.8226 Freq:60.00Hz Lamp Flux:939.076x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

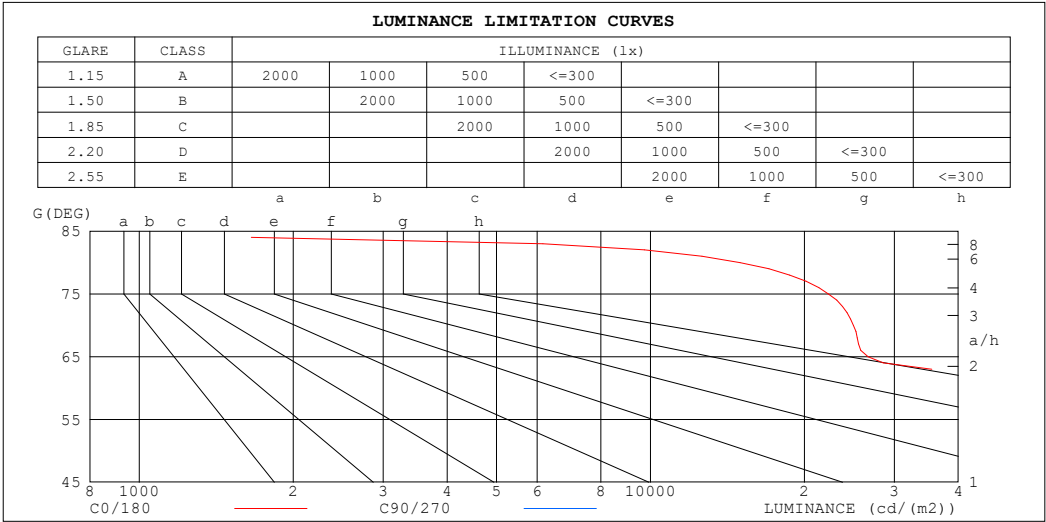

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	13	176987
80	14964	188791
75	22294	372523
70	24941	669137
65	26656	904837
60	53926	1162440
55	164227	1478703
50	379301	1867930
45	777772	2355974


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-19

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:12.000V I:1.4688A P:14.300W PF:0.8226 Freq:60.00Hz		
Lamp Flux:939.076x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.11	1.08	1.06	1.09	1.06	1.04	1.04	1.03	1.01	1.01	.99	.98	.97	.96	.95	.93
2.0	1.03	.99	.96	1.01	.98	.95	.98	.95	.92	.95	.93	.90	.92	.90	.89	.87
3.0	.96	.91	.87	.95	.90	.87	.92	.88	.85	.90	.86	.84	.87	.85	.83	.81
4.0	.90	.85	.80	.89	.84	.80	.87	.82	.79	.85	.81	.78	.83	.80	.77	.76
5.0	.85	.79	.75	.84	.78	.74	.82	.77	.74	.80	.76	.73	.79	.75	.72	.71
6.0	.80	.74	.70	.79	.73	.69	.77	.72	.69	.76	.72	.68	.75	.71	.68	.66
7.0	.75	.69	.65	.74	.69	.65	.73	.68	.65	.72	.68	.64	.71	.67	.64	.63
8.0	.71	.65	.61	.71	.65	.61	.69	.64	.61	.68	.64	.61	.67	.63	.60	.59
9.0	.67	.62	.58	.67	.62	.58	.66	.61	.58	.65	.61	.57	.64	.60	.57	.56
10.0	.64	.59	.55	.64	.58	.55	.63	.58	.55	.62	.58	.54	.61	.57	.54	.53

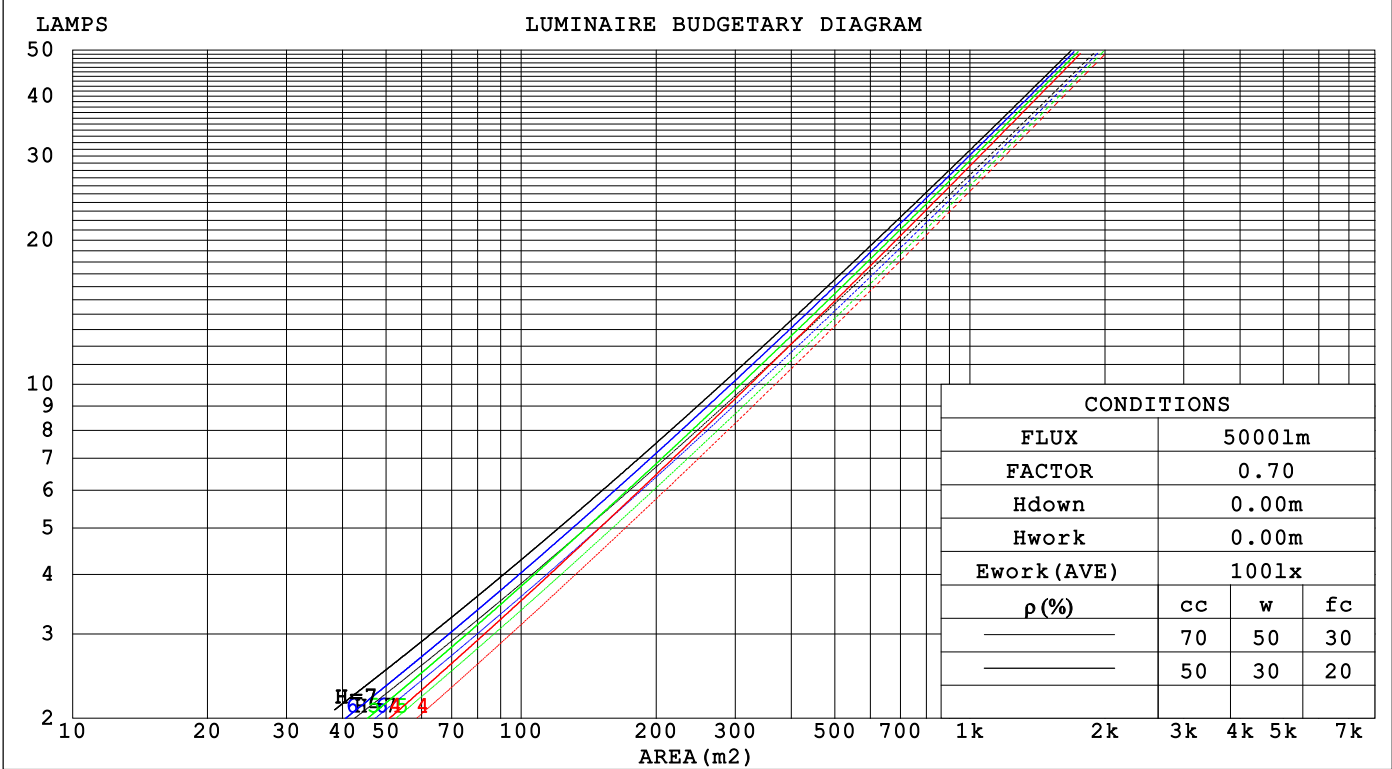

C Range: 0 - 360DEG

C Interval: 22.5DEG

Test Speed: HIGH

Temperature:25.3℃

Operators:Allen

Test Date:2026-01-19

γ Range: 0 - 180DEG

γ Interval: 1.0DEG

Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459

Humidity:45%

Test Distance:2.900m [K=0.8783]

Remarks:

WEC AND CCEC

Test:U:12.000V I:1.4688A P:14.300W PF:0.8226 Freq:60.00Hz Lamp Flux:939.076x1 lm					
NAME:		TYPE:		WEIGHT:	
SPEC.:		DIM.:		SERIAL No.:	
MFR.:		SUR.:		Shielding Angle:	

pcc	80%			70%			50%			30%			10%			0														
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
pfc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Wall Exitance Coefficients(WEC)														
0.0																														
1.0	.178	.101	.032	.172	.098	.031	.159	.091	.029	.147	.085	.027	.136	.079	.026															
2.0	.171	.093	.029	.165	.091	.028	.154	.086	.027	.144	.081	.025	.135	.077	.024															
3.0	.162	.086	.026	.157	.084	.025	.148	.080	.024	.140	.077	.023	.132	.073	.023															
4.0	.154	.080	.024	.150	.078	.023	.142	.075	.022	.135	.072	.022	.128	.069	.021															
5.0	.146	.074	.022	.143	.073	.021	.136	.071	.021	.129	.068	.020	.123	.066	.020															
6.0	.139	.070	.020	.136	.069	.020	.130	.067	.019	.124	.065	.019	.119	.063	.019															
7.0	.132	.066	.019	.130	.065	.018	.124	.063	.018	.119	.061	.018	.115	.060	.018															
8.0	.126	.062	.017	.124	.061	.017	.119	.060	.017	.115	.058	.017	.111	.057	.017															
9.0	.121	.058	.016	.119	.058	.016	.114	.057	.016	.110	.055	.016	.107	.054	.016															
10.0	.116	.055	.015	.114	.055	.015	.110	.054	.015	.106	.053	.015	.103	.052	.015															

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.172	.158	.146	.147	.136	.126	.101	.094	.087	.058	.054	.050	.019	.017	.016	
2.0	.157	.134	.114	.135	.115	.098	.092	.080	.069	.053	.046	.040	.017	.015	.013	
3.0	.145	.115	.091	.124	.099	.079	.085	.069	.055	.049	.040	.033	.016	.013	.011	
4.0	.134	.100	.074	.115	.086	.064	.079	.060	.045	.046	.035	.027	.015	.011	.009	
5.0	.126	.088	.061	.108	.076	.053	.074	.053	.037	.043	.031	.022	.014	.010	.007	
6.0	.118	.079	.051	.102	.068	.044	.070	.048	.031	.041	.028	.019	.013	.009	.006	
7.0	.112	.071	.043	.096	.062	.038	.066	.043	.027	.039	.026	.016	.012	.008	.005	
8.0	.106	.065	.037	.091	.057	.033	.063	.040	.023	.037	.023	.014	.012	.008	.005	
9.0	.100	.060	.033	.087	.052	.028	.060	.037	.020	.035	.022	.012	.011	.007	.004	
10.0	.096	.056	.029	.083	.048	.025	.057	.034	.018	.033	.020	.011	.011	.007	.004	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-19

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:12.000V I:1.4688A P:14.300W PF:0.8226 Freq:60.00Hz Lamp Flux:939.076x1 lm										
NAME:			TYPE:			WEIGHT:				
SPEC.:			DIM.:			SERIAL No.:				
MFR.:			SUR.:			Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	32.6	33.5	32.8	33.7	33.9	36.8	37.8	37.1	38.0	38.1
3H	32.4	33.3	32.7	33.5	33.7	37.1	38.0	37.4	38.2	38.4
4H	32.3	33.2	32.6	33.4	33.6	37.1	37.9	37.4	38.2	38.4
6H	32.3	33.0	32.6	33.3	33.5	37.1	37.8	37.4	38.1	38.3
8H	32.2	32.9	32.5	33.2	33.5	37.0	37.8	37.3	38.0	38.3
12H	32.2	32.9	32.5	33.1	33.4	37.0	37.7	37.3	38.0	38.2
4H 2H	32.8	33.6	33.1	33.8	34.1	36.7	37.5	37.0	37.7	38.0
3H	32.6	33.4	33.0	33.6	33.9	37.0	37.7	37.3	38.0	38.3
4H	32.6	33.2	32.9	33.5	33.8	37.0	37.7	37.4	38.0	38.3
6H	32.5	33.0	32.8	33.4	33.7	37.0	37.5	37.4	37.9	38.2
8H	32.4	32.9	32.8	33.3	33.7	36.9	37.5	37.3	37.8	38.2
12H	32.4	32.8	32.8	33.2	33.6	36.9	37.4	37.3	37.8	38.1
8H 4H	32.5	33.0	32.9	33.3	33.7	36.9	37.4	37.3	37.8	38.1
6H	32.4	32.8	32.8	33.2	33.6	36.8	37.3	37.3	37.7	38.1
8H	32.3	32.7	32.8	33.1	33.6	36.8	37.2	37.3	37.6	38.0
12H	32.3	32.6	32.7	33.0	33.5	36.8	37.1	37.2	37.5	38.0
12H 4H	32.4	32.9	32.8	33.3	33.7	36.8	37.3	37.3	37.7	38.1
6H	32.3	32.7	32.8	33.1	33.6	36.8	37.2	37.2	37.6	38.0
8H	32.3	32.6	32.8	33.1	33.5	36.8	37.1	37.2	37.5	38.0
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 2.4 / - 6.7					+ 1.1 / - 1.7				
1.5H	+ 2.8 / - 5.4					+ 1.3 / - 1.5				
2.0H	+ 3.5 / - 7.8					+ 2.5 / - 3.1				

CIE Pub.117, 939.1 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -0.2)
Area: 0.0001 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-19

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:12.000V I:1.4688A P:14.300W PF:0.8226 Freq:60.00Hz Lamp Flux:939.076x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	84	77	73	84	77	73	83	77	73	69
0.80	92	86	82	91	85	82	90	85	81	77
1.00	97	91	87	96	91	87	95	91	86	82
1.25	102	96	92	100	95	92	98	94	91	87
1.50	105	99	96	103	99	95	101	97	94	89
2.00	108	103	100	106	102	99	103	100	97	92
2.50	109	105	102	108	104	101	105	102	99	93
3.00	111	107	105	109	106	103	106	103	101	95
4.00	113	110	108	111	109	106	107	105	104	97
5.00	115	112	110	112	110	108	108	107	105	98
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3℃
 Operators: Allen
 Test Date: 2026-01-19

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity: 45%
 Test Distance: 2.900m [K=0.8783]
 Remarks:

ISOCANDELA DIAGRAM


Test:U:12.000V I:1.4688A P:14.300W PF:0.8226 Freq:60.00Hz Lamp Flux:939.076x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

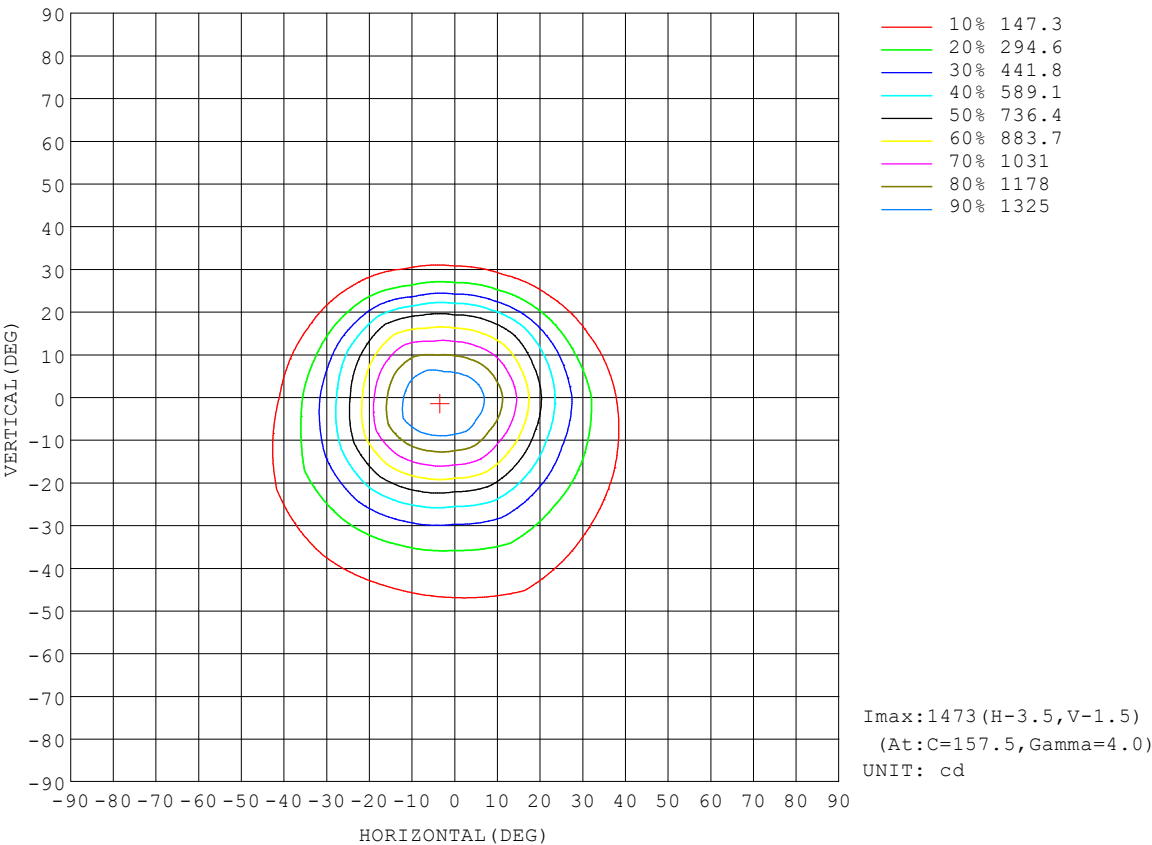

C Range: 0 - 360DEG C Interval: 22.5DEG Test Speed: HIGH Temperature:25.3℃ Operators:Allen Test Date:2026-01-19	γ Range: 0 - 180DEG γ Interval: 1.0DEG Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459 Humidity:45% Test Distance:2.900m [K=0.8783] Remarks:
--	---

AAI Figure

Test:U:12.000V I:1.4688A P:14.300W PF:0.8226 Freq:60.00Hz Lamp Flux:939.076x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

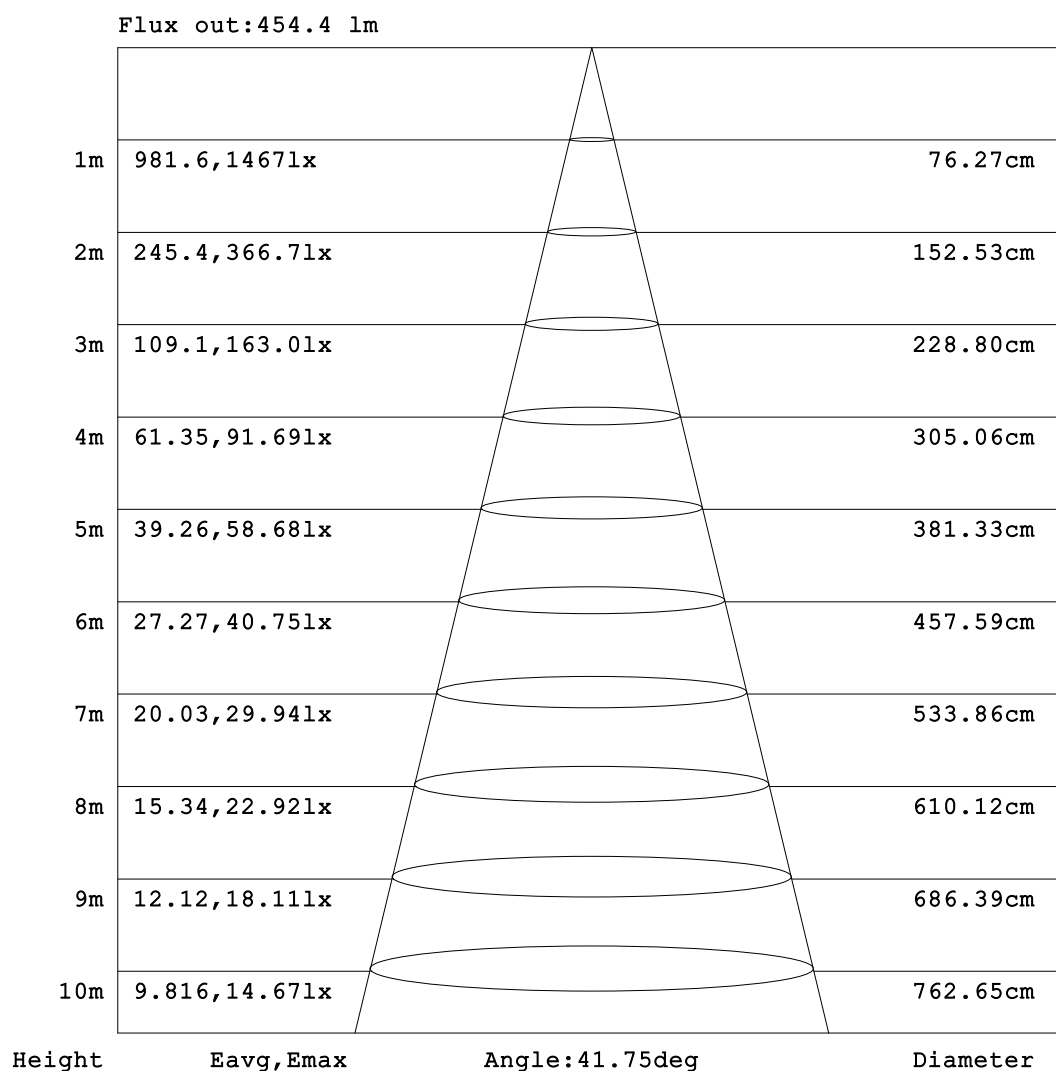


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3℃
 Operators: Allen
 Test Date: 2026-01-19

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity: 45%
 Test Distance: 2.900m [K=0.8783]
 Remarks:

ISOLUX DIAGRAM


Test:U:12.000V I:1.4688A P:14.300W PF:0.8226 Freq:60.00Hz Lamp Flux:939.076x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

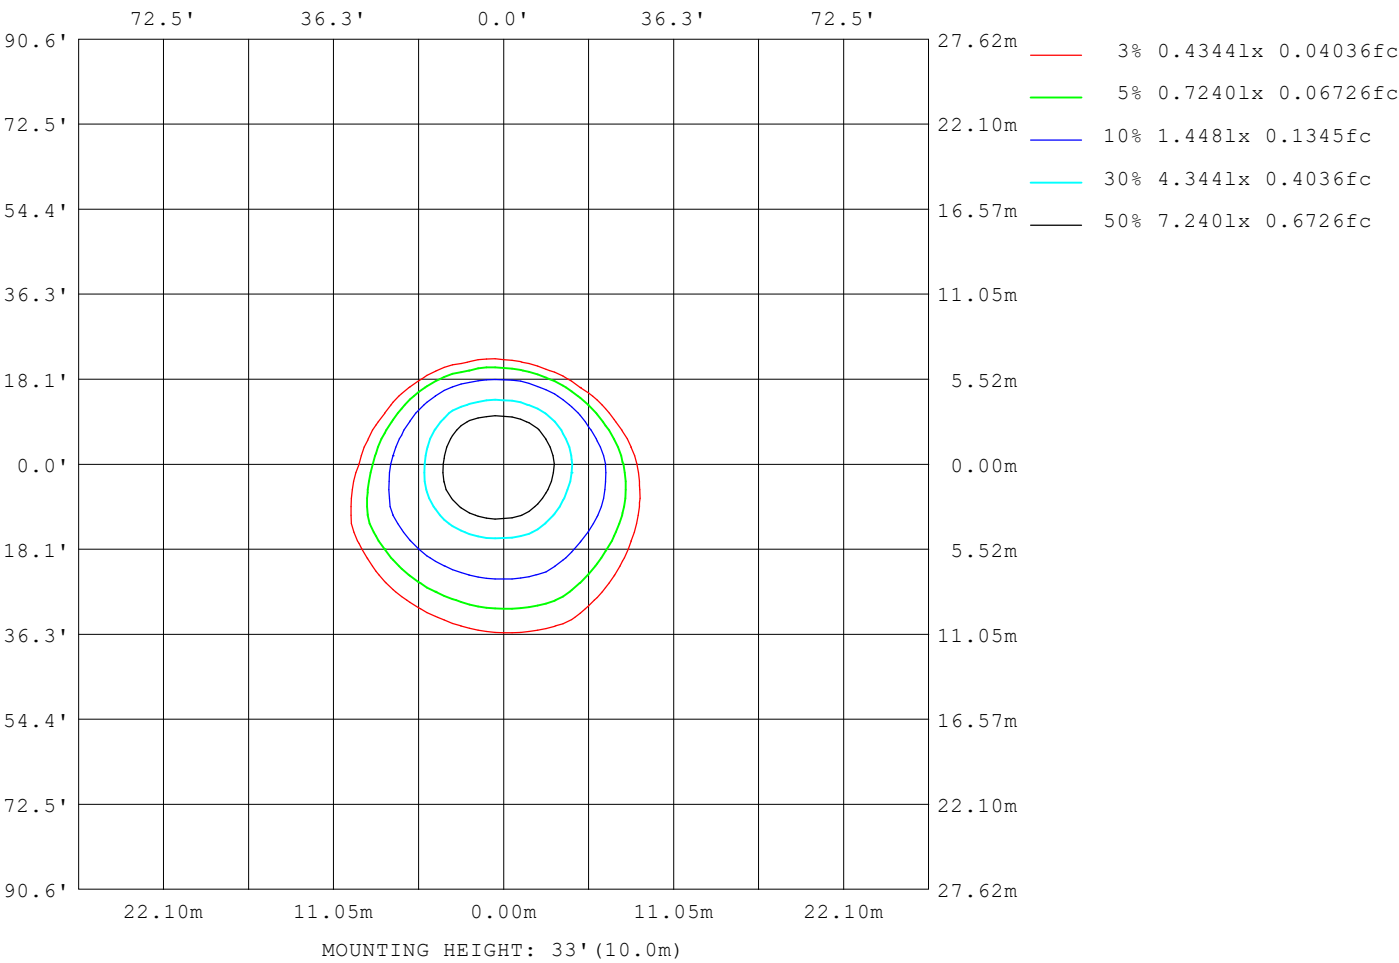

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-19

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

Planar Illuminance Curve

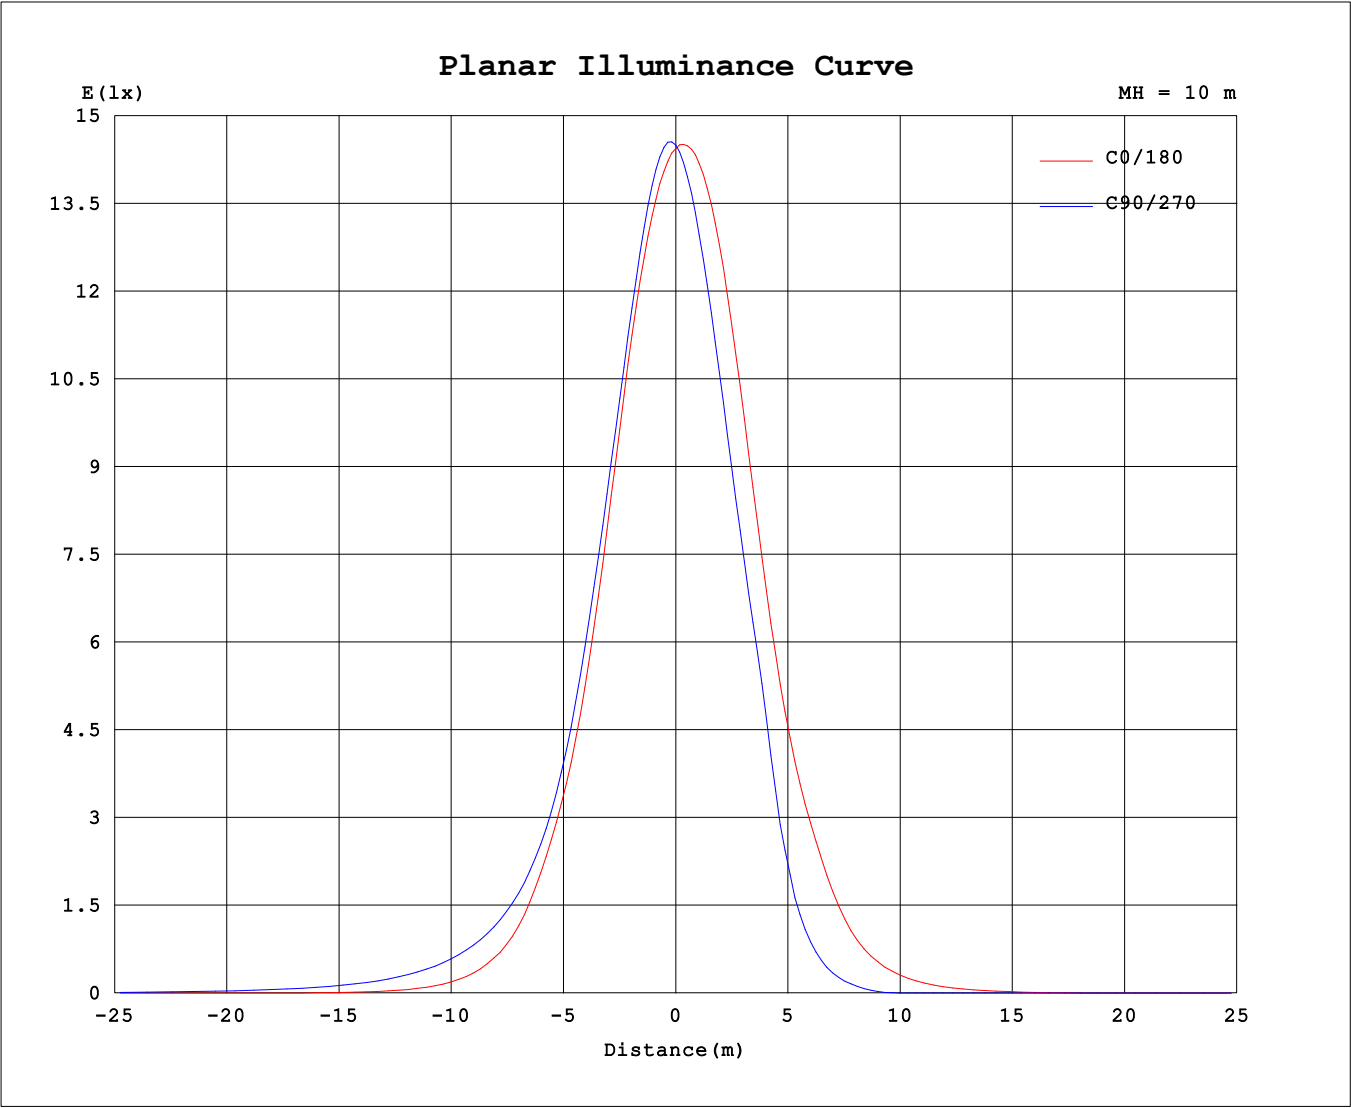

C Range: 0 - 360DEG	γ Range: 0 - 180DEG
C Interval: 22.5DEG	γ Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Temperature:25.3℃	Humidity:45%
Operators:Allen	Test Distance:2.900m [K=0.8783]
Test Date:2026-01-19	Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.000V I:1.4688A P:14.300W PF:0.8226 Freq:60.00Hz Lamp Flux:939.076x1 lm																	
NAME:									TYPE:						WEIGHT:		
SPEC.:									DIM.:						SERIAL No.:		
MFR.:									SUR.:						Shielding Angle:		

Table--1

UNIT: cd

γ (DEG)	C (DEG)																
	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5	
0	1444	1447	1451	1452	1450	1450	1453	1454	1444	1447	1451	1452	1450	1450	1453	1454	
5	1373	1380	1385	1415	1424	1441	1458	1471	1450	1435	1414	1367	1350	1345	1355	1365	
10	1228	1229	1229	1266	1278	1316	1368	1409	1379	1349	1296	1203	1166	1162	1179	1199	
15	1008	1007	1017	1061	1069	1121	1197	1254	1213	1178	1116	992	939	940	965	975	
20	753	756	788	837	836	897	980	1027	970	941	898	766	703	711	739	729	
25	529	533	573	621	611	672	751	773	710	691	651	461	388	396	456	500	
30	360	367	398	444	434	478	541	549	498	436	337	210	168	169	211	272	
35	209	252	273	319	311	332	372	383	317	215	142	84.1	63.1	59.1	81.0	133	
40	113	159	189	234	227	232	251	265	169	98.8	53.6	28.1	17.9	15.8	28.5	57.5	
45	55.0	91.3	132	172	167	163	168	164	87.5	40.5	15.8	1.79	1.10	1.23	4.64	22.6	
50	24.4	50.2	85.9	126	120	114	112	94.4	42.2	14.3	1.55	0.00	0.00	0.00	0.44	5.10	
55	9.42	25.3	52.0	88.9	84.8	79.0	68.7	52.7	18.8	2.59	0.25	0.00	0.00	0.00	0.22	1.23	
60	2.70	12.1	29.3	58.7	58.1	53.6	40.4	26.5	5.96	0.75	0.19	0.00	0.00	0.00	0.11	0.62	
65	1.13	4.53	14.2	34.2	38.2	32.8	22.2	11.8	1.99	0.59	0.00	0.00	0.00	0.00	0.00	0.43	
70	0.85	1.92	6.15	17.0	22.9	17.8	10.8	3.91	1.08	0.37	0.00	0.00	0.00	0.00	0.00	0.15	
75	0.58	1.12	2.36	6.81	9.64	8.06	4.29	1.64	0.84	0.01	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.26	0.84	1.29	2.37	3.28	2.90	1.81	1.19	0.53	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.54	1.03	1.42	1.54	1.50	1.31	0.91	0.17	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.26	0.73	1.18	1.32	1.27	1.03	0.58	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
95	0.00	0.02	0.43	0.86	1.03	0.97	0.72	0.26	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
100	0.00	0.00	0.18	0.55	0.70	0.64	0.40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
105	0.00	0.00	0.00	0.27	0.40	0.35	0.15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
110	0.00	0.00	0.00	0.06	0.16	0.12	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.03	0.04	0.05	0.04	
135	0.04	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.10	0.12	0.17	0.18	0.20	0.22	0.21	
140	0.16	0.14	0.12	0.07	0.05	0.04	0.04	0.06	0.27	0.29	0.31	0.38	0.40	0.43	0.44	0.44	
145	0.26	0.25	0.23	0.19	0.17	0.16	0.16	0.16	0.49	0.51	0.54	0.62	0.65	0.68	0.69	0.68	
150	0.34	0.34	0.32	0.28	0.27	0.25	0.24	0.24	0.72	0.73	0.76	0.85	0.88	0.91	0.92	0.91	
155	0.46	0.45	0.44	0.40	0.39	0.37	0.36	0.36	0.94	0.95	0.98	1.06	1.09	1.12	1.13	1.11	
160	0.55	0.55	0.54	0.52	0.51	0.49	0.48	0.48	1.11	1.12	1.14	1.19	1.23	1.24	1.25	1.23	
165	0.61	0.61	0.60	0.58	0.57	0.56	0.55	0.55	1.18	1.18	1.19	1.22	1.24	1.25	1.25	1.23	
170	0.66	0.66	0.65	0.64	0.63	0.62	0.61	0.62	1.18	1.18	1.19	1.19	1.20	1.20	1.20	1.17	
175	0.81	0.81	0.79	0.74	0.73	0.72	0.72	0.71	1.13	1.13	1.13	1.10	1.10	1.09	1.08	1.06	
180	1.01	1.00	1.01	0.94	0.94	0.91	0.90	0.88	1.00	1.00	0.99	0.96	0.94	0.94	0.91	0.90	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-19

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks: