


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:12.000V I:1.3865A P:13.800W PF:0.8160 Freq:60.00Hz Lamp Flux:1046.12x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 75.81 lm/W			
MODEL		Imax (cd)	4612	S/MH(C0/180)	0.39
NOMINAL POWER(W)		LOR(%)	100.0	S/MH(C90/270)	0.57
RATED VOLTAGE(V)		TOTAL FLUX(lm)	1046.1	η UP,DN(C0-180)	0.1,36.7
NOMINAL FLUX(lm)	1046.12	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,63.1
LAMPS INSIDE	1	η up (%)	0.1	CIBSE SHR NOM	0.00
TEST VOLTAGE(V)		η down (%)	99.9	CIBSE SHR MAX	0.30

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

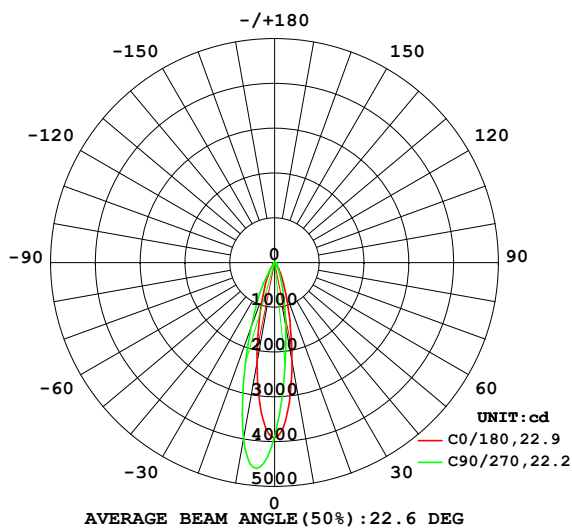

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

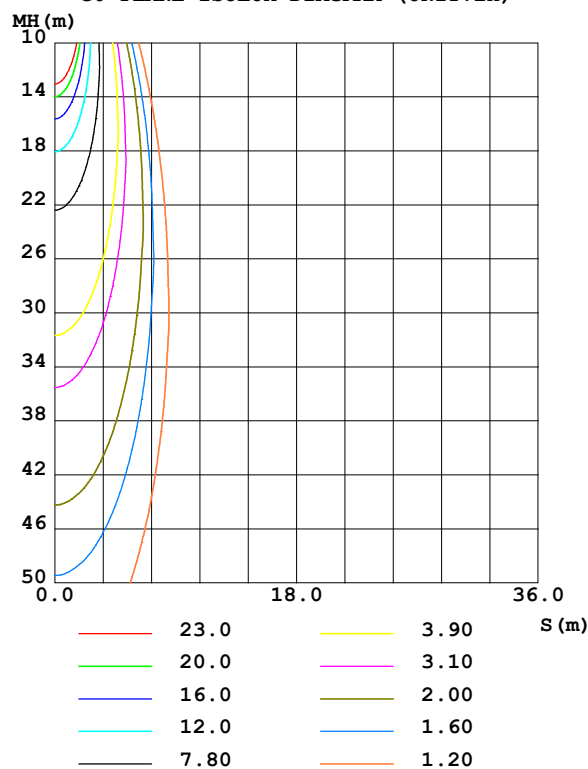

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-19

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	2243	1597	1453	1591	2283	3352	3991	3342	0- 10	298.3	298.3	28.5,28.5
20	740.0	459.5	442.4	458.0	751.0	1164	1531	1173	10- 20	417.5	715.7	68.4,68.4
30	241.0	149.1	155.3	148.1	246.0	245.7	346.8	279.1	20- 30	216.1	931.8	89.1,89.1
40	68.09	71.18	71.98	67.57	61.91	33.27	32.53	35.17	30- 40	69.37	1001	95.7,95.7
50	21.42	38.68	39.42	35.91	20.24	4.799	1.576	5.013	40- 50	27.17	1028	98.3,98.3
60	3.266	15.46	20.59	14.16	3.081	0.0497	0	0.0097	50- 60	11.57	1040	99.4,99.4
70	0.4518	2.802	5.515	2.289	0.4346	0	0	0	60- 70	3.787	1044	99.8,99.8
80	0.1323	0.7929	0.8907	0.5845	0.1394	0	0	0	70- 80	0.6701	1044	99.8,99.8
90	0	0.4333	0.6026	0.2860	0	0	0	0	80- 90	0.2597	1045	99.9,99.9
100	0	0.0443	0.2304	0.0087	0	0	0	0	90-100	0.1049	1045	99.9,99.9
110	0	0	0	0	0	0	0	0	100-110	0.0117	1045	99.9,99.9
120	0	0	0	0	0	0	0	0	110-120	0	1045	99.9,99.9
130	0	0	0	0	0	0	0	0	120-130	0	1045	99.9,99.9
140	0.1399	0.2702	0.3397	0.3118	0.3223	0.1944	0.1479	0.1992	130-140	0.0457	1045	99.9,99.9
150	0.4103	0.4987	0.5946	0.6723	1.153	0.9753	0.8649	0.9891	140-150	0.3160	1045	99.9,99.9
160	0.5746	0.5881	0.6597	0.7747	1.848	1.876	1.880	1.970	150-160	0.4834	1046	100,100
170	0.5597	0.5695	0.6575	0.8104	1.606	1.782	2.035	2.153	160-170	0.3739	1046	100,100
180	0.8641	1.126	1.375	1.425	0.8645	0.9906	1.254	1.411	170-180	0.1199	1046	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 1017.4 lm

%lum = 97.3%

%lamp = 97.3%

Conical surface Flux(120deg): 1039.9 lm

%lum = 99.4%


%lamp = 99.4%

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-19

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:12.000V I:1.3865A P:13.800W PF:0.8160 Freq:60.00Hz Lamp Flux:1046.12x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

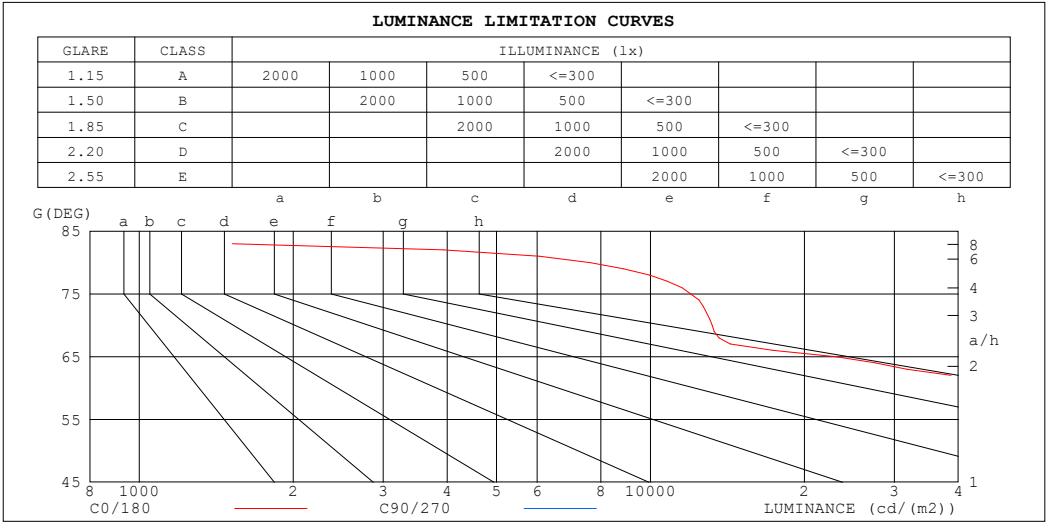

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	0	88130
80	7620	51295
75	11995	63093
70	13211	161250
65	23102	303214
60	65321	411790
55	190701	509456
50	333179	613248
45	535968	744713


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-19

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:12.000V I:1.3865A P:13.800W PF:0.8160 Freq:60.00Hz		
Lamp Flux:1046.12x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.12	1.10	1.08	1.10	1.08	1.07	1.06	1.05	1.03	1.02	1.01	1.00	.99	.98	.97	.96
2.0	1.06	1.03	1.00	1.05	1.02	.99	1.01	.99	.97	.98	.97	.95	.96	.94	.93	.91
3.0	1.01	.97	.94	.90	.96	.93	.97	.94	.92	.95	.92	.90	.93	.91	.89	.87
4.0	.96	.92	.89	.95	.91	.88	.93	.90	.87	.91	.88	.86	.89	.87	.85	.84
5.0	.92	.87	.84	.91	.87	.84	.90	.86	.83	.88	.85	.82	.87	.84	.82	.80
6.0	.88	.84	.80	.88	.83	.80	.86	.82	.79	.85	.82	.79	.84	.81	.78	.77
7.0	.85	.80	.77	.84	.80	.77	.83	.79	.76	.82	.79	.76	.81	.78	.76	.74
8.0	.82	.77	.74	.81	.77	.74	.80	.76	.73	.79	.76	.73	.78	.75	.73	.72
9.0	.79	.74	.71	.78	.74	.71	.78	.74	.71	.77	.73	.71	.76	.73	.70	.69
10.0	.76	.72	.69	.76	.71	.69	.75	.71	.68	.74	.71	.68	.74	.70	.68	.67

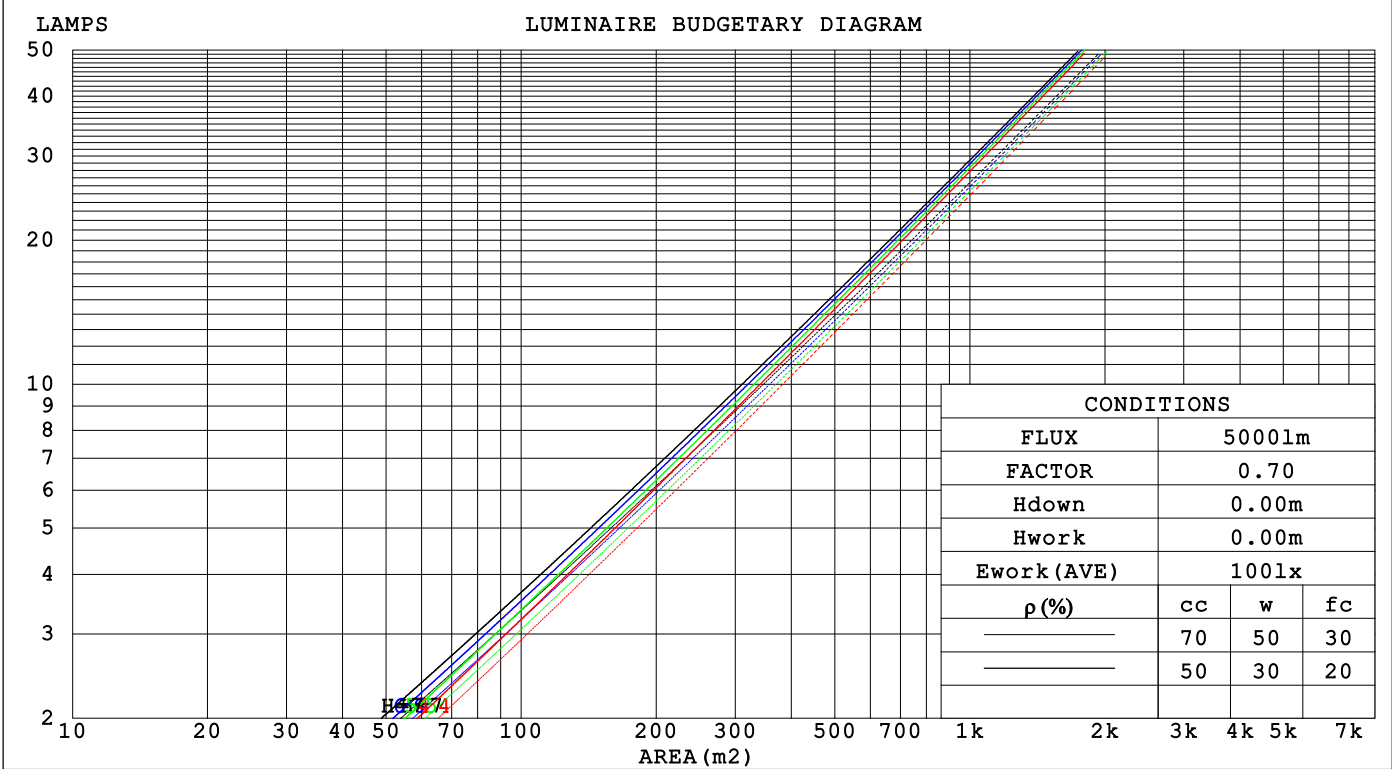

C Range: 0 - 360DEG

C Interval: 22.5DEG

Test Speed: HIGH

Temperature:25.3℃

Operators:Allen

Test Date:2026-01-19

γ Range: 0 - 180DEG

γ Interval: 1.0DEG

Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459

Humidity:45%

Test Distance:2.900m [K=0.8783]

Remarks:

WEC AND CCEC

Test:U:12.000V I:1.3865A P:13.800W PF:0.8160 Freq:60.00Hz Lamp Flux:1046.12x1 lm					
NAME:		TYPE:		WEIGHT:	
SPEC.:		DIM.:		SERIAL No.:	
MFR.:		SUR.:		Shielding Angle:	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.149	.085	.027	.142	.081	.026	.130	.075	.024	.118	.068	.022	.108	.062	.020	
2.0	.140	.077	.024	.134	.074	.023	.124	.069	.021	.114	.064	.020	.106	.060	.019	
3.0	.131	.070	.021	.127	.068	.020	.118	.064	.019	.110	.060	.018	.102	.057	.018	
4.0	.124	.064	.019	.120	.063	.019	.112	.060	.018	.106	.057	.017	.099	.054	.016	
5.0	.117	.060	.017	.114	.058	.017	.107	.056	.016	.101	.053	.016	.096	.051	.015	
6.0	.111	.056	.016	.108	.055	.016	.103	.053	.015	.097	.051	.015	.093	.049	.014	
7.0	.106	.052	.015	.103	.051	.015	.098	.050	.014	.094	.048	.014	.089	.046	.014	
8.0	.101	.049	.014	.099	.049	.014	.094	.047	.013	.090	.046	.013	.086	.044	.013	
9.0	.096	.047	.013	.094	.046	.013	.091	.045	.013	.087	.044	.012	.084	.042	.012	
10.0	.092	.044	.012	.091	.044	.012	.087	.043	.012	.084	.042	.012	.081	.041	.012	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.170	.159	.148	.146	.136	.127	.100	.094	.088	.057	.054	.051	.018	.017	.017	
2.0	.153	.134	.117	.131	.115	.102	.090	.080	.071	.052	.046	.042	.017	.015	.014	
3.0	.139	.114	.095	.119	.099	.082	.082	.069	.058	.047	.040	.034	.015	.013	.011	
4.0	.127	.099	.078	.109	.086	.068	.075	.060	.048	.043	.035	.028	.014	.011	.009	
5.0	.117	.087	.065	.101	.075	.057	.069	.053	.040	.040	.031	.024	.013	.010	.008	
6.0	.109	.077	.055	.093	.067	.048	.064	.047	.034	.037	.028	.020	.012	.009	.007	
7.0	.101	.069	.047	.087	.060	.041	.060	.042	.029	.035	.025	.017	.011	.008	.006	
8.0	.095	.063	.041	.082	.054	.035	.057	.038	.025	.033	.023	.015	.011	.007	.005	
9.0	.090	.057	.035	.077	.050	.031	.053	.035	.022	.031	.021	.013	.010	.007	.004	
10.0	.085	.053	.031	.073	.046	.027	.051	.032	.019	.030	.019	.012	.010	.006	.004	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-19

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:12.000V I:1.3865A P:13.800W PF:0.8160 Freq:60.00Hz Lamp Flux:1046.12x1 lm										
NAME:			TYPE:			WEIGHT:				
SPEC.:			DIM.:			SERIAL No.:				
MFR.:			SUR.:			Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	27.4	28.1	27.6	28.3	28.4	28.6	29.3	28.8	29.5	29.6
3H	27.2	27.9	27.5	28.1	28.3	28.8	29.5	29.0	29.7	29.9
4H	27.2	27.8	27.4	28.0	28.2	28.7	29.4	29.0	29.6	29.8
6H	27.1	27.7	27.4	27.9	28.2	28.7	29.3	29.0	29.5	29.8
8H	27.0	27.6	27.3	27.9	28.1	28.6	29.2	28.9	29.5	29.7
12H	27.0	27.6	27.3	27.8	28.1	28.6	29.2	28.9	29.4	29.7
4H 2H	27.5	28.1	27.7	28.3	28.6	28.6	29.2	28.8	29.4	29.7
3H	27.3	27.9	27.6	28.2	28.4	28.8	29.4	29.1	29.6	29.9
4H	27.2	27.8	27.6	28.1	28.4	28.7	29.3	29.1	29.6	29.9
6H	27.1	27.6	27.5	27.9	28.3	28.7	29.1	29.0	29.5	29.8
8H	27.1	27.5	27.5	27.9	28.2	28.6	29.1	29.0	29.4	29.8
12H	27.0	27.4	27.4	27.8	28.2	28.6	29.0	29.0	29.4	29.8
8H 4H	27.1	27.5	27.5	27.9	28.3	28.6	29.0	29.0	29.4	29.7
6H	27.0	27.4	27.4	27.8	28.2	28.5	28.9	29.0	29.3	29.7
8H	27.0	27.3	27.4	27.7	28.1	28.5	28.8	28.9	29.2	29.7
12H	26.9	27.2	27.4	27.6	28.1	28.5	28.7	28.9	29.2	29.7
12H 4H	27.1	27.5	27.5	27.8	28.2	28.5	28.9	29.0	29.3	29.7
6H	27.0	27.3	27.4	27.7	28.1	28.5	28.8	28.9	29.2	29.6
8H	26.9	27.2	27.4	27.6	28.1	28.4	28.7	28.9	29.2	29.6
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 2.2 / - 5.1					+ 1.0 / - 1.6				
1.5H	+ 2.8 / - 3.6					+ 1.1 / - 0.7				
2.0H	+ 3.3 / - 8.7					+ 1.8 / - 2.6				

CIE Pub.117, 1046 lm Total Lamp Luminous Flux Correct ($8\log(F/F_0) = 0.2$)
Area: 0.0001 m²

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-19

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:12.000V I:1.3865A P:13.800W PF:0.8160 Freq:60.00Hz Lamp Flux:1046.12x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	89	83	79	88	83	79	88	82	79	75
0.80	96	91	87	95	90	87	94	90	86	83
1.00	100	95	91	99	94	91	98	94	91	87
1.25	104	99	96	103	99	95	101	97	95	91
1.50	107	102	99	105	101	98	103	100	97	93
2.00	109	105	102	108	104	101	105	102	100	95
2.50	111	107	104	109	106	103	106	103	101	96
3.00	112	109	106	110	107	105	107	105	103	97
4.00	114	111	109	112	110	108	108	107	105	98
5.00	115	113	111	113	111	110	109	108	107	99
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3℃
 Operators: Allen
 Test Date: 2026-01-19

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity: 45%
 Test Distance: 2.900m [K=0.8783]
 Remarks:

ISOCANDELA DIAGRAM


Test:U:12.000V I:1.3865A P:13.800W PF:0.8160 Freq:60.00Hz Lamp Flux:1046.12x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

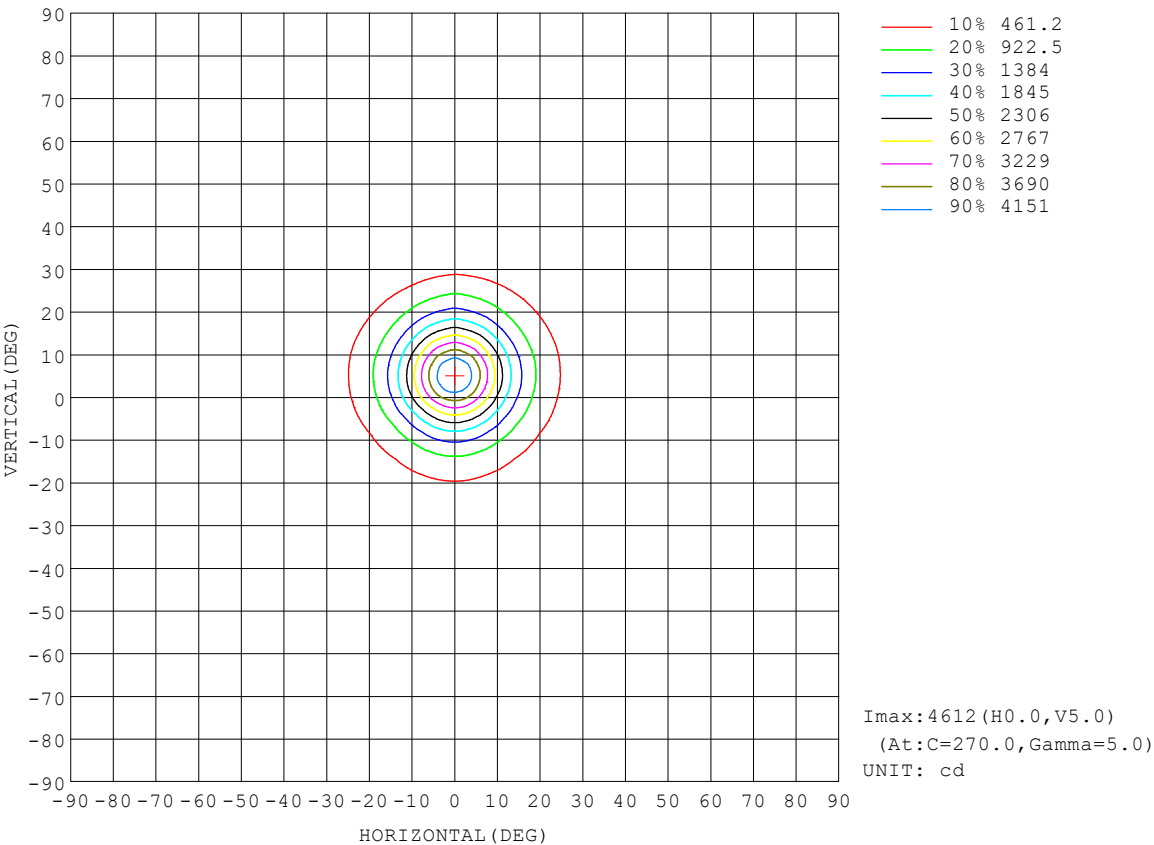

C Range: 0 - 360DEG	γ Range: 0 - 180DEG
C Interval: 22.5DEG	γ Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Temperature:25.3℃	Humidity:45%
Operators:Allen	Test Distance:2.900m [K=0.8783]
Test Date:2026-01-19	Remarks:

AAI Figure

Test:U:12.000V I:1.3865A P:13.800W PF:0.8160 Freq:60.00Hz Lamp Flux:1046.12x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

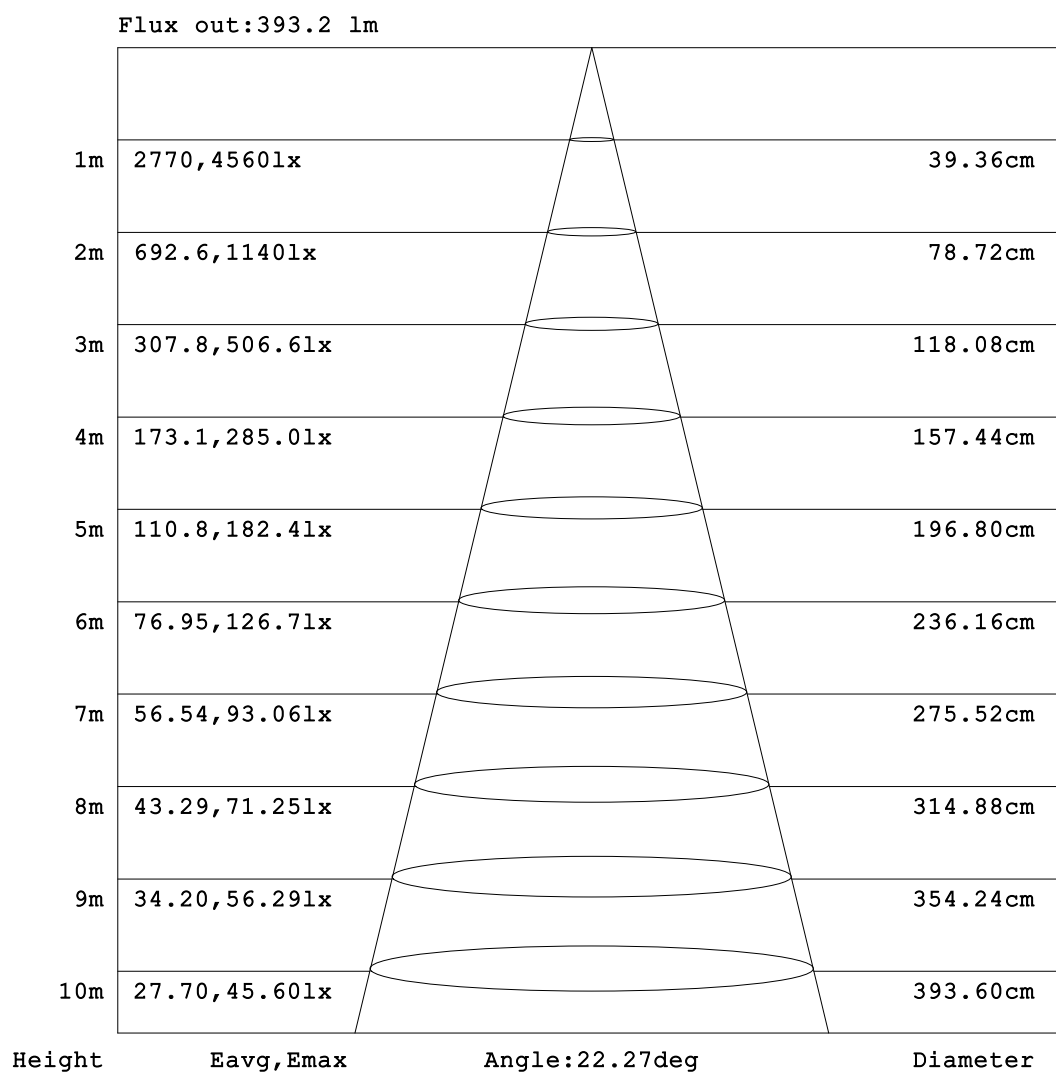


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3℃
Operators: Allen
Test Date: 2026-01-19

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity: 45%
Test Distance: 2.900m [K=0.8783]
Remarks:


ISOLUX DIAGRAM

Test:U:12.000V I:1.3865A P:13.800W PF:0.8160 Freq:60.00Hz Lamp Flux:1046.12x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

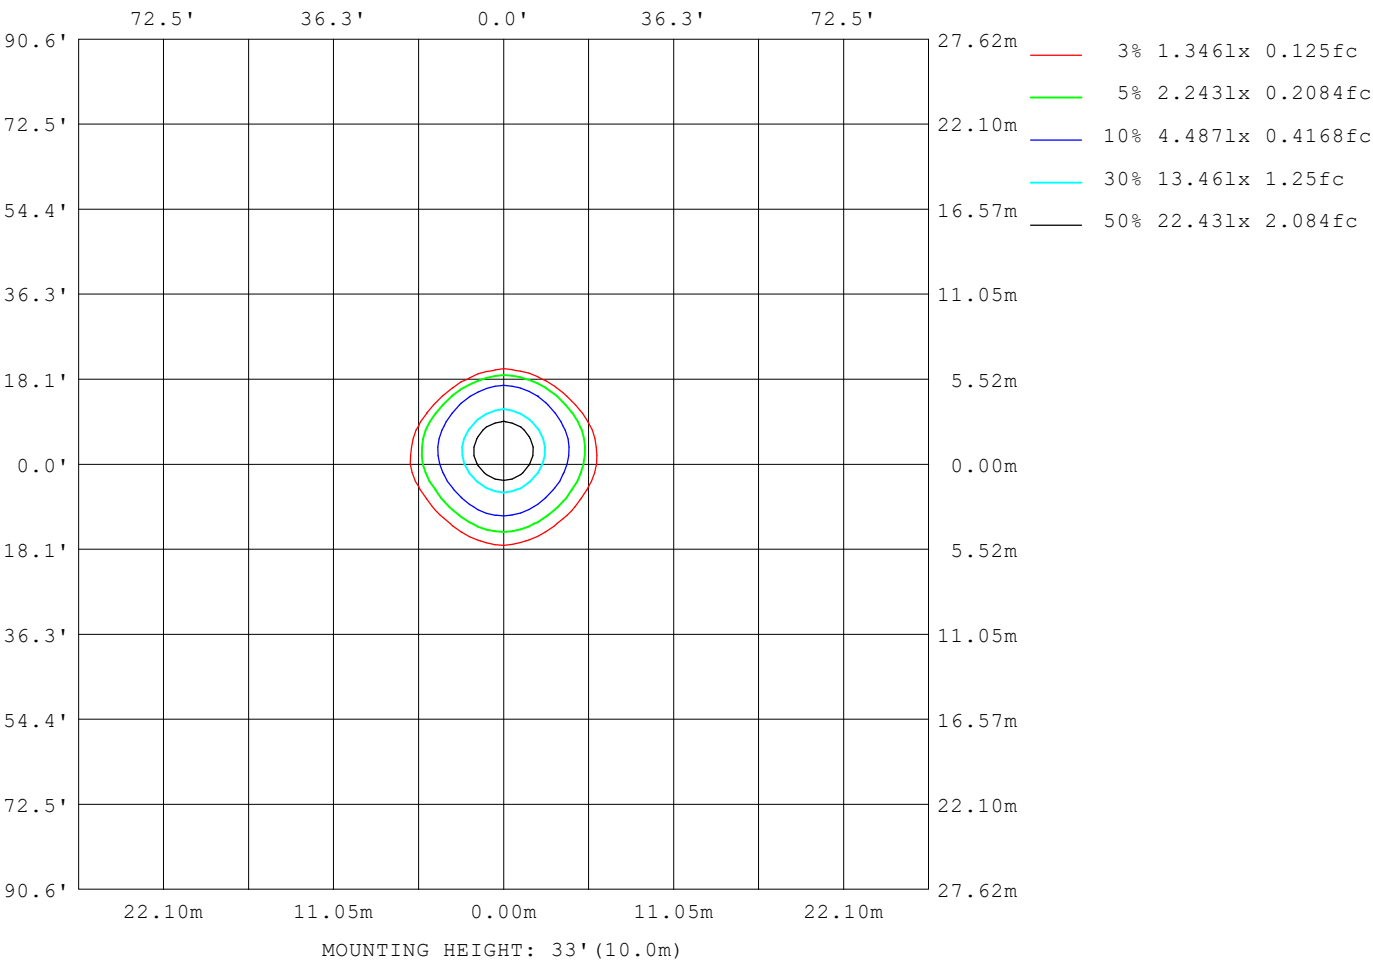

C Range: 0 - 360DEG	γ Range: 0 - 180DEG
C Interval: 22.5DEG	γ Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Temperature:25.3℃	Humidity:45%
Operators:Allen	Test Distance:2.900m [K=0.8783]
Test Date:2026-01-19	Remarks:

Planar Illuminance Curve

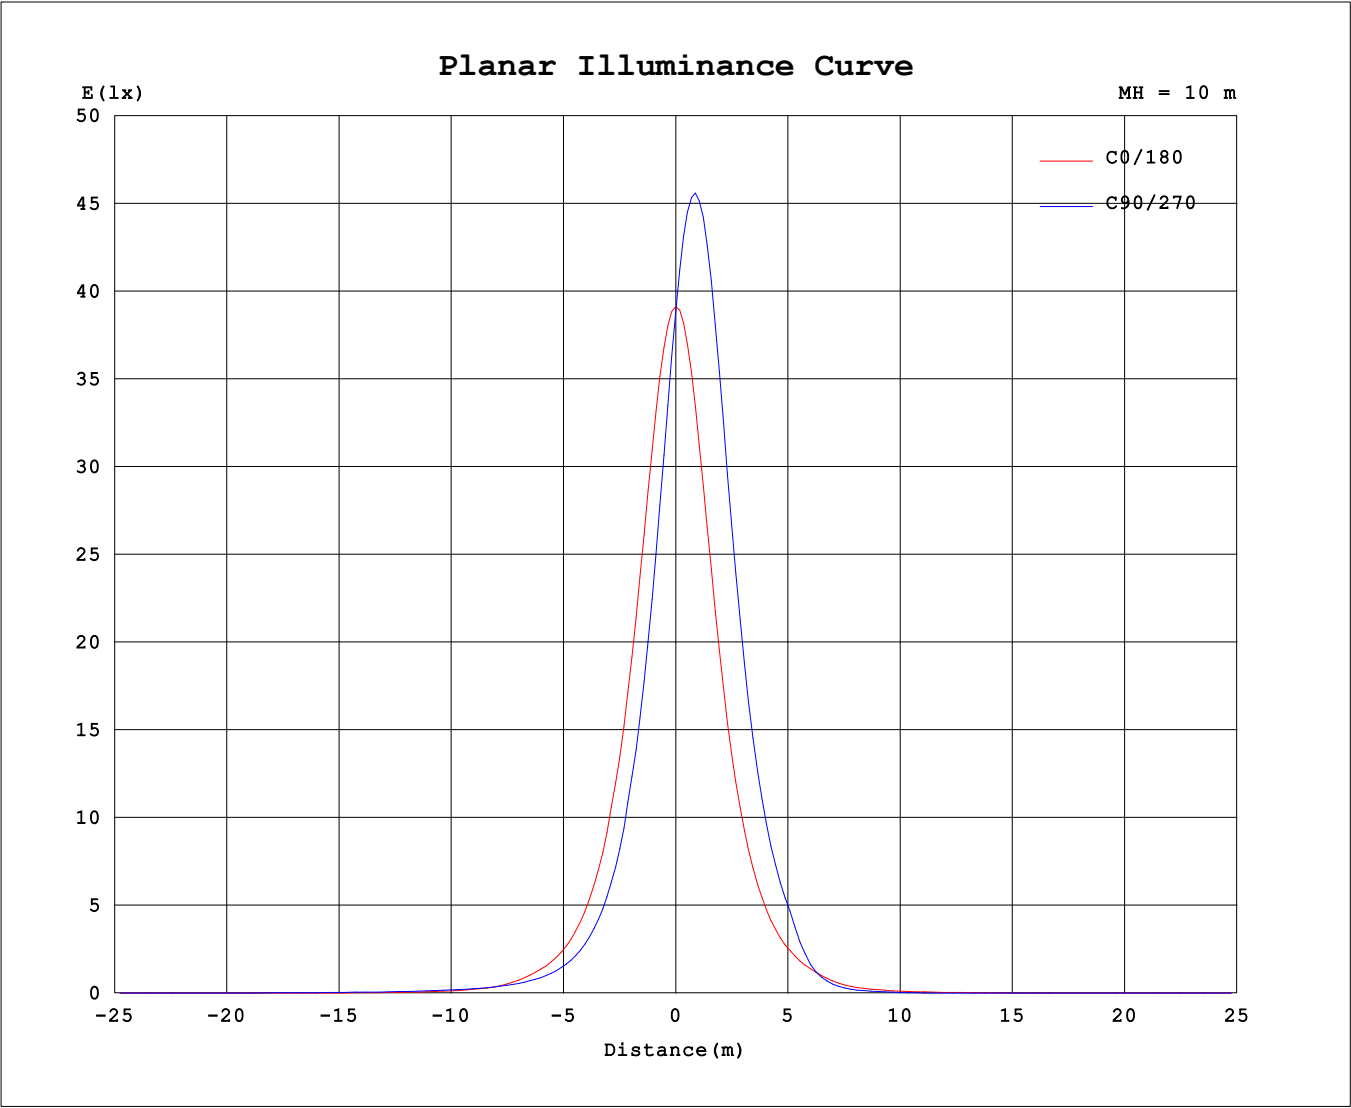

C Range: 0 - 360DEG	γ Range: 0 - 180DEG
C Interval: 22.5DEG	γ Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Temperature:25.3℃	Humidity:45%
Operators:Allen	Test Distance:2.900m [K=0.8783]
Test Date:2026-01-19	Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.000V I:1.3865A P:13.800W PF:0.8160 Freq:60.00Hz Lamp Flux:1046.12x1 lm																		
NAME:									TYPE:					WEIGHT:				
SPEC.:									DIM.:					SERIAL No.:				
MFR.:									SUR.:					Shielding Angle:				

Table--1

UNIT: cd

γ (DEG)	C (DEG)																	
	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5		
0	3912	3908	3902	3893	3889	3887	3880	3884	3912	3908	3902	3893	3889	3887	3880	3884		
5	3352	2987	2730	2578	2532	2582	2728	2983	3385	3807	4210	4509	4612	4493	4181	3774		
10	2243	1837	1597	1482	1453	1484	1591	1836	2283	2806	3352	3810	3991	3801	3342	2785		
15	1331	1020	863	806	799	809	858	1015	1340	1721	2106	2481	2665	2482	2112	1718		
20	740	555	459	437	442	441	458	550	751	971	1164	1385	1531	1399	1173	970		
25	415	305	251	245	254	248	251	303	424	540	620	745	850	757	624	536		
30	241	178	149	148	155	150	148	176	246	278	246	287	347	310	279	291		
35	136	115	98.7	97.9	102	98.4	96.1	110	126	99.9	79.0	77.3	95.0	85.0	86.9	111		
40	68.1	76.3	71.2	69.9	72.0	69.1	67.6	69.6	61.9	44.7	33.3	30.7	32.5	31.7	35.2	49.7		
45	37.9	49.1	53.5	52.3	52.7	51.1	50.2	44.9	34.8	24.1	17.1	13.1	12.8	13.4	17.9	26.4		
50	21.4	31.3	38.7	39.9	39.4	38.5	35.9	28.8	20.2	11.8	4.80	1.47	1.58	1.67	5.01	13.1		
55	10.9	18.6	26.0	29.6	29.2	28.3	23.8	17.1	10.0	2.99	0.56	0.00	0.00	0.00	0.54	3.26		
60	3.27	9.75	15.5	19.7	20.6	18.6	14.2	8.78	3.08	0.63	0.05	0.00	0.00	0.00	0.01	0.62		
65	0.98	3.43	7.91	11.4	12.8	10.5	6.90	2.95	0.94	0.26	0.00	0.00	0.00	0.00	0.00	0.22		
70	0.45	1.21	2.80	4.92	5.52	4.30	2.29	1.01	0.43	0.15	0.00	0.00	0.00	0.00	0.00	0.11		
75	0.31	0.63	1.12	1.58	1.63	1.29	0.81	0.53	0.30	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
80	0.13	0.48	0.79	0.94	0.89	0.75	0.58	0.39	0.14	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
85	0.00	0.30	0.63	0.80	0.77	0.62	0.44	0.23	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
90	0.00	0.11	0.43	0.62	0.60	0.46	0.29	0.08	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
95	0.00	0.00	0.23	0.42	0.42	0.29	0.14	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
100	0.00	0.00	0.04	0.22	0.23	0.14	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
105	0.00	0.00	0.00	0.03	0.06	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
135	0.00	0.00	0.04	0.07	0.08	0.08	0.06	0.02	0.05	0.01	0.00	0.00	0.00	0.00	0.00	0.02		
140	0.14	0.20	0.27	0.32	0.34	0.34	0.31	0.24	0.32	0.25	0.19	0.16	0.15	0.16	0.20	0.26		
145	0.31	0.38	0.46	0.51	0.55	0.57	0.56	0.50	0.73	0.63	0.54	0.47	0.45	0.47	0.54	0.64		
150	0.41	0.45	0.50	0.55	0.59	0.64	0.67	0.65	1.15	1.08	0.98	0.90	0.86	0.90	0.99	1.12		
155	0.54	0.55	0.57	0.60	0.65	0.70	0.75	0.77	1.58	1.54	1.49	1.43	1.41	1.45	1.54	1.64		
160	0.57	0.57	0.59	0.62	0.66	0.72	0.77	0.81	1.85	1.86	1.88	1.88	1.88	1.91	1.97	2.03		
165	0.55	0.55	0.57	0.61	0.66	0.72	0.78	0.83	1.81	1.83	1.93	2.01	2.06	2.11	2.16	2.18		
170	0.56	0.56	0.57	0.61	0.66	0.74	0.81	0.87	1.61	1.62	1.78	1.93	2.03	2.11	2.15	2.15		
175	0.64	0.68	0.72	0.79	0.85	0.91	0.96	0.99	1.29	1.30	1.47	1.65	1.79	1.88	1.93	1.91		
180	0.86	0.99	1.13	1.25	1.38	1.42	1.42	1.36	0.86	0.87	0.99	1.13	1.25	1.36	1.41	1.41		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-19

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks: