
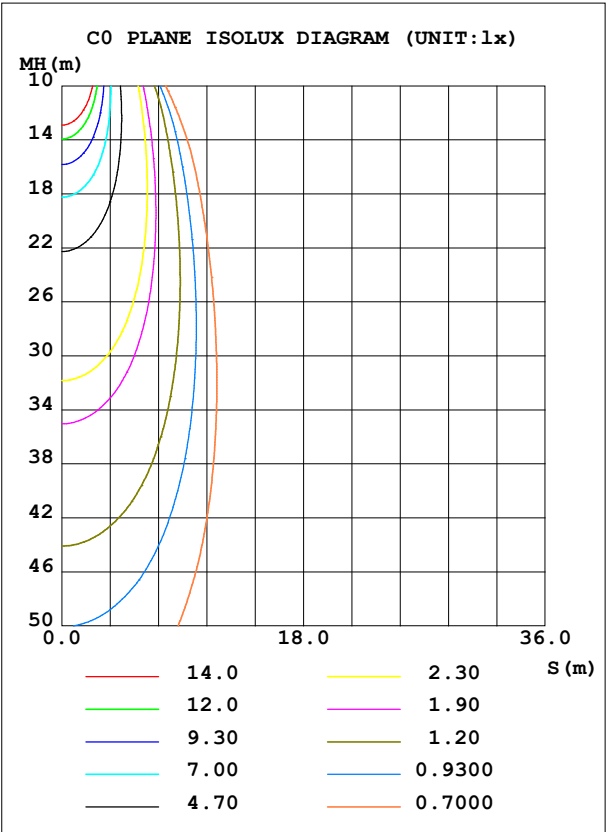


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.000V I:1.3840A P:13.800W PF:0.8154 Freq:60.01Hz Lamp Flux:999.549x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 72.43 lm/W
MODEL		Imax (cd)	2511	S/MH(C0/180)		0.55
NOMINAL POWER(W)		LOR(%)	100.0	S/MH(C90/270)		0.70
RATED VOLTAGE(V)		TOTAL FLUX(lm)	999.55	η UP,DN(C0-180)		0.1,41.7
NOMINAL FLUX(lm)	999.549	CIE CLASS	DIRECT	η UP,DN(C180-360)		0.1,58.2
LAMPS INSIDE	1	η up (%)	0.1	CIBSE SHR NOM		0.50
TEST VOLTAGE(V)		η down (%)	99.9	CIBSE SHR MAX		0.55

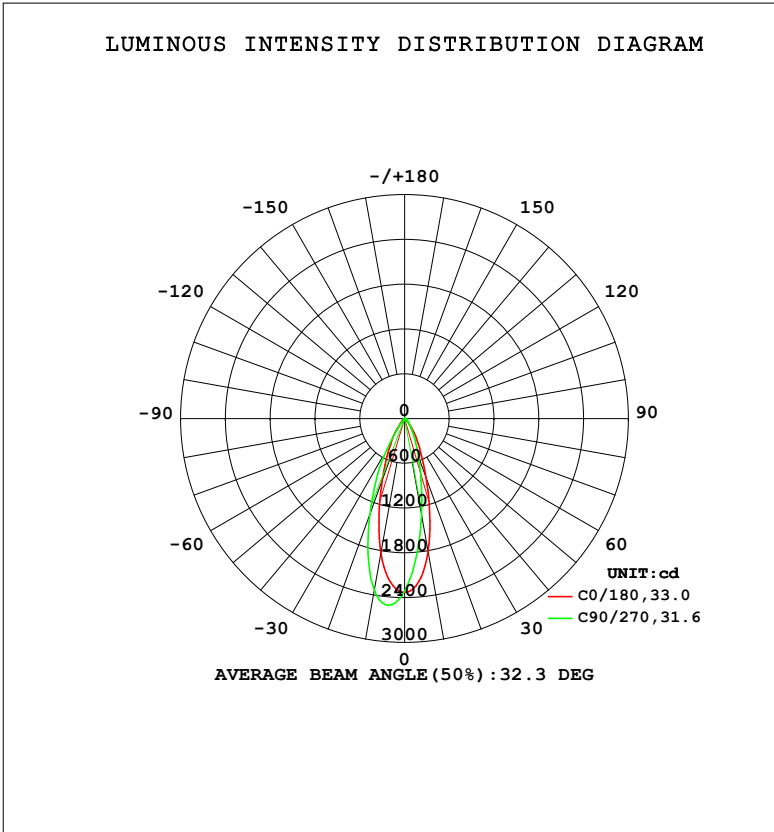

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-19

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1813	1459	1311	1443	1831	2211	2340	2210	0- 10	197.3	197.3	19.7,19.7
20	849.5	604.5	550.0	601.4	880.0	1202	1360	1232	10- 20	370.9	568.1	56.8,56.8
30	339.1	223.8	229.0	220.6	354.5	389.2	478.2	420.0	20- 30	266.2	834.3	83.5,83.5
40	103.5	97.49	103.1	92.63	98.31	51.67	56.93	52.47	30- 40	108.9	943.3	94.4,94.4
50	24.50	45.16	49.38	41.15	23.72	5.306	1.853	5.450	40- 50	36.31	979.6	98,98
60	3.759	16.58	23.29	14.88	3.618	0.1095	0	0.0643	50- 60	13.19	992.8	99.3,99.3
70	0.6324	3.353	6.106	2.729	0.6069	0	0	0	60- 70	4.250	997.0	99.7,99.7
80	0.2252	1.065	1.191	0.7926	0.2356	0	0	0	70- 80	0.8500	997.9	99.8,99.8
90	0	0.6098	0.8310	0.4162	0	0	0	0	80- 90	0.3638	998.2	99.9,99.9
100	0	0.1050	0.3459	0.0645	0	0	0	0	90-100	0.1562	998.4	99.9,99.9
110	0	0	0	0	0	0	0	0	100-110	0.0223	998.4	99.9,99.9
120	0	0	0	0	0	0	0	0	110-120	0	998.4	99.9,99.9
130	0	0	0	0	0	0	0	0	120-130	0	998.4	99.9,99.9
140	0.1375	0.2103	0.2492	0.2380	0.3381	0.2423	0.2018	0.2502	130-140	0.0527	998.4	99.9,99.9
150	0.3405	0.4149	0.4807	0.5031	0.9482	0.8454	0.7811	0.8656	140-150	0.2764	998.7	99.9,99.9
160	0.5544	0.5894	0.6551	0.7244	1.458	1.462	1.468	1.538	150-160	0.4015	999.1	100,100
170	0.6062	0.6253	0.7062	0.8075	1.374	1.457	1.606	1.695	160-170	0.3150	999.4	100,100
180	0.9557	1.113	1.288	1.326	0.9454	1.024	1.192	1.296	170-180	0.1084	999.5	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 965.95 lm

%lum = 96.6%

%lamp = 96.6%

Conical surface Flux(120deg): 992.75 lm

%lum = 99.3%


%lamp = 99.3%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:Allen
 Test Date:2026-01-19

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity:45%
 Test Distance:2.900m [K=0.8783]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:12.000V I:1.3840A P:13.800W PF:0.8154 Freq:60.01Hz Lamp Flux:999.549x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

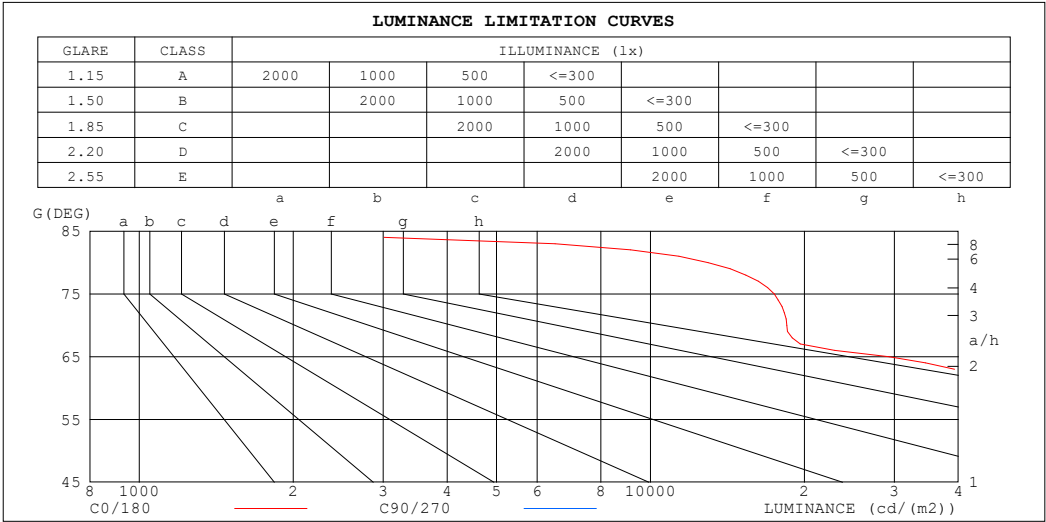

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	72	118962
80	12970	68592
75	17465	78926
70	18490	178539
65	29322	329563
60	75180	465743
55	203276	597525
50	381105	768175
45	729096	1005490


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-19

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:12.000V I:1.3840A P:13.800W PF:0.8154 Freq:60.01Hz		
Lamp Flux:999.549x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

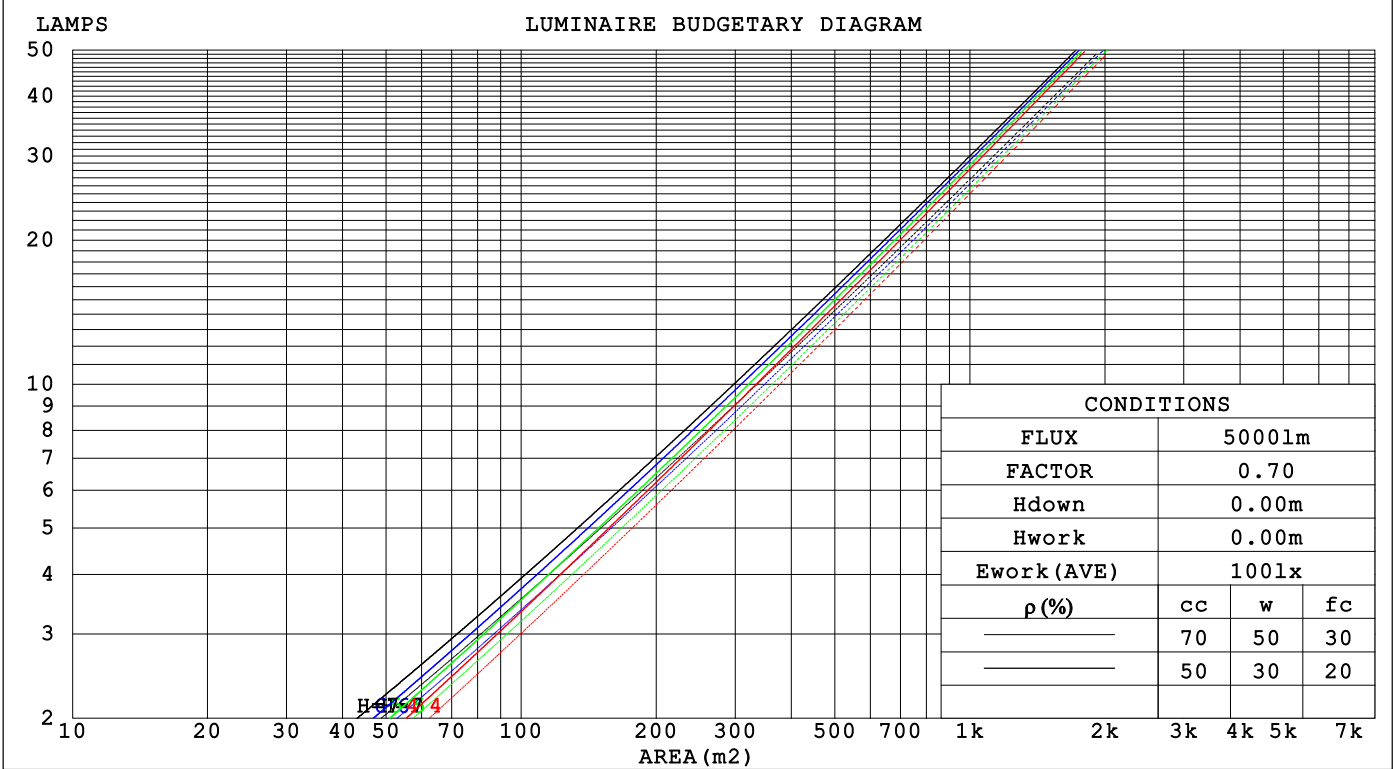

C Range: 0 - 360DEG

C Interval: 22.5DEG

Test Speed: HIGH

Temperature:25.3℃

Operators:Allen

Test Date:2026-01-19

γ Range: 0 - 180DEG

γ Interval: 1.0DEG

Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459

Humidity:45%

Test Distance:2.900m [K=0.8783]

Remarks:

WEC AND CCEC

Test:U:12.000V I:1.3840A P:13.800W PF:0.8154 Freq:60.01Hz Lamp Flux:999.549x1 lm					
NAME:		TYPE:		WEIGHT:	
SPEC.:		DIM.:		SERIAL No.:	
MFR.:		SUR.:		Shielding Angle:	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.161	.092	.029	.154	.088	.028	.142	.081	.026	.130	.075	.024	.120	.069	.022	
2.0	.153	.084	.026	.147	.081	.025	.136	.076	.024	.127	.071	.022	.118	.067	.021	
3.0	.144	.077	.023	.140	.075	.022	.131	.071	.022	.122	.067	.021	.115	.064	.020	
4.0	.137	.071	.021	.133	.069	.021	.125	.066	.020	.118	.063	.019	.111	.061	.018	
5.0	.130	.066	.019	.126	.065	.019	.120	.062	.018	.114	.060	.018	.108	.058	.017	
6.0	.123	.062	.018	.120	.061	.018	.115	.059	.017	.109	.057	.017	.104	.055	.016	
7.0	.118	.058	.017	.115	.057	.016	.110	.056	.016	.105	.054	.016	.101	.052	.015	
8.0	.113	.055	.015	.110	.054	.015	.106	.053	.015	.101	.051	.015	.098	.050	.015	
9.0	.108	.052	.015	.106	.052	.014	.102	.050	.014	.098	.049	.014	.094	.048	.014	
10.0	.103	.050	.014	.102	.049	.014	.098	.048	.014	.095	.047	.013	.091	.046	.013	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.191	.191	.191	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.171	.158	.147	.146	.136	.127	.100	.094	.088	.058	.054	.051	.018	.017	.016	
2.0	.155	.134	.116	.133	.115	.100	.091	.080	.070	.052	.046	.041	.017	.015	.013	
3.0	.141	.114	.093	.121	.099	.081	.083	.069	.057	.048	.040	.033	.015	.013	.011	
4.0	.130	.100	.076	.112	.086	.066	.077	.060	.047	.044	.035	.028	.014	.011	.009	
5.0	.121	.088	.063	.104	.076	.055	.071	.053	.039	.041	.031	.023	.013	.010	.008	
6.0	.113	.078	.053	.097	.068	.046	.067	.047	.033	.039	.028	.019	.013	.009	.006	
7.0	.106	.070	.045	.091	.061	.039	.063	.043	.028	.037	.025	.017	.012	.008	.006	
8.0	.100	.064	.039	.086	.055	.034	.059	.039	.024	.035	.023	.014	.011	.008	.005	
9.0	.095	.058	.034	.081	.051	.030	.056	.036	.021	.033	.021	.013	.011	.007	.004	
10.0	.090	.054	.030	.077	.047	.026	.054	.033	.019	.031	.019	.011	.010	.006	.004	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-19

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:12.000V I:1.3840A P:13.800W PF:0.8154 Freq:60.01Hz Lamp Flux:999.549x1 lm										
NAME:			TYPE:			WEIGHT:				
SPEC.:			DIM.:			SERIAL No.:				
MFR.:			SUR.:			Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	29.7	30.5	29.9	30.7	30.8	30.6	31.4	30.8	31.5	31.7
3H	29.5	30.3	29.8	30.5	30.7	30.7	31.4	30.9	31.6	31.8
4H	29.5	30.2	29.7	30.4	30.6	30.6	31.3	30.9	31.5	31.8
6H	29.4	30.0	29.7	30.3	30.5	30.5	31.2	30.8	31.5	31.7
8H	29.3	30.0	29.6	30.2	30.5	30.5	31.2	30.8	31.4	31.7
12H	29.3	29.9	29.6	30.2	30.4	30.5	31.1	30.8	31.4	31.6
4H 2H	29.7	30.4	29.9	30.6	30.8	30.5	31.2	30.7	31.4	31.6
3H	29.5	30.1	29.8	30.4	30.7	30.6	31.2	30.9	31.5	31.8
4H	29.4	30.0	29.8	30.3	30.6	30.5	31.1	30.9	31.4	31.7
6H	29.3	29.8	29.7	30.2	30.5	30.5	31.0	30.8	31.3	31.7
8H	29.3	29.7	29.7	30.1	30.5	30.4	30.9	30.8	31.3	31.6
12H	29.2	29.7	29.6	30.0	30.4	30.4	30.8	30.8	31.2	31.6
8H 4H	29.3	29.8	29.7	30.1	30.5	30.4	30.9	30.8	31.2	31.6
6H	29.2	29.6	29.6	30.0	30.4	30.3	30.7	30.8	31.1	31.5
8H	29.2	29.5	29.6	29.9	30.4	30.3	30.7	30.8	31.1	31.5
12H	29.1	29.4	29.6	29.8	30.3	30.3	30.6	30.8	31.0	31.5
12H 4H	29.2	29.7	29.7	30.0	30.4	30.4	30.8	30.8	31.2	31.5
6H	29.2	29.5	29.6	29.9	30.4	30.3	30.6	30.7	31.0	31.5
8H	29.1	29.4	29.6	29.8	30.3	30.3	30.6	30.7	31.0	31.5
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 2.8 / - 6.6					+ 1.3 / - 2.2				
1.5H	+ 3.9 / - 4.8					+ 1.9 / - 1.4				
2.0H	+ 3.9 / - 8.4					+ 2.6 / - 3.0				

CIE Pub.117, 999.5 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -0.0)
Area: 0.0001 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-19

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:12.000V I:1.3840A P:13.800W PF:0.8154 Freq:60.01Hz Lamp Flux:999.549x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	88	82	78	87	82	78	87	81	78	74
0.80	95	90	86	95	89	86	94	89	85	82
1.00	100	94	91	99	94	90	97	94	90	86
1.25	104	99	95	103	98	95	101	97	94	90
1.50	106	102	98	105	101	98	103	99	97	92
2.00	109	105	102	107	104	101	105	102	99	94
2.50	110	107	104	109	106	103	106	103	101	95
3.00	112	109	106	110	107	105	107	105	103	96
4.00	114	111	109	112	110	108	108	106	105	98
5.00	115	113	111	113	111	110	109	108	106	99
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3℃
 Operators: Allen
 Test Date: 2026-01-19

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity: 45%
 Test Distance: 2.900m [K=0.8783]
 Remarks:

ISOCANDELA DIAGRAM


Test:U:12.000V I:1.3840A P:13.800W PF:0.8154 Freq:60.01Hz Lamp Flux:999.549x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

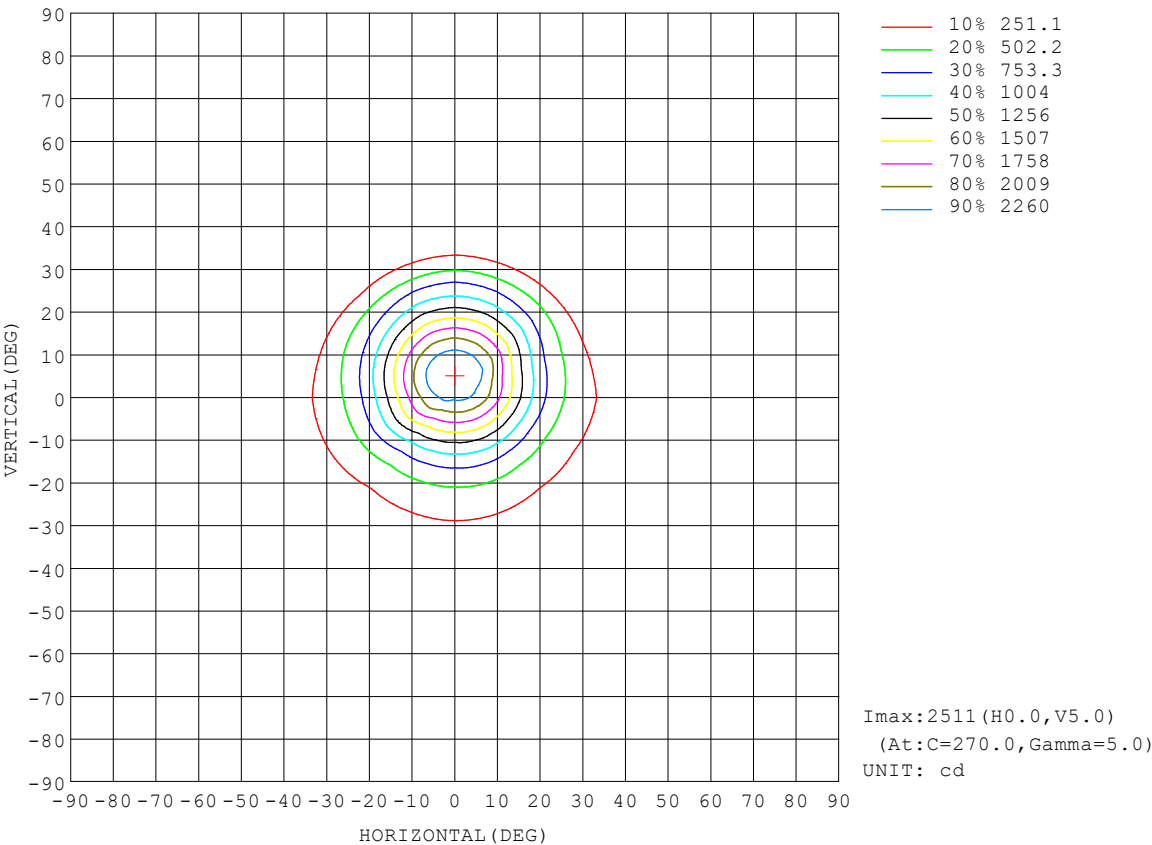

C Range: 0 - 360DEG	γ Range: 0 - 180DEG
C Interval: 22.5DEG	γ Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Temperature:25.3℃	Humidity:45%
Operators:Allen	Test Distance:2.900m [K=0.8783]
Test Date:2026-01-19	Remarks:

AAI Figure

Test:U:12.000V I:1.3840A P:13.800W PF:0.8154 Freq:60.01Hz Lamp Flux:999.549x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

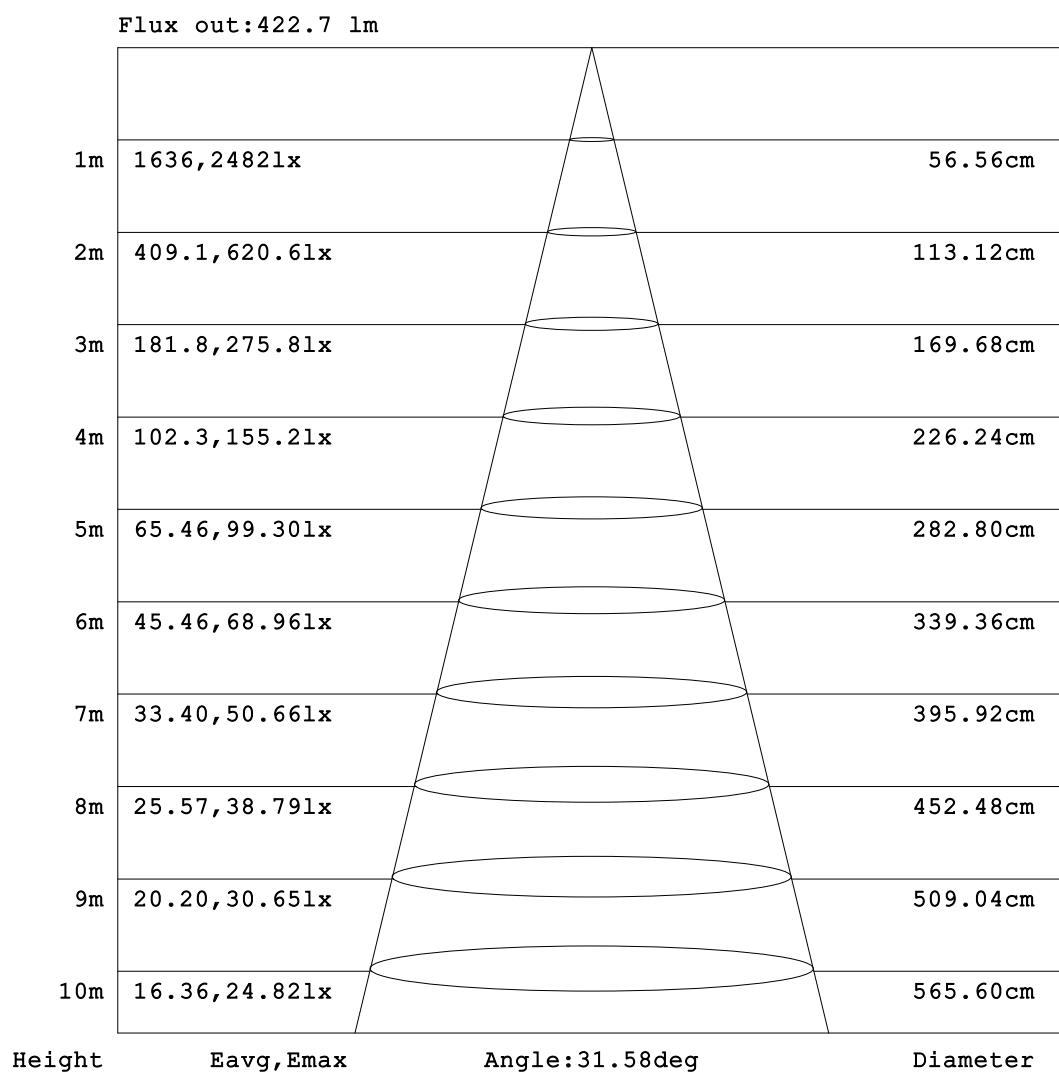


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-19

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:


ISOLUX DIAGRAM

Test:U:12.000V I:1.3840A P:13.800W PF:0.8154 Freq:60.01Hz Lamp Flux:999.549x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

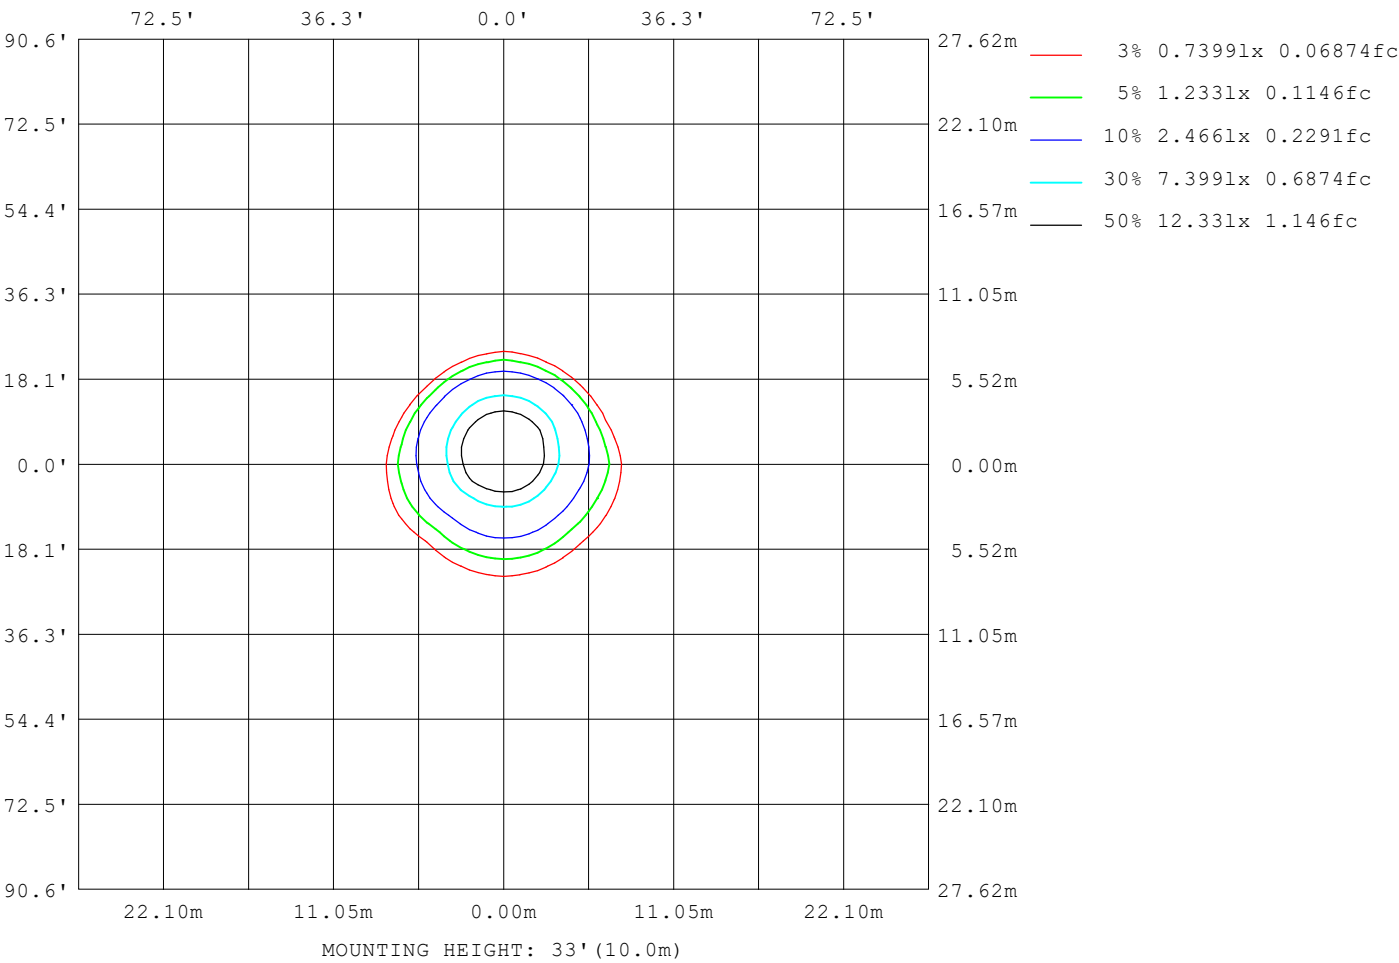

C Range: 0 - 360DEG	γ Range: 0 - 180DEG
C Interval: 22.5DEG	γ Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Temperature:25.3℃	Humidity:45%
Operators:Allen	Test Distance:2.900m [K=0.8783]
Test Date:2026-01-19	Remarks:

Planar Illuminance Curve

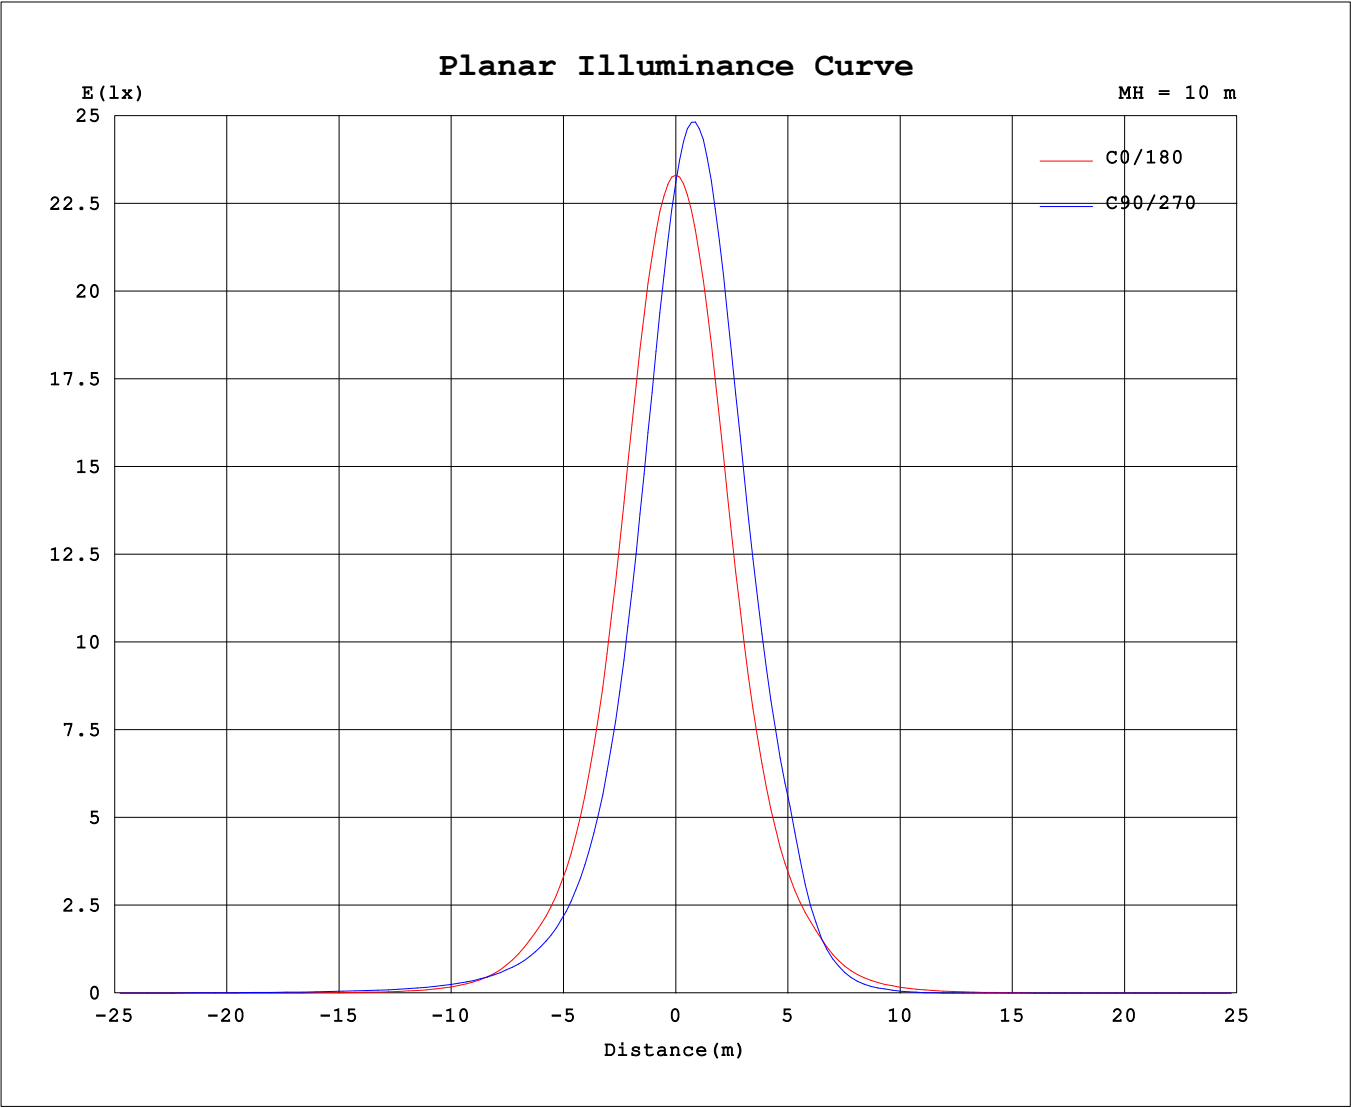

C Range: 0 - 360DEG	γ Range: 0 - 180DEG
C Interval: 22.5DEG	γ Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Temperature:25.3℃	Humidity:45%
Operators:Allen	Test Distance:2.900m [K=0.8783]
Test Date:2026-01-19	Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.000V I:1.3840A P:13.800W PF:0.8154 Freq:60.01Hz Lamp Flux:999.549x1 lm																		
NAME:									TYPE:					WEIGHT:				
SPEC.:									DIM.:					SERIAL No.:				
MFR.:									SUR.:					Shielding Angle:				

Table--1

UNIT: cd

γ (DEG)	C (DEG)																	
	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5		
0	2331	2326	2319	2314	2311	2311	2311	2334	2331	2326	2319	2314	2311	2311	2311	2334		
5	2193	2061	1953	1881	1849	1870	1935	2113	2200	2327	2431	2495	2511	2489	2424	2285		
10	1813	1612	1459	1359	1311	1342	1443	1698	1831	2040	2211	2312	2340	2307	2210	1955		
15	1302	1104	975	899	861	882	966	1207	1332	1546	1739	1862	1895	1865	1758	1453		
20	850	693	604	570	550	557	601	776	880	1044	1202	1331	1360	1333	1232	970		
25	535	422	364	358	352	350	362	475	558	663	759	869	900	867	782	613		
30	339	261	224	228	229	223	221	290	354	395	389	431	478	446	420	366		
35	206	168	144	148	152	145	140	182	202	171	145	157	179	161	153	160		
40	104	108	97.5	99.5	103	98.0	92.6	113	98.3	72.8	51.7	50.9	56.9	50.8	52.5	67.0		
45	51.6	63.0	68.1	68.9	71.1	67.5	63.1	64.1	48.8	31.4	20.5	16.8	17.8	16.9	20.4	28.8		
50	24.5	36.7	45.2	48.5	49.4	47.1	41.1	37.5	23.7	13.2	5.31	1.71	1.85	1.98	5.45	11.6		
55	11.7	20.1	28.6	33.9	34.3	32.7	25.9	20.9	11.0	3.47	0.71	0.00	0.00	0.00	0.68	2.63		
60	3.76	10.3	16.6	21.8	23.3	20.7	14.9	10.9	3.62	0.83	0.11	0.00	0.00	0.00	0.06	0.51		
65	1.24	3.98	8.57	12.4	13.9	11.5	7.49	4.31	1.20	0.38	0.03	0.00	0.00	0.00	0.00	0.32		
70	0.63	1.53	3.35	5.57	6.11	4.84	2.73	1.53	0.61	0.24	0.00	0.00	0.00	0.00	0.00	0.17		
75	0.45	0.87	1.45	2.01	2.04	1.63	1.06	0.76	0.44	0.03	0.00	0.00	0.00	0.00	0.00	0.00		
80	0.23	0.67	1.06	1.26	1.19	1.00	0.79	0.58	0.24	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
85	0.00	0.44	0.85	1.08	1.04	0.84	0.61	0.39	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
90	0.00	0.20	0.61	0.85	0.83	0.64	0.42	0.20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
95	0.00	0.00	0.35	0.59	0.59	0.42	0.23	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
100	0.00	0.00	0.11	0.32	0.35	0.22	0.06	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
105	0.00	0.00	0.00	0.08	0.12	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
135	0.00	0.02	0.04	0.06	0.06	0.07	0.06	0.01	0.09	0.06	0.04	0.02	0.02	0.02	0.04	0.11		
140	0.14	0.17	0.21	0.23	0.25	0.25	0.24	0.17	0.34	0.29	0.24	0.21	0.20	0.21	0.25	0.36		
145	0.26	0.30	0.34	0.37	0.40	0.41	0.40	0.34	0.65	0.59	0.53	0.49	0.47	0.48	0.54	0.67		
150	0.34	0.37	0.41	0.45	0.48	0.50	0.50	0.45	0.95	0.90	0.85	0.80	0.78	0.81	0.87	1.01		
155	0.47	0.50	0.53	0.56	0.59	0.62	0.63	0.60	1.24	1.22	1.19	1.16	1.15	1.18	1.23	1.37		
160	0.55	0.57	0.59	0.62	0.66	0.70	0.72	0.72	1.46	1.45	1.46	1.46	1.47	1.49	1.54	1.62		
165	0.57	0.58	0.60	0.63	0.67	0.72	0.76	0.78	1.46	1.47	1.52	1.57	1.60	1.64	1.68	1.71		
170	0.61	0.61	0.63	0.66	0.71	0.76	0.81	0.84	1.37	1.38	1.46	1.54	1.61	1.66	1.69	1.69		
175	0.73	0.77	0.81	0.87	0.92	0.96	0.99	0.95	1.21	1.21	1.30	1.40	1.49	1.55	1.59	1.53		
180	0.96	1.03	1.11	1.20	1.29	1.31	1.33	1.23	0.95	0.95	1.02	1.11	1.19	1.27	1.30	1.25		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-19

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks: