
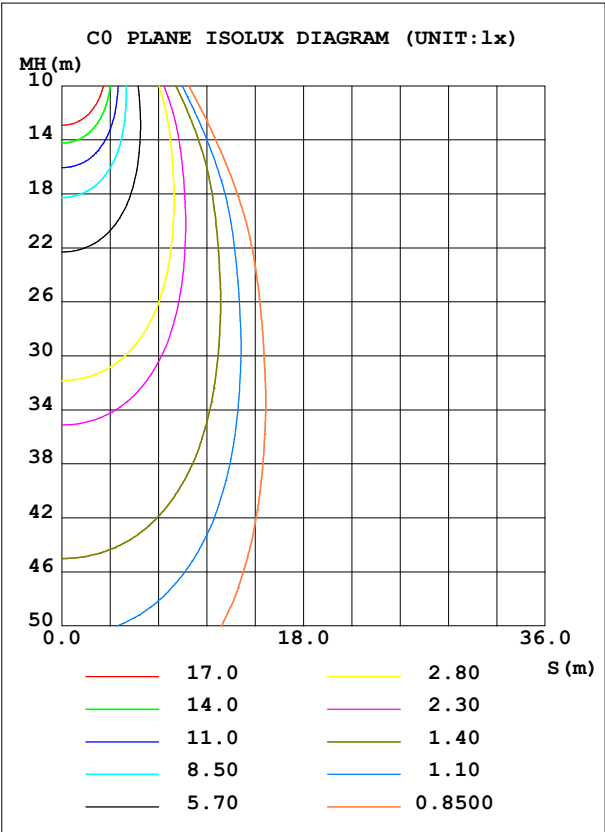


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.000V I:2.6759A P:27.000W PF:0.8716 Freq:60.01Hz Lamp Flux:1941.53x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 71.91 lm/W
MODEL		Imax (cd)	2942	S/MH(C0/180)		0.77
NOMINAL POWER(W)		LOR(%)	100.0	S/MH(C90/270)		0.76
RATED VOLTAGE(V)		TOTAL FLUX(lm)	1941.5	η UP,DN(C0-180)		0.1,51.8
NOMINAL FLUX(lm)	1941.53	CIE CLASS	DIRECT	η UP,DN(C180-360)		0.1,48.1
LAMPS INSIDE	1	η up (%)	0.2	CIBSE SHR NOM		0.75
TEST VOLTAGE(V)		η down (%)	99.8	CIBSE SHR MAX		0.75

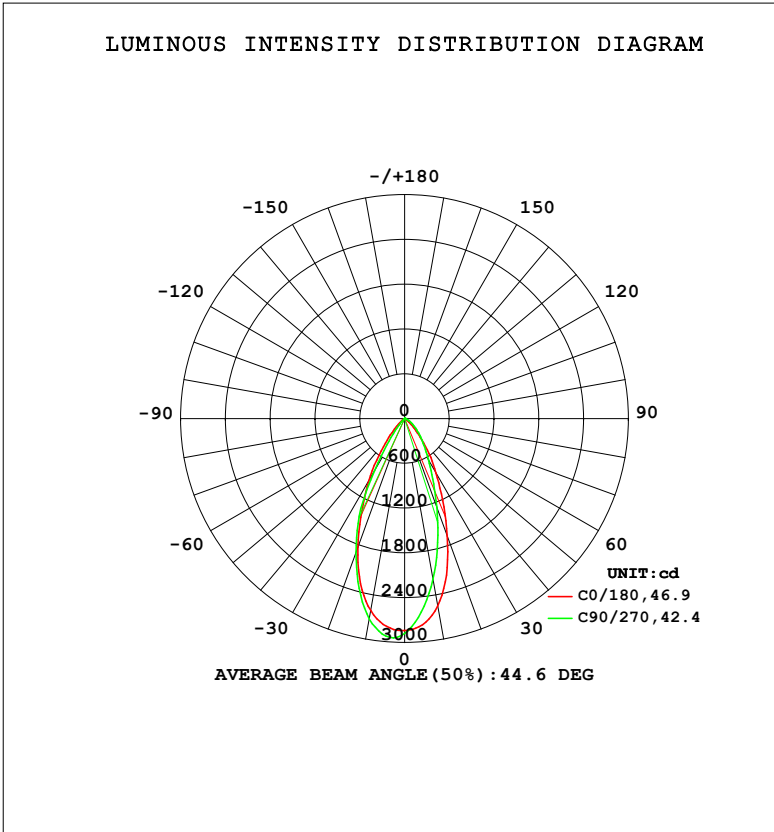

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-19

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	2551	2330	2190	2506	2615	2759	2729	2632	0- 10	258.8	258.8	13.3,13.3
20	1675	1468	1267	1691	1836	2011	1907	1778	10- 20	595.3	854.1	44,44
30	847.7	728.6	643.9	909.2	966.0	937.2	808.9	713.8	20- 30	568.6	1423	73.3,73.3
40	331.8	353.2	348.8	424.5	333.4	176.5	142.4	118.2	30- 40	311.9	1735	89.3,89.3
50	89.75	174.2	181.7	185.5	81.14	8.951	2.632	5.218	40- 50	130.9	1866	96.1,96.1
60	13.53	63.05	84.14	65.08	8.647	0.5807	0	0.6812	50- 60	50.80	1916	98.7,98.7
70	2.521	13.68	22.82	13.93	2.145	0	0	0	60- 70	16.86	1933	99.6,99.6
80	1.321	3.764	3.958	2.956	0.9254	0	0	0	70- 80	3.595	1937	99.8,99.8
90	0.0002	2.430	2.883	1.839	0	0	0	0	80- 90	1.377	1938	99.8,99.8
100	0	0.9110	1.429	0.7346	0	0	0	0	90-100	0.7016	1939	99.9,99.9
110	0	0	0.2971	0	0	0	0	0	100-110	0.2007	1939	99.9,99.9
120	0	0	0	0	0	0	0	0	110-120	0.0092	1939	99.9,99.9
130	0.0890	0.0735	0.0588	0.0125	0.1706	0.1548	0.1369	0.2671	120-130	0.0249	1939	99.9,99.9
140	0.4761	0.4866	0.4959	0.3781	0.8561	0.7764	0.7479	1.015	130-140	0.2758	1939	99.9,99.9
150	0.8311	0.8764	0.9288	0.8292	1.736	1.675	1.684	1.993	140-150	0.6226	1940	99.9,99.9
160	1.266	1.319	1.385	1.325	2.443	2.457	2.552	2.734	150-160	0.7606	1941	100,100
170	1.473	1.504	1.585	1.605	2.484	2.542	2.701	2.794	160-170	0.5772	1941	100,100
180	2.124	2.235	2.440	2.246	2.101	2.161	2.285	2.231	170-180	0.2041	1942	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 1815.1 lm

%lum = 93.5%

%lamp = 93.5%

Conical surface Flux(120deg): 1916.3 lm

%lum = 98.7%


%lamp = 98.7%

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-19

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:12.000V I:2.6759A P:27.000W PF:0.8716 Freq:60.01Hz Lamp Flux:1941.53x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

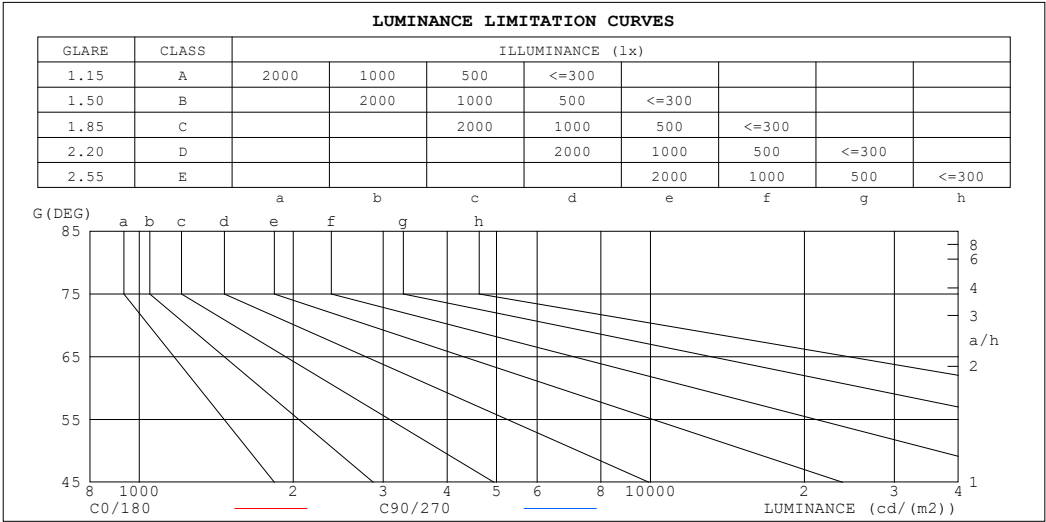

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	69266	397387
80	76064	227939
75	76627	326376
70	73710	667339
65	112294	1218291
60	270678	1682852
55	695562	2209892
50	1396225	2827253
45	2554900	3599163


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-19

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:12.000V I:2.6759A P:27.000W PF:0.8716 Freq:60.01Hz		
Lamp Flux:1941.53x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

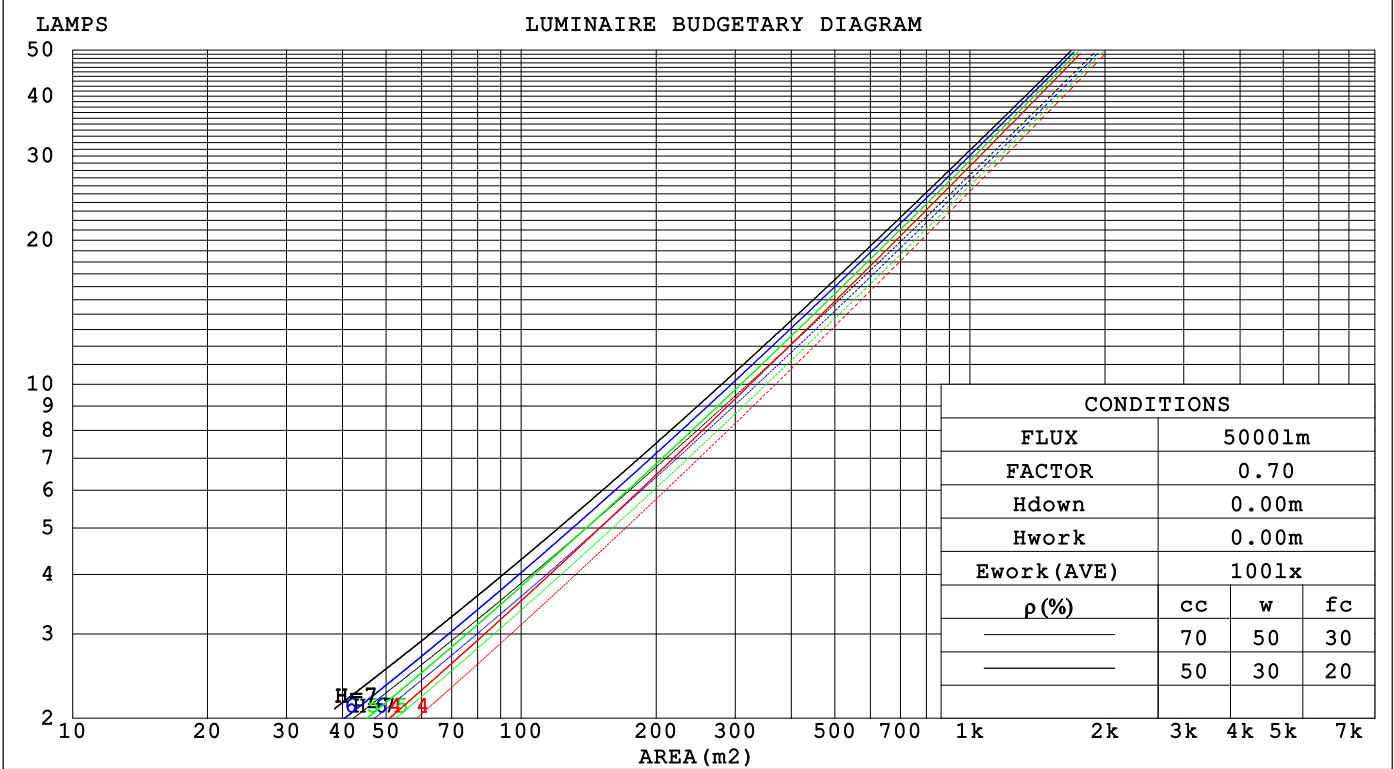

C Range: 0 - 360DEG

C Interval: 22.5DEG

Test Speed: HIGH

Temperature:25.3℃

Operators:Allen

Test Date:2026-01-19

γ Range: 0 - 180DEG

γ Interval: 1.0DEG

Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459

Humidity:45%

Test Distance:2.900m [K=0.8783]

Remarks:

WEC AND CCEC

Test:U:12.000V I:2.6759A P:27.000W PF:0.8716 Freq:60.01Hz Lamp Flux:1941.53x1 lm					
NAME:		TYPE:		WEIGHT:	
SPEC.:		DIM.:		SERIAL No.:	
MFR.:		SUR.:		Shielding Angle:	

pcc	80%			70%			50%			30%			10%			0														
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
pfc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Wall Exitance Coefficients(WEC)														
0.0																														
1.0	.178	.101	.032	.171	.097	.031	.158	.091	.029	.146	.084	.027	.136	.079	.025															
2.0	.170	.093	.029	.164	.090	.028	.154	.085	.027	.144	.081	.025	.135	.076	.024															
3.0	.162	.086	.026	.157	.084	.025	.148	.080	.024	.139	.076	.023	.131	.073	.023															
4.0	.154	.080	.023	.149	.078	.023	.142	.075	.022	.134	.072	.022	.127	.069	.021															
5.0	.146	.074	.022	.142	.073	.021	.136	.071	.021	.129	.068	.020	.123	.066	.020															
6.0	.139	.070	.020	.136	.069	.020	.130	.067	.019	.124	.065	.019	.119	.063	.019															
7.0	.133	.066	.019	.130	.065	.018	.124	.063	.018	.119	.061	.018	.115	.060	.018															
8.0	.127	.062	.017	.124	.061	.017	.119	.060	.017	.115	.058	.017	.111	.057	.017															
9.0	.121	.059	.016	.119	.058	.016	.115	.057	.016	.111	.055	.016	.107	.054	.016															
10.0	.116	.056	.015	.114	.055	.015	.110	.054	.015	.107	.053	.015	.103	.052	.015															

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.172	.159	.146	.148	.136	.126	.101	.094	.087	.058	.054	.051	.019	.017	.016	
2.0	.157	.134	.114	.135	.115	.099	.092	.080	.069	.053	.046	.040	.017	.015	.013	
3.0	.145	.115	.091	.124	.099	.079	.085	.069	.055	.049	.040	.033	.016	.013	.011	
4.0	.135	.100	.074	.116	.087	.064	.079	.060	.045	.046	.035	.027	.015	.012	.009	
5.0	.126	.089	.061	.108	.077	.053	.074	.054	.038	.043	.031	.022	.014	.010	.007	
6.0	.118	.079	.051	.102	.069	.045	.070	.048	.032	.041	.028	.019	.013	.009	.006	
7.0	.112	.072	.044	.096	.062	.038	.066	.044	.027	.039	.026	.016	.012	.008	.005	
8.0	.106	.065	.038	.091	.057	.033	.063	.040	.023	.037	.024	.014	.012	.008	.005	
9.0	.101	.060	.033	.087	.052	.029	.060	.037	.020	.035	.022	.012	.011	.007	.004	
10.0	.096	.056	.029	.083	.048	.025	.058	.034	.018	.034	.020	.011	.011	.007	.004	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-19

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:12.000V I:2.6759A P:27.000W PF:0.8716 Freq:60.01Hz Lamp Flux:1941.53x1 lm										
NAME:			TYPE:			WEIGHT:				
SPEC.:			DIM.:			SERIAL No.:				
MFR.:			SUR.:			Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	33.3	34.3	33.6	34.4	34.6	35.0	35.9	35.2	36.1	36.3
3H	33.2	34.0	33.4	34.2	34.4	35.1	36.0	35.4	36.2	36.4
4H	33.1	33.9	33.4	34.1	34.4	35.1	35.9	35.3	36.1	36.3
6H	33.0	33.8	33.3	34.0	34.3	35.0	35.7	35.3	36.0	36.2
8H	33.0	33.7	33.3	34.0	34.2	34.9	35.7	35.3	35.9	36.2
12H	32.9	33.6	33.2	33.9	34.2	34.9	35.6	35.2	35.9	36.2
4H 2H	33.4	34.2	33.7	34.4	34.6	34.9	35.7	35.2	35.9	36.2
3H	33.2	33.9	33.6	34.2	34.5	35.1	35.8	35.4	36.0	36.3
4H	33.1	33.8	33.5	34.1	34.4	35.0	35.6	35.4	35.9	36.3
6H	33.1	33.6	33.4	34.0	34.3	34.9	35.5	35.3	35.8	36.2
8H	33.0	33.5	33.4	33.9	34.3	34.9	35.4	35.3	35.8	36.1
12H	33.0	33.4	33.4	33.8	34.2	34.9	35.3	35.3	35.7	36.1
8H 4H	33.0	33.6	33.4	33.9	34.3	34.9	35.4	35.3	35.7	36.1
6H	32.9	33.4	33.4	33.8	34.2	34.8	35.2	35.2	35.6	36.0
8H	32.9	33.3	33.4	33.7	34.1	34.8	35.1	35.2	35.6	36.0
12H	32.9	33.2	33.3	33.6	34.1	34.8	35.1	35.2	35.5	36.0
12H 4H	33.0	33.5	33.4	33.8	34.2	34.8	35.3	35.2	35.7	36.1
6H	32.9	33.3	33.4	33.7	34.1	34.8	35.1	35.2	35.5	36.0
8H	32.9	33.2	33.3	33.6	34.1	34.7	35.1	35.2	35.5	36.0
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 2.2 / - 6.0					+ 1.3 / - 2.1				
1.5H	+ 2.9 / - 4.4					+ 1.3 / - 1.1				
2.0H	+ 3.8 / - 7.8					+ 2.5 / - 3.1				

CIE Pub.117, 1942 lm Total Lamp Luminous Flux Correct ($8\log(F/F_0) = 2.3$)
Area: 0.0001 m²

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-19

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:12.000V I:2.6759A P:27.000W PF:0.8716 Freq:60.01Hz Lamp Flux:1941.53x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	85	78	74	84	78	74	83	77	74	70
0.80	93	86	82	92	86	82	91	85	82	78
1.00	98	92	88	97	91	87	95	91	87	83
1.25	102	96	93	101	96	92	99	95	91	87
1.50	105	100	96	104	99	96	101	97	95	90
2.00	108	103	100	106	102	99	104	100	98	92
2.50	110	106	102	108	104	102	105	102	100	94
3.00	111	108	105	109	106	104	106	104	101	95
4.00	113	110	108	111	109	107	108	106	104	97
5.00	115	112	110	112	110	109	108	107	105	98
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3℃
 Operators: Allen
 Test Date: 2026-01-19

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity: 45%
 Test Distance: 2.900m [K=0.8783]
 Remarks:

ISOCANDELA DIAGRAM


Test:U:12.000V I:2.6759A P:27.000W PF:0.8716 Freq:60.01Hz Lamp Flux:1941.53x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

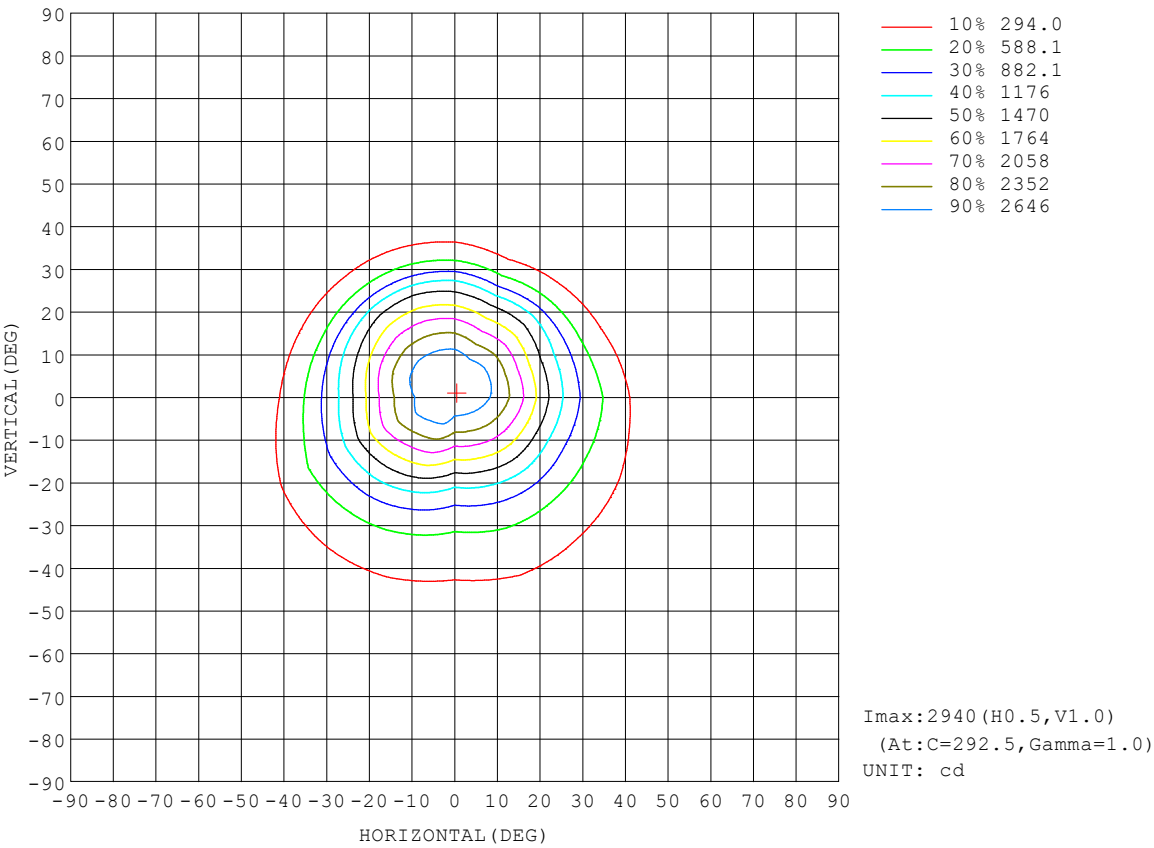

C Range: 0 - 360DEG	γ Range: 0 - 180DEG
C Interval: 22.5DEG	γ Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Temperature:25.3℃	Humidity:45%
Operators:Allen	Test Distance:2.900m [K=0.8783]
Test Date:2026-01-19	Remarks:

AAI Figure

Test:U:12.000V I:2.6759A P:27.000W PF:0.8716 Freq:60.01Hz Lamp Flux:1941.53x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

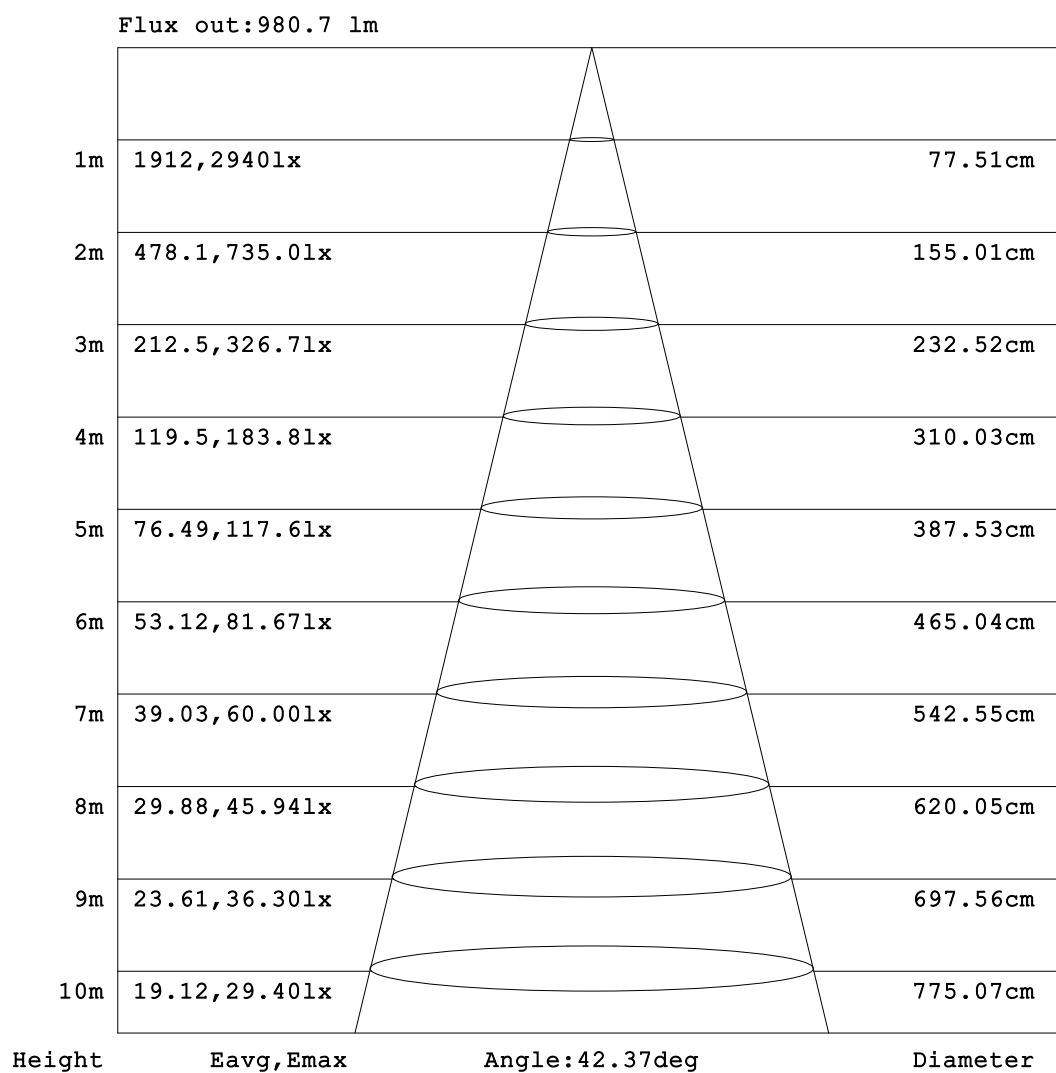


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-19

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:


ISOLUX DIAGRAM

Test:U:12.000V I:2.6759A P:27.000W PF:0.8716 Freq:60.01Hz Lamp Flux:1941.53x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

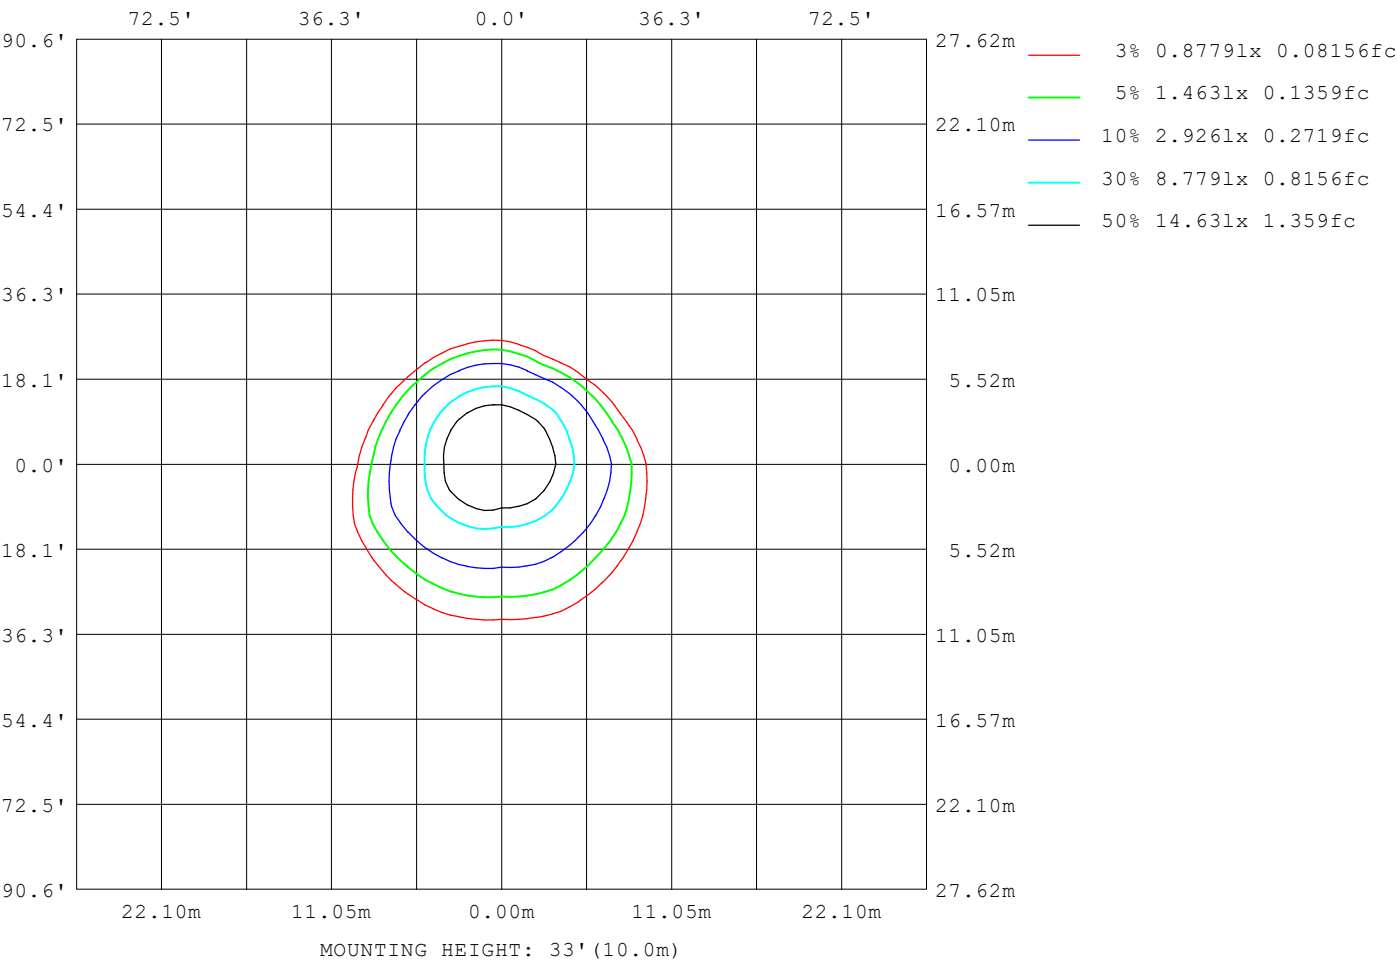

C Range: 0 - 360DEG	γ Range: 0 - 180DEG
C Interval: 22.5DEG	γ Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Temperature:25.3℃	Humidity:45%
Operators:Allen	Test Distance:2.900m [K=0.8783]
Test Date:2026-01-19	Remarks:

Planar Illuminance Curve

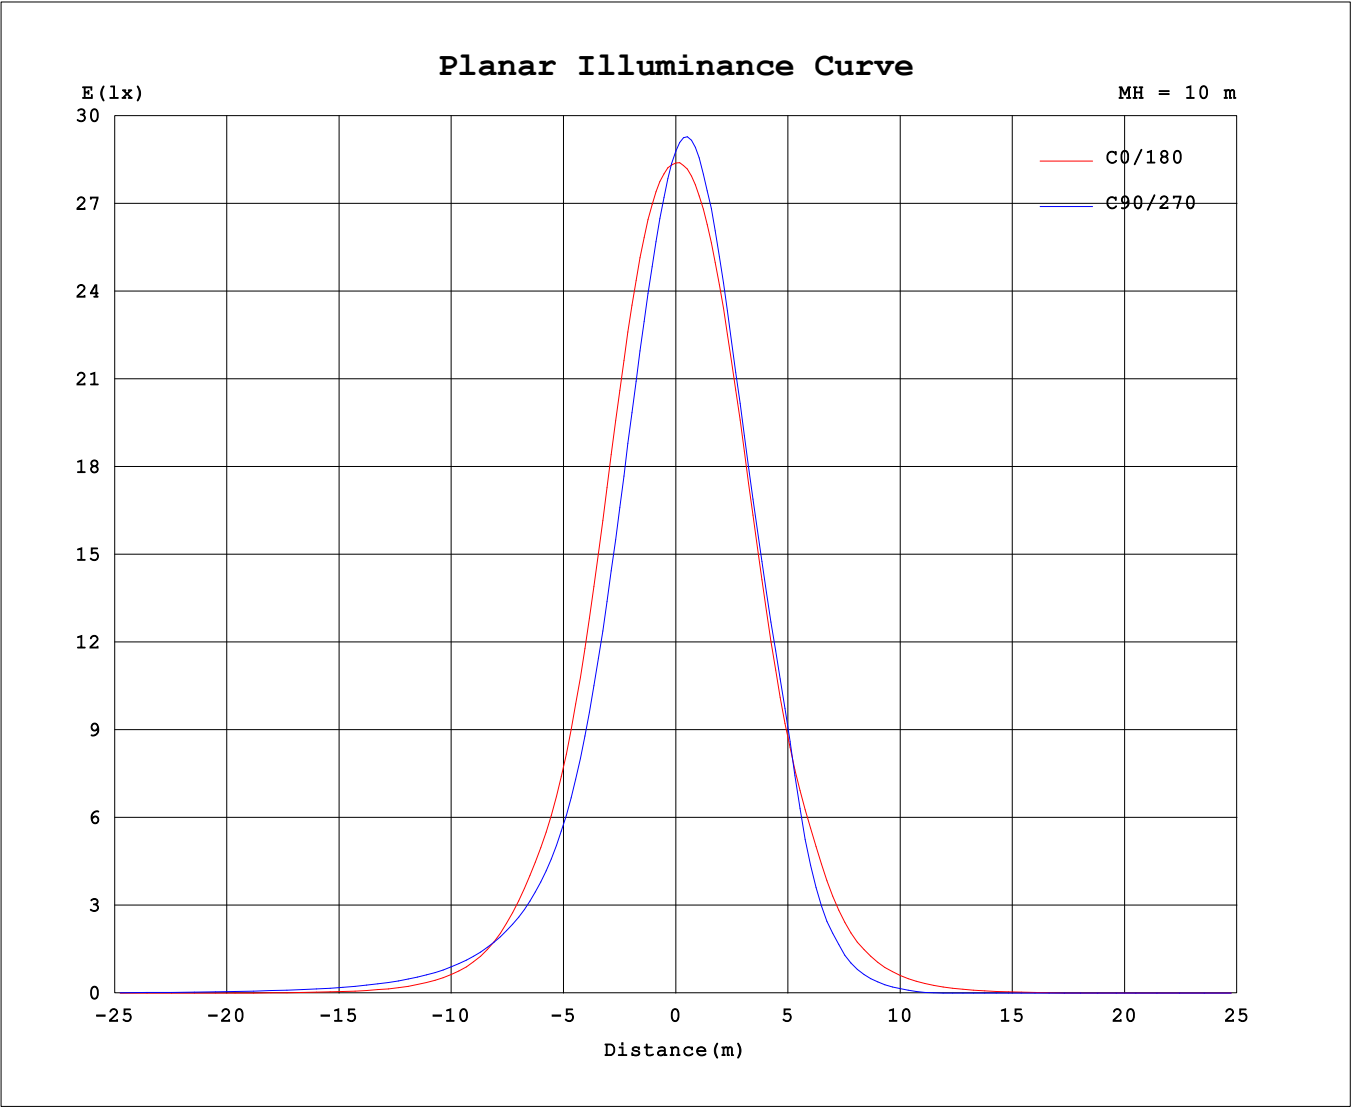

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-19

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.000V I:2.6759A P:27.000W PF:0.8716 Freq:60.01Hz Lamp Flux:1941.53x1 lm																		
NAME:									TYPE:					WEIGHT:				
SPEC.:									DIM.:					SERIAL No.:				
MFR.:									SUR.:					Shielding Angle:				

Table--1

UNIT: cd

γ (DEG)	C (DEG)																	
	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5		
0	2838	2847	2857	2867	2879	2937	2937	2923	2838	2847	2857	2867	2879	2937	2937	2923		
5	2771	2714	2656	2613	2599	2756	2794	2848	2796	2857	2900	2920	2925	2881	2879	2839		
10	2551	2437	2330	2234	2190	2405	2506	2639	2615	2721	2759	2745	2729	2612	2632	2588		
15	2171	2027	1914	1793	1721	1968	2118	2307	2288	2405	2443	2404	2356	2207	2238	2165		
20	1675	1545	1468	1352	1267	1505	1691	1885	1836	1943	2011	1982	1907	1752	1778	1661		
25	1211	1099	1054	971	897	1088	1276	1425	1358	1444	1548	1537	1442	1251	1313	1195		
30	848	762	729	697	644	768	909	1017	966	957	937	885	809	623	714	772		
35	574	530	503	509	473	545	625	711	603	496	441	408	373	256	324	403		
40	332	365	353	375	349	392	424	482	333	239	177	161	142	90.5	118	196		
45	181	226	252	274	254	283	289	288	172	101	61.9	48.4	45.1	17.6	39.8	83.5		
50	89.7	132	174	196	182	202	185	165	81.1	37.7	8.95	2.90	2.63	0.82	5.22	31.4		
55	39.9	70.7	109	137	127	142	112	89.9	34.2	6.51	0.88	0.13	0.02	0.20	0.89	5.78		
60	13.5	34.7	63.0	87.3	84.1	90.9	65.1	42.9	8.65	1.84	0.58	0.06	0.00	0.07	0.68	1.89		
65	4.75	14.6	31.4	48.1	51.5	52.4	33.2	16.7	3.15	1.36	0.32	0.00	0.00	0.00	0.32	1.45		
70	2.52	5.81	13.7	21.3	22.8	25.0	13.9	5.46	2.14	0.90	0.00	0.00	0.00	0.00	0.00	0.95		
75	1.98	3.24	5.68	8.03	8.45	9.61	5.28	2.73	1.60	0.18	0.00	0.00	0.00	0.00	0.00	0.28		
80	1.32	2.63	3.76	4.21	3.96	3.83	2.96	2.17	0.93	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
85	0.60	1.97	3.16	3.70	3.46	3.06	2.42	1.60	0.24	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
90	0.00	1.23	2.43	3.04	2.88	2.53	1.84	1.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
95	0.00	0.57	1.65	2.24	2.14	1.89	1.25	0.46	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
100	0.00	0.03	0.91	1.47	1.43	1.26	0.73	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
105	0.00	0.00	0.32	0.76	0.80	0.73	0.28	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
110	0.00	0.00	0.00	0.23	0.30	0.29	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.06	0.06		
130	0.09	0.08	0.07	0.06	0.06	0.00	0.01	0.02	0.17	0.16	0.15	0.14	0.14	0.24	0.27	0.29		
135	0.25	0.25	0.25	0.24	0.24	0.16	0.17	0.18	0.46	0.44	0.41	0.39	0.39	0.54	0.58	0.62		
140	0.48	0.49	0.49	0.49	0.50	0.38	0.38	0.38	0.86	0.82	0.78	0.74	0.75	0.96	1.02	1.06		
145	0.68	0.70	0.71	0.73	0.74	0.66	0.64	0.64	1.31	1.27	1.23	1.19	1.21	1.44	1.50	1.55		
150	0.83	0.86	0.88	0.91	0.93	0.85	0.83	0.82	1.74	1.70	1.68	1.66	1.68	1.94	1.99	2.03		
155	1.07	1.09	1.11	1.15	1.18	1.08	1.06	1.05	2.14	2.12	2.11	2.13	2.17	2.40	2.45	2.47		
160	1.27	1.29	1.32	1.35	1.39	1.33	1.33	1.33	2.44	2.44	2.46	2.49	2.55	2.69	2.73	2.74		
165	1.36	1.38	1.40	1.45	1.48	1.47	1.48	1.49	2.52	2.52	2.56	2.62	2.69	2.79	2.83	2.83		
170	1.47	1.49	1.50	1.54	1.58	1.58	1.60	1.65	2.48	2.49	2.54	2.62	2.70	2.75	2.79	2.78		
175	1.76	1.80	1.83	1.88	1.92	1.79	1.81	1.82	2.36	2.37	2.43	2.51	2.60	2.55	2.58	2.56		
180	2.12	2.18	2.24	2.31	2.44	2.24	2.25	2.23	2.10	2.11	2.16	2.22	2.28	2.21	2.23	2.24		

C Range: 0 - 360DEG

C Interval: 22.5DEG

Test Speed: HIGH

Temperature:25.3℃

Operators:Allen

Test Date:2026-01-19

γ Range: 0 - 180DEG

γ Interval: 1.0DEG

Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459

Humidity:45%

Test Distance:2.900m [K=0.8783]

Remarks: