
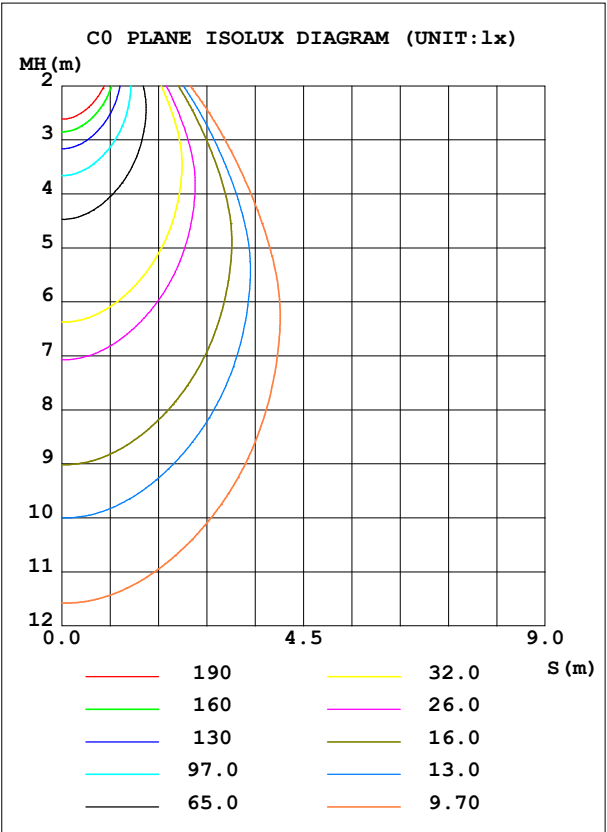


LUMINAIRE PHOTOMETRIC TEST REPORT

|                                                           |       |                  |
|-----------------------------------------------------------|-------|------------------|
| Test:U:12.000V I:2.6672A P:25.255W PF:0.8304 Freq:60.04Hz |       |                  |
| Lamp Flux:1412.98x1 lm                                    |       |                  |
| NAME:                                                     | TYPE: | WEIGHT:          |
| SPEC.:                                                    | DIM.: | SERIAL No.:      |
| MFR.:                                                     | SUR.: | Shielding Angle: |

| DATA OF LAMP     |                     | PHOTOMETRIC DATA |        |                   |          | Eff: 55.95 lm/W |
|------------------|---------------------|------------------|--------|-------------------|----------|-----------------|
| MODEL            | SMART FIXTURE 2700K | Imax (cd)        | 1300   | S/MH(C0/180)      | 0.89     |                 |
| NOMINAL POWER(W) |                     | LOR(%)           | 100.0  | S/MH(C90/270)     | 0.84     |                 |
| RATED VOLTAGE(V) |                     | TOTAL FLUX(lm)   | 1413.0 | η UP,DN(C0-180)   | 0.1,61.8 |                 |
| NOMINAL FLUX(lm) | 1412.98             | CIE CLASS        | DIRECT | η UP,DN(C180-360) | 0.1,38.0 |                 |
| LAMPS INSIDE     | 1                   | η up (%)         | 0.2    | CIBSE SHR NOM     | 0.75     |                 |
| TEST VOLTAGE(V)  |                     | η down (%)       | 99.8   | CIBSE SHR MAX     | 0.95     |                 |

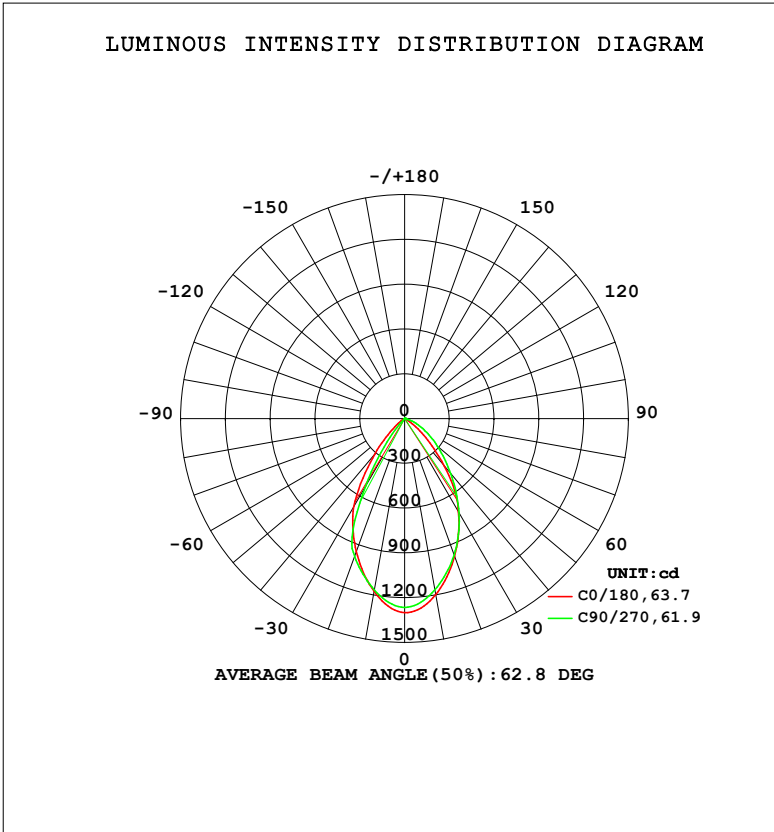

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:Allen  
Test Date:2026-01-29

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.00.459  
Humidity:45%  
Test Distance:2.900m [K=0.8783]  
Remarks:

## ZONAL FLUX DIAGRAM

## ZONAL FLUX DIAGRAM:

| $\gamma$ | C0                    | C45    | C90    | C135   | C180   | C225   | C270   | C315   | $\gamma$ | $\Phi$ zone | $\Phi$ total | %lum, lamp |
|----------|-----------------------|--------|--------|--------|--------|--------|--------|--------|----------|-------------|--------------|------------|
| 10       | 1198                  | 1180   | 1165   | 1166   | 1176   | 1150   | 1167   | 1164   | 0- 10    | 116.1       | 116.1        | 8.22,8.22  |
| 20       | 981.2                 | 978.6  | 971.9  | 977.7  | 948.4  | 946.8  | 982.2  | 973.3  | 10- 20   | 300.9       | 417.0        | 29.5,29.5  |
| 30       | 724.0                 | 756.7  | 729.4  | 759.3  | 681.7  | 521.4  | 524.6  | 634.5  | 20- 30   | 380.7       | 797.8        | 56.5,56.5  |
| 40       | 413.1                 | 532.5  | 482.5  | 525.8  | 312.2  | 132.1  | 105.0  | 206.4  | 30- 40   | 306.4       | 1104         | 78.1,78.1  |
| 50       | 149.0                 | 338.1  | 288.0  | 295.6  | 86.95  | 1.996  | 0.2193 | 9.127  | 40- 50   | 176.6       | 1281         | 90.6,90.6  |
| 60       | 26.46                 | 158.6  | 151.2  | 112.7  | 7.140  | 0.6610 | 0      | 1.154  | 50- 60   | 86.91       | 1368         | 96.8,96.8  |
| 70       | 3.528                 | 42.11  | 55.96  | 21.70  | 2.674  | 0      | 0      | 0      | 60- 70   | 33.70       | 1401         | 99.2,99.2  |
| 80       | 1.842                 | 5.068  | 6.612  | 3.989  | 0.8842 | 0      | 0      | 0      | 70- 80   | 7.361       | 1409         | 99.7,99.7  |
| 90       | 0.1902                | 2.758  | 3.616  | 2.354  | 0      | 0      | 0      | 0      | 80- 90   | 1.742       | 1410         | 99.8,99.8  |
| 100      | 0                     | 1.074  | 1.712  | 0.7433 | 0      | 0      | 0      | 0      | 90-100   | 0.8358      | 1411         | 99.9,99.9  |
| 110      | 0                     | 0.0866 | 0.4458 | 0      | 0      | 0      | 0      | 0      | 100-110  | 0.2375      | 1412         | 99.9,99.9  |
| 120      | 0                     | 0      | 0      | 0      | 0      | 0      | 0      | 0      | 110-120  | 0.0186      | 1412         | 99.9,99.9  |
| 130      | 0.0260                | 0      | 0      | 0      | 0.1299 | 0.2228 | 0.2225 | 0.1978 | 120-130  | 0.0328      | 1412         | 99.9,99.9  |
| 140      | 0.2598                | 0.1506 | 0.1547 | 0.1951 | 0.5316 | 0.6389 | 0.6472 | 0.6211 | 130-140  | 0.1783      | 1412         | 99.9,99.9  |
| 150      | 0.4964                | 0.3877 | 0.3988 | 0.4440 | 1.000  | 1.077  | 1.091  | 1.081  | 140-150  | 0.3610      | 1412         | 99.9,99.9  |
| 160      | 0.7705                | 0.6869 | 0.6938 | 0.7445 | 1.362  | 1.372  | 1.377  | 1.392  | 150-160  | 0.4173      | 1413         | 100,100    |
| 170      | 0.9645                | 0.8810 | 0.8875 | 0.9412 | 1.407  | 1.398  | 1.409  | 1.433  | 160-170  | 0.3121      | 1413         | 100,100    |
| 180      | 1.336                 | 1.262  | 1.286  | 1.304  | 1.299  | 1.246  | 1.254  | 1.279  | 170-180  | 0.1149      | 1413         | 100,100    |
| DEG      | LUMINOUS INTENSITY:cd |        |        |        |        |        |        |        |          | UNIT:lm     |              |            |

Conical surface Flux(90deg): 1207.1 lm

%lum = 85.4%

%lamp = 85.4%

Conical surface Flux(120deg): 1367.7 lm

%lum = 96.8%


%lamp = 96.8%

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3℃  
 Operators:Allen  
 Test Date:2026-01-29

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.00.459  
 Humidity:45%  
 Test Distance:2.900m [K=0.8783]  
 Remarks:

LUMINANCE LIMITATION CURVES

|                                                                                     |       |                  |
|-------------------------------------------------------------------------------------|-------|------------------|
| Test:U:12.000V I:2.6672A P:25.255W PF:0.8304 Freq:60.04Hz<br>Lamp Flux:1412.98x1 lm |       |                  |
| NAME:                                                                               | TYPE: | WEIGHT:          |
| SPEC.:                                                                              | DIM.: | SERIAL No.:      |
| MFR.:                                                                               | SUR.: | Shielding Angle: |

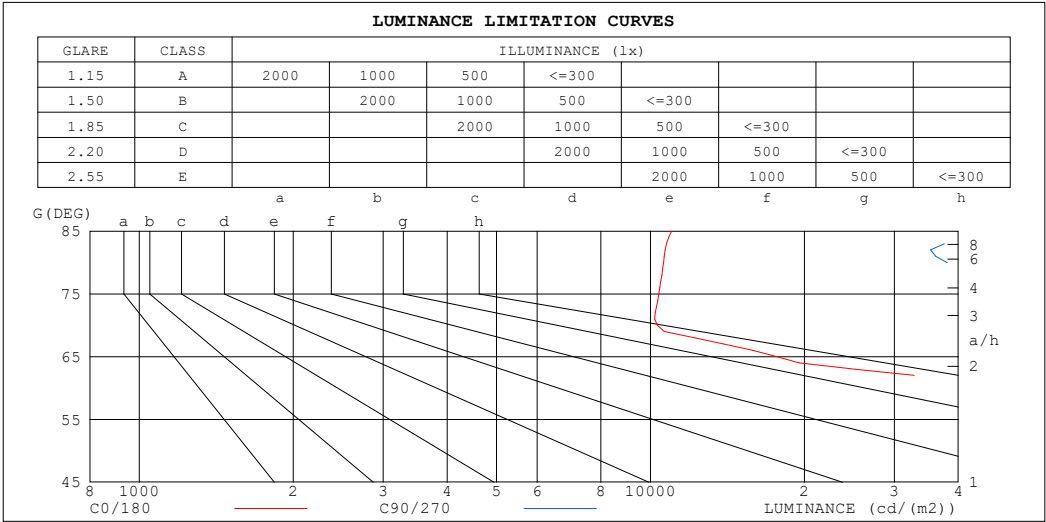

| LUMINANCE cd/(m2) |        |         |
|-------------------|--------|---------|
| G (DEG)           | C0/180 | C90/270 |
| 85                | 11000  | 49164   |
| 80                | 10608  | 38079   |
| 75                | 10383  | 80318   |
| 70                | 10315  | 163607  |
| 65                | 17699  | 236011  |
| 60                | 52914  | 302343  |
| 55                | 122662 | 371517  |
| 50                | 231746 | 447994  |
| 45                | 370814 | 533760  |


C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:Allen  
Test Date:2026-01-29

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.00.459  
Humidity:45%  
Test Distance:2.900m [K=0.8783]  
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

|                                                           |       |                  |
|-----------------------------------------------------------|-------|------------------|
| Test:U:12.000V I:2.6672A P:25.255W PF:0.8304 Freq:60.04Hz |       |                  |
| Lamp Flux:1412.98x1 lm                                    |       |                  |
| NAME:                                                     | TYPE: | WEIGHT:          |
| SPEC.:                                                    | DIM.: | SERIAL No.:      |
| MFR.:                                                     | SUR.: | Shielding Angle: |

| pcc             | 80%                                                                        |      |      | 70%  |      |      | 50%  |      |      | 30%  |      |      | 10%  |      |      | 0   |
|-----------------|----------------------------------------------------------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|-----|
| p <sub>w</sub>  | 50%                                                                        | 30%  | 10%  | 50%  | 30%  | 10%  | 50%  | 30%  | 10%  | 50%  | 30%  | 10%  | 50%  | 30%  | 10%  | 0   |
| p <sub>fc</sub> | 20%                                                                        |      |      | 20%  |      |      | 20%  |      |      | 20%  |      |      | 20%  |      |      | 0   |
| RCR             | RCR:Room Cavity Ratio                      Coefficients of Utilization(CU) |      |      |      |      |      |      |      |      |      |      |      |      |      |      |     |
| 0.0             | 1.19                                                                       | 1.19 | 1.19 | 1.16 | 1.16 | 1.16 | 1.11 | 1.11 | 1.11 | 1.06 | 1.06 | 1.06 | 1.02 | 1.02 | 1.02 | .00 |
| 1.0             | 1.09                                                                       | 1.07 | 1.04 | 1.07 | 1.05 | 1.02 | 1.03 | 1.01 | .99  | .99  | .98  | .96  | .96  | .94  | .93  | .91 |
| 2.0             | 1.00                                                                       | .96  | .92  | .98  | .94  | .91  | .95  | .92  | .89  | .92  | .89  | .87  | .89  | .87  | .85  | .83 |
| 3.0             | .92                                                                        | .86  | .82  | .91  | .85  | .81  | .88  | .83  | .80  | .85  | .82  | .78  | .83  | .80  | .77  | .75 |
| 4.0             | .85                                                                        | .78  | .74  | .84  | .78  | .73  | .81  | .76  | .72  | .79  | .75  | .71  | .77  | .73  | .70  | .69 |
| 5.0             | .78                                                                        | .72  | .67  | .77  | .71  | .66  | .75  | .70  | .66  | .74  | .69  | .65  | .72  | .68  | .65  | .63 |
| 6.0             | .73                                                                        | .66  | .61  | .72  | .65  | .61  | .70  | .64  | .60  | .69  | .64  | .60  | .67  | .63  | .59  | .58 |
| 7.0             | .68                                                                        | .61  | .56  | .67  | .60  | .56  | .65  | .60  | .55  | .64  | .59  | .55  | .63  | .58  | .55  | .53 |
| 8.0             | .63                                                                        | .56  | .52  | .62  | .56  | .52  | .61  | .55  | .51  | .60  | .55  | .51  | .59  | .54  | .51  | .49 |
| 9.0             | .59                                                                        | .52  | .48  | .58  | .52  | .48  | .57  | .52  | .48  | .56  | .51  | .47  | .56  | .51  | .47  | .46 |
| 10.0            | .55                                                                        | .49  | .45  | .55  | .49  | .45  | .54  | .48  | .44  | .53  | .48  | .44  | .52  | .48  | .44  | .43 |

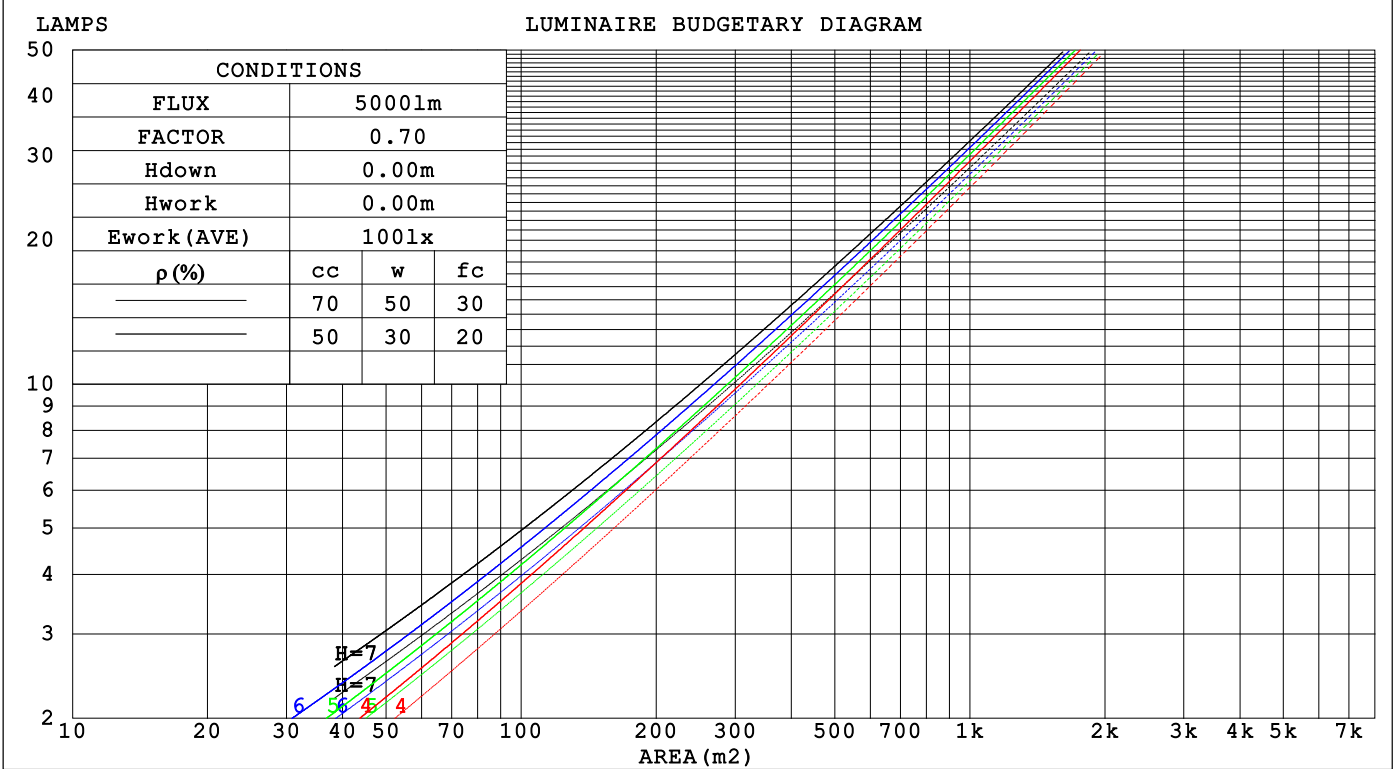

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:Allen  
Test Date:2026-01-29

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.00.459  
Humidity:45%  
Test Distance:2.900m [K=0.8783]  
Remarks:

## WEC AND CCEC

|                                                                                     |  |       |  |                  |  |
|-------------------------------------------------------------------------------------|--|-------|--|------------------|--|
| Test:U:12.000V I:2.6672A P:25.255W PF:0.8304 Freq:60.04Hz<br>Lamp Flux:1412.98x1 lm |  |       |  |                  |  |
| NAME:                                                                               |  | TYPE: |  | WEIGHT:          |  |
| SPEC.:                                                                              |  | DIM.: |  | SERIAL No.:      |  |
| MFR.:                                                                               |  | SUR.: |  | Shielding Angle: |  |

| pcc  | 80%                   |      |      | 70%  |      |      | 50%  |      |      | 30%  |      |      | 10%  |      |      | 0                               |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|------|-----------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|---------------------------------|--|--|--|--|--|--|--|--|--|--|--|--|--|--|
| pw   | 50%                   | 30%  | 10%  | 50%  | 30%  | 10%  | 50%  | 30%  | 10%  | 50%  | 30%  | 10%  | 50%  | 30%  | 10%  | 0                               |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| pfc  | 20%                   |      |      | 20%  |      |      | 20%  |      |      | 20%  |      |      | 20%  |      |      | 0                               |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| RCR  | RCR:Room Cavity Ratio |      |      |      |      |      |      |      |      |      |      |      |      |      |      | Wall Exitance Coefficients(WEC) |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 0.0  |                       |      |      |      |      |      |      |      |      |      |      |      |      |      |      |                                 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 1.0  | .204                  | .116 | .037 | .197 | .112 | .036 | .184 | .106 | .034 | .172 | .099 | .032 | .161 | .094 | .030 |                                 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 2.0  | .197                  | .108 | .033 | .192 | .106 | .033 | .181 | .100 | .031 | .171 | .096 | .030 | .161 | .091 | .029 |                                 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 3.0  | .188                  | .100 | .030 | .183 | .098 | .030 | .174 | .094 | .029 | .165 | .091 | .028 | .157 | .087 | .027 |                                 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 4.0  | .179                  | .093 | .027 | .175 | .091 | .027 | .167 | .088 | .026 | .159 | .085 | .026 | .152 | .082 | .025 |                                 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 5.0  | .170                  | .087 | .025 | .166 | .085 | .025 | .159 | .083 | .024 | .152 | .080 | .024 | .146 | .078 | .023 |                                 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 6.0  | .162                  | .081 | .023 | .158 | .080 | .023 | .152 | .078 | .023 | .146 | .076 | .022 | .140 | .074 | .022 |                                 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 7.0  | .154                  | .076 | .022 | .150 | .075 | .021 | .145 | .073 | .021 | .139 | .071 | .021 | .134 | .070 | .021 |                                 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 8.0  | .146                  | .071 | .020 | .143 | .071 | .020 | .138 | .069 | .020 | .133 | .068 | .019 | .129 | .066 | .019 |                                 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 9.0  | .139                  | .067 | .019 | .137 | .067 | .019 | .132 | .065 | .019 | .128 | .064 | .018 | .124 | .063 | .018 |                                 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 10.0 | .133                  | .064 | .018 | .131 | .063 | .018 | .126 | .062 | .017 | .122 | .061 | .017 | .119 | .060 | .017 |                                 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |

| pcc  | 80%                   |      |      | 70%  |      |      | 50%                                         |      |      | 30%  |      |      | 10%  |      |      | 0 |
|------|-----------------------|------|------|------|------|------|---------------------------------------------|------|------|------|------|------|------|------|------|---|
| pw   | 50%                   | 30%  | 10%  | 50%  | 30%  | 10%  | 50%                                         | 30%  | 10%  | 50%  | 30%  | 10%  | 50%  | 30%  | 10%  | 0 |
| pfc  | 20%                   |      |      | 20%  |      |      | 20%                                         |      |      | 20%  |      |      | 20%  |      |      | 0 |
| RCR  | RCR:Room Cavity Ratio |      |      |      |      |      | Ceiling Cavity Exitance Coefficients (CCEC) |      |      |      |      |      |      |      |      |   |
| 0.0  | .192                  | .192 | .192 | .164 | .164 | .164 | .112                                        | .112 | .112 | .064 | .064 | .064 | .021 | .021 | .021 |   |
| 1.0  | .174                  | .158 | .144 | .149 | .136 | .124 | .102                                        | .094 | .086 | .059 | .054 | .050 | .019 | .017 | .016 |   |
| 2.0  | .161                  | .134 | .111 | .138 | .115 | .096 | .095                                        | .080 | .067 | .054 | .046 | .039 | .017 | .015 | .013 |   |
| 3.0  | .150                  | .115 | .087 | .129 | .099 | .076 | .088                                        | .069 | .053 | .051 | .040 | .031 | .016 | .013 | .010 |   |
| 4.0  | .141                  | .101 | .070 | .121 | .087 | .061 | .083                                        | .061 | .043 | .048 | .036 | .025 | .015 | .012 | .008 |   |
| 5.0  | .133                  | .090 | .058 | .114 | .078 | .050 | .079                                        | .054 | .035 | .046 | .032 | .021 | .015 | .010 | .007 |   |
| 6.0  | .126                  | .081 | .048 | .108 | .070 | .042 | .075                                        | .049 | .030 | .043 | .029 | .018 | .014 | .009 | .006 |   |
| 7.0  | .120                  | .073 | .041 | .103 | .064 | .036 | .071                                        | .045 | .025 | .041 | .026 | .015 | .013 | .009 | .005 |   |
| 8.0  | .114                  | .067 | .035 | .098 | .058 | .031 | .068                                        | .041 | .022 | .040 | .024 | .013 | .013 | .008 | .004 |   |
| 9.0  | .109                  | .062 | .031 | .094 | .054 | .027 | .065                                        | .038 | .019 | .038 | .022 | .011 | .012 | .007 | .004 |   |
| 10.0 | .104                  | .058 | .027 | .090 | .050 | .024 | .062                                        | .035 | .017 | .036 | .021 | .010 | .012 | .007 | .003 |   |

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:Allen  
Test Date:2026-01-29

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.00.459  
Humidity:45%  
Test Distance:2.900m [K=0.8783]  
Remarks:

UGR(Unified Glare Rating) Table

|                                                                                     |                  |      |       |      |      |                  |      |      |      |      |
|-------------------------------------------------------------------------------------|------------------|------|-------|------|------|------------------|------|------|------|------|
| Test:U:12.000V I:2.6672A P:25.255W PF:0.8304 Freq:60.04Hz<br>Lamp Flux:1412.98x1 lm |                  |      |       |      |      |                  |      |      |      |      |
| NAME:                                                                               |                  |      | TYPE: |      |      | WEIGHT:          |      |      |      |      |
| SPEC.:                                                                              |                  |      | DIM.: |      |      | SERIAL No.:      |      |      |      |      |
| MFR.:                                                                               |                  |      | SUR.: |      |      | Shielding Angle: |      |      |      |      |
| ceiling/cavity                                                                      | 0.7              | 0.7  | 0.5   | 0.5  | 0.3  | 0.7              | 0.7  | 0.5  | 0.5  | 0.3  |
| walls                                                                               | 0.5              | 0.3  | 0.5   | 0.3  | 0.3  | 0.5              | 0.3  | 0.5  | 0.3  | 0.3  |
| working plane                                                                       | 0.2              | 0.2  | 0.2   | 0.2  | 0.2  | 0.2              | 0.2  | 0.2  | 0.2  | 0.2  |
| Room dimensions                                                                     | Viewed crosswise |      |       |      |      | Viewed endwise   |      |      |      |      |
| x = 2H y = 2H                                                                       | 30.8             | 31.9 | 31.0  | 32.1 | 32.3 | 32.7             | 33.8 | 32.9 | 33.9 | 34.1 |
| 3H                                                                                  | 30.7             | 31.7 | 30.9  | 31.9 | 32.1 | 33.0             | 34.1 | 33.3 | 34.3 | 34.5 |
| 4H                                                                                  | 30.6             | 31.5 | 30.9  | 31.8 | 32.0 | 33.0             | 34.0 | 33.3 | 34.2 | 34.5 |
| 6H                                                                                  | 30.5             | 31.4 | 30.8  | 31.6 | 31.9 | 33.0             | 33.9 | 33.3 | 34.1 | 34.4 |
| 8H                                                                                  | 30.4             | 31.3 | 30.8  | 31.6 | 31.8 | 32.9             | 33.8 | 33.2 | 34.1 | 34.3 |
| 12H                                                                                 | 30.4             | 31.2 | 30.7  | 31.5 | 31.8 | 32.9             | 33.7 | 33.2 | 34.0 | 34.3 |
| 4H 2H                                                                               | 31.2             | 32.1 | 31.5  | 32.4 | 32.6 | 32.8             | 33.7 | 33.1 | 34.0 | 34.2 |
| 3H                                                                                  | 31.1             | 31.9 | 31.4  | 32.2 | 32.5 | 33.2             | 34.1 | 33.6 | 34.3 | 34.6 |
| 4H                                                                                  | 31.0             | 31.7 | 31.3  | 32.0 | 32.3 | 33.3             | 34.0 | 33.6 | 34.3 | 34.6 |
| 6H                                                                                  | 30.9             | 31.5 | 31.3  | 31.9 | 32.2 | 33.2             | 33.9 | 33.6 | 34.2 | 34.5 |
| 8H                                                                                  | 30.8             | 31.4 | 31.2  | 31.8 | 32.2 | 33.2             | 33.8 | 33.6 | 34.1 | 34.5 |
| 12H                                                                                 | 30.8             | 31.3 | 31.2  | 31.7 | 32.1 | 33.1             | 33.7 | 33.5 | 34.1 | 34.4 |
| 8H 4H                                                                               | 30.9             | 31.5 | 31.3  | 31.9 | 32.3 | 33.1             | 33.7 | 33.5 | 34.1 | 34.5 |
| 6H                                                                                  | 30.8             | 31.3 | 31.3  | 31.7 | 32.1 | 33.1             | 33.6 | 33.5 | 34.0 | 34.4 |
| 8H                                                                                  | 30.8             | 31.2 | 31.2  | 31.6 | 32.1 | 33.0             | 33.5 | 33.5 | 33.9 | 34.4 |
| 12H                                                                                 | 30.7             | 31.1 | 31.2  | 31.6 | 32.0 | 33.0             | 33.4 | 33.5 | 33.8 | 34.3 |
| 12H 4H                                                                              | 30.9             | 31.4 | 31.3  | 31.8 | 32.2 | 33.1             | 33.6 | 33.5 | 34.0 | 34.4 |
| 6H                                                                                  | 30.8             | 31.2 | 31.2  | 31.6 | 32.1 | 33.0             | 33.5 | 33.5 | 33.9 | 34.3 |
| 8H                                                                                  | 30.7             | 31.1 | 31.2  | 31.6 | 32.0 | 33.0             | 33.4 | 33.5 | 33.8 | 34.3 |
| Variations with the observer position at spacings(CIE Pub.117):                     |                  |      |       |      |      |                  |      |      |      |      |
| S = 1.0H                                                                            | + 1.7 / - 3.3    |      |       |      |      | + 0.9 / - 1.2    |      |      |      |      |
| 1.5H                                                                                | + 1.0 / - 3.2    |      |       |      |      | + 0.3 / - 0.9    |      |      |      |      |
| 2.0H                                                                                | + 2.6 / - 7.0    |      |       |      |      | + 1.3 / - 1.8    |      |      |      |      |

CIE Pub.117, 1413 lm Total Lamp Luminous Flux Correct ( $8\log(F/F_0) = 1.2$ )  
Area: 0.001 m<sup>2</sup>

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:Allen  
Test Date:2026-01-29

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.00.459  
Humidity:45%  
Test Distance:2.900m [K=0.8783]  
Remarks:

## UTILIZATION FACTORS TABLE

|                                                                                     |       |                  |
|-------------------------------------------------------------------------------------|-------|------------------|
| Test:U:12.000V I:2.6672A P:25.255W PF:0.8304 Freq:60.04Hz<br>Lamp Flux:1412.98x1 lm |       |                  |
| NAME:                                                                               | TYPE: | WEIGHT:          |
| SPEC.:                                                                              | DIM.: | SERIAL No.:      |
| MFR.:                                                                               | SUR.: | Shielding Angle: |


| REFLECTANCE                      |                                                      |     |           |     |     |     |     |               |     |        |
|----------------------------------|------------------------------------------------------|-----|-----------|-----|-----|-----|-----|---------------|-----|--------|
| Ceiling                          | 0.8                                                  | 0.8 | 0.8       | 0.7 | 0.7 | 0.7 | 0.5 | 0.5           | 0.5 | 0      |
| Walls                            | 0.7                                                  | 0.5 | 0.3       | 0.7 | 0.5 | 0.3 | 0.7 | 0.5           | 0.3 | 0      |
| Working plane                    | 0.2                                                  | 0.2 | 0.2       | 0.2 | 0.2 | 0.2 | 0.2 | 0.2           | 0.2 | 0      |
| ROOM INDEX                       | UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$ |     |           |     |     |     |     |               |     |        |
| $k = 0.60$                       | 78                                                   | 70  | 65        | 77  | 69  | 65  | 76  | 69            | 64  | 60     |
| 0.80                             | 86                                                   | 79  | 74        | 86  | 78  | 74  | 84  | 78            | 73  | 69     |
| 1.00                             | 93                                                   | 86  | 81        | 92  | 85  | 81  | 90  | 85            | 80  | 75     |
| 1.25                             | 98                                                   | 91  | 87        | 97  | 91  | 86  | 95  | 89            | 86  | 81     |
| 1.50                             | 101                                                  | 95  | 91        | 100 | 95  | 91  | 98  | 93            | 89  | 84     |
| 2.00                             | 105                                                  | 100 | 96        | 104 | 99  | 95  | 101 | 97            | 94  | 88     |
| 2.50                             | 108                                                  | 103 | 99        | 106 | 102 | 98  | 103 | 99            | 96  | 90     |
| 3.00                             | 110                                                  | 105 | 102       | 108 | 104 | 101 | 104 | 101           | 99  | 92     |
| 4.00                             | 112                                                  | 108 | 106       | 110 | 107 | 104 | 106 | 104           | 102 | 94     |
| 5.00                             | 113                                                  | 110 | 108       | 111 | 109 | 106 | 107 | 105           | 103 | 95     |
| ROOM INDEX                       | UF (total)                                           |     |           |     |     |     |     |               |     | Direct |
| According to DIN EN 13032-2 2004 |                                                      |     | Suspended |     |     |     |     | SHRNOM = 1.25 |     |        |

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3℃  
 Operators: Allen  
 Test Date: 2026-01-29

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-R5000\_V2 SYSTEM V2.00.459  
 Humidity: 45%  
 Test Distance: 2.900m [K=0.8783]  
 Remarks:

ISOCANDELA DIAGRAM

|                                                                                     |       |                  |
|-------------------------------------------------------------------------------------|-------|------------------|
| Test:U:12.000V I:2.6672A P:25.255W PF:0.8304 Freq:60.04Hz<br>Lamp Flux:1412.98x1 lm |       |                  |
| NAME:                                                                               | TYPE: | WEIGHT:          |
| SPEC.:                                                                              | DIM.: | SERIAL No.:      |
| MFR.:                                                                               | SUR.: | Shielding Angle: |

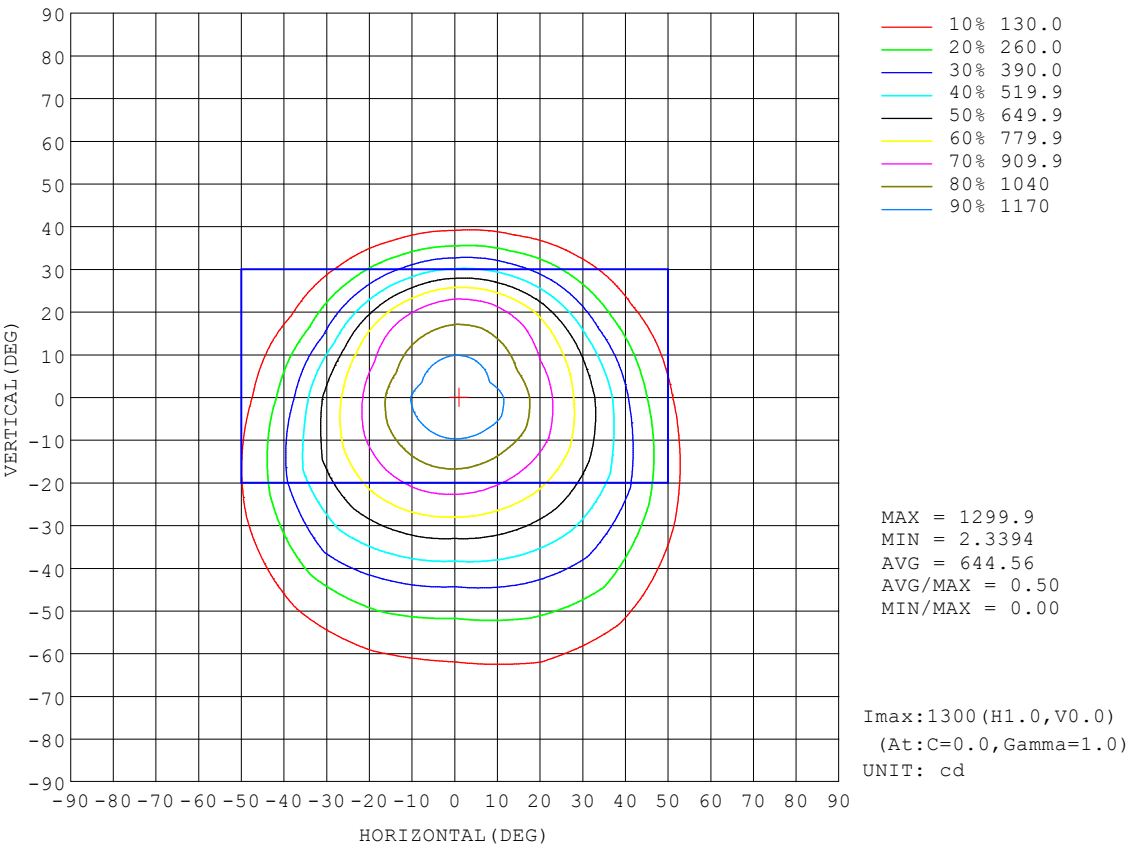


|                      |                                                   |
|----------------------|---------------------------------------------------|
| C Range: 0 - 360DEG  | γ Range: 0 - 180DEG                               |
| C Interval: 22.5DEG  | γ Interval: 1.0DEG                                |
| Test Speed: HIGH     | Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459 |
| Temperature:25.3℃    | Humidity:45%                                      |
| Operators:Allen      | Test Distance:2.900m [K=0.8783]                   |
| Test Date:2026-01-29 | Remarks:                                          |



## AAI Figure

|                                                                                     |       |                  |
|-------------------------------------------------------------------------------------|-------|------------------|
| Test:U:12.000V I:2.6672A P:25.255W PF:0.8304 Freq:60.04Hz<br>Lamp Flux:1412.98x1 lm |       |                  |
| NAME:                                                                               | TYPE: | WEIGHT:          |
| SPEC.:                                                                              | DIM.: | SERIAL No.:      |
| MFR.:                                                                               | SUR.: | Shielding Angle: |

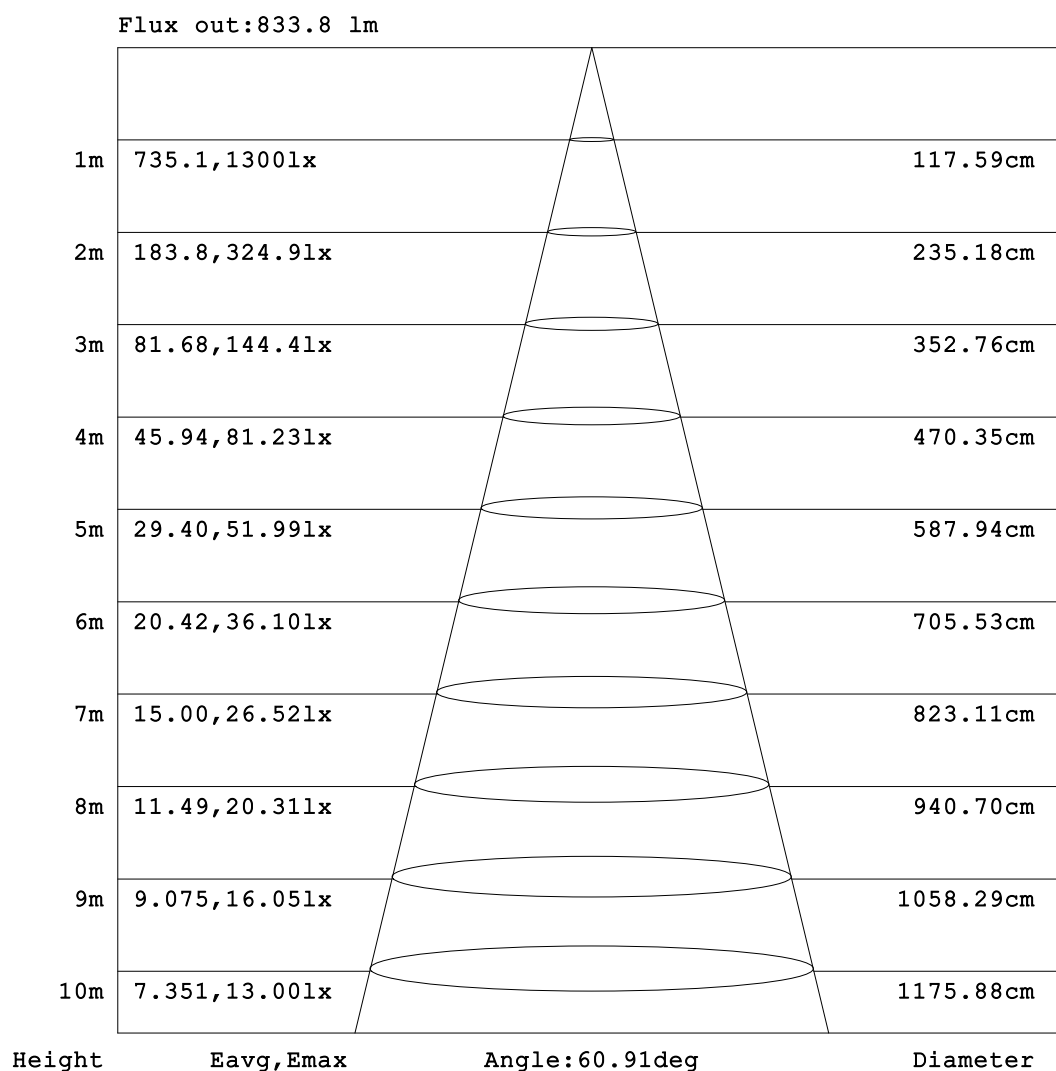


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3℃  
Operators: Allen  
Test Date: 2026-01-29

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System: EVERFINE GO-R5000\_V2 SYSTEM V2.00.459  
Humidity: 45%  
Test Distance: 2.900m [K=0.8783]  
Remarks:

ISOLUX DIAGRAM


|                                                                                     |       |                  |
|-------------------------------------------------------------------------------------|-------|------------------|
| Test:U:12.000V I:2.6672A P:25.255W PF:0.8304 Freq:60.04Hz<br>Lamp Flux:1412.98x1 lm |       |                  |
| NAME:                                                                               | TYPE: | WEIGHT:          |
| SPEC.:                                                                              | DIM.: | SERIAL No.:      |
| MFR.:                                                                               | SUR.: | Shielding Angle: |

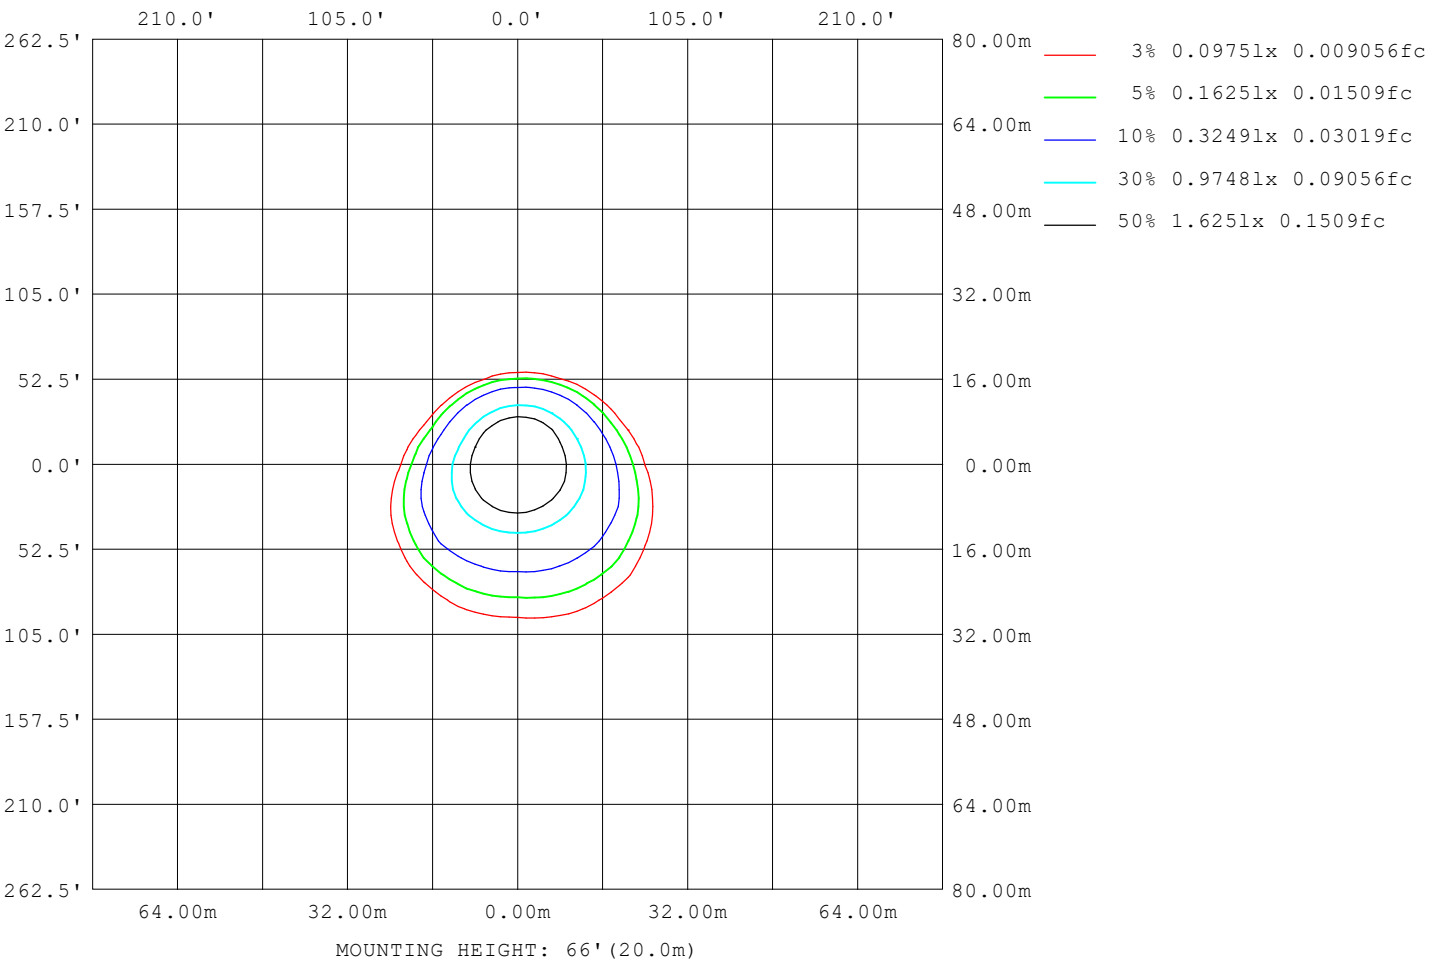

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:Allen  
Test Date:2026-01-29

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.00.459  
Humidity:45%  
Test Distance:2.900m [K=0.8783]  
Remarks:

Planar Illuminance Curve

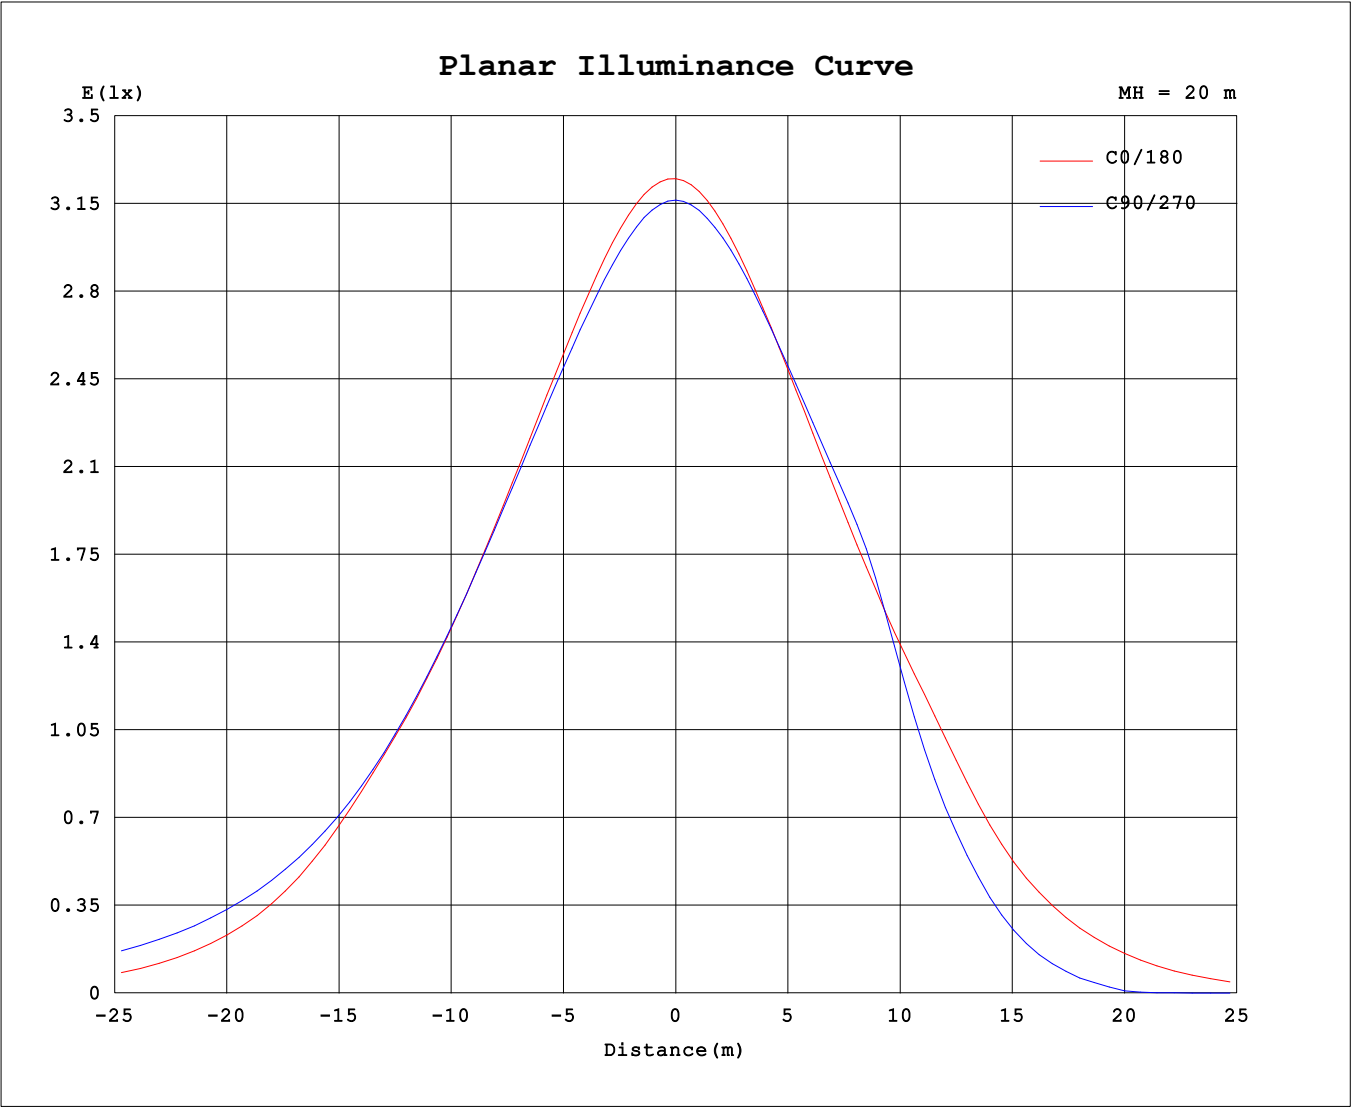

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:Allen  
Test Date:2026-01-29

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.00.459  
Humidity:45%  
Test Distance:2.900m [K=0.8783]  
Remarks:

## LUMINOUS DISTRIBUTION INTENSITY DATA

|                                                                                     |  |  |  |  |  |  |  |  |       |  |  |  |  |  |                  |  |  |
|-------------------------------------------------------------------------------------|--|--|--|--|--|--|--|--|-------|--|--|--|--|--|------------------|--|--|
| Test:U:12.000V I:2.6672A P:25.255W PF:0.8304 Freq:60.04Hz<br>Lamp Flux:1412.98x1 lm |  |  |  |  |  |  |  |  |       |  |  |  |  |  |                  |  |  |
| NAME:                                                                               |  |  |  |  |  |  |  |  | TYPE: |  |  |  |  |  | WEIGHT:          |  |  |
| SPEC.:                                                                              |  |  |  |  |  |  |  |  | DIM.: |  |  |  |  |  | SERIAL No.:      |  |  |
| MFR.:                                                                               |  |  |  |  |  |  |  |  | SUR.: |  |  |  |  |  | Shielding Angle: |  |  |

Table--1

UNIT: cd

| γ (DEG) | C (DEG) |      |      |      |      |       |      |       |      |       |      |       |      |       |      |       |  |
|---------|---------|------|------|------|------|-------|------|-------|------|-------|------|-------|------|-------|------|-------|--|
|         | 0       | 22.5 | 45   | 67.5 | 90   | 112.5 | 135  | 157.5 | 180  | 202.5 | 225  | 247.5 | 270  | 292.5 | 315  | 337.5 |  |
| 0       | 1300    | 1279 | 1270 | 1267 | 1265 | 1263  | 1260 | 1257  | 1300 | 1279  | 1270 | 1267  | 1265 | 1263  | 1260 | 1257  |  |
| 5       | 1274    | 1268 | 1251 | 1241 | 1237 | 1234  | 1235 | 1237  | 1262 | 1229  | 1230 | 1233  | 1236 | 1236  | 1232 | 1224  |  |
| 10      | 1198    | 1202 | 1180 | 1169 | 1165 | 1165  | 1166 | 1171  | 1176 | 1140  | 1150 | 1158  | 1167 | 1169  | 1164 | 1152  |  |
| 15      | 1096    | 1108 | 1083 | 1076 | 1076 | 1077  | 1077 | 1079  | 1068 | 1036  | 1052 | 1065  | 1079 | 1083  | 1073 | 1058  |  |
| 20      | 981     | 999  | 979  | 970  | 972  | 978   | 978  | 974   | 948  | 921   | 947  | 965   | 982  | 989   | 973  | 951   |  |
| 25      | 855     | 884  | 869  | 856  | 855  | 867   | 872  | 861   | 820  | 787   | 786  | 788   | 819  | 847   | 863  | 834   |  |
| 30      | 724     | 762  | 757  | 738  | 729  | 745   | 759  | 743   | 682  | 555   | 521  | 507   | 525  | 569   | 635  | 684   |  |
| 35      | 586     | 638  | 643  | 621  | 602  | 619   | 642  | 625   | 488  | 343   | 302  | 274   | 278  | 323   | 399  | 467   |  |
| 40      | 413     | 521  | 533  | 510  | 482  | 499   | 526  | 488   | 312  | 181   | 132  | 105   | 105  | 134   | 206  | 286   |  |
| 45      | 262     | 401  | 430  | 408  | 377  | 391   | 414  | 334   | 180  | 76.7  | 31.1 | 8.59  | 11.5 | 26.4  | 79.8 | 149   |  |
| 50      | 149     | 274  | 338  | 320  | 288  | 298   | 296  | 212   | 86.9 | 15.1  | 2.00 | 0.34  | 0.22 | 0.74  | 9.13 | 62.5  |  |
| 55      | 70.4    | 169  | 245  | 243  | 213  | 219   | 190  | 121   | 33.6 | 2.87  | 0.94 | 0.23  | 0.08 | 0.40  | 1.44 | 12.6  |  |
| 60      | 26.5    | 91.8 | 159  | 178  | 151  | 146   | 113  | 56.8  | 7.14 | 1.94  | 0.66 | 0.00  | 0.00 | 0.21  | 1.15 | 3.22  |  |
| 65      | 7.48    | 41.1 | 91.2 | 116  | 99.7 | 84.6  | 55.8 | 19.8  | 3.37 | 1.39  | 0.00 | 0.00  | 0.00 | 0.00  | 0.66 | 2.27  |  |
| 70      | 3.53    | 14.7 | 42.1 | 62.3 | 56.0 | 41.0  | 21.7 | 6.12  | 2.67 | 0.44  | 0.00 | 0.00  | 0.00 | 0.00  | 0.00 | 1.64  |  |
| 75      | 2.69    | 5.60 | 14.2 | 24.0 | 20.8 | 14.4  | 6.52 | 3.70  | 1.87 | 0.00  | 0.00 | 0.00  | 0.00 | 0.00  | 0.00 | 0.73  |  |
| 80      | 1.84    | 3.42 | 5.07 | 6.78 | 6.61 | 5.26  | 3.99 | 2.94  | 0.88 | 0.00  | 0.00 | 0.00  | 0.00 | 0.00  | 0.00 | 0.00  |  |
| 85      | 0.96    | 2.59 | 3.59 | 4.19 | 4.28 | 3.97  | 3.23 | 2.03  | 0.00 | 0.00  | 0.00 | 0.00  | 0.00 | 0.00  | 0.00 | 0.00  |  |
| 90      | 0.19    | 1.71 | 2.76 | 3.49 | 3.62 | 3.18  | 2.35 | 1.12  | 0.00 | 0.00  | 0.00 | 0.00  | 0.00 | 0.00  | 0.00 | 0.00  |  |
| 95      | 0.00    | 0.94 | 1.85 | 2.54 | 2.65 | 2.23  | 1.47 | 0.37  | 0.00 | 0.00  | 0.00 | 0.00  | 0.00 | 0.00  | 0.00 | 0.00  |  |
| 100     | 0.00    | 0.35 | 1.07 | 1.63 | 1.71 | 1.39  | 0.74 | 0.00  | 0.00 | 0.00  | 0.00 | 0.00  | 0.00 | 0.00  | 0.00 | 0.00  |  |
| 105     | 0.00    | 0.00 | 0.50 | 0.90 | 0.97 | 0.73  | 0.23 | 0.00  | 0.00 | 0.00  | 0.00 | 0.00  | 0.00 | 0.00  | 0.00 | 0.00  |  |
| 110     | 0.00    | 0.00 | 0.09 | 0.39 | 0.45 | 0.27  | 0.00 | 0.00  | 0.00 | 0.00  | 0.00 | 0.00  | 0.00 | 0.00  | 0.00 | 0.00  |  |
| 115     | 0.00    | 0.00 | 0.00 | 0.04 | 0.08 | 0.00  | 0.00 | 0.00  | 0.00 | 0.00  | 0.00 | 0.00  | 0.00 | 0.00  | 0.00 | 0.00  |  |
| 120     | 0.00    | 0.00 | 0.00 | 0.00 | 0.00 | 0.00  | 0.00 | 0.00  | 0.00 | 0.00  | 0.00 | 0.00  | 0.00 | 0.00  | 0.00 | 0.00  |  |
| 125     | 0.00    | 0.00 | 0.00 | 0.00 | 0.00 | 0.00  | 0.00 | 0.00  | 0.01 | 0.07  | 0.08 | 0.08  | 0.08 | 0.07  | 0.06 | 0.03  |  |
| 130     | 0.03    | 0.00 | 0.00 | 0.00 | 0.00 | 0.00  | 0.00 | 0.01  | 0.13 | 0.21  | 0.22 | 0.22  | 0.22 | 0.22  | 0.20 | 0.17  |  |
| 135     | 0.13    | 0.06 | 0.04 | 0.03 | 0.04 | 0.05  | 0.08 | 0.10  | 0.31 | 0.40  | 0.41 | 0.41  | 0.41 | 0.40  | 0.39 | 0.36  |  |
| 140     | 0.26    | 0.17 | 0.15 | 0.15 | 0.15 | 0.17  | 0.20 | 0.22  | 0.53 | 0.63  | 0.64 | 0.64  | 0.65 | 0.64  | 0.62 | 0.60  |  |
| 145     | 0.38    | 0.31 | 0.28 | 0.28 | 0.29 | 0.31  | 0.33 | 0.37  | 0.77 | 0.86  | 0.87 | 0.87  | 0.88 | 0.87  | 0.86 | 0.84  |  |
| 150     | 0.50    | 0.41 | 0.39 | 0.39 | 0.40 | 0.42  | 0.44 | 0.48  | 1.00 | 1.08  | 1.08 | 1.09  | 1.09 | 1.10  | 1.08 | 1.07  |  |
| 155     | 0.65    | 0.55 | 0.53 | 0.52 | 0.54 | 0.56  | 0.59 | 0.62  | 1.21 | 1.27  | 1.26 | 1.26  | 1.27 | 1.28  | 1.28 | 1.27  |  |
| 160     | 0.77    | 0.70 | 0.69 | 0.68 | 0.69 | 0.72  | 0.74 | 0.78  | 1.36 | 1.38  | 1.37 | 1.37  | 1.38 | 1.38  | 1.39 | 1.38  |  |
| 165     | 0.85    | 0.79 | 0.77 | 0.76 | 0.78 | 0.80  | 0.83 | 0.85  | 1.40 | 1.40  | 1.39 | 1.40  | 1.40 | 1.42  | 1.43 | 1.43  |  |
| 170     | 0.96    | 0.90 | 0.88 | 0.87 | 0.89 | 0.91  | 0.94 | 0.97  | 1.41 | 1.40  | 1.40 | 1.40  | 1.41 | 1.42  | 1.43 | 1.43  |  |
| 175     | 1.15    | 1.05 | 1.04 | 1.04 | 1.05 | 1.08  | 1.10 | 1.12  | 1.39 | 1.35  | 1.35 | 1.36  | 1.36 | 1.38  | 1.39 | 1.39  |  |
| 180     | 1.34    | 1.26 | 1.26 | 1.26 | 1.29 | 1.29  | 1.30 | 1.30  | 1.30 | 1.25  | 1.25 | 1.25  | 1.25 | 1.28  | 1.28 | 1.29  |  |

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:Allen  
Test Date:2026-01-29

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.00.459  
Humidity:45%  
Test Distance:2.900m [K=0.8783]  
Remarks: