LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.000V I:2.6681A P:25.559W PF:0.8306 Freq:60.00Hz Lamp Flux:1644.12x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 64.33 lm/W			
MODEL	SMART FIXTURE 2700K	Imax(cd)	3327	S/MH(C0/180)	0.88
NOMINAL POWER(W)		LOR(%)	100.0	S/MH(C90/270)	0.48
RATED VOLTAGE(V)		TOTAL FLUX(lm)	1644.1	η UP,DN(C0-180)	0.1,48.3
NOMINAL FLUX(lm)	1644.12	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,51.5
LAMPS INSIDE	1	η up(%)	0.2	CIBSE SHR NOM	0.00
TEST VOLTAGE(V)		η down(%)	99.8	CIBSE SHR MAX	0.30

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

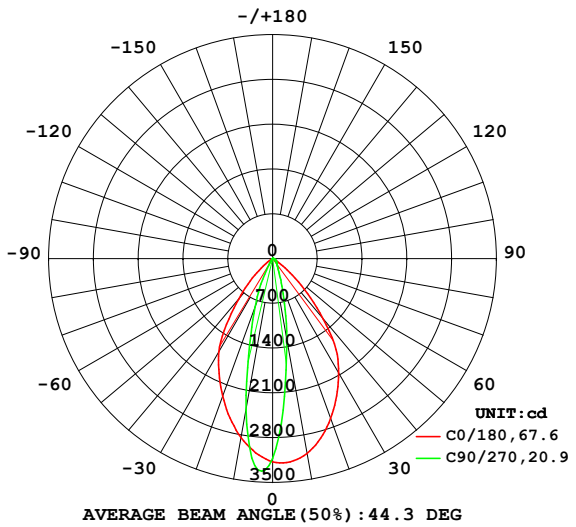

AVERAGE BEAM ANGLE(50%):44.3 DEG

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

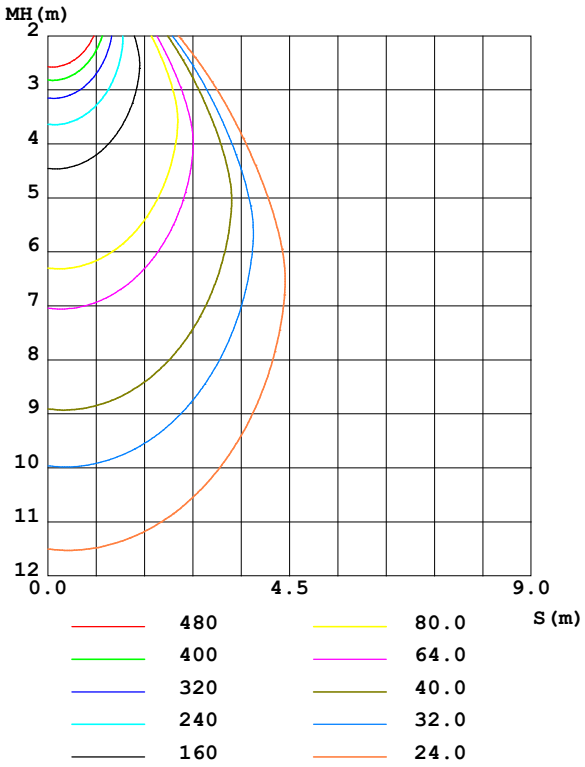

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	3093	1835	1271	1702	2844	2951	2406	2650	0- 10	258.8	258.8	15.7,15.7
20	2657	865.6	407.3	697.5	2287	1562	810.4	1127	10- 20	486.6	745.5	45.3,45.3
30	2064	386.2	167.4	273.8	1682	443.8	137.5	320.6	20- 30	431.0	1176	71.6,71.6
40	1236	183.0	103.2	134.4	829.7	47.19	34.12	50.20	30- 40	272.7	1449	88.1,88.1
50	410.9	96.80	67.20	74.32	233.3	3.429	0.9839	7.162	40- 50	131.3	1580	96.1,96.1
60	49.28	45.87	39.39	33.06	7.167	0.9201	0	1.325	50- 60	45.08	1626	98.9,98.9
70	3.657	13.79	14.11	8.593	2.735	0	0	0.0004	60- 70	11.96	1637	99.6,99.6
80	2.059	3.039	2.038	2.469	1.005	0	0	0	70- 80	2.958	1640	99.8,99.8
90	0.2316	2.012	1.302	1.595	0	0	0	0	80- 90	1.057	1642	99.8,99.8
100	0	0.7951	0.5801	0.5068	0	0	0	0	90-100	0.4641	1642	99.9,99.9
110	0	0	0.0690	0	0	0	0	0	100-110	0.1045	1642	99.9,99.9
120	0	0	0	0	0.0234	0	0	0	110-120	0.0017	1642	99.9,99.9
130	0.0936	0.1220	0	0.0074	0.3488	0.0775	0	0.0330	120-130	0.0254	1642	99.9,99.9
140	0.3691	0.5908	0.2945	0.4047	0.9489	0.6644	0.2350	0.6159	130-140	0.2004	1642	99.9,99.9
150	0.5604	0.8584	0.8682	0.7653	1.551	1.478	1.170	1.615	140-150	0.5104	1643	99.9,99.9
160	0.8132	1.098	1.253	1.109	1.955	2.004	2.310	2.605	150-160	0.6512	1643	100,100
170	1.019	1.145	1.388	1.264	1.875	1.914	2.410	2.764	160-170	0.4879	1644	100,100
180	1.616	1.699	1.879	2.011	1.610	1.635	1.788	1.889	170-180	0.1684	1644	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 1529.4 lm

%lum = 93.0%
%lamp = 93.0%

Conical surface Flux(120deg): 1625.5 lm

%lum = 98.9%
%lamp = 98.9%

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:12.000V I:2.6681A P:25.559W PF:0.8306 Freq:60.00Hz **Lamp Flux:1644.12x1 lm**		
NAME:	**TYPE:**	**WEIGHT:**
SPEC.:	**DIM.:**	**SERIAL No.:**
MFR.:	**SUR.:**	**Shielding Angle:**

LUMINANCE LIMITATION CURVES

GLARE	CLASS	ILLUMINANCE (lx)							
1.15	A	2000	1000	500	<=300				
1.50	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.20	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300

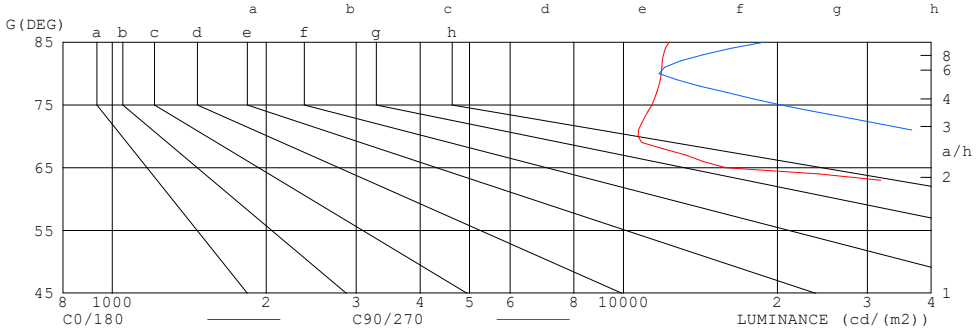

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	12276	18809
80	11856	11738
75	11360	20345
70	10691	41247
65	15867	62909
60	98560	78785
55	291802	91478
50	639278	104544
45	1092739	118516

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:12.000V I:2.6681A P:25.559W PF:0.8306 Freq:60.00Hz
Lamp Flux:1644.12x1 lm

NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.11	1.08	1.06	1.09	1.06	1.04	1.05	1.03	1.01	1.01	.99	.98	.97	.96	.95	.93
2.0	1.03	.99	.96	1.01	.98	.95	.98	.95	.93	.95	.93	.91	.92	.90	.89	.87
3.0	.96	.91	.88	.95	.90	.87	.92	.89	.85	.90	.87	.84	.88	.85	.83	.81
4.0	.90	.85	.81	.89	.84	.80	.87	.83	.79	.85	.81	.78	.83	.80	.77	.76
5.0	.85	.79	.75	.84	.78	.74	.82	.77	.74	.80	.76	.73	.79	.75	.72	.71
6.0	.80	.74	.70	.79	.74	.70	.78	.73	.69	.76	.72	.69	.75	.71	.68	.67
7.0	.75	.70	.65	.75	.69	.65	.73	.69	.65	.72	.68	.65	.71	.67	.64	.63
8.0	.71	.66	.62	.71	.65	.61	.70	.65	.61	.69	.64	.61	.68	.64	.61	.59
9.0	.68	.62	.58	.67	.62	.58	.66	.61	.58	.65	.61	.58	.65	.61	.57	.56
10.0	.64	.59	.55	.64	.59	.55	.63	.58	.55	.62	.58	.55	.62	.58	.55	.53

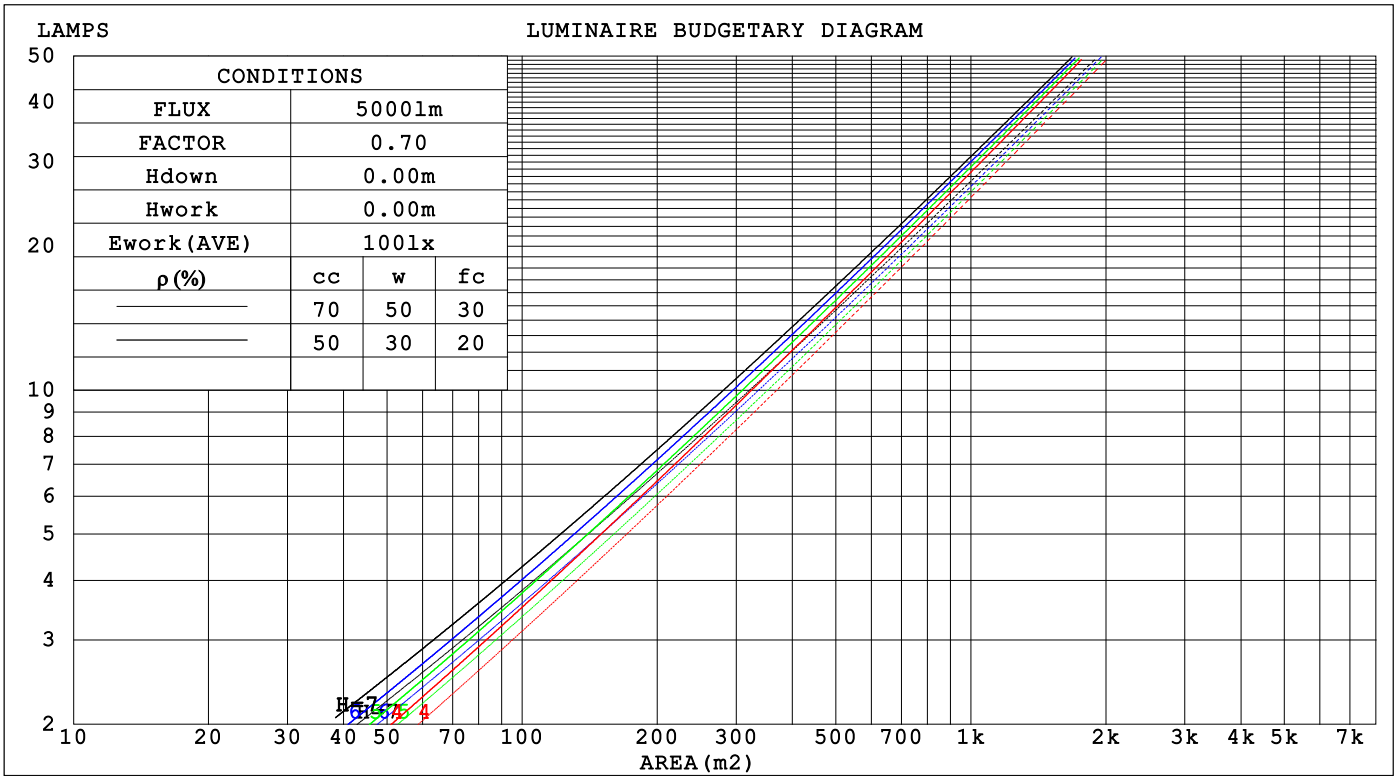

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

WEC AND CCEC

Test:U:12.000V I:2.6681A P:25.559W PF:0.8306 Freq:60.00Hz Lamp Flux:1644.12x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coeffcients(WEC)									
0.0																
1.0	.177	.100	.032	.170	.097	.031	.157	.090	.029	.146	.084	.027	.135	.078	.025	
2.0	.169	.093	.028	.163	.090	.028	.153	.085	.026	.143	.080	.025	.134	.076	.024	
3.0	.161	.086	.026	.156	.084	.025	.147	.080	.024	.139	.076	.023	.131	.072	.022	
4.0	.153	.079	.023	.149	.078	.023	.141	.075	.022	.134	.072	.022	.127	.069	.021	
5.0	.145	.074	.021	.142	.073	.021	.135	.070	.021	.128	.068	.020	.122	.065	.020	
6.0	.138	.069	.020	.135	.068	.020	.129	.066	.019	.123	.064	.019	.118	.062	.018	
7.0	.132	.065	.018	.129	.064	.018	.124	.063	.018	.119	.061	.018	.114	.059	.017	
8.0	.126	.061	.017	.123	.061	.017	.119	.059	.017	.114	.058	.017	.110	.056	.016	
9.0	.120	.058	.016	.118	.058	.016	.114	.056	.016	.110	.055	.016	.106	.054	.016	
10.0	.115	.055	.015	.113	.055	.015	.109	.054	.015	.106	.052	.015	.102	.051	.015	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.172	.159	.146	.147	.136	.126	.101	.094	.087	.058	.054	.051	.019	.017	.016	
2.0	.157	.134	.114	.135	.115	.099	.092	.080	.069	.053	.046	.040	.017	.015	.013	
3.0	.145	.115	.091	.124	.099	.079	.085	.069	.055	.049	.040	.033	.016	.013	.011	
4.0	.134	.100	.074	.115	.086	.064	.079	.060	.045	.046	.035	.027	.015	.011	.009	
5.0	.126	.088	.061	.108	.077	.053	.074	.053	.038	.043	.031	.022	.014	.010	.007	
6.0	.118	.079	.051	.101	.069	.045	.070	.048	.032	.041	.028	.019	.013	.009	.006	
7.0	.111	.072	.044	.096	.062	.038	.066	.043	.027	.038	.026	.016	.012	.008	.005	
8.0	.106	.065	.038	.091	.057	.033	.063	.040	.023	.037	.023	.014	.012	.008	.005	
9.0	.100	.060	.033	.086	.052	.029	.060	.037	.020	.035	.022	.012	.011	.007	.004	
10.0	.096	.056	.029	.082	.048	.025	.057	.034	.018	.033	.020	.011	.011	.007	.004	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:12.000V I:2.6681A P:25.559W PF:0.8306 Freq:60.00Hz Lamp Flux:1644.12x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	31.4	32.4	31.7	32.5	32.7	22.3	23.2	22.5	23.4	23.5
3H	31.3	32.1	31.5	32.3	32.6	22.7	23.5	22.9	23.7	23.9
4H	31.2	32.0	31.5	32.2	32.5	22.7	23.5	22.9	23.7	23.9
6H	31.1	31.9	31.4	32.1	32.4	22.6	23.4	22.9	23.6	23.9
8H	31.1	31.8	31.4	32.1	32.3	22.6	23.3	22.9	23.6	23.8
12H	31.0	31.7	31.3	32.0	32.3	22.5	23.2	22.9	23.5	23.8
4H 2H	31.2	32.0	31.5	32.3	32.5	22.8	23.6	23.1	23.8	24.0
3H	31.1	31.8	31.4	32.0	32.3	23.2	23.9	23.5	24.2	24.5
4H	31.0	31.6	31.3	31.9	32.2	23.2	23.9	23.6	24.2	24.5
6H	30.9	31.4	31.3	31.8	32.1	23.2	23.7	23.5	24.1	24.4
8H	30.8	31.3	31.2	31.7	32.1	23.1	23.7	23.5	24.0	24.4
12H	30.8	31.3	31.2	31.6	32.0	23.1	23.6	23.5	24.0	24.3
8H 4H	30.8	31.3	31.2	31.7	32.1	23.1	23.6	23.5	24.0	24.4
6H	30.7	31.2	31.2	31.6	32.0	23.1	23.5	23.5	23.9	24.3
8H	30.7	31.1	31.1	31.5	31.9	23.1	23.4	23.5	23.9	24.3
12H	30.6	31.0	31.1	31.4	31.9	23.1	23.4	23.5	23.8	24.3
12H 4H	30.8	31.3	31.2	31.6	32.0	23.1	23.6	23.5	23.9	24.3
6H	30.7	31.1	31.1	31.5	31.9	23.0	23.4	23.5	23.8	24.3
8H	30.6	31.0	31.1	31.4	31.9	23.0	23.4	23.5	23.8	24.3
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 4.9 / - 5.8					+ 1.0 / - 1.4				
1.5H	+ 5.6 / - 9.2					+ 1.1 / - 1.2				
2.0H	+ 7.2 / - 8.4					+ 0.9 / - 1.4				

CIE Pub.117, 1644 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 1.7)
Area: 0.001 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:12.000V I:2.6681A P:25.559W PF:0.8306 Freq:60.00Hz Lamp Flux:1644.12x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) k(RI) x RCR = 5									
k = 0.60	84	77	73	83	77	73	83	76	73	69
0.80	92	86	81	91	85	81	90	85	81	77
1.00	97	91	87	96	91	87	95	91	86	82
1.25	102	96	92	100	95	92	98	94	91	87
1.50	105	99	96	103	99	95	101	97	94	89
2.00	108	103	100	106	102	99	103	100	97	92
2.50	109	105	102	108	104	101	105	102	99	93
3.00	111	107	105	109	106	103	106	103	101	95
4.00	113	110	108	111	109	106	107	105	104	96
5.00	114	112	110	112	110	108	108	107	105	98
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004				Suspended					SHRNOM = 1.25	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.000V I:2.6681A P:25.559W PF:0.8306 Freq:60.00Hz Lamp Flux:1644.12x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

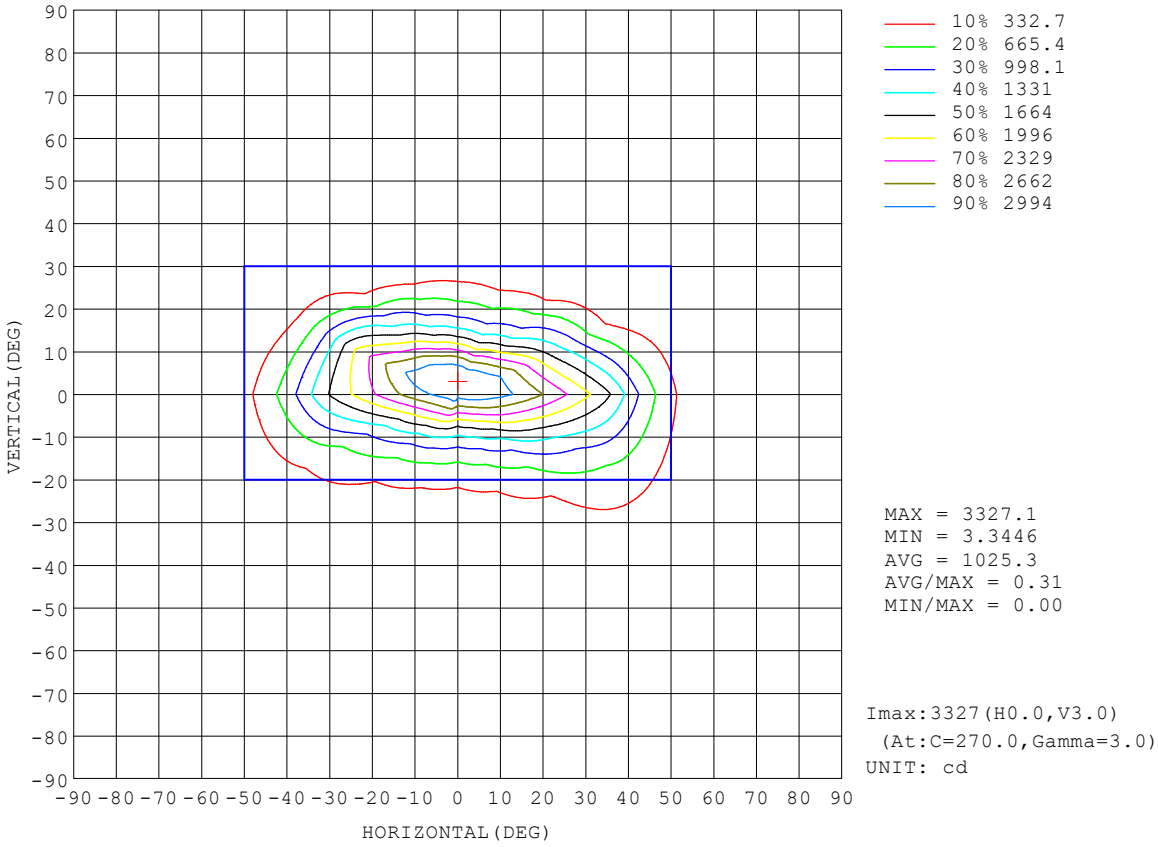

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

AAI Figure

Test:U:12.000V I:2.6681A P:25.559W PF:0.8306 Freq:60.00Hz Lamp Flux:1644.12x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

Flux out:304.4 lm

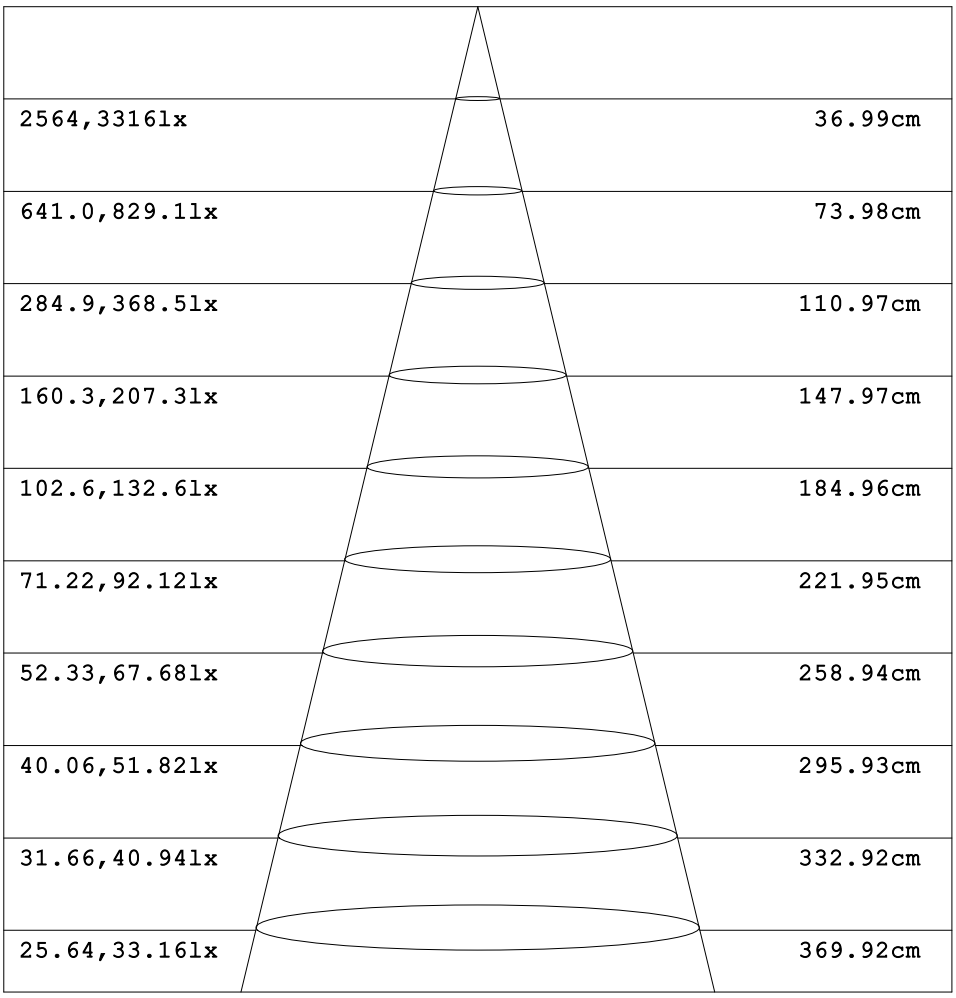

Height	Eavg,Emax	Angle:20.96deg	Diameter
1m	2564,3316lx		36.99cm
2m	641.0,829.1lx		73.98cm
3m	284.9,368.5lx		110.97cm
4m	160.3,207.3lx		147.97cm
5m	102.6,132.6lx		184.96cm
6m	71.22,92.12lx		221.95cm
7m	52.33,67.68lx		258.94cm
8m	40.06,51.82lx		295.93cm
9m	31.66,40.94lx		332.92cm
10m	25.64,33.16lx		369.92cm

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

ISOLUX DIAGRAM

Test:U:12.000V I:2.6681A P:25.559W PF:0.8306 Freq:60.00Hz Lamp Flux:1644.12x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

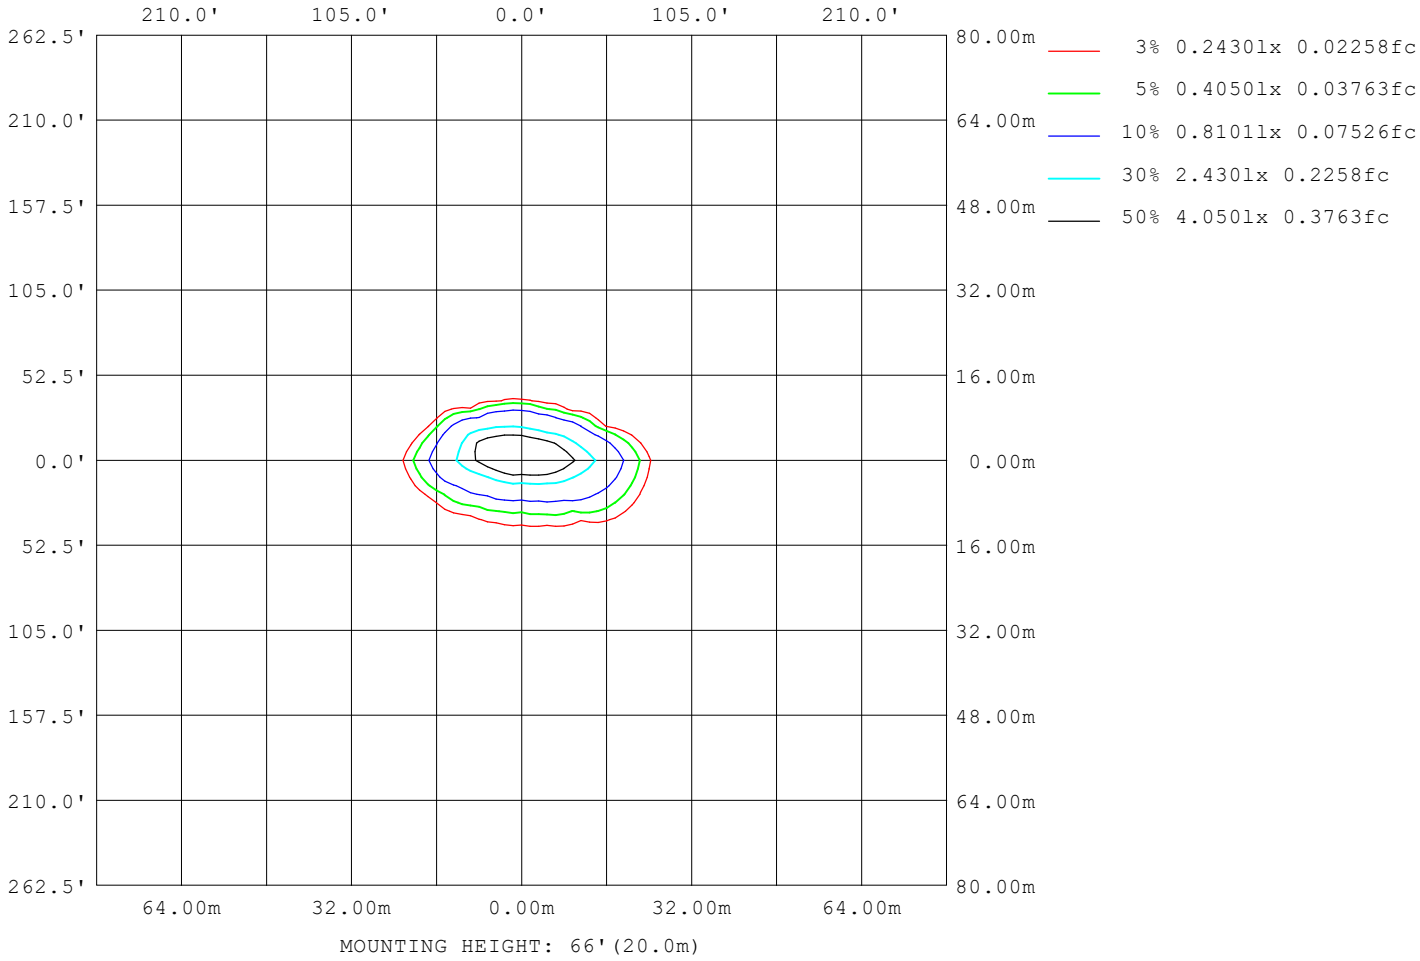

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

Planar Illuminance Curve

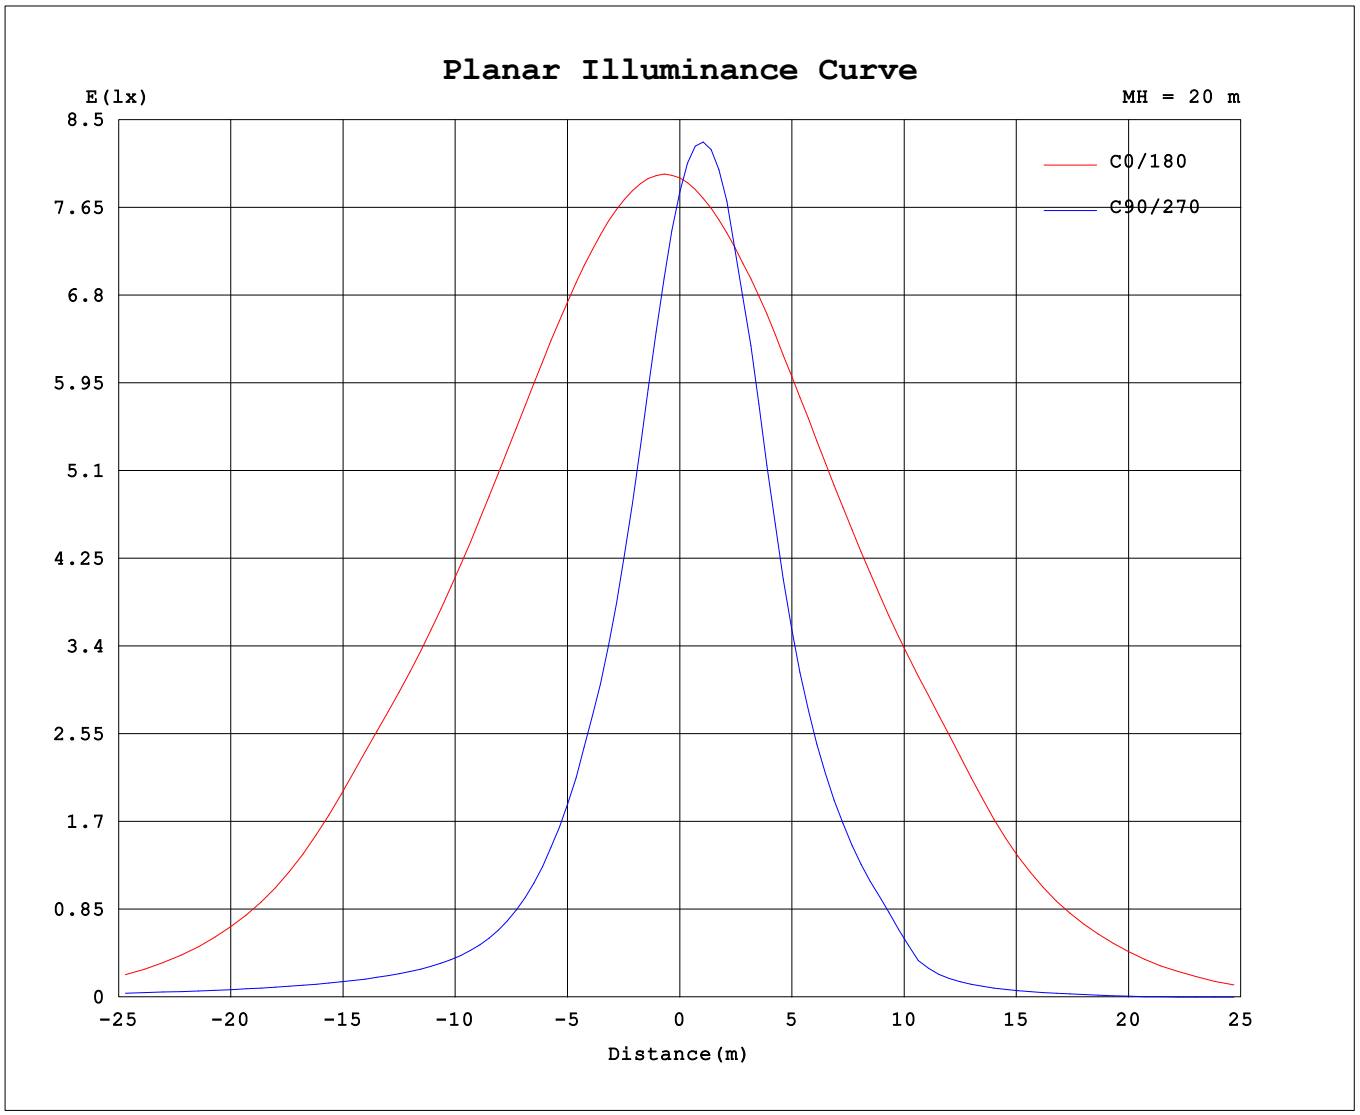

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.000V I:2.6681A P:25.559W PF:0.8306 Freq:60.00Hz Lamp Flux:1644.12x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

Table--1 UNIT: cd

γ (DEG) \ C(DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	3175	3159	3144	3131	3121	3223	3201	3165	3175	3159	3144	3131	3121	3223	3201	3165			
5	3188	2895	2552	2288	2159	2397	2538	2764	3048	3244	3301	3273	3244	3160	3240	3263			
10	3093	2514	1835	1427	1271	1453	1702	2207	2844	3146	2951	2604	2406	2272	2650	3051			
15	2908	2086	1270	878	732	859	1097	1657	2581	2890	2284	1642	1398	1334	1790	2601			
20	2657	1675	866	520	407	488	697	1216	2287	2530	1562	987	810	787	1127	2026			
25	2369	1321	581	312	243	284	432	887	1986	2098	1008	563	443	423	716	1480			
30	2064	1023	386	205	167	187	274	641	1682	1486	444	179	137	138	321	1013			
35	1734	787	261	149	129	138	185	456	1255	839	146	70.0	65.2	64.4	108	518			
40	1236	595	183	116	103	109	134	308	830	391	47.2	34.1	34.1	34.2	50.2	212			
45	773	430	133	93.0	83.8	88.1	100	189	499	123	17.9	10.3	10.9	10.8	25.3	69.3			
50	411	274	96.8	74.6	67.2	70.6	74.3	108	233	26.4	3.43	0.98	0.98	1.24	7.16	29.2			
55	167	157	68.9	58.3	52.5	54.9	52.2	55.4	74.9	4.20	1.13	0.26	0.04	0.32	1.79	10.4			
60	49.3	74.6	45.9	43.4	39.4	39.5	33.1	24.9	7.17	2.13	0.92	0.06	0.00	0.13	1.33	4.08			
65	6.71	27.2	27.1	28.7	26.6	25.1	18.0	9.88	3.23	1.76	0.21	0.00	0.00	0.00	0.78	2.65			
70	3.66	8.17	13.8	16.0	14.1	13.0	8.59	4.57	2.73	0.93	0.00	0.00	0.00	0.00	0.00	1.96			
75	2.94	3.82	6.05	6.76	5.27	5.18	3.93	3.08	2.05	0.00	0.00	0.00	0.00	0.00	0.00	0.95			
80	2.06	3.01	3.04	2.67	2.04	2.12	2.47	2.58	1.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
85	1.07	2.34	2.53	2.07	1.64	1.73	2.08	1.86	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
90	0.23	1.54	2.01	1.69	1.30	1.39	1.60	1.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
95	0.00	0.80	1.38	1.24	0.92	0.99	1.02	0.29	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
100	0.00	0.22	0.80	0.79	0.58	0.62	0.51	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
105	0.00	0.00	0.33	0.41	0.29	0.30	0.10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
110	0.00	0.00	0.00	0.12	0.07	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
125	0.00	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.15	0.08	0.00	0.00	0.00	0.00	0.00	0.04			
130	0.09	0.17	0.12	0.00	0.00	0.00	0.01	0.12	0.35	0.25	0.08	0.00	0.00	0.00	0.03	0.25			
135	0.20	0.31	0.34	0.13	0.02	0.02	0.18	0.25	0.62	0.51	0.32	0.09	0.02	0.08	0.26	0.55			
140	0.37	0.49	0.59	0.45	0.29	0.26	0.40	0.43	0.95	0.84	0.66	0.37	0.24	0.35	0.62	0.93			
145	0.48	0.61	0.77	0.75	0.62	0.57	0.64	0.60	1.28	1.19	1.09	0.82	0.63	0.78	1.08	1.35			
150	0.56	0.69	0.86	0.91	0.87	0.79	0.77	0.71	1.55	1.49	1.48	1.34	1.17	1.36	1.62	1.79			
155	0.72	0.85	1.01	1.07	1.10	1.02	0.94	0.87	1.79	1.75	1.81	1.87	1.81	2.01	2.17	2.23			
160	0.81	0.94	1.10	1.16	1.25	1.21	1.11	1.00	1.95	1.93	2.00	2.20	2.31	2.51	2.60	2.58			
165	0.86	0.95	1.12	1.21	1.33	1.31	1.16	1.07	1.93	1.90	1.97	2.19	2.47	2.71	2.80	2.73			
170	1.02	1.03	1.15	1.27	1.39	1.36	1.26	1.25	1.88	1.87	1.91	2.10	2.41	2.65	2.76	2.70			
175	1.34	1.32	1.35	1.43	1.50	1.50	1.58	1.59	1.80	1.81	1.85	1.98	2.18	2.30	2.43	2.44			
180	1.62	1.64	1.70	1.81	1.88	1.88	2.01	1.97	1.61	1.61	1.63	1.70	1.79	1.81	1.89	2.01			

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks: