
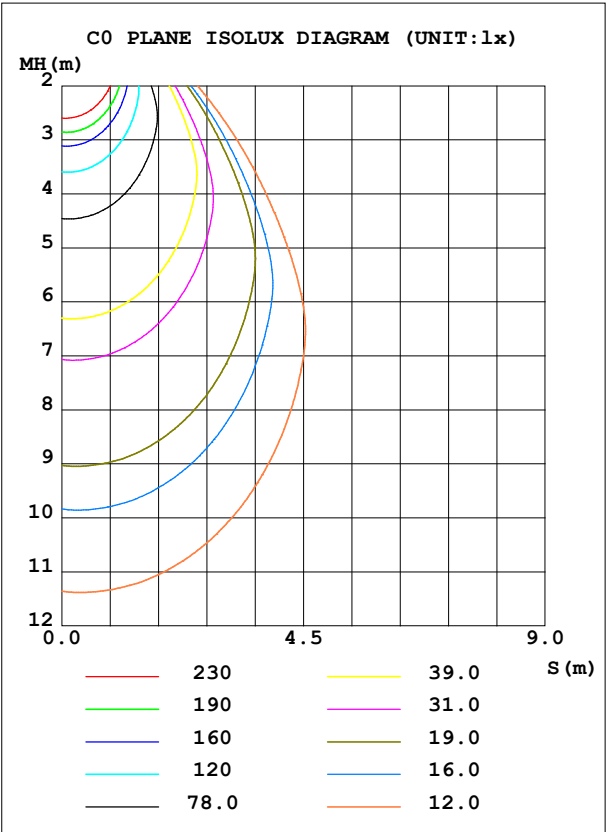


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.000V I:1.4352A P:14.200W PF:0.7970 Freq:60.00Hz		
Lamp Flux:836.123x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 58.88 lm/W
MODEL	SMART FIXTURE 2700K	Imax (cd)	1637	S/MH(C0/180)	0.90	
NOMINAL POWER(W)		LOR(%)	100.0	S/MH(C90/270)	0.48	
RATED VOLTAGE(V)		TOTAL FLUX(lm)	836.12	η UP,DN(C0-180)	0.1,48.3	
NOMINAL FLUX(lm)	836.123	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,51.6	
LAMPS INSIDE	1	η up (%)	0.1	CIBSE SHR NOM	0.00	
TEST VOLTAGE(V)		η down (%)	99.9	CIBSE SHR MAX	0.30	

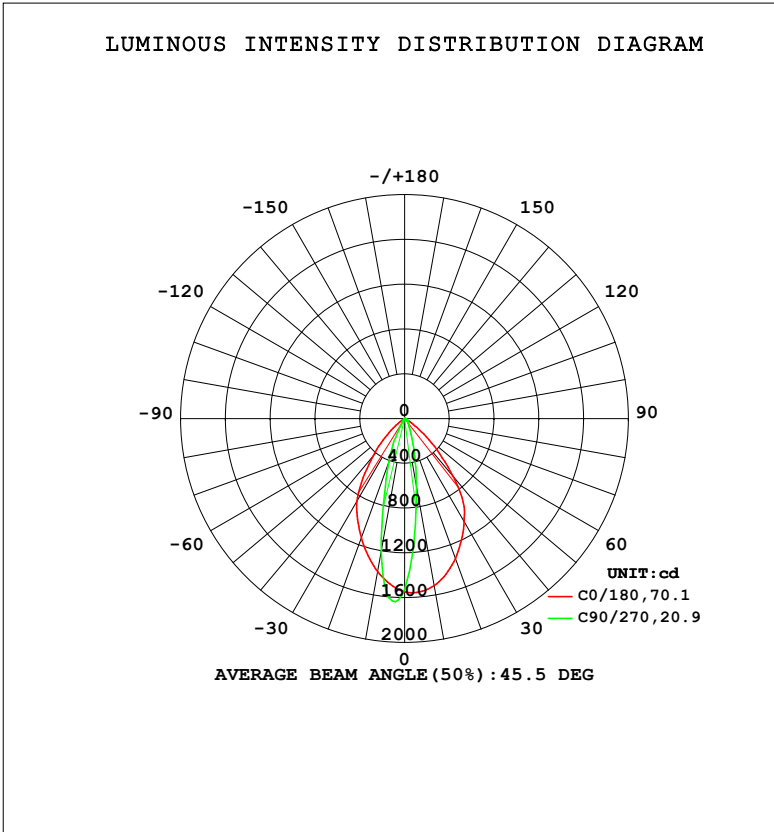

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1515	886.3	615.9	826.0	1388	1474	1201	1324	0- 10	127.0	127.0	15.2,15.2
20	1329	424.7	200.7	344.4	1133	790.0	411.2	574.9	10- 20	241.3	368.3	44,44
30	1065	194.1	84.29	137.5	854.4	232.6	72.69	167.0	20- 30	218.3	586.5	70.2,70.2
40	676.7	94.19	52.20	68.32	441.0	26.52	18.18	27.69	30- 40	142.5	729.1	87.2,87.2
50	254.4	50.53	33.98	37.84	136.3	1.871	0.5327	4.160	40- 50	71.71	800.8	95.8,95.8
60	35.92	24.00	19.71	16.60	3.712	0.4760	0	0.7275	50- 60	25.74	826.5	98.9,98.9
70	2.060	7.341	6.818	4.351	1.468	0	0	0	60- 70	6.517	833.0	99.6,99.6
80	1.119	1.614	0.9434	1.261	0.4537	0	0	0	70- 80	1.521	834.6	99.8,99.8
90	0.0498	1.033	0.5724	0.7719	0	0	0	0	80- 90	0.5291	835.1	99.9,99.9
100	0	0.3345	0.1897	0.1642	0	0	0	0	90-100	0.2035	835.3	99.9,99.9
110	0	0	0	0	0	0	0	0	100-110	0.0260	835.3	99.9,99.9
120	0	0	0	0	0	0	0	0	110-120	0	835.3	99.9,99.9
130	0	0	0	0	0.0784	0	0	0	120-130	0.0010	835.3	99.9,99.9
140	0.0805	0.1950	0.0470	0.1072	0.3737	0.2279	0.0087	0.2010	130-140	0.0442	835.4	99.9,99.9
150	0.1752	0.3257	0.3317	0.2818	0.6683	0.6286	0.4714	0.6960	140-150	0.1896	835.6	99.9,99.9
160	0.3005	0.4458	0.5264	0.4529	0.8584	0.8882	1.039	1.187	150-160	0.2756	835.8	100,100
170	0.4053	0.4695	0.5965	0.5327	0.8202	0.8412	1.096	1.276	160-170	0.2133	836.0	100,100
180	0.7002	0.7516	0.8451	0.9118	0.6965	0.7119	0.7998	0.8491	170-180	0.0744	836.1	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 772.43 lm

%lum = 92.4%

%lamp = 92.4%

Conical surface Flux(120deg): 826.53 lm

%lum = 98.9%


%lamp = 98.9%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:Allen
 Test Date:2026-01-29

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity:45%
 Test Distance:2.900m [K=0.8783]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:12.000V I:1.4352A P:14.200W PF:0.7970 Freq:60.00Hz Lamp Flux:836.123x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

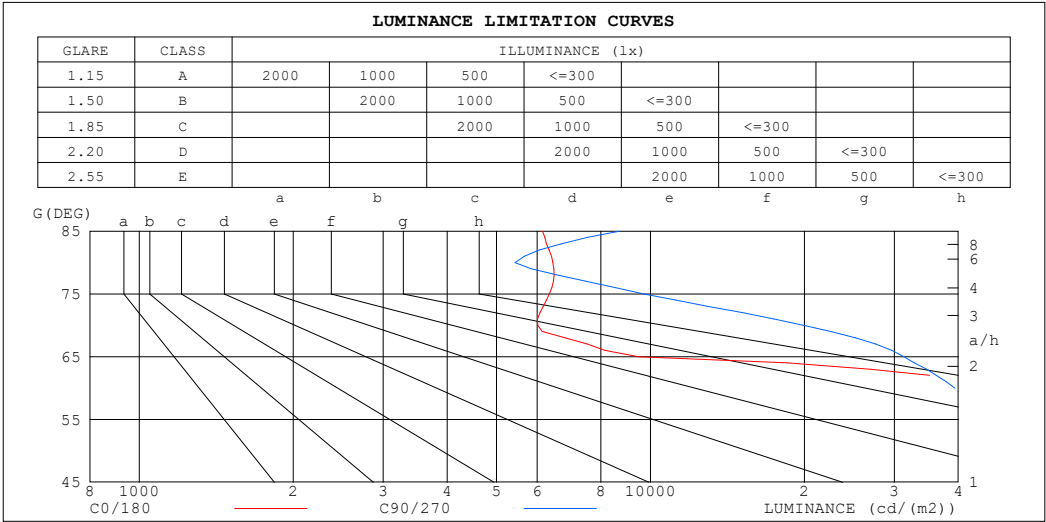

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	6146	8679
80	6442	5433
75	6342	9712
70	6022	19934
65	9476	31305
60	71849	39415
55	200084	46120
50	395707	52866
45	626769	60025


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:12.000V I:1.4352A P:14.200W PF:0.7970 Freq:60.00Hz		
Lamp Flux:836.123x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.11	1.08	1.06	1.09	1.06	1.04	1.04	1.03	1.01	1.01	.99	.98	.97	.96	.95	.93
2.0	1.03	.99	.96	1.01	.98	.94	.98	.95	.92	.95	.93	.90	.92	.90	.88	.87
3.0	.96	.91	.87	.95	.90	.86	.92	.88	.85	.90	.86	.84	.87	.85	.82	.81
4.0	.90	.84	.80	.89	.84	.80	.86	.82	.79	.84	.81	.78	.83	.79	.77	.75
5.0	.84	.78	.74	.83	.78	.74	.81	.77	.73	.80	.76	.72	.78	.75	.72	.70
6.0	.79	.73	.69	.78	.73	.69	.77	.72	.68	.76	.71	.68	.74	.70	.67	.66
7.0	.75	.69	.65	.74	.68	.64	.73	.68	.64	.72	.67	.64	.70	.66	.63	.62
8.0	.71	.65	.61	.70	.65	.61	.69	.64	.60	.68	.63	.60	.67	.63	.60	.59
9.0	.67	.61	.57	.67	.61	.57	.66	.61	.57	.65	.60	.57	.64	.60	.57	.55
10.0	.64	.58	.54	.63	.58	.54	.62	.57	.54	.62	.57	.54	.61	.57	.54	.52

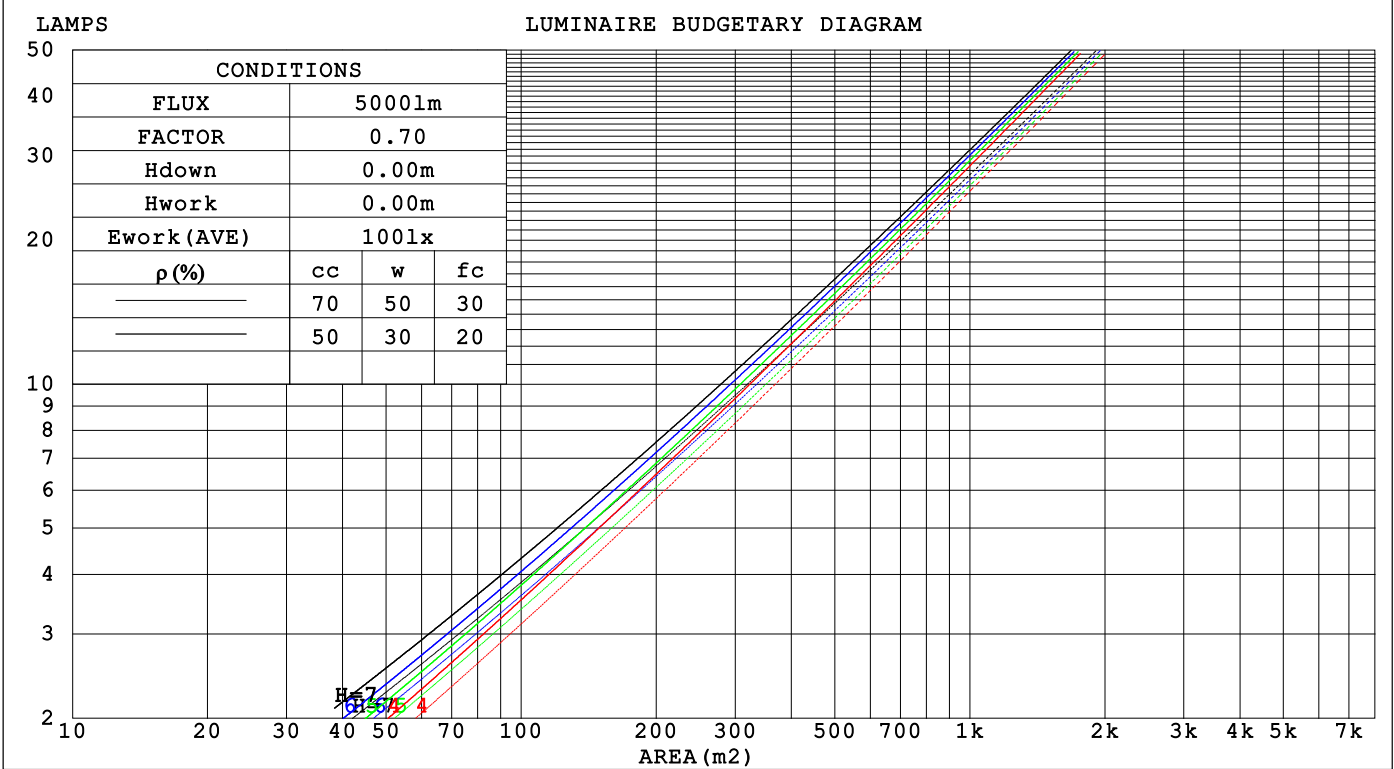

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

WEC AND CCEC

Test:U:12.000V I:1.4352A P:14.200W PF:0.7970 Freq:60.00Hz Lamp Flux:836.123x1 lm					
NAME:		TYPE:		WEIGHT:	
SPEC.:		DIM.:		SERIAL No.:	
MFR.:		SUR.:		Shielding Angle:	

pcc	80%			70%			50%			30%			10%			0														
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
pfc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Wall Exitance Coefficients(WEC)														
0.0																														
1.0	.179	.102	.032	.172	.098	.031	.159	.091	.029	.148	.085	.027	.137	.079	.026															
2.0	.171	.094	.029	.166	.091	.028	.155	.086	.027	.145	.081	.025	.136	.077	.024															
3.0	.163	.087	.026	.158	.085	.026	.149	.081	.025	.141	.077	.024	.133	.074	.023															
4.0	.155	.081	.024	.151	.079	.023	.143	.076	.023	.136	.073	.022	.129	.070	.021															
5.0	.147	.075	.022	.144	.074	.021	.137	.071	.021	.130	.069	.020	.124	.067	.020															
6.0	.140	.070	.020	.137	.069	.020	.131	.067	.020	.125	.065	.019	.120	.063	.019															
7.0	.134	.066	.019	.131	.065	.019	.125	.063	.018	.120	.062	.018	.116	.060	.018															
8.0	.127	.062	.018	.125	.062	.017	.120	.060	.017	.116	.059	.017	.112	.057	.017															
9.0	.122	.059	.016	.120	.058	.016	.115	.057	.016	.111	.056	.016	.108	.055	.016															
10.0	.117	.056	.016	.115	.055	.015	.111	.054	.015	.107	.053	.015	.104	.052	.015															

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.191	.191	.191	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.172	.158	.146	.147	.136	.125	.101	.093	.087	.058	.054	.050	.019	.017	.016	
2.0	.157	.133	.114	.135	.115	.098	.092	.079	.068	.053	.046	.040	.017	.015	.013	
3.0	.145	.115	.090	.124	.099	.078	.085	.069	.055	.049	.040	.032	.016	.013	.011	
4.0	.135	.100	.073	.115	.086	.064	.079	.060	.045	.046	.035	.027	.015	.011	.009	
5.0	.126	.088	.060	.108	.076	.053	.074	.053	.037	.043	.031	.022	.014	.010	.007	
6.0	.118	.079	.051	.102	.068	.044	.070	.048	.031	.041	.028	.019	.013	.009	.006	
7.0	.112	.071	.043	.096	.062	.038	.066	.043	.027	.039	.026	.016	.012	.008	.005	
8.0	.106	.065	.037	.091	.056	.032	.063	.040	.023	.037	.023	.014	.012	.008	.005	
9.0	.101	.060	.032	.087	.052	.028	.060	.037	.020	.035	.022	.012	.011	.007	.004	
10.0	.096	.055	.028	.083	.048	.025	.057	.034	.018	.033	.020	.011	.011	.007	.003	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:12.000V I:1.4352A P:14.200W PF:0.7970 Freq:60.00Hz Lamp Flux:836.123x1 lm										
NAME:			TYPE:			WEIGHT:				
SPEC.:			DIM.:			SERIAL No.:				
MFR.:			SUR.:			Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	32.1	33.0	32.3	33.2	33.4	22.3	23.3	22.6	23.5	23.6
3H	31.9	32.8	32.2	33.0	33.2	22.7	23.6	23.0	23.8	24.0
4H	31.8	32.7	32.1	32.9	33.1	22.7	23.5	23.0	23.8	24.0
6H	31.8	32.5	32.1	32.8	33.0	22.6	23.4	22.9	23.7	23.9
8H	31.7	32.4	32.0	32.7	33.0	22.6	23.3	22.9	23.6	23.9
12H	31.7	32.4	32.0	32.6	32.9	22.6	23.3	22.9	23.6	23.8
4H 2H	31.9	32.7	32.1	32.9	33.1	23.0	23.8	23.2	24.0	24.2
3H	31.7	32.4	32.0	32.7	33.0	23.4	24.1	23.7	24.3	24.6
4H	31.6	32.3	32.0	32.6	32.9	23.4	24.0	23.7	24.3	24.6
6H	31.5	32.1	31.9	32.4	32.8	23.3	23.9	23.7	24.2	24.6
8H	31.5	32.0	31.9	32.3	32.7	23.3	23.8	23.7	24.1	24.5
12H	31.4	31.9	31.8	32.3	32.7	23.2	23.7	23.6	24.1	24.5
8H 4H	31.5	32.0	31.9	32.3	32.7	23.3	23.8	23.7	24.1	24.5
6H	31.4	31.8	31.8	32.2	32.6	23.2	23.7	23.7	24.1	24.5
8H	31.3	31.7	31.8	32.1	32.6	23.2	23.6	23.6	24.0	24.4
12H	31.3	31.6	31.7	32.0	32.5	23.2	23.5	23.7	24.0	24.4
12H 4H	31.4	31.9	31.8	32.3	32.7	23.2	23.7	23.6	24.1	24.5
6H	31.3	31.7	31.8	32.1	32.6	23.2	23.6	23.6	24.0	24.4
8H	31.3	31.6	31.7	32.0	32.5	23.2	23.5	23.6	23.9	24.4
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 4.7 / - 4.6					+ 1.0 / - 1.5				
1.5H	+ 5.3 / - 9.6					+ 1.2 / - 1.3				
2.0H	+ 7.0 / - 8.3					+ 1.1 / - 1.6				

CIE Pub.117, 836.1 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -0.6)
Area: 0.001 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:12.000V I:1.4352A P:14.200W PF:0.7970 Freq:60.00Hz Lamp Flux:836.123x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	83	76	72	83	76	72	82	76	72	68
0.80	91	85	81	91	85	81	89	84	80	76
1.00	97	91	87	96	90	86	94	90	86	81
1.25	101	96	92	100	95	91	98	94	91	86
1.50	104	99	95	103	98	95	101	97	94	89
2.00	107	103	100	106	102	99	103	100	97	92
2.50	109	105	102	108	104	101	104	101	99	93
3.00	111	107	104	109	106	103	106	103	101	94
4.00	113	110	108	111	108	106	107	105	104	96
5.00	114	112	110	112	110	108	108	107	105	97
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3℃
 Operators: Allen
 Test Date: 2026-01-29

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity: 45%
 Test Distance: 2.900m [K=0.8783]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:12.000V I:1.4352A P:14.200W PF:0.7970 Freq:60.00Hz Lamp Flux:836.123x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

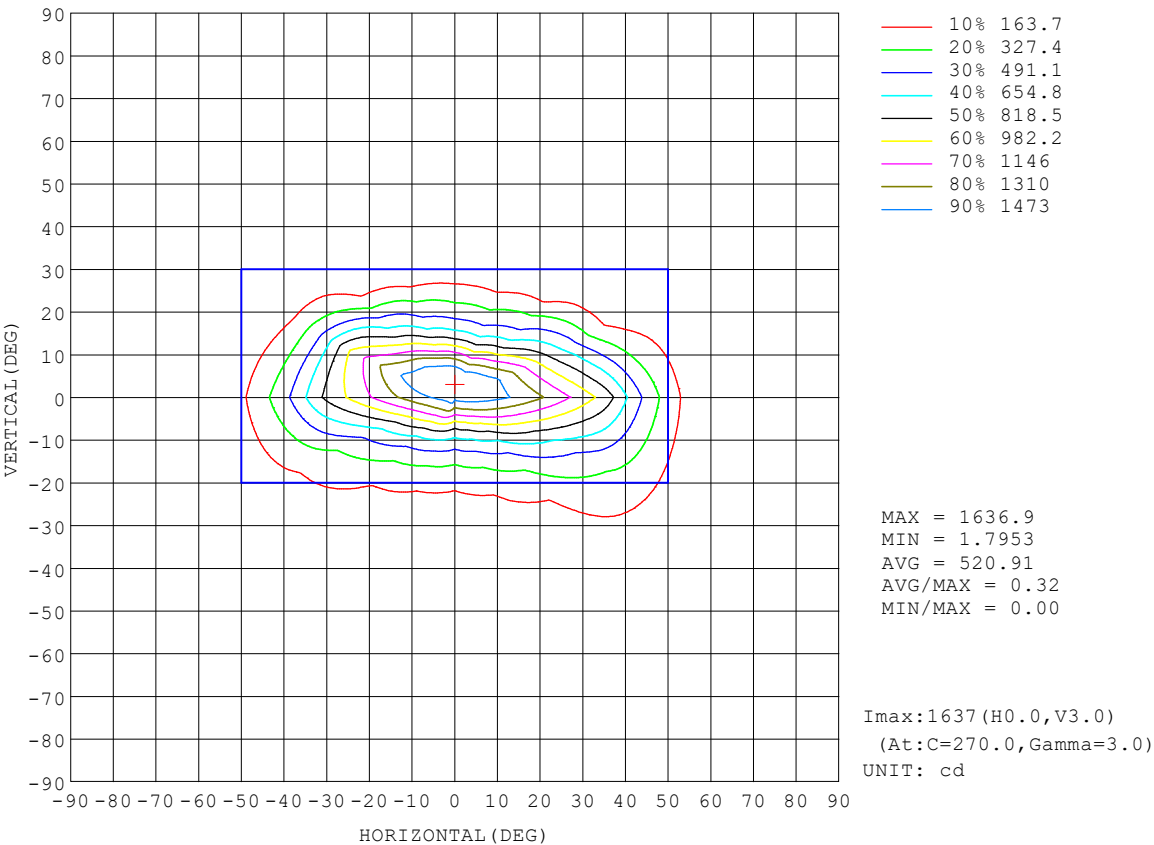


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

AAI Figure

Test:U:12.000V I:1.4352A P:14.200W PF:0.7970 Freq:60.00Hz Lamp Flux:836.123x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

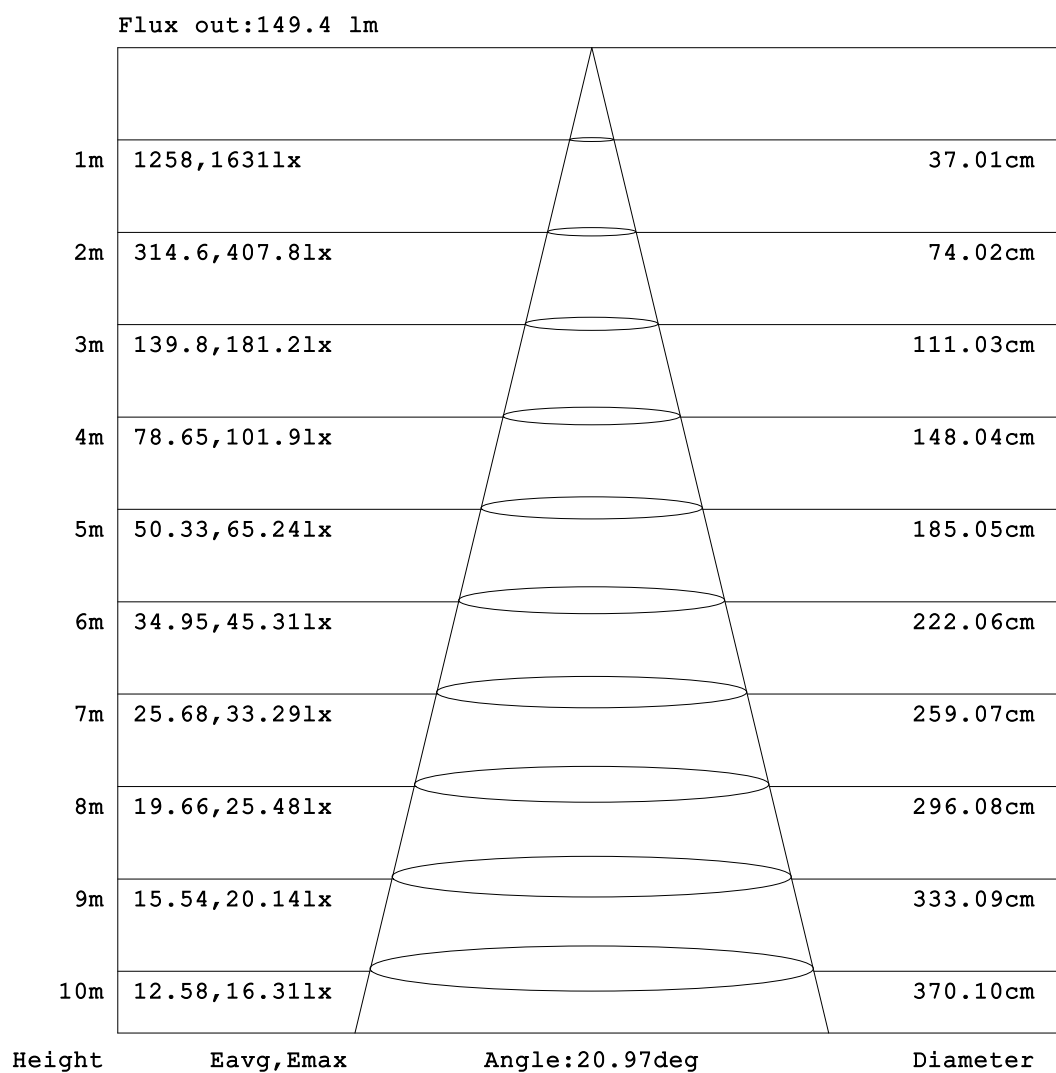


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

ISOLUX DIAGRAM


Test:U:12.000V I:1.4352A P:14.200W PF:0.7970 Freq:60.00Hz Lamp Flux:836.123x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

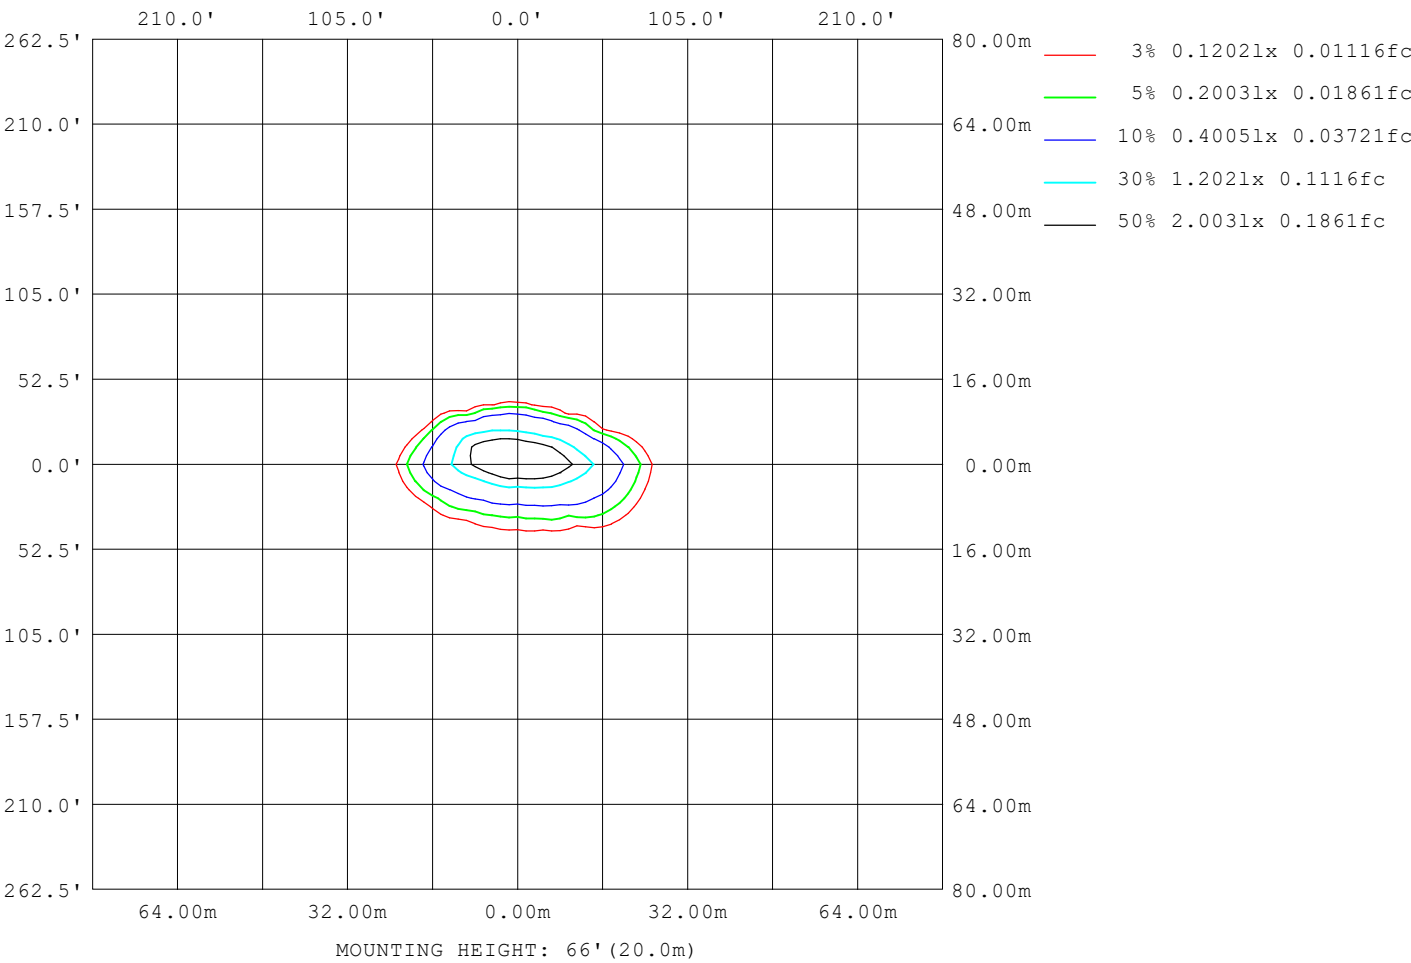

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

Planar Illuminance Curve

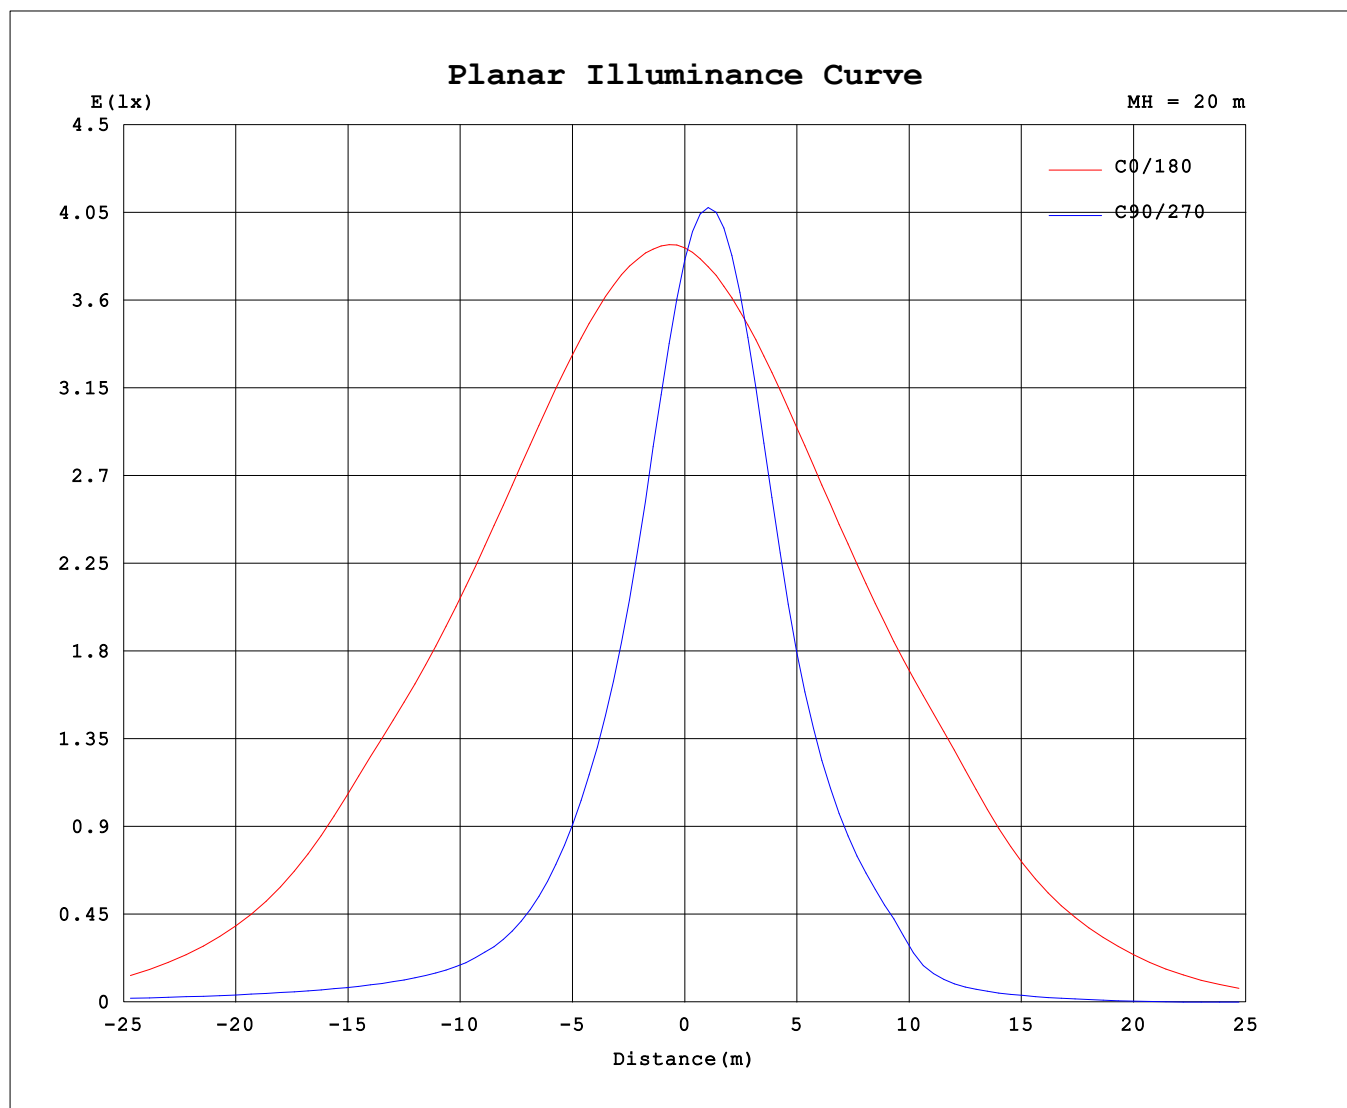

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3 °C
Operators: Allen
Test Date: 2026-01-29

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity: 45%
Test Distance: 2.900m [K=0.8783]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.000V I:1.4352A P:14.200W PF:0.7970 Freq:60.00Hz Lamp Flux:836.123x1 lm																		
NAME:									TYPE:					WEIGHT:				
SPEC.:									DIM.:					SERIAL No.:				
MFR.:									SUR.:					Shielding Angle:				

Table--1

UNIT: cd

γ (DEG)	C (DEG)																	
	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5		
0	1548	1539	1532	1528	1523	1577	1564	1547	1548	1539	1532	1528	1523	1577	1564	1547		
5	1554	1403	1235	1105	1039	1161	1231	1347	1485	1590	1626	1616	1606	1566	1602	1607		
10	1515	1218	886	693	616	706	826	1076	1388	1553	1474	1296	1201	1135	1324	1514		
15	1438	1014	614	429	357	421	537	815	1267	1441	1145	823	706	674	905	1303		
20	1329	820	425	257	201	241	344	603	1133	1271	790	499	411	401	575	1030		
25	1201	654	288	156	123	142	215	445	994	1068	517	283	230	222	369	763		
30	1065	515	194	103	84.3	94.3	137	326	854	770	233	93.7	72.7	73.4	167	536		
35	917	404	134	75.8	64.6	69.7	94.0	234	648	446	77.8	36.6	34.3	33.9	59.1	288		
40	677	313	94.2	58.8	52.2	55.2	68.3	160	441	211	26.5	17.8	18.2	18.3	27.7	120		
45	443	232	68.7	47.5	42.4	44.8	51.2	99.4	275	70.5	9.45	5.55	5.96	6.06	13.6	39.1		
50	254	154	50.5	38.1	34.0	35.9	37.8	57.4	136	12.2	1.87	0.52	0.53	0.73	4.16	15.7		
55	115	91.8	36.0	29.8	26.5	27.8	26.5	29.5	45.4	2.28	0.60	0.08	0.00	0.11	1.06	5.90		
60	35.9	45.6	24.0	22.2	19.7	19.8	16.6	13.4	3.71	1.16	0.48	0.00	0.00	0.00	0.73	2.33		
65	4.00	16.9	14.2	14.7	13.2	12.7	9.30	5.17	1.74	0.94	0.05	0.00	0.00	0.00	0.40	1.49		
70	2.06	4.73	7.34	8.39	6.82	6.44	4.35	2.38	1.47	0.45	0.00	0.00	0.00	0.00	0.00	1.08		
75	1.64	2.10	3.25	3.41	2.51	2.53	1.98	1.64	1.06	0.00	0.00	0.00	0.00	0.00	0.00	0.49		
80	1.12	1.65	1.61	1.30	0.94	1.01	1.26	1.36	0.45	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
85	0.54	1.25	1.34	1.03	0.76	0.82	1.05	0.94	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
90	0.05	0.78	1.03	0.81	0.57	0.63	0.77	0.46	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
95	0.00	0.35	0.66	0.56	0.37	0.42	0.45	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
100	0.00	0.03	0.33	0.31	0.19	0.22	0.16	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
105	0.00	0.00	0.08	0.11	0.04	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.08	0.03	0.00	0.00	0.00	0.00	0.00	0.02		
135	0.00	0.05	0.07	0.00	0.00	0.00	0.00	0.03	0.21	0.16	0.05	0.00	0.00	0.00	0.02	0.17		
140	0.08	0.14	0.19	0.12	0.05	0.03	0.11	0.12	0.37	0.32	0.23	0.08	0.01	0.07	0.20	0.36		
145	0.13	0.20	0.28	0.27	0.21	0.19	0.22	0.20	0.54	0.49	0.44	0.30	0.20	0.28	0.43	0.57		
150	0.18	0.24	0.33	0.35	0.33	0.29	0.28	0.26	0.67	0.63	0.63	0.56	0.47	0.57	0.70	0.79		
155	0.25	0.32	0.40	0.43	0.45	0.41	0.37	0.34	0.78	0.76	0.79	0.82	0.79	0.89	0.97	1.01		
160	0.30	0.36	0.45	0.48	0.53	0.50	0.45	0.40	0.86	0.84	0.89	0.99	1.04	1.14	1.19	1.18		
165	0.32	0.37	0.45	0.50	0.57	0.55	0.48	0.43	0.84	0.83	0.87	0.98	1.13	1.25	1.29	1.26		
170	0.41	0.41	0.47	0.54	0.60	0.58	0.53	0.53	0.82	0.82	0.84	0.94	1.10	1.22	1.28	1.24		
175	0.57	0.56	0.57	0.62	0.65	0.65	0.69	0.70	0.79	0.79	0.81	0.88	0.99	1.05	1.12	1.12		
180	0.70	0.72	0.75	0.81	0.85	0.84	0.91	0.89	0.70	0.70	0.71	0.74	0.80	0.81	0.85	0.91		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks: