


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:12.000V I:1.3817A P:13.800W PF:0.7509 Freq:59.94Hz Lamp Flux:836.231x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 60.60 lm/W
MODEL	SMART FIXTURE 3000K	Imax (cd)	1693	S/MH(C0/180)	0.39	
NOMINAL POWER(W)		LOR(%)	100.0	S/MH(C90/270)	0.62	
RATED VOLTAGE(V)		TOTAL FLUX(lm)	836.23	η UP,DN(C0-180)	0.1,61.7	
NOMINAL FLUX(lm)	836.231	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,38.2	
LAMPS INSIDE	1	η up (%)	0.2	CIBSE SHR NOM	0.50	
TEST VOLTAGE(V)		η down (%)	99.8	CIBSE SHR MAX	0.55	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

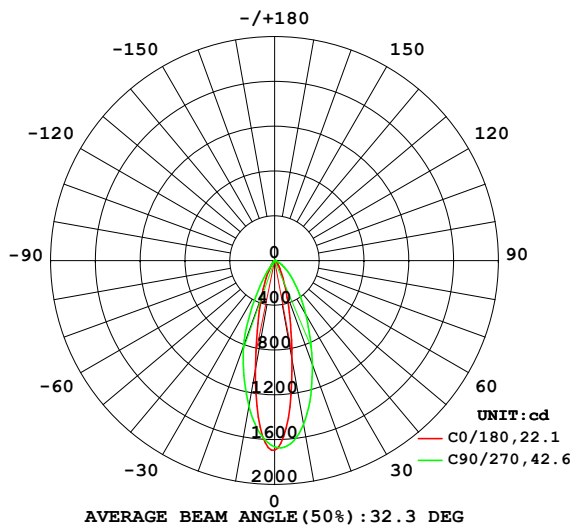

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

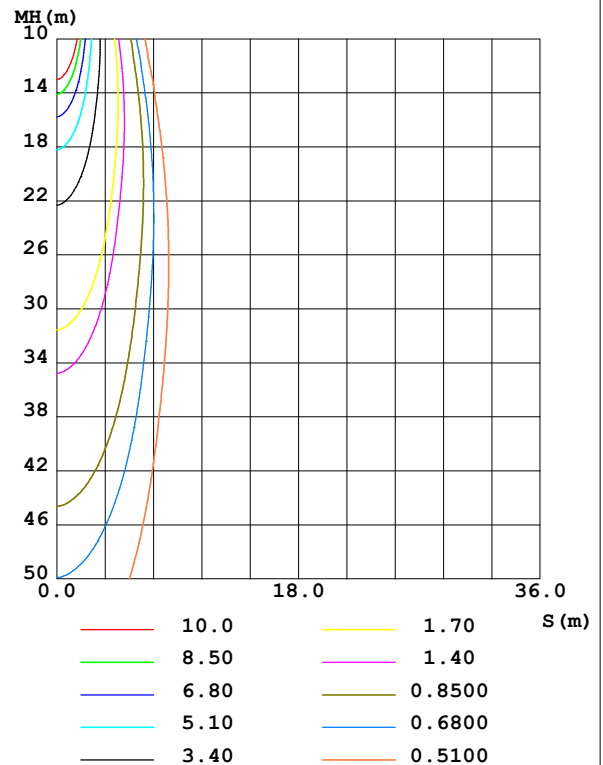

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	902.3	1411	1487	1058	994.7	1449	1324	805.8	0- 10	133.5	133.5	16,16
20	314.4	928.2	987.9	369.3	345.0	985.4	813.8	273.5	10- 20	241.0	374.5	44.8,44.8
30	112.8	537.8	555.7	132.9	106.5	401.7	257.9	71.70	20- 30	207.4	581.9	69.6,69.6
40	52.73	294.7	300.1	63.73	32.07	56.45	20.14	21.99	30- 40	125.4	707.3	84.6,84.6
50	25.36	150.2	154.1	33.88	8.838	0.0245	0	3.309	40- 50	68.44	775.7	92.8,92.8
60	8.751	59.73	70.95	14.35	0.4815	0	0	0.1283	50- 60	38.37	814.1	97.4,97.4
70	1.455	13.77	19.05	2.608	0.1472	0	0	0	60- 70	16.46	830.5	99.3,99.3
80	0.5735	3.144	3.506	0.6910	0	0	0	0	70- 80	3.527	834.1	99.7,99.7
90	0.0879	2.087	1.990	0.2576	0	0	0	0	80- 90	0.7820	834.9	99.8,99.8
100	0	0.9364	0.9848	0	0	0	0	0	90-100	0.4210	835.3	99.9,99.9
110	0	0.0838	0.2004	0	0	0	0	0	100-110	0.1278	835.4	99.9,99.9
120	0	0	0	0	0	0	0	0	110-120	0.0064	835.4	99.9,99.9
130	0	0	0	0	0	0.1184	0.0823	0	120-130	0.0039	835.4	99.9,99.9
140	0.0032	0.0482	0.0981	0	0.1541	0.4481	0.3969	0.1828	130-140	0.0545	835.5	99.9,99.9
150	0.2151	0.1558	0.2377	0.2721	0.7103	0.8093	0.7066	0.7234	140-150	0.2012	835.7	99.9,99.9
160	0.4234	0.3047	0.3787	0.4684	1.201	1.122	0.8645	1.030	150-160	0.2821	835.9	100,100
170	0.5387	0.4375	0.4397	0.5478	1.202	1.113	0.8515	0.9002	160-170	0.2099	836.2	100,100
180	0.8239	0.7746	0.6844	0.7109	0.8240	0.8170	0.6998	0.6867	170-180	0.0718	836.2	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 746.46 lm

%lum = 89.3%

%lamp = 89.3%

Conical surface Flux(120deg): 814.08 lm

%lum = 97.4%


%lamp = 97.4%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:Allen
 Test Date:2026-01-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity:45%
 Test Distance:2.900m [K=0.8783]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:12.000V I:1.3817A P:13.800W PF:0.7509 Freq:59.94Hz Lamp Flux:836.231x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

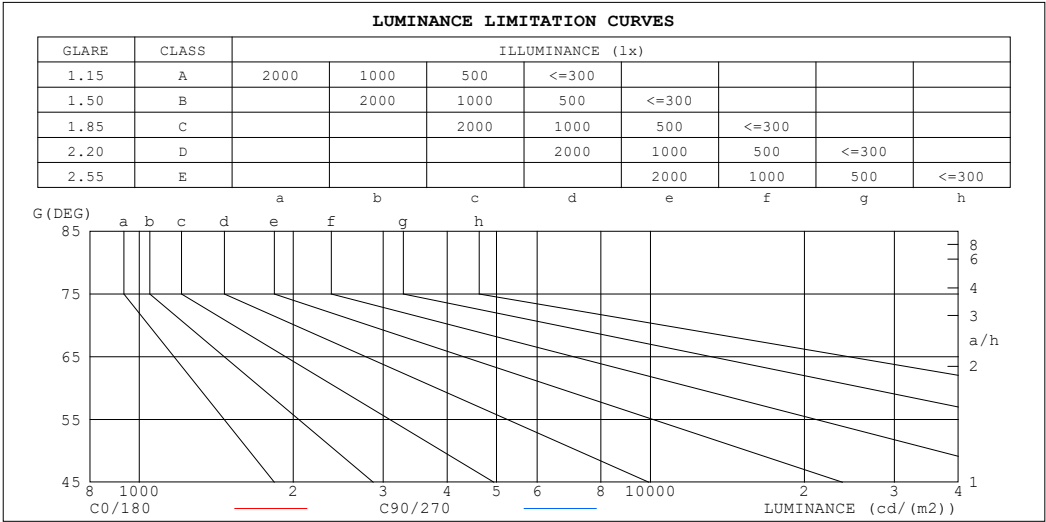

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	366582	2692757
80	330254	2018938
75	321189	3167799
70	425387	5571156
65	740962	9452365
60	1750202	14189496
55	2868106	18566921
50	3945619	23979975
45	5326378	30681213


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:12.000V I:1.3817A P:13.800W PF:0.7509 Freq:59.94Hz		
Lamp Flux:836.231x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

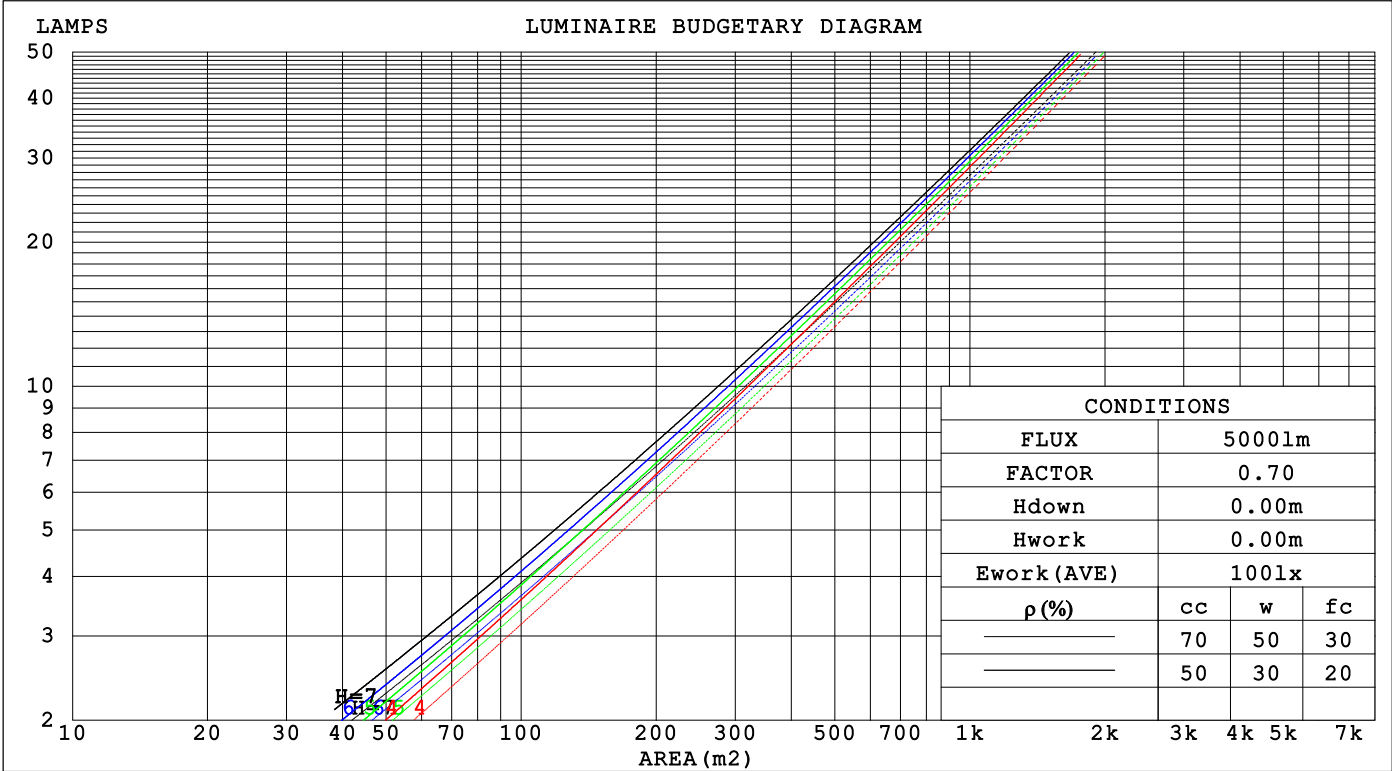

C Range: 0 - 360DEG

C Interval: 22.5DEG

Test Speed: HIGH

Temperature:25.3℃

Operators:Allen

Test Date:2026-01-27

γ Range: 0 - 180DEG

γ Interval: 1.0DEG

Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459

Humidity:45%

Test Distance:2.900m [K=0.8783]

Remarks:

WEC AND CCEC

Test:U:12.000V I:1.3817A P:13.800W PF:0.7509 Freq:59.94Hz Lamp Flux:836.231x1 lm					
NAME:		TYPE:		WEIGHT:	
SPEC.:		DIM.:		SERIAL No.:	
MFR.:		SUR.:		Shielding Angle:	

pcc	80%			70%			50%			30%			10%			0														
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
pfc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Wall Exitance Coefficients(WEC)														
0.0																														
1.0	.184	.105	.033	.177	.101	.032	.164	.094	.030	.153	.088	.028	.142	.082	.027															
2.0	.176	.097	.030	.171	.094	.029	.160	.089	.028	.150	.084	.026	.141	.080	.025															
3.0	.167	.089	.027	.162	.087	.026	.153	.083	.025	.145	.079	.024	.137	.076	.023															
4.0	.159	.082	.024	.154	.081	.024	.146	.078	.023	.139	.075	.023	.132	.072	.022															
5.0	.150	.077	.022	.146	.075	.022	.140	.073	.021	.133	.070	.021	.127	.068	.020															
6.0	.142	.071	.020	.139	.070	.020	.133	.068	.020	.127	.066	.019	.122	.064	.019															
7.0	.135	.067	.019	.132	.066	.019	.127	.064	.019	.122	.063	.018	.117	.061	.018															
8.0	.129	.063	.018	.126	.062	.018	.121	.061	.017	.117	.059	.017	.113	.058	.017															
9.0	.123	.059	.017	.120	.059	.016	.116	.057	.016	.112	.056	.016	.108	.055	.016															
10.0	.117	.056	.016	.115	.056	.016	.111	.055	.015	.108	.053	.015	.104	.052	.015															

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.173	.159	.146	.148	.136	.125	.101	.094	.087	.058	.054	.050	.019	.017	.016	
2.0	.158	.134	.113	.135	.115	.098	.093	.080	.068	.054	.046	.040	.017	.015	.013	
3.0	.146	.115	.090	.125	.099	.078	.086	.069	.055	.050	.040	.032	.016	.013	.011	
4.0	.136	.100	.073	.117	.087	.064	.080	.060	.045	.046	.035	.026	.015	.012	.009	
5.0	.127	.089	.060	.109	.077	.053	.075	.054	.037	.044	.031	.022	.014	.010	.007	
6.0	.119	.079	.051	.103	.069	.044	.071	.048	.031	.041	.028	.019	.013	.009	.006	
7.0	.113	.072	.043	.097	.062	.038	.067	.044	.027	.039	.026	.016	.013	.008	.005	
8.0	.107	.066	.037	.092	.057	.032	.064	.040	.023	.037	.024	.014	.012	.008	.005	
9.0	.101	.060	.033	.087	.052	.028	.061	.037	.020	.035	.022	.012	.011	.007	.004	
10.0	.097	.056	.029	.083	.049	.025	.058	.034	.018	.034	.020	.011	.011	.007	.004	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:12.000V I:1.3817A P:13.800W PF:0.7509 Freq:59.94Hz Lamp Flux:836.23lx1 lm										
NAME:			TYPE:			WEIGHT:				
SPEC.:			DIM.:			SERIAL No.:				
MFR.:			SUR.:			Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	42.5	43.4	42.7	43.6	43.8	52.6	53.5	52.8	53.7	53.9
3H	42.3	43.2	42.6	43.4	43.6	52.8	53.7	53.1	53.9	54.1
4H	42.2	43.1	42.5	43.3	43.5	52.7	53.6	53.0	53.8	54.0
6H	42.2	42.9	42.5	43.2	43.4	52.7	53.4	53.0	53.7	53.9
8H	42.1	42.9	42.4	43.1	43.4	52.6	53.4	52.9	53.6	53.9
12H	42.1	42.8	42.4	43.1	43.3	52.6	53.3	52.9	53.6	53.8
4H 2H	44.6	45.5	44.9	45.7	45.9	52.4	53.3	52.7	53.5	53.7
3H	44.5	45.2	44.8	45.5	45.8	52.8	53.5	53.1	53.8	54.1
4H	44.4	45.1	44.8	45.4	45.7	52.7	53.4	53.1	53.7	54.0
6H	44.3	44.9	44.7	45.3	45.6	52.7	53.2	53.0	53.6	53.9
8H	44.3	44.8	44.7	45.2	45.6	52.6	53.1	53.0	53.5	53.9
12H	44.3	44.7	44.7	45.1	45.5	52.6	53.1	53.0	53.4	53.8
8H 4H	44.6	45.2	45.0	45.5	45.9	52.6	53.1	53.0	53.5	53.9
6H	44.5	45.0	45.0	45.4	45.8	52.5	53.0	52.9	53.4	53.8
8H	44.5	44.9	44.9	45.3	45.7	52.5	52.9	52.9	53.3	53.7
12H	44.4	44.8	44.9	45.2	45.7	52.4	52.8	52.9	53.2	53.7
12H 4H	44.6	45.1	45.0	45.4	45.8	52.5	53.0	53.0	53.4	53.8
6H	44.5	44.9	44.9	45.3	45.7	52.5	52.9	52.9	53.3	53.7
8H	44.5	44.8	44.9	45.2	45.7	52.4	52.7	52.9	53.2	53.7
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 2.0 / - 4.8					+ 1.3 / - 2.7				
1.5H	+ 2.1 / - 2.7					+ 1.4 / - 5.2				
2.0H	+ 3.5 / - 4.9					+ 2.8 / - 6.9				

CIE Pub.117, 836.2 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -0.6)
Area: 1e-005 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:12.000V I:1.3817A P:13.800W PF:0.7509 Freq:59.94Hz Lamp Flux:836.231x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	82	74	70	81	74	70	80	74	70	66
0.80	90	83	79	89	83	79	88	82	78	74
1.00	95	89	85	94	88	84	93	89	84	79
1.25	100	94	90	99	93	90	97	92	89	84
1.50	103	98	94	102	97	93	100	95	92	87
2.00	107	102	98	105	101	97	102	99	96	90
2.50	109	104	101	107	103	100	104	101	98	92
3.00	110	107	103	109	105	102	105	102	100	93
4.00	113	110	107	111	108	106	107	105	103	96
5.00	114	111	109	112	110	108	108	106	105	97
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3℃
 Operators: Allen
 Test Date: 2026-01-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity: 45%
 Test Distance: 2.900m [K=0.8783]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:12.000V I:1.3817A P:13.800W PF:0.7509 Freq:59.94Hz Lamp Flux:836.231x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

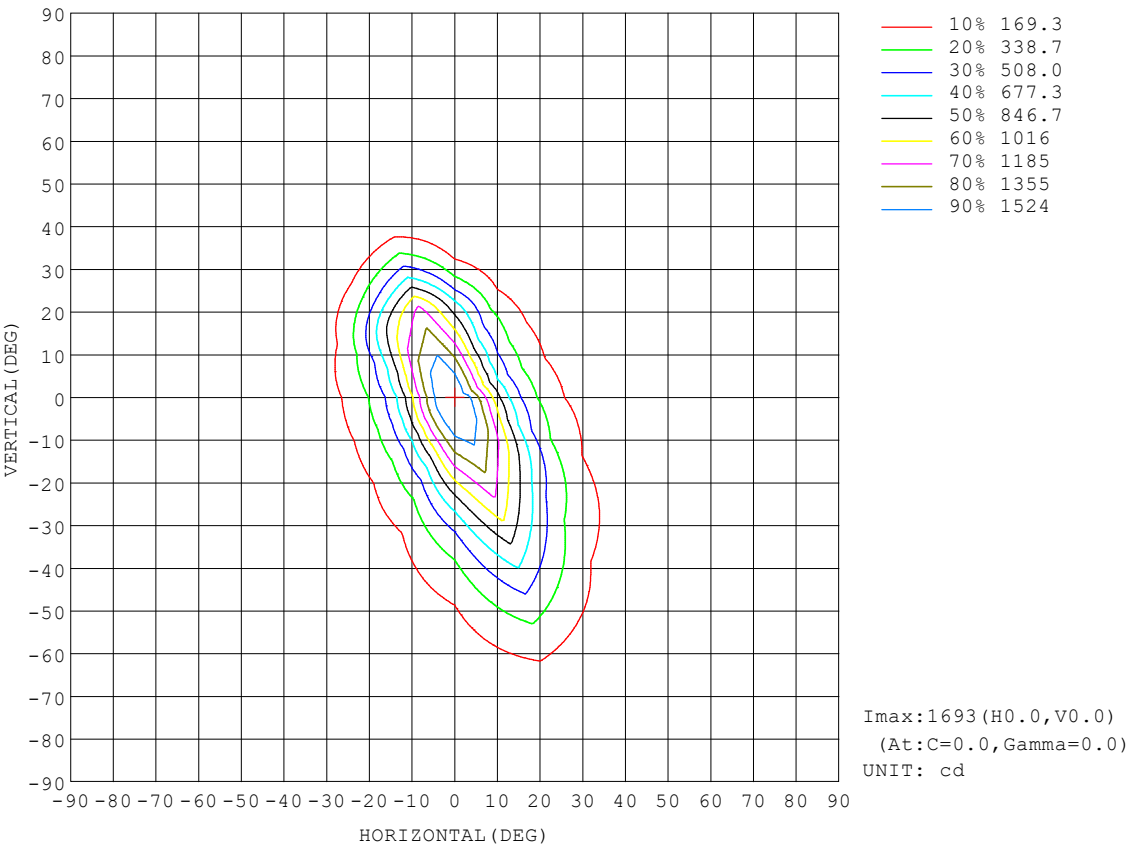


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

AAI Figure

Test:U:12.000V I:1.3817A P:13.800W PF:0.7509 Freq:59.94Hz Lamp Flux:836.23lx1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

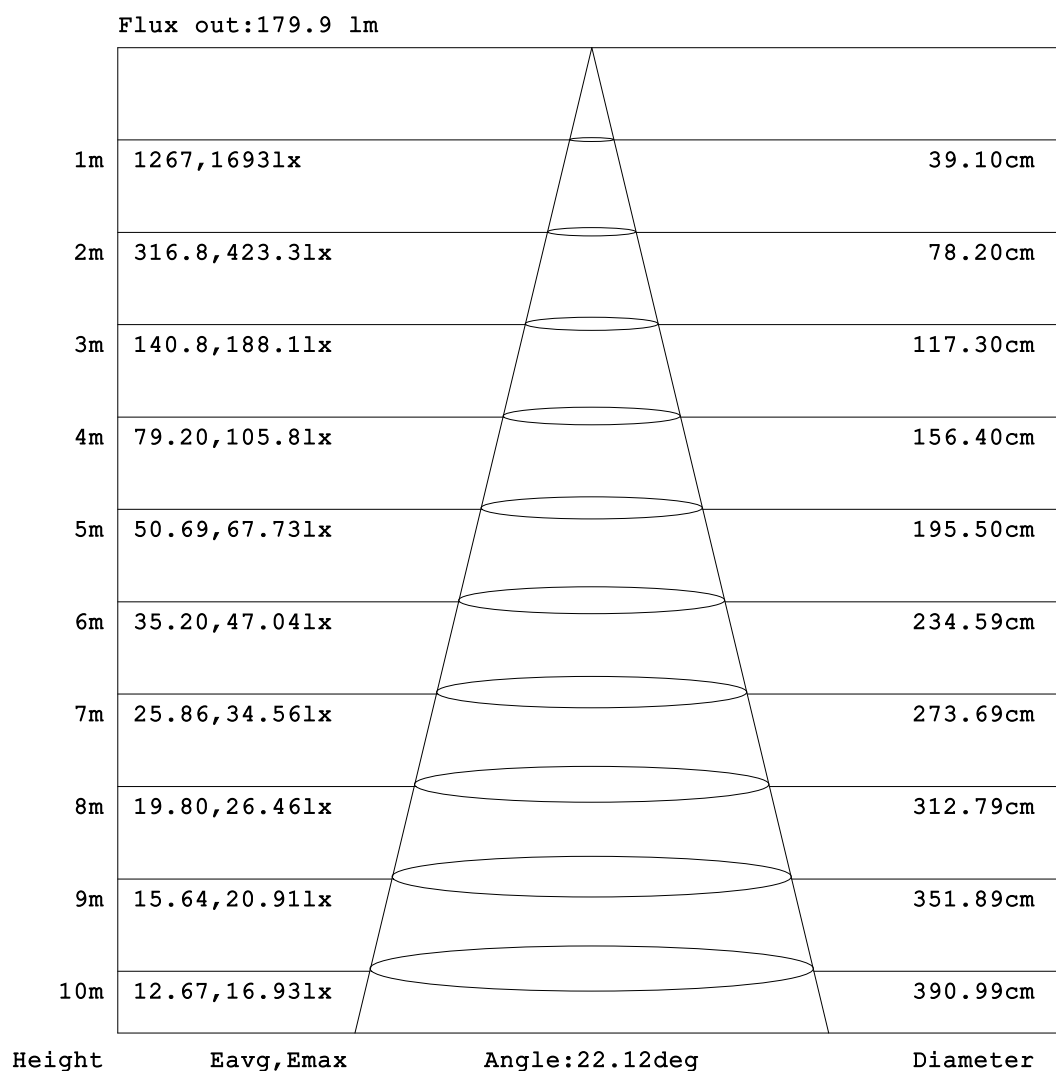


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:Allen
 Test Date:2026-01-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity:45%
 Test Distance:2.900m [K=0.8783]
 Remarks:


ISOLUX DIAGRAM

Test:U:12.000V I:1.3817A P:13.800W PF:0.7509 Freq:59.94Hz Lamp Flux:836.23lx 1m		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

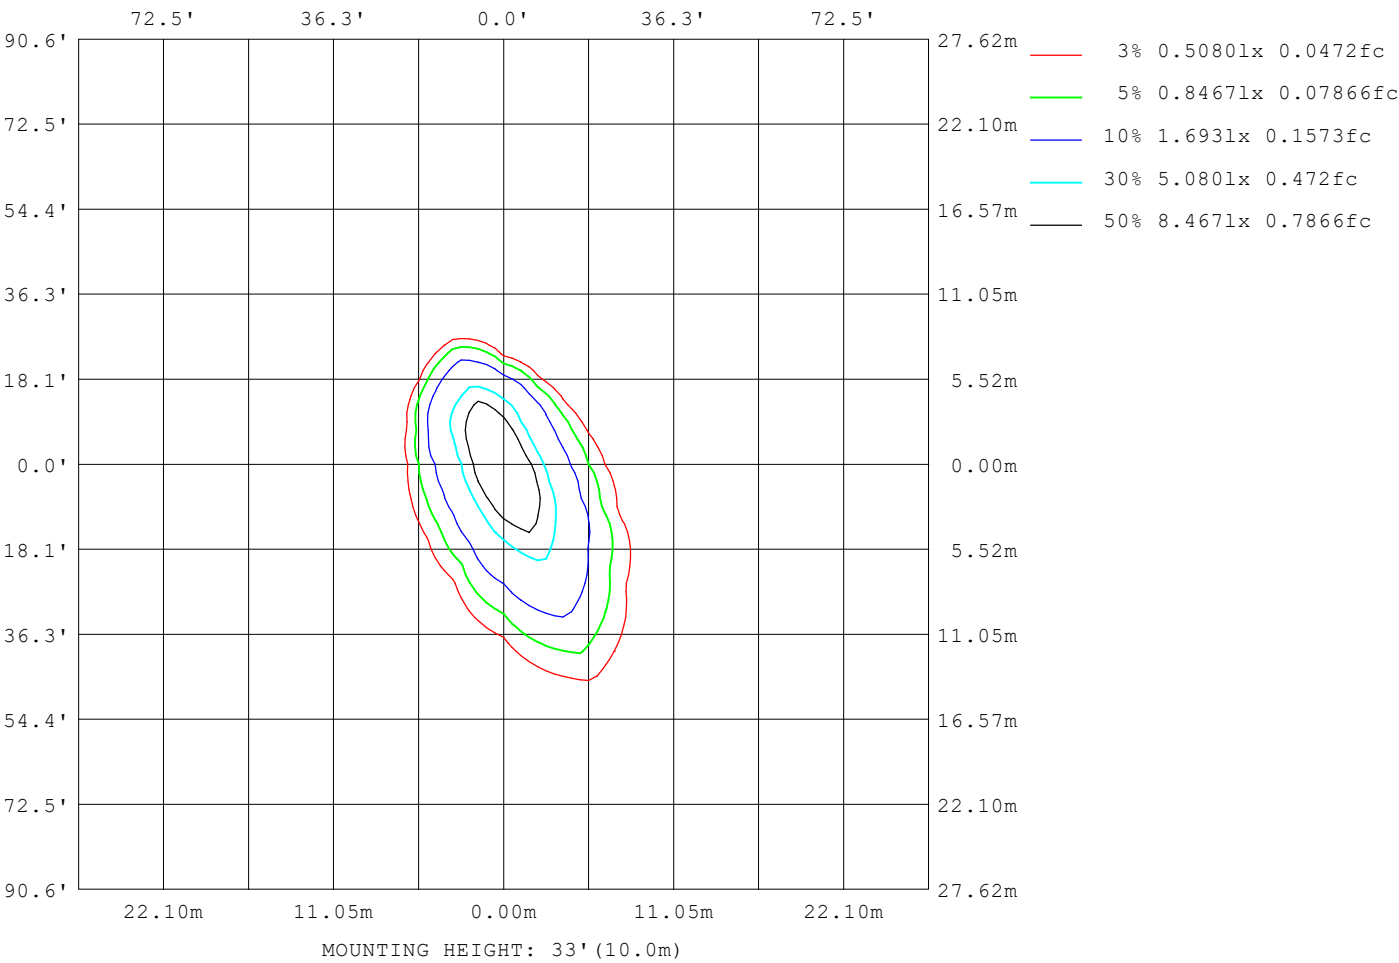

C Range: 0 - 360DEG C Interval: 22.5DEG Test Speed: HIGH Temperature:25.3℃ Operators:Allen Test Date:2026-01-27	γ Range: 0 - 180DEG γ Interval: 1.0DEG Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459 Humidity:45% Test Distance:2.900m [K=0.8783] Remarks:
--	---

Planar Illuminance Curve

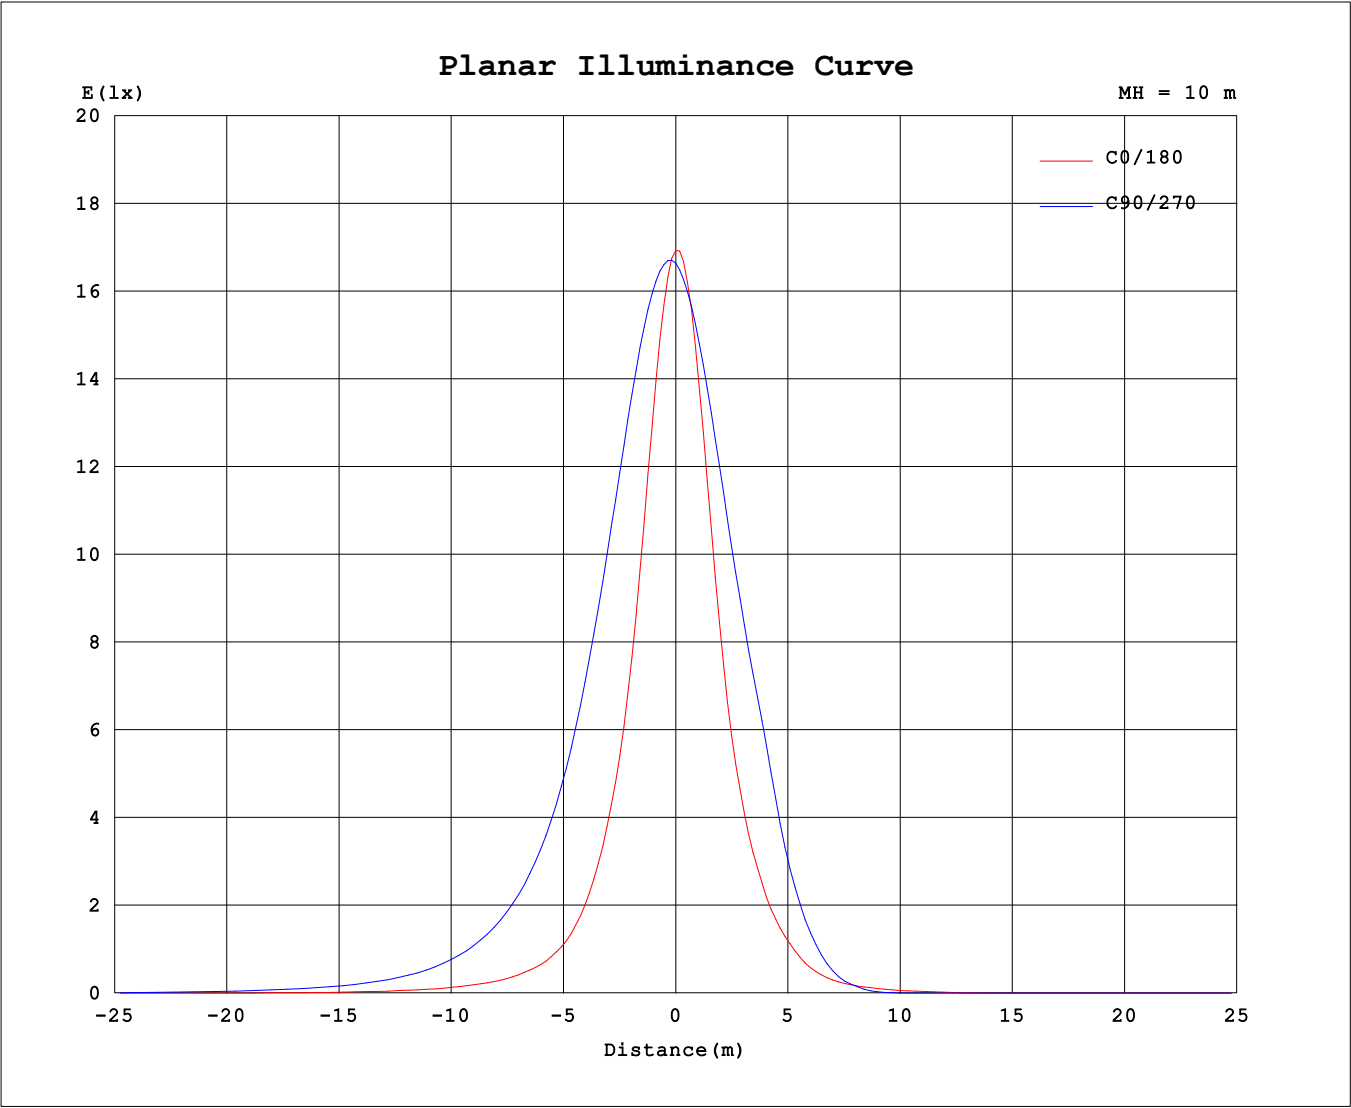

C Range: 0 - 360DEG	γ Range: 0 - 180DEG
C Interval: 22.5DEG	γ Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Temperature:25.3℃	Humidity:45%
Operators:Allen	Test Distance:2.900m [K=0.8783]
Test Date:2026-01-27	Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.000V I:1.3817A P:13.800W PF:0.7509 Freq:59.94Hz Lamp Flux:836.231x1 lm																	
NAME:									TYPE:						WEIGHT:		
SPEC.:									DIM.:						SERIAL No.:		
MFR.:									SUR.:						Shielding Angle:		

Table--1

UNIT: cd

γ (DEG)	C (DEG)																			
	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5				
0	1693	1685	1680	1675	1664	1654	1649	1645	1693	1685	1680	1675	1664	1654	1649	1645				
5	1412	1501	1602	1652	1642	1587	1530	1505	1493	1556	1618	1631	1544	1412	1305	1265				
10	902	1114	1411	1570	1487	1250	1058	989	995	1201	1449	1541	1324	1010	806	747				
15	535	740	1169	1459	1248	846	622	558	580	808	1221	1422	1063	654	475	428				
20	314	489	928	1333	988	548	369	318	345	524	985	1292	814	424	274	238				
25	183	322	714	1197	750	360	216	179	199	335	712	1048	519	236	151	135				
30	113	210	538	1050	556	235	133	109	106	168	402	679	258	103	71.7	80.1				
35	76.8	138	401	896	409	154	88.5	69.1	55.4	71.6	183	382	93.1	38.3	39.4	51.3				
40	52.7	95.0	295	744	300	105	63.7	47.0	32.1	28.0	56.5	161	20.1	14.7	22.0	33.7				
45	37.7	65.0	213	600	217	74.5	46.8	31.9	18.3	9.86	4.52	22.6	1.78	3.98	11.3	22.2				
50	25.4	43.9	150	466	154	53.6	33.9	20.8	8.84	2.15	0.02	0.00	0.00	0.00	0.27	3.31	12.6			
55	16.5	30.2	103	344	106	37.6	23.1	11.8	2.61	0.11	0.00	0.00	0.00	0.00	0.00	0.66	4.60			
60	8.75	19.1	59.7	237	70.9	25.9	14.4	4.77	0.48	0.06	0.00	0.00	0.00	0.00	0.00	0.13	1.47			
65	3.13	11.7	30.7	147	39.9	16.0	7.22	1.63	0.25	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.45			
70	1.45	5.74	13.8	73.2	19.1	9.06	2.61	0.51	0.15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.30			
75	0.83	2.71	6.19	21.4	8.20	3.80	1.09	0.34	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.14			
80	0.57	1.87	3.14	3.90	3.51	1.79	0.69	0.19	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
85	0.32	1.45	2.55	2.72	2.35	1.36	0.46	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
90	0.09	0.99	2.09	2.38	1.99	0.99	0.26	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
95	0.00	0.57	1.50	1.84	1.50	0.64	0.08	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
100	0.00	0.22	0.94	1.24	0.98	0.34	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
105	0.00	0.00	0.44	0.71	0.55	0.10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
110	0.00	0.00	0.08	0.26	0.20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.00	0.00	0.00	0.00	0.00			
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.12	0.10	0.08	0.00	0.00	0.00	0.00			
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.12	0.27	0.24	0.22	0.13	0.00	0.00	0.00			
140	0.00	0.03	0.05	0.07	0.10	0.08	0.00	0.00	0.15	0.31	0.45	0.40	0.40	0.34	0.18	0.12	0.00			
145	0.12	0.11	0.11	0.14	0.19	0.22	0.14	0.11	0.41	0.54	0.64	0.57	0.57	0.56	0.45	0.39	0.00			
150	0.22	0.17	0.16	0.18	0.24	0.30	0.27	0.24	0.71	0.78	0.81	0.72	0.71	0.75	0.72	0.69	0.00			
155	0.33	0.27	0.24	0.25	0.31	0.38	0.39	0.39	0.99	1.00	0.98	0.86	0.82	0.88	0.95	0.96	0.00			
160	0.42	0.35	0.30	0.31	0.38	0.44	0.47	0.50	1.20	1.19	1.12	0.96	0.86	0.90	1.03	1.12	0.00			
165	0.49	0.40	0.35	0.34	0.40	0.45	0.49	0.55	1.26	1.24	1.15	0.97	0.86	0.86	0.96	1.11	0.00			
170	0.54	0.48	0.44	0.41	0.44	0.50	0.55	0.61	1.20	1.19	1.11	0.96	0.85	0.84	0.90	1.01	0.00			
175	0.65	0.64	0.61	0.58	0.53	0.55	0.60	0.64	1.05	1.05	1.00	0.91	0.81	0.78	0.81	0.86	0.00			
180	0.82	0.82	0.77	0.73	0.68	0.69	0.71	0.70	0.82	0.82	0.82	0.77	0.70	0.68	0.69	0.71	0.00			

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks: