

LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:12.000V I:2.6710A P:25.532W PF:0.8304 Freq:59.98Hz

Lamp Flux:1909.1x1 lm


NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 74.77 lm/W
MODEL	SMART FIXTURE 2700K	Imax (cd)	9145	S/MH(C0/180)	0.34	
NOMINAL POWER(W)		LOR(%)	100.0	S/MH(C90/270)	0.48	
RATED VOLTAGE(V)		TOTAL FLUX(lm)	1909.1	η UP,DN(C0-180)	0.1,43.8	
NOMINAL FLUX(lm)	1909.1	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,56.1	
LAMPS INSIDE	1	η up (%)	0.2	CIBSE SHR NOM	0.00	
TEST VOLTAGE(V)		η down (%)	99.8	CIBSE SHR MAX	0.30	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

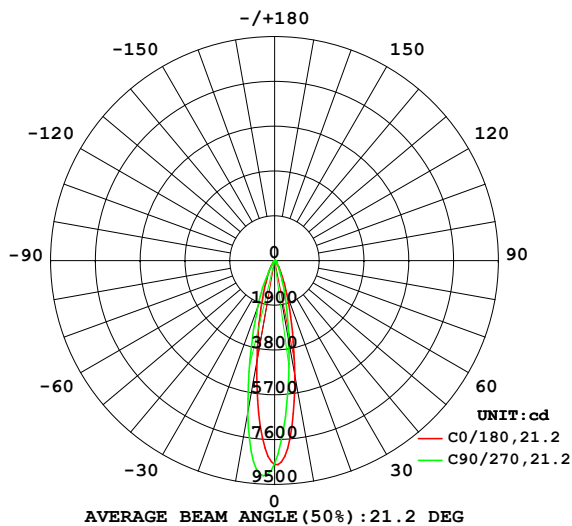

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

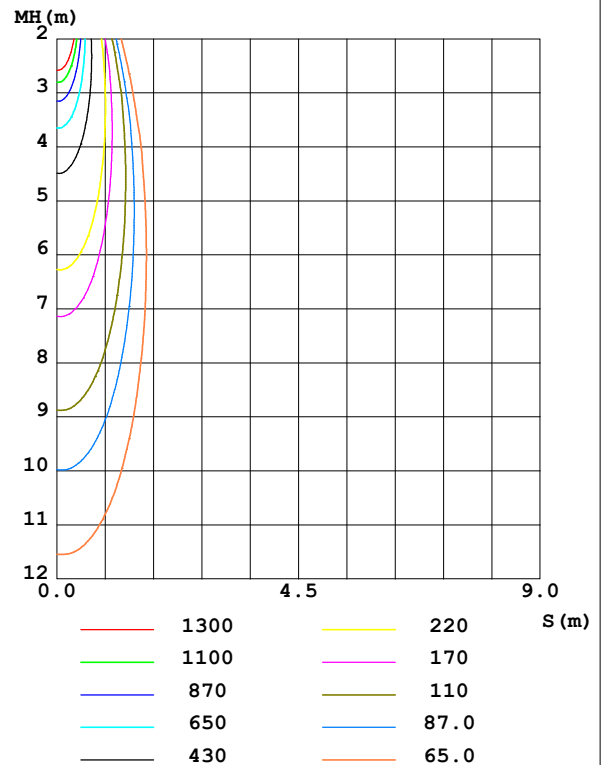

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-29

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	4939	3865	3502	3504	4348	5583	6577	6211	0- 10	618.7	618.7	32.4,32.4
20	1518	1084	1025	946.0	1295	1636	2106	1858	10- 20	754.4	1373	71.9,71.9
30	457.0	309.7	329.1	283.0	391.2	223.0	315.2	367.5	20- 30	348.4	1721	90.2,90.2
40	127.6	135.3	140.7	122.9	83.37	38.23	35.22	52.21	30- 40	107.2	1829	95.8,95.8
50	42.05	75.90	74.54	62.51	26.45	1.835	0.6972	7.178	40- 50	45.54	1874	98.2,98.2
60	9.428	34.90	40.33	24.53	2.845	0.1144	0	0.2462	50- 60	21.23	1895	99.3,99.3
70	1.084	9.067	14.62	4.512	0.7966	0	0	0	60- 70	8.111	1903	99.7,99.7
80	0.5381	1.392	1.780	1.240	0.2040	0	0	0	70- 80	1.798	1905	99.8,99.8
90	0.0001	0.8399	1.159	0.6778	0	0	0	0	80- 90	0.5218	1906	99.8,99.8
100	0	0.2824	0.5562	0.1354	0	0	0	0	90-100	0.2414	1906	99.8,99.8
110	0	0	0.0750	0	0	0	0	0	100-110	0.0568	1906	99.8,99.8
120	0	0	0	0	0	0	0	0	110-120	0.0007	1906	99.8,99.8
130	0	0	0	0	0.0207	0	0.0001	0	120-130	0.0001	1906	99.8,99.8
140	0.4216	0.5719	0.6715	0.7048	0.8927	0.7176	0.6098	0.6278	130-140	0.1799	1906	99.9,99.9
150	1.012	1.130	1.252	1.366	2.610	2.426	2.208	2.273	140-150	0.7580	1907	99.9,99.9
160	1.322	1.316	1.387	1.517	3.933	4.021	4.031	4.098	150-160	1.064	1908	99.9,99.9
170	1.279	1.258	1.341	1.510	3.358	3.574	3.936	4.138	160-170	0.7687	1909	100,100
180	1.844	2.093	2.404	2.519	1.847	1.963	2.250	2.483	170-180	0.2328	1909	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 1855.6 lm

%lum = 97.2%

%lamp = 97.2%

Conical surface Flux(120deg): 1895.4 lm

%lum = 99.3%


%lamp = 99.3%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:Allen
 Test Date:2026-01-29

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity:45%
 Test Distance:2.900m [K=0.8783]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:12.000V I:2.6710A P:25.532W PF:0.8304 Freq:59.98Hz Lamp Flux:1909.1x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

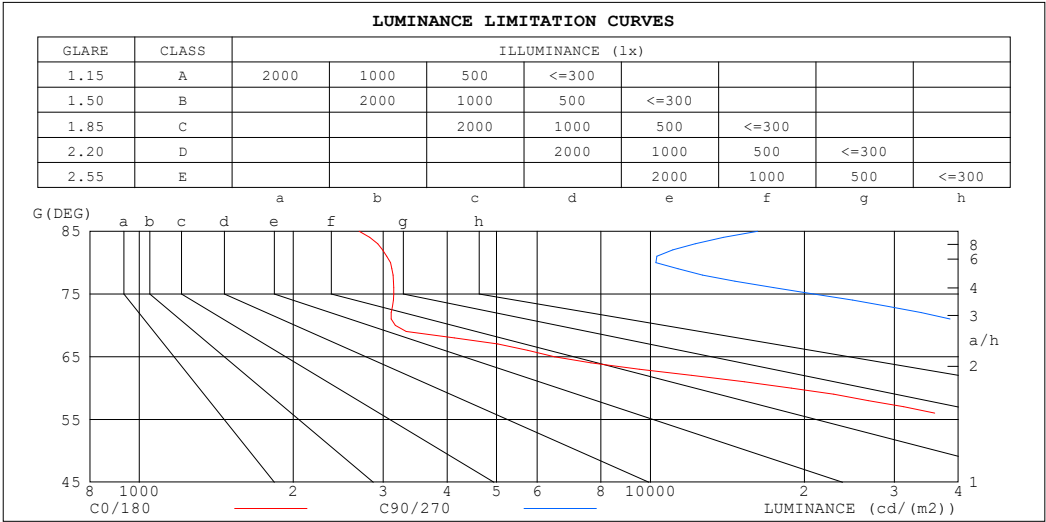

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	2693	16201
80	3099	10252
75	3145	20864
70	3169	42759
65	6485	64252
60	18855	80651
55	40725	97094
50	65413	115963
45	100485	142021


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:12.000V I:2.6710A P:25.532W PF:0.8304 Freq:59.98Hz																	
Lamp Flux:1909.1x1 lm																	
NAME:						TYPE:						WEIGHT:					
SPEC.:						DIM.:						SERIAL No.:					
MFR.:						SUR.:						Shielding Angle:					

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.12	1.10	1.09	1.10	1.08	1.07	1.06	1.05	1.04	1.03	1.01	1.00	.99	.98	.98	.96
2.0	1.07	1.03	1.01	1.05	1.02	.00	1.02	.99	.97	.99	.97	.95	.96	.95	.93	.92
3.0	1.02	.98	.95	1.00	.97	.94	.98	.95	.92	.95	.93	.91	.93	.91	.90	.88
4.0	.97	.93	.90	.96	.92	.89	.94	.91	.88	.92	.89	.87	.90	.88	.86	.85
5.0	.93	.89	.85	.92	.88	.85	.91	.87	.84	.89	.86	.84	.88	.85	.83	.82
6.0	.90	.85	.82	.89	.85	.81	.87	.84	.81	.86	.83	.80	.85	.82	.80	.79
7.0	.86	.82	.79	.86	.81	.78	.85	.81	.78	.83	.80	.78	.82	.79	.77	.76
8.0	.83	.79	.76	.83	.79	.76	.82	.78	.75	.81	.78	.75	.80	.77	.75	.74
9.0	.81	.76	.73	.80	.76	.73	.79	.76	.73	.79	.75	.73	.78	.75	.72	.71
10.0	.78	.74	.71	.78	.74	.71	.77	.73	.71	.76	.73	.70	.76	.73	.70	.69

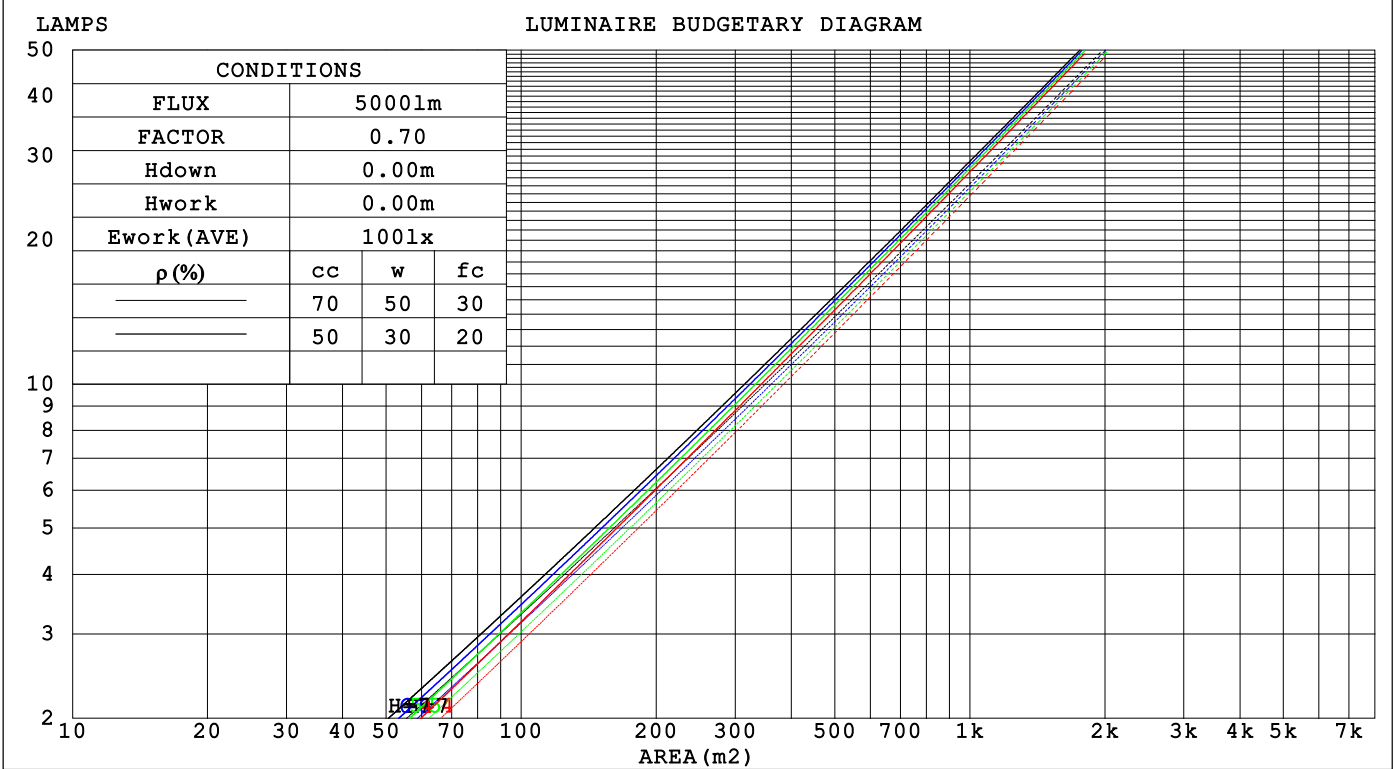

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

WEC AND CCEC

Test:U:12.000V I:2.6710A P:25.532W PF:0.8304 Freq:59.98Hz Lamp Flux:1909.1x1 lm					
NAME:		TYPE:		WEIGHT:	
SPEC.:		DIM.:		SERIAL No.:	
MFR.:		SUR.:		Shielding Angle:	

pcc	80%			70%			50%			30%			10%			0														
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
pfc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Wall Exitance Coefficients(WEC)														
0.0																														
1.0	.146	.083	.026	.139	.079	.025	.126	.073	.023	.115	.066	.021	.104	.060	.019															
2.0	.136	.075	.023	.131	.072	.022	.120	.067	.021	.111	.062	.019	.102	.058	.018															
3.0	.128	.068	.020	.123	.066	.020	.114	.062	.019	.106	.058	.018	.099	.055	.017															
4.0	.120	.062	.018	.116	.061	.018	.109	.058	.017	.102	.055	.016	.095	.052	.016															
5.0	.113	.058	.017	.110	.056	.016	.103	.054	.016	.098	.051	.015	.092	.049	.015															
6.0	.107	.054	.015	.104	.053	.015	.099	.051	.015	.094	.049	.014	.089	.047	.014															
7.0	.102	.050	.014	.099	.049	.014	.094	.048	.014	.090	.046	.013	.086	.045	.013															
8.0	.097	.047	.013	.095	.047	.013	.091	.045	.013	.087	.044	.013	.083	.043	.012															
9.0	.093	.045	.013	.091	.044	.012	.087	.043	.012	.083	.042	.012	.080	.041	.012															
10.0	.089	.043	.012	.087	.042	.012	.084	.041	.012	.080	.040	.011	.077	.039	.011															

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.170	.159	.149	.146	.136	.128	.100	.094	.088	.057	.054	.051	.018	.017	.017	
2.0	.153	.134	.118	.131	.115	.102	.090	.080	.071	.052	.046	.042	.017	.015	.014	
3.0	.138	.115	.096	.119	.099	.083	.081	.069	.058	.047	.040	.034	.015	.013	.011	
4.0	.126	.099	.079	.108	.086	.069	.075	.060	.048	.043	.035	.029	.014	.011	.009	
5.0	.116	.087	.066	.100	.076	.057	.069	.053	.041	.040	.031	.024	.013	.010	.008	
6.0	.108	.077	.056	.092	.067	.049	.064	.047	.034	.037	.028	.020	.012	.009	.007	
7.0	.100	.069	.048	.086	.060	.042	.060	.042	.030	.035	.025	.018	.011	.008	.006	
8.0	.094	.063	.041	.081	.054	.036	.056	.038	.026	.032	.023	.015	.011	.007	.005	
9.0	.088	.057	.036	.076	.050	.032	.053	.035	.022	.031	.021	.013	.010	.007	.004	
10.0	.083	.052	.032	.072	.046	.028	.050	.032	.020	.029	.019	.012	.009	.006	.004	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:12.000V I:2.6710A P:25.532W PF:0.8304 Freq:59.98Hz Lamp Flux:1909.1x1 lm										
NAME:			TYPE:			WEIGHT:				
SPEC.:			DIM.:			SERIAL No.:				
MFR.:			SUR.:			Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise				Viewed endwise				
x = 2H y = 2H	20.0	20.7	20.2	20.9	21.0	21.1	21.8	21.3	22.0	22.1
3H	19.9	20.5	20.1	20.7	20.9	21.5	22.2	21.8	22.4	22.6
4H	19.8	20.4	20.1	20.6	20.8	21.5	22.1	21.8	22.4	22.6
6H	19.7	20.3	20.0	20.5	20.8	21.5	22.0	21.7	22.3	22.5
8H	19.7	20.2	20.0	20.5	20.7	21.4	22.0	21.7	22.2	22.5
12H	19.6	20.2	19.9	20.4	20.7	21.4	21.9	21.7	22.2	22.5
4H 2H	20.2	20.8	20.4	21.0	21.2	21.2	21.8	21.5	22.0	22.2
3H	20.1	20.6	20.4	20.9	21.1	21.6	22.2	21.9	22.4	22.7
4H	20.0	20.5	20.3	20.8	21.1	21.6	22.1	22.0	22.4	22.7
6H	19.9	20.3	20.3	20.7	21.0	21.6	22.0	21.9	22.3	22.7
8H	19.8	20.2	20.2	20.6	21.0	21.5	21.9	21.9	22.3	22.7
12H	19.8	20.2	20.2	20.5	20.9	21.5	21.9	21.9	22.2	22.6
8H 4H	19.9	20.3	20.3	20.6	21.0	21.5	21.9	21.9	22.3	22.6
6H	19.8	20.1	20.2	20.5	20.9	21.4	21.8	21.9	22.2	22.6
8H	19.7	20.0	20.2	20.4	20.9	21.4	21.7	21.8	22.1	22.6
12H	19.7	19.9	20.1	20.4	20.8	21.4	21.6	21.8	22.1	22.5
12H 4H	19.8	20.2	20.2	20.6	21.0	21.4	21.8	21.9	22.2	22.6
6H	19.7	20.0	20.2	20.4	20.9	21.4	21.7	21.8	22.1	22.5
8H	19.7	19.9	20.1	20.4	20.8	21.3	21.6	21.8	22.0	22.5
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 1.9 / - 4.0					+ 0.9 / - 1.3				
1.5H	+ 2.4 / - 3.2					+ 1.2 / - 0.8				
2.0H	+ 2.7 / - 6.4					+ 1.5 / - 1.7				

CIE Pub.117, 1909 lm Total Lamp Luminous Flux Correct ($8\log(F/F_0) = 2.2$)
Area: 0.001 m²

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:12.000V I:2.6710A P:25.532W PF:0.8304 Freq:59.98Hz Lamp Flux:1909.1x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	89	83	79	88	83	79	88	82	79	76
0.80	96	91	87	95	90	87	94	90	86	83
1.00	100	95	91	99	94	91	98	94	91	87
1.25	104	99	96	103	99	95	101	97	95	91
1.50	107	102	99	105	101	98	103	100	97	93
2.00	109	105	102	108	104	101	105	102	100	95
2.50	111	107	104	109	106	103	106	103	101	96
3.00	112	109	106	110	107	105	107	105	103	97
4.00	114	111	109	112	110	108	108	107	105	98
5.00	115	113	111	113	111	110	109	108	107	99
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3℃
 Operators: Allen
 Test Date: 2026-01-29

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity: 45%
 Test Distance: 2.900m [K=0.8783]
 Remarks:

ISOCANDELA DIAGRAM


Test:U:12.000V I:2.6710A P:25.532W PF:0.8304 Freq:59.98Hz Lamp Flux:1909.1x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

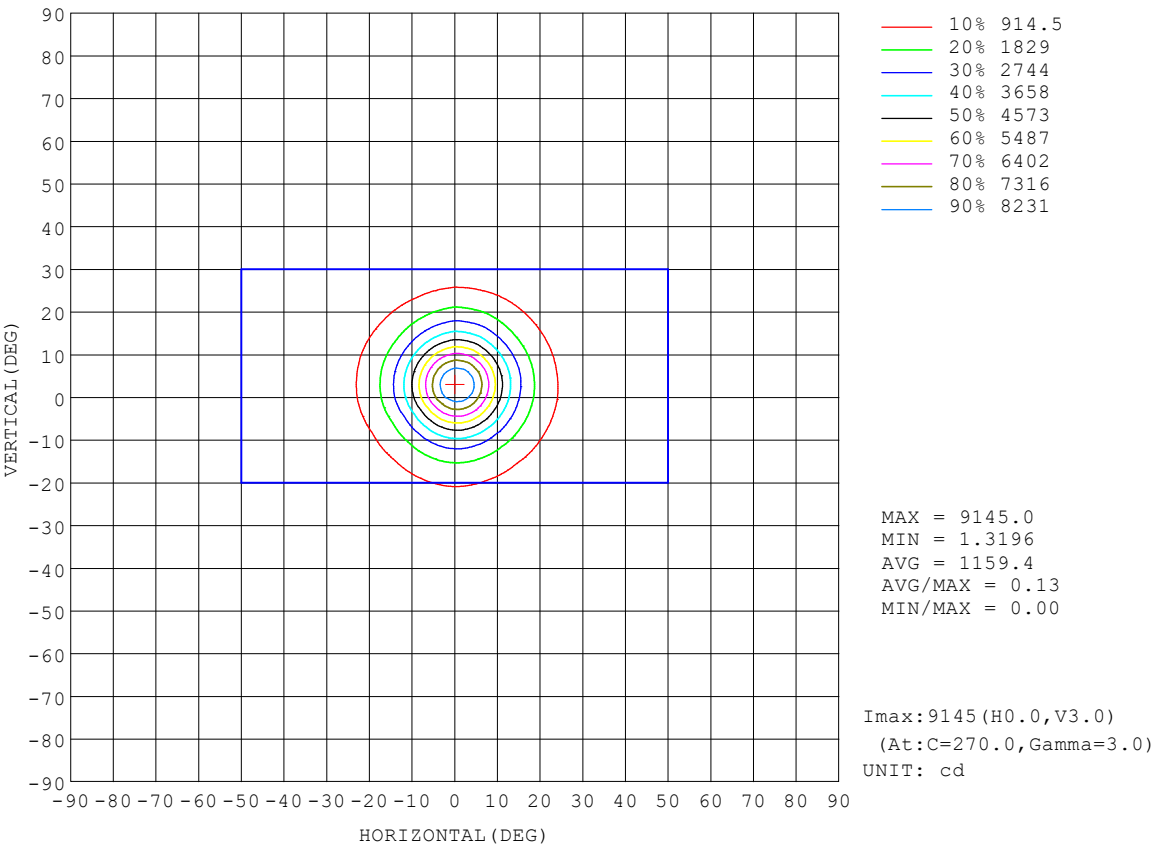

C Range: 0 - 360DEG C Interval: 22.5DEG Test Speed: HIGH Temperature:25.3℃ Operators:Allen Test Date:2026-01-29	γ Range: 0 - 180DEG γ Interval: 1.0DEG Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459 Humidity:45% Test Distance:2.900m [K=0.8783] Remarks:
--	---

AAI Figure

Test:U:12.000V I:2.6710A P:25.532W PF:0.8304 Freq:59.98Hz Lamp Flux:1909.1x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

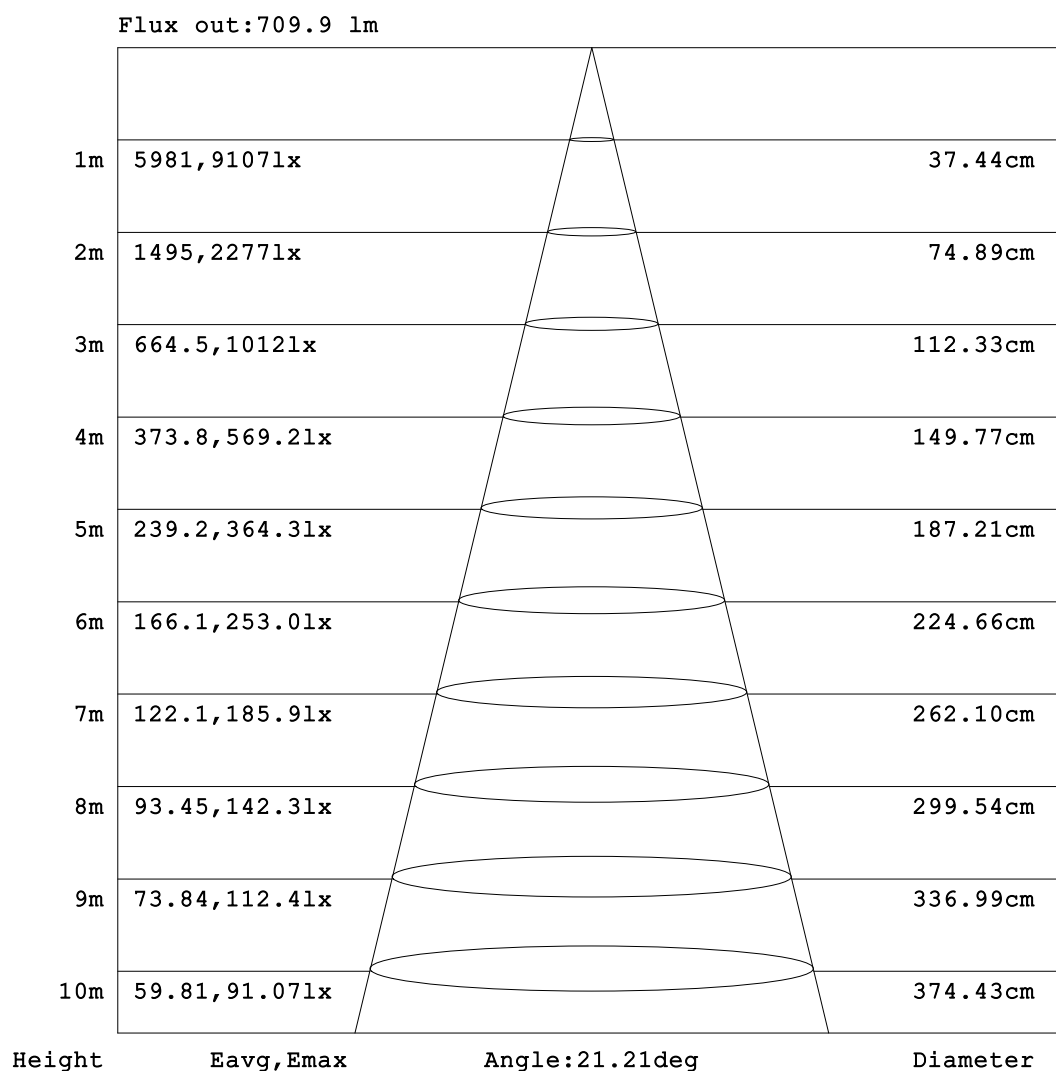


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

ISOLUX DIAGRAM


Test:U:12.000V I:2.6710A P:25.532W PF:0.8304 Freq:59.98Hz Lamp Flux:1909.1x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

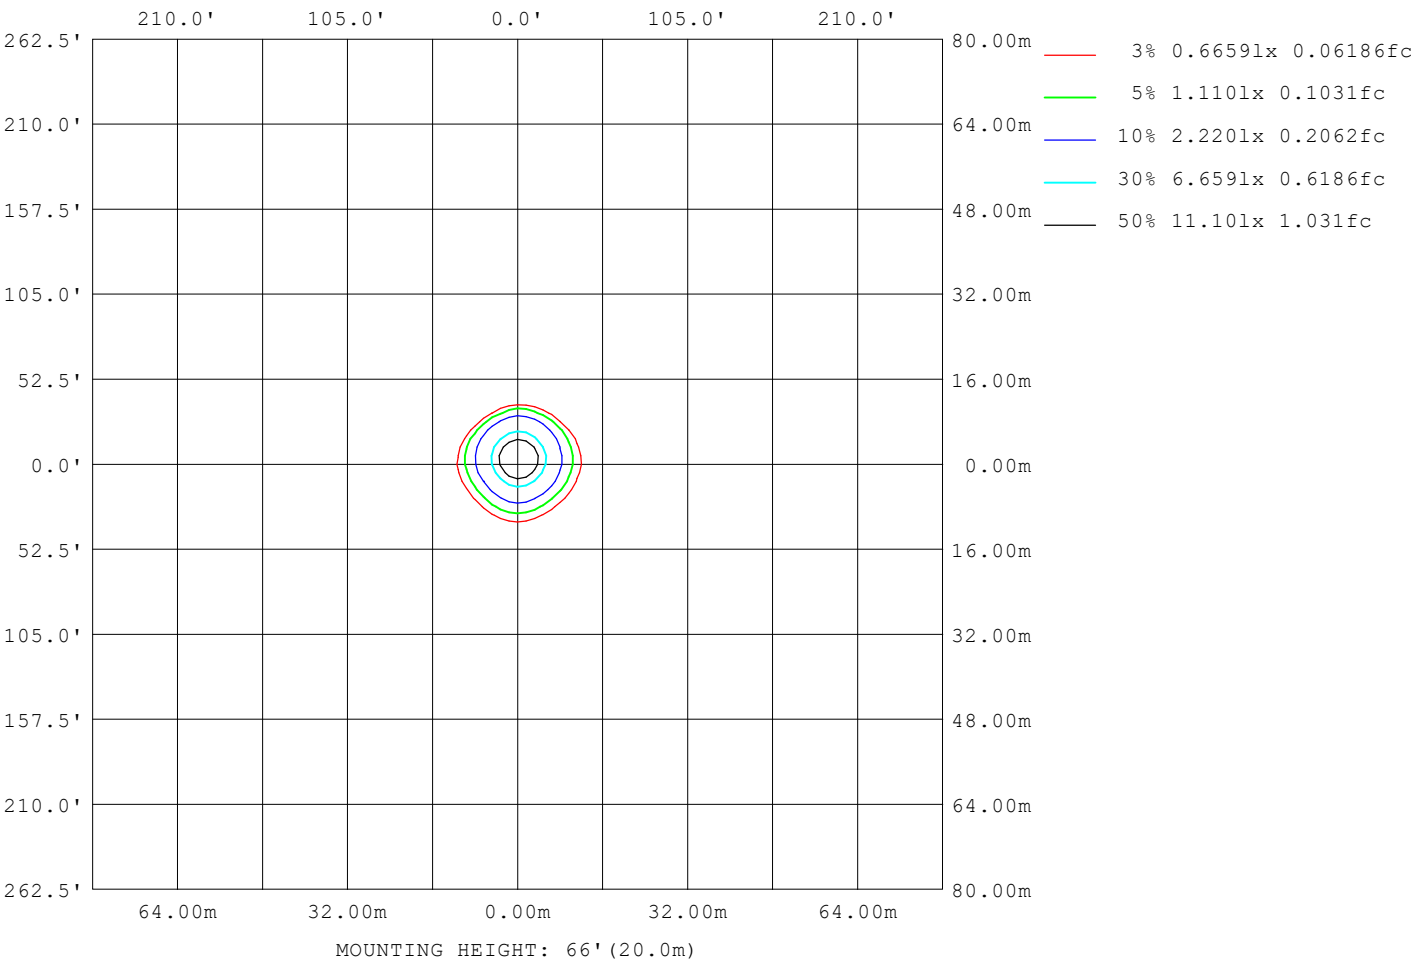

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

Planar Illuminance Curve

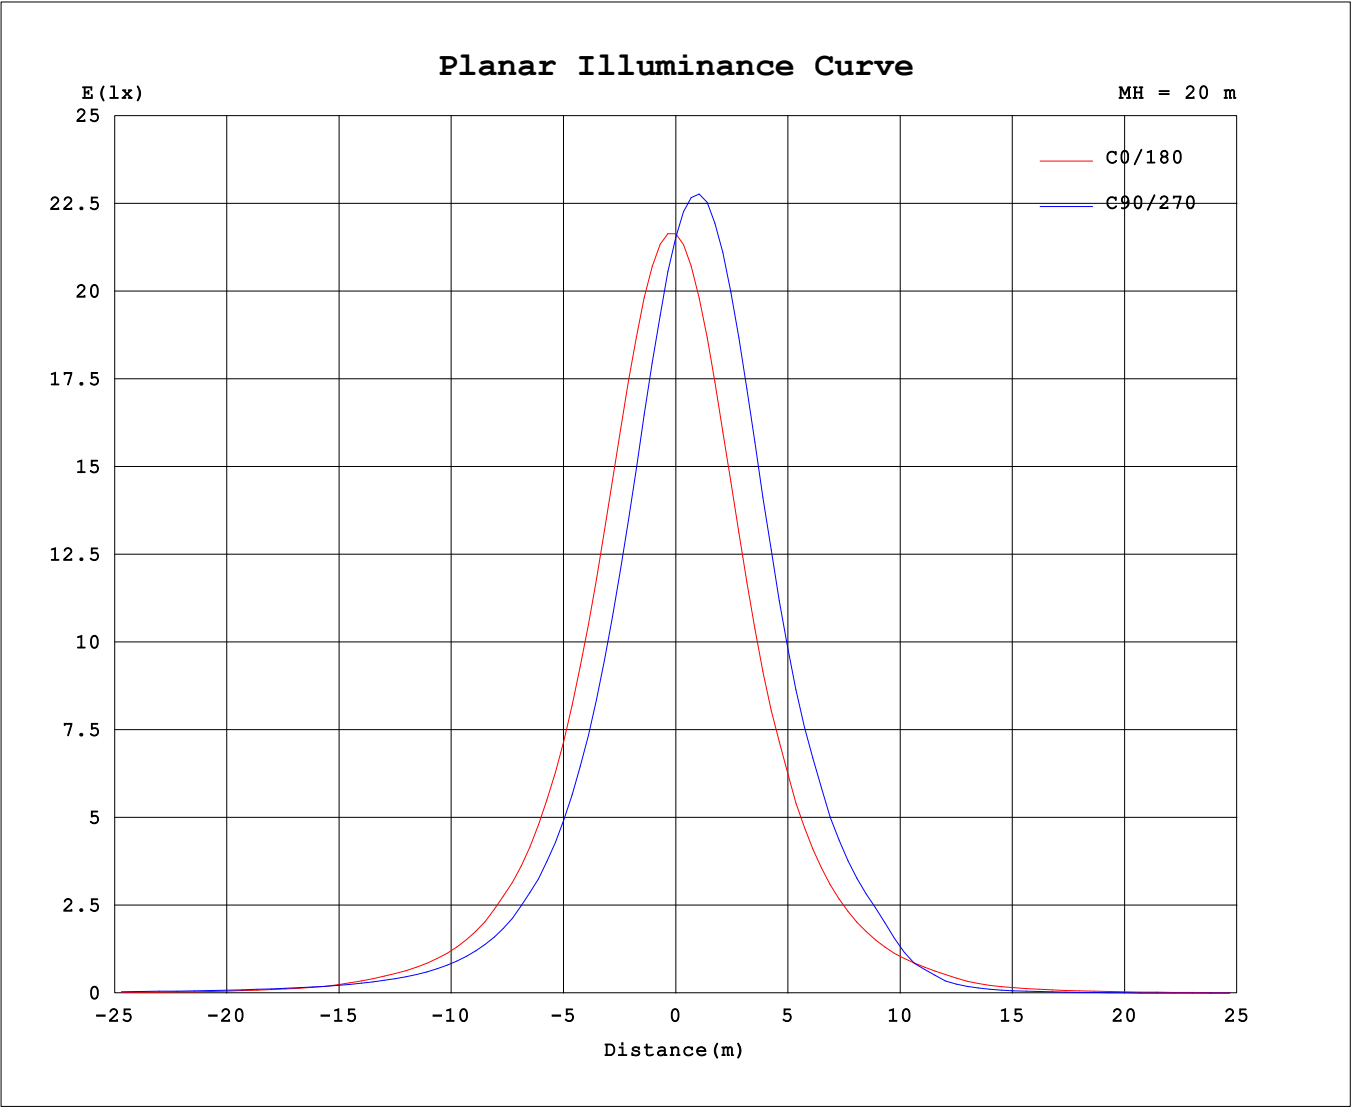

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.000V I:2.6710A P:25.532W PF:0.8304 Freq:59.98Hz Lamp Flux:1909.1x1 lm																	
NAME:									TYPE:						WEIGHT:		
SPEC.:									DIM.:						SERIAL No.:		
MFR.:									SUR.:						Shielding Angle:		

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	8657	8647	8632	8623	8616	8608	8603	8605	8657	8647	8632	8623	8616	8608	8603	8605			
5	7567	7018	6538	6231	6053	6028	6166	6462	7046	7592	8164	8627	8878	8885	8634	8161			
10	4939	4319	3865	3616	3502	3444	3504	3762	4348	4952	5583	6168	6577	6570	6211	5642			
15	2794	2370	2064	1946	1908	1854	1837	1990	2408	2810	3148	3499	3840	3818	3522	3258			
20	1518	1276	1084	1015	1025	979	946	1036	1295	1492	1636	1858	2106	2059	1858	1722			
25	819	668	554	539	565	533	499	550	707	803	814	893	1082	1070	960	905			
30	457	373	310	306	329	309	283	309	391	320	223	228	315	331	367	471			
35	257	227	194	193	208	194	177	187	162	111	77.0	71.2	82.1	89.9	116	173			
40	128	150	135	134	141	133	123	109	83.4	52.9	38.2	34.2	35.2	39.8	52.2	81.5			
45	71.1	97.0	100	98.6	100	95.3	88.3	69.9	47.0	28.3	14.7	9.24	10.5	14.1	27.2	45.4			
50	42.0	63.5	75.9	75.3	74.5	71.6	62.5	43.9	26.4	9.70	1.84	0.40	0.70	1.52	7.18	24.8			
55	23.4	39.8	54.2	57.1	55.7	52.9	41.1	25.7	10.8	1.88	0.17	0.00	0.00	0.00	1.02	7.98			
60	9.43	22.8	34.9	41.2	40.3	35.8	24.5	12.2	2.84	0.54	0.11	0.00	0.00	0.00	0.25	1.91			
65	2.74	10.6	19.7	26.4	27.2	21.0	12.2	4.04	1.03	0.40	0.00	0.00	0.00	0.00	0.14	0.66			
70	1.08	3.51	9.07	14.0	14.6	10.2	4.51	1.59	0.80	0.16	0.00	0.00	0.00	0.00	0.00	0.49			
75	0.81	1.40	3.11	5.23	5.40	3.46	1.82	1.08	0.54	0.00	0.00	0.00	0.00	0.00	0.00	0.23			
80	0.54	1.01	1.39	1.81	1.78	1.52	1.24	0.82	0.20	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
85	0.23	0.73	1.12	1.37	1.41	1.28	0.98	0.51	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
90	0.00	0.44	0.84	1.11	1.16	1.00	0.68	0.21	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
95	0.00	0.18	0.54	0.80	0.85	0.70	0.38	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
100	0.00	0.00	0.28	0.51	0.56	0.41	0.14	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
105	0.00	0.00	0.06	0.25	0.29	0.17	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
110	0.00	0.00	0.00	0.04	0.07	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
135	0.09	0.12	0.16	0.18	0.21	0.23	0.23	0.20	0.32	0.27	0.23	0.20	0.19	0.18	0.19	0.20			
140	0.42	0.49	0.57	0.63	0.67	0.70	0.70	0.64	0.89	0.80	0.72	0.65	0.61	0.60	0.63	0.67			
145	0.78	0.87	0.97	1.04	1.10	1.15	1.17	1.12	1.73	1.63	1.50	1.39	1.31	1.30	1.35	1.43			
150	1.01	1.07	1.13	1.19	1.25	1.31	1.37	1.37	2.61	2.54	2.43	2.30	2.21	2.20	2.27	2.37			
155	1.28	1.28	1.31	1.34	1.38	1.44	1.51	1.54	3.45	3.44	3.39	3.32	3.27	3.27	3.33	3.41			
160	1.32	1.30	1.32	1.34	1.39	1.45	1.52	1.57	3.93	3.95	4.02	4.03	4.03	4.05	4.10	4.13			
165	1.27	1.25	1.27	1.30	1.35	1.42	1.49	1.55	3.81	3.83	3.98	4.10	4.18	4.25	4.31	4.31			
170	1.28	1.26	1.26	1.29	1.34	1.42	1.51	1.60	3.36	3.38	3.57	3.77	3.94	4.06	4.14	4.13			
175	1.42	1.42	1.46	1.52	1.59	1.67	1.75	1.81	2.68	2.69	2.89	3.10	3.30	3.44	3.55	3.54			
180	1.84	1.95	2.09	2.25	2.40	2.49	2.52	2.48	1.85	1.85	1.96	2.10	2.25	2.40	2.48	2.52			

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks: