


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:12.000V I:1.4478A P:14.409W PF:0.7951 Freq:60.01Hz Lamp Flux:971.9x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 67.45 lm/W
MODEL	SMART FIXTURE 2700K	Imax (cd)	4522	S/MH(C0/180)	0.35	
NOMINAL POWER(W)		LOR(%)	100.0	S/MH(C90/270)	0.49	
RATED VOLTAGE(V)		TOTAL FLUX(lm)	971.90	η UP,DN(C0-180)	0.0,45.1	
NOMINAL FLUX(lm)	971.9	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,54.7	
LAMPS INSIDE	1	η up (%)	0.1	CIBSE SHR NOM	0.00	
TEST VOLTAGE(V)		η down (%)	99.9	CIBSE SHR MAX	0.30	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

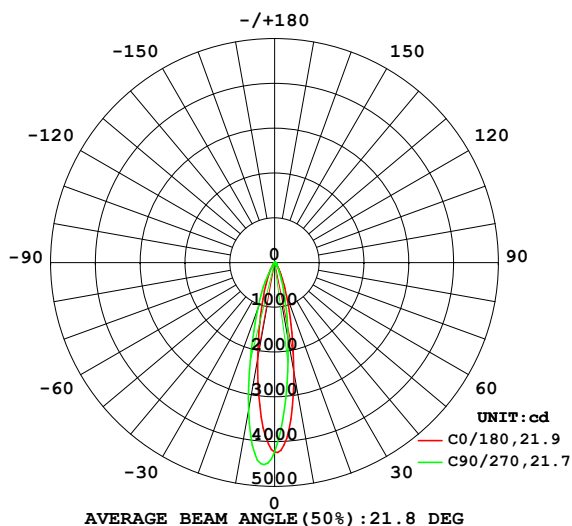

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

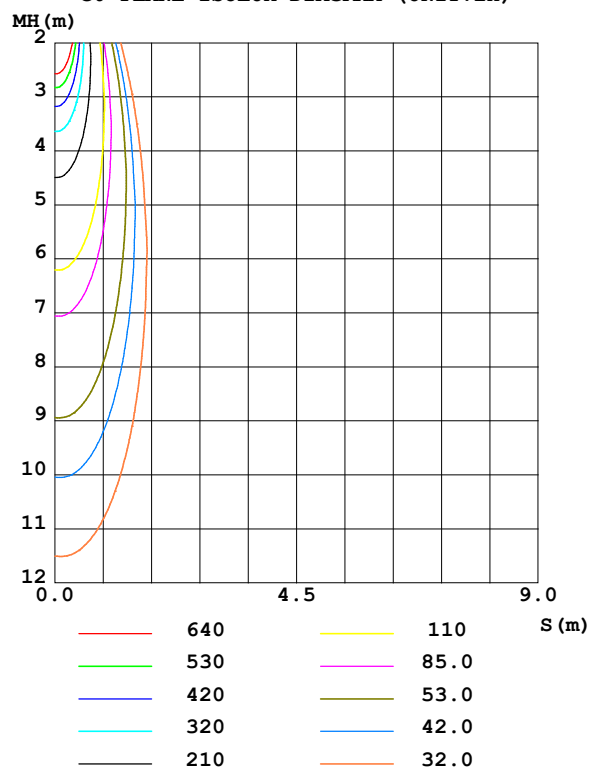

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-29

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	2489	1931	1748	1971	2197	2842	3359	2900	0- 10	309.0	309.0	31.8,31.8
20	787.7	544.0	525.5	548.1	669.7	860.7	1122	866.9	10- 20	384.6	693.6	71.4,71.4
30	244.3	160.9	173.3	162.2	204.6	120.7	169.0	152.8	20- 30	181.3	874.9	90,90
40	67.11	69.06	73.31	66.50	41.79	19.65	18.94	24.73	30- 40	56.28	931.2	95.8,95.8
50	21.46	38.13	37.61	32.77	12.69	0.8625	0.3678	2.688	40- 50	23.40	954.6	98.2,98.2
60	4.900	17.10	19.84	13.02	1.257	0	0	0.0295	50- 60	10.71	965.3	99.3,99.3
70	0.4816	4.344	6.934	2.433	0.3015	0	0	0	60- 70	4.085	969.4	99.7,99.7
80	0.1903	0.6166	0.7563	0.5441	0	0	0	0	70- 80	0.8378	970.3	99.8,99.8
90	0	0.3319	0.4817	0.2605	0	0	0	0	80- 90	0.2164	970.5	99.9,99.9
100	0	0.0423	0.1709	0	0	0	0	0	90-100	0.0841	970.6	99.9,99.9
110	0	0	0	0	0	0	0	0	100-110	0.0088	970.6	99.9,99.9
120	0	0	0	0	0	0	0	0	110-120	0	970.6	99.9,99.9
130	0	0	0	0	0	0	0	0	120-130	0	970.6	99.9,99.9
140	0.1116	0.1910	0.2473	0.2078	0.3546	0.2615	0.2068	0.2764	130-140	0.0399	970.6	99.9,99.9
150	0.4023	0.4667	0.5335	0.5819	1.217	1.119	1.006	1.145	140-150	0.3254	970.9	99.9,99.9
160	0.5700	0.5699	0.6105	0.6858	1.884	1.928	1.930	2.010	150-160	0.4974	971.4	100,100
170	0.5518	0.5439	0.5923	0.6817	1.598	1.711	1.906	1.979	160-170	0.3625	971.8	100,100
180	0.8438	0.9852	1.146	1.138	0.8445	0.9101	1.072	1.108	170-180	0.1081	971.9	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 945.2 lm

%lum = 97.3%

%lamp = 97.3%

Conical surface Flux(120deg): 965.33 lm

%lum = 99.3%


%lamp = 99.3%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:Allen
 Test Date:2026-01-29

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity:45%
 Test Distance:2.900m [K=0.8783]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:12.000V I:1.4478A P:14.409W PF:0.7951 Freq:60.01Hz Lamp Flux:971.9x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

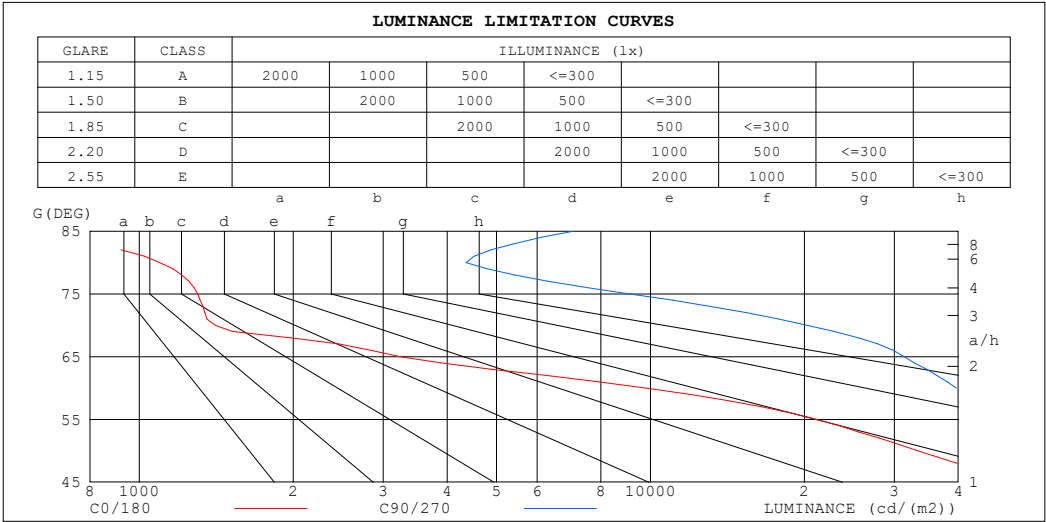

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	366	7058
80	1096	4355
75	1302	9120
70	1408	20273
65	3244	31392
60	9799	39689
55	21171	48347
50	33379	58513
45	52712	72716


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:12.000V I:1.4478A P:14.409W PF:0.7951 Freq:60.01Hz		
Lamp Flux:971.9x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.12	1.10	1.09	1.10	1.08	1.07	1.06	1.05	1.03	1.03	1.01	1.00	.99	.98	.97	.96
2.0	1.07	1.03	1.01	1.05	1.02	.00	1.02	.99	.97	.99	.97	.95	.96	.95	.93	.92
3.0	1.01	.98	.94	1.00	.97	.94	.98	.95	.92	.95	.93	.91	.93	.91	.89	.88
4.0	.97	.93	.89	.96	.92	.89	.94	.91	.88	.92	.89	.87	.90	.88	.86	.85
5.0	.93	.88	.85	.92	.88	.85	.90	.87	.84	.89	.86	.83	.87	.85	.83	.81
6.0	.89	.85	.82	.89	.84	.81	.87	.84	.81	.86	.83	.80	.85	.82	.80	.79
7.0	.86	.82	.78	.85	.81	.78	.84	.80	.78	.83	.80	.77	.82	.79	.77	.76
8.0	.83	.79	.75	.83	.78	.75	.82	.78	.75	.81	.77	.75	.80	.77	.74	.73
9.0	.80	.76	.73	.80	.76	.73	.79	.75	.73	.78	.75	.72	.78	.74	.72	.71
10.0	.78	.73	.71	.77	.73	.70	.77	.73	.70	.76	.73	.70	.75	.72	.70	.69

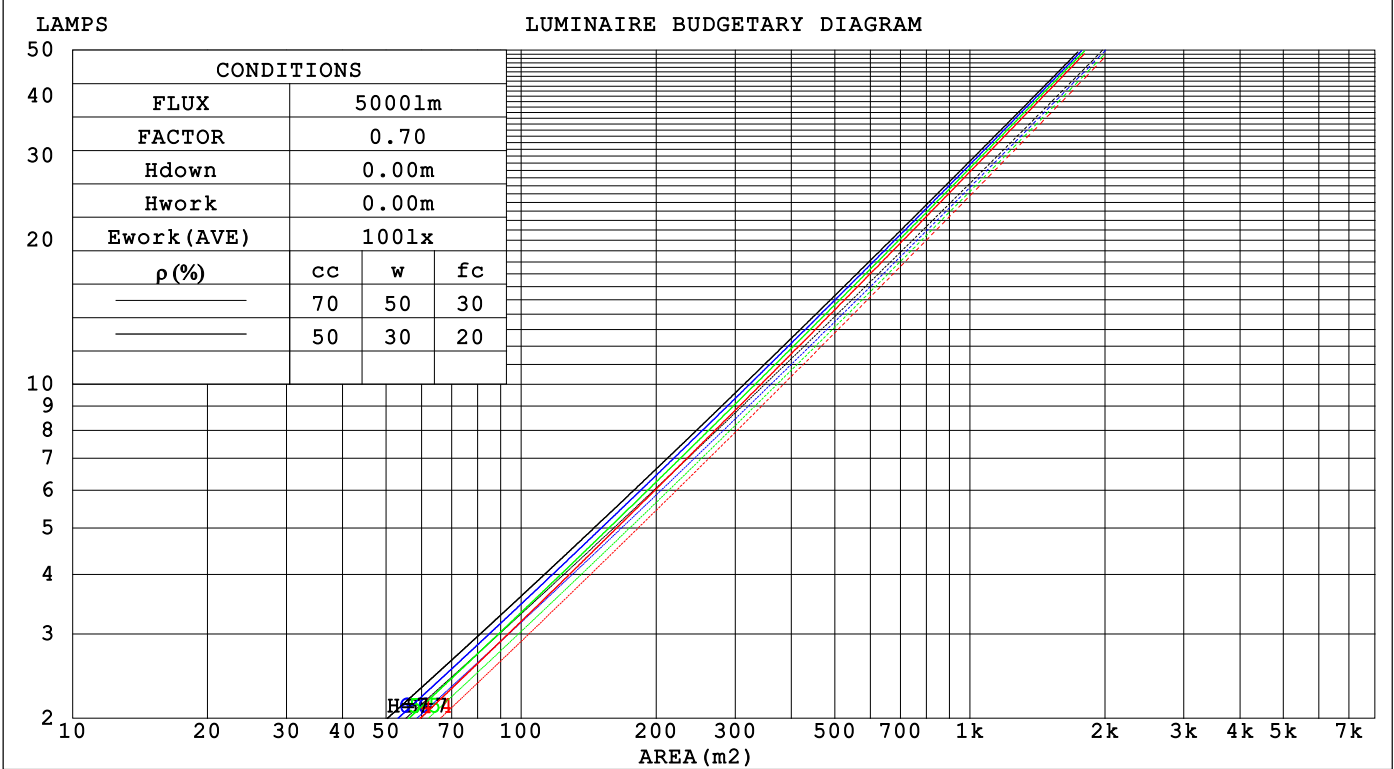

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

WEC AND CCEC

Test:U:12.000V I:1.4478A P:14.409W PF:0.7951 Freq:60.01Hz Lamp Flux:971.9x1 lm					
NAME:		TYPE:		WEIGHT:	
SPEC.:		DIM.:		SERIAL No.:	
MFR.:		SUR.:		Shielding Angle:	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.146	.083	.026	.139	.080	.025	.127	.073	.023	.115	.067	.021	.105	.061	.020	
2.0	.137	.075	.023	.131	.072	.022	.121	.067	.021	.111	.062	.020	.102	.058	.018	
3.0	.128	.068	.020	.123	.066	.020	.115	.062	.019	.107	.058	.018	.099	.055	.017	
4.0	.120	.063	.018	.117	.061	.018	.109	.058	.017	.102	.055	.017	.096	.052	.016	
5.0	.114	.058	.017	.110	.057	.017	.104	.054	.016	.098	.052	.015	.093	.049	.015	
6.0	.108	.054	.015	.105	.053	.015	.099	.051	.015	.094	.049	.014	.089	.047	.014	
7.0	.102	.051	.014	.100	.050	.014	.095	.048	.014	.091	.046	.014	.086	.045	.013	
8.0	.098	.048	.013	.095	.047	.013	.091	.046	.013	.087	.044	.013	.083	.043	.012	
9.0	.093	.045	.013	.091	.044	.012	.087	.043	.012	.084	.042	.012	.081	.041	.012	
10.0	.089	.043	.012	.087	.042	.012	.084	.041	.012	.081	.040	.011	.078	.039	.011	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.170	.159	.148	.146	.136	.128	.100	.094	.088	.057	.054	.051	.018	.017	.017	
2.0	.153	.134	.118	.131	.115	.102	.090	.080	.071	.052	.046	.042	.017	.015	.014	
3.0	.138	.114	.096	.119	.099	.083	.081	.069	.058	.047	.040	.034	.015	.013	.011	
4.0	.126	.099	.079	.108	.086	.068	.075	.060	.048	.043	.035	.028	.014	.011	.009	
5.0	.116	.087	.066	.100	.075	.057	.069	.053	.040	.040	.031	.024	.013	.010	.008	
6.0	.108	.077	.056	.092	.067	.048	.064	.047	.034	.037	.028	.020	.012	.009	.007	
7.0	.100	.069	.048	.086	.060	.041	.060	.042	.029	.035	.025	.017	.011	.008	.006	
8.0	.094	.063	.041	.081	.054	.036	.056	.038	.025	.032	.022	.015	.011	.007	.005	
9.0	.088	.057	.036	.076	.049	.031	.053	.035	.022	.031	.021	.013	.010	.007	.004	
10.0	.083	.052	.032	.072	.045	.028	.050	.032	.020	.029	.019	.012	.009	.006	.004	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:12.000V I:1.4478A P:14.409W PF:0.7951 Freq:60.01Hz Lamp Flux:971.9x1 lm										
NAME:			TYPE:			WEIGHT:				
SPEC.:			DIM.:			SERIAL No.:				
MFR.:			SUR.:			Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	20.1	20.8	20.3	21.0	21.1	21.1	21.8	21.3	21.9	22.1
3H	20.0	20.6	20.2	20.8	21.0	21.4	22.1	21.7	22.3	22.5
4H	19.9	20.5	20.2	20.7	21.0	21.4	22.0	21.7	22.2	22.5
6H	19.8	20.4	20.1	20.6	20.9	21.3	21.9	21.6	22.2	22.4
8H	19.8	20.3	20.1	20.6	20.8	21.3	21.9	21.6	22.1	22.4
12H	19.7	20.3	20.0	20.5	20.8	21.2	21.8	21.6	22.1	22.3
4H 2H	20.2	20.9	20.5	21.1	21.3	21.1	21.7	21.4	22.0	22.2
3H	20.1	20.7	20.4	20.9	21.2	21.5	22.1	21.8	22.3	22.6
4H	20.0	20.5	20.4	20.8	21.1	21.5	22.0	21.8	22.3	22.6
6H	19.9	20.4	20.3	20.7	21.1	21.4	21.9	21.8	22.2	22.5
8H	19.9	20.3	20.3	20.7	21.0	21.4	21.8	21.8	22.1	22.5
12H	19.8	20.2	20.2	20.6	21.0	21.3	21.7	21.7	22.1	22.5
8H 4H	19.9	20.3	20.3	20.7	21.1	21.4	21.8	21.7	22.1	22.5
6H	19.8	20.2	20.3	20.6	21.0	21.3	21.6	21.7	22.0	22.4
8H	19.8	20.1	20.2	20.5	20.9	21.2	21.5	21.7	22.0	22.4
12H	19.7	20.0	20.2	20.4	20.9	21.2	21.5	21.7	21.9	22.4
12H 4H	19.9	20.3	20.3	20.6	21.0	21.3	21.7	21.7	22.1	22.4
6H	19.8	20.1	20.2	20.5	20.9	21.2	21.5	21.7	21.9	22.4
8H	19.7	20.0	20.2	20.4	20.9	21.2	21.4	21.6	21.9	22.4
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 2.2 / - 4.3					+ 1.0 / - 1.5				
1.5H	+ 3.0 / - 3.4					+ 1.4 / - 0.8				
2.0H	+ 2.9 / - 6.6					+ 1.6 / - 1.8				

CIE Pub.117, 971.9 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -0.1)
Area: 0.001 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:12.000V I:1.4478A P:14.409W PF:0.7951 Freq:60.01Hz Lamp Flux:971.9x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	89	83	79	88	83	79	88	82	79	76
0.80	96	91	87	95	90	87	94	90	87	83
1.00	100	95	92	99	95	91	98	94	91	87
1.25	104	99	96	103	99	95	101	97	95	91
1.50	107	102	99	105	101	99	103	100	97	93
2.00	109	105	102	108	104	101	105	102	100	95
2.50	111	107	104	109	106	103	106	103	101	96
3.00	112	109	106	110	107	105	107	105	103	97
4.00	114	111	109	112	110	108	108	107	105	98
5.00	115	113	111	113	111	110	109	108	107	99
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3℃
 Operators: Allen
 Test Date: 2026-01-29

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity: 45%
 Test Distance: 2.900m [K=0.8783]
 Remarks:

ISOCANDELA DIAGRAM


Test:U:12.000V I:1.4478A P:14.409W PF:0.7951 Freq:60.01Hz Lamp Flux:971.9x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

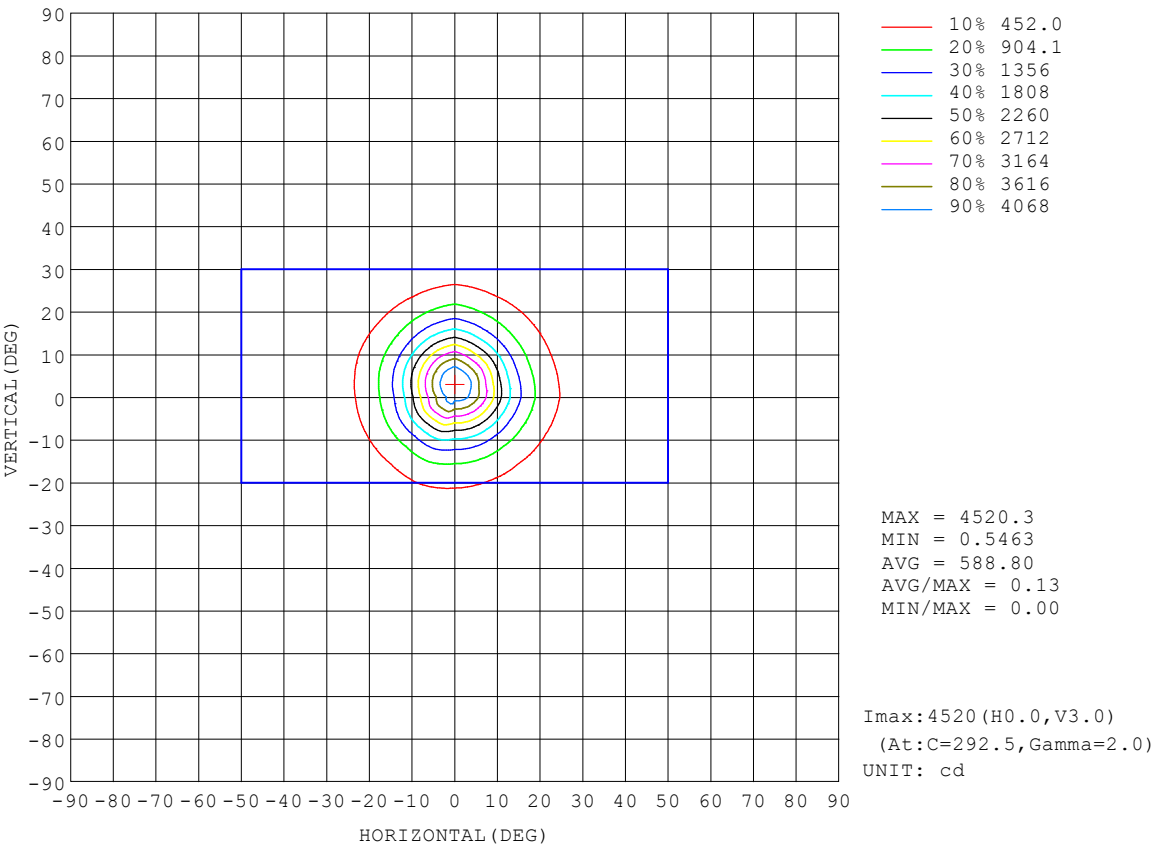

C Range: 0 - 360DEG	γ Range: 0 - 180DEG
C Interval: 22.5DEG	γ Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Temperature:25.3℃	Humidity:45%
Operators:Allen	Test Distance:2.900m [K=0.8783]
Test Date:2026-01-29	Remarks:

AAI Figure

Test:U:12.000V I:1.4478A P:14.409W PF:0.7951 Freq:60.01Hz Lamp Flux:971.9x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

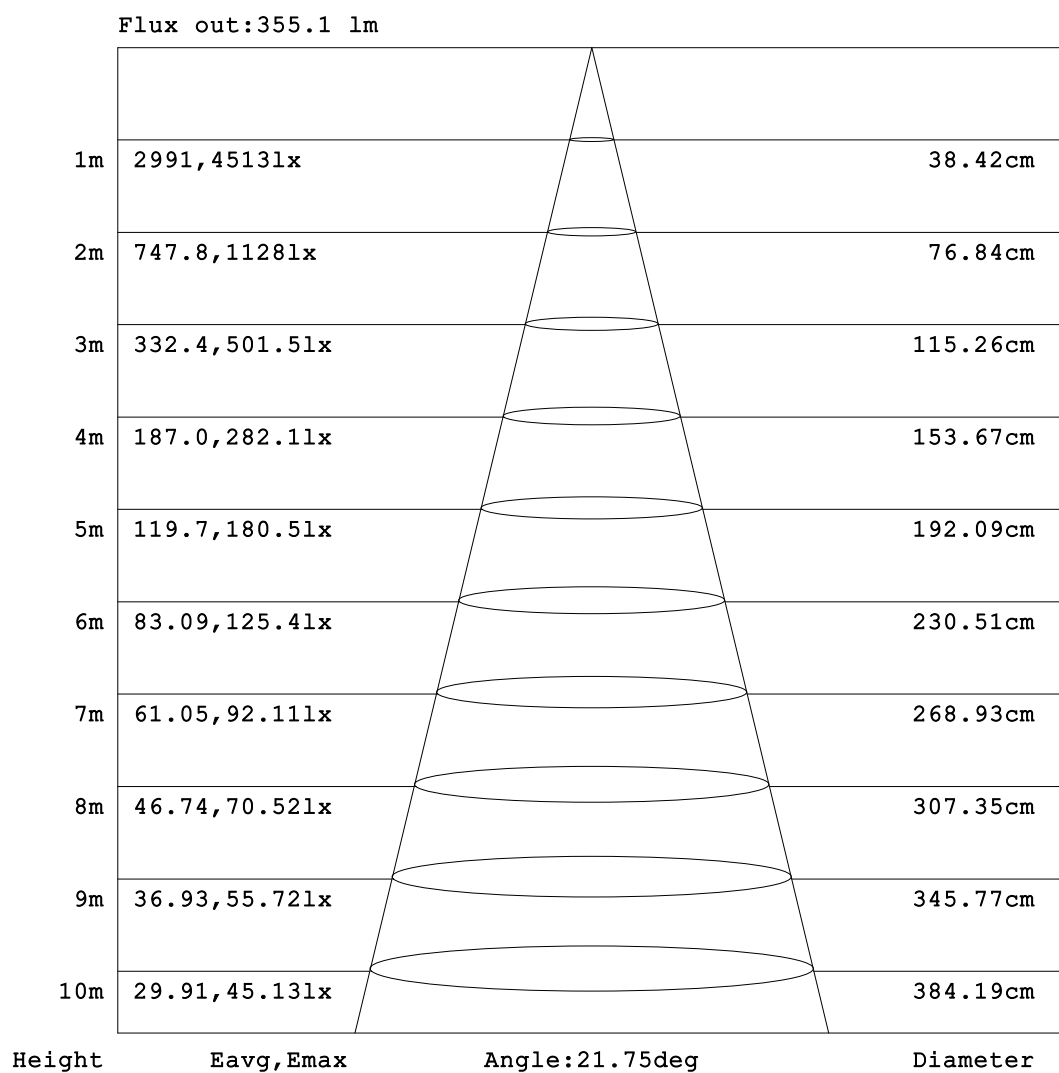


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3℃
Operators: Allen
Test Date: 2026-01-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity: 45%
Test Distance: 2.900m [K=0.8783]
Remarks:

ISOLUX DIAGRAM


Test:U:12.000V I:1.4478A P:14.409W PF:0.7951 Freq:60.01Hz Lamp Flux:971.9x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

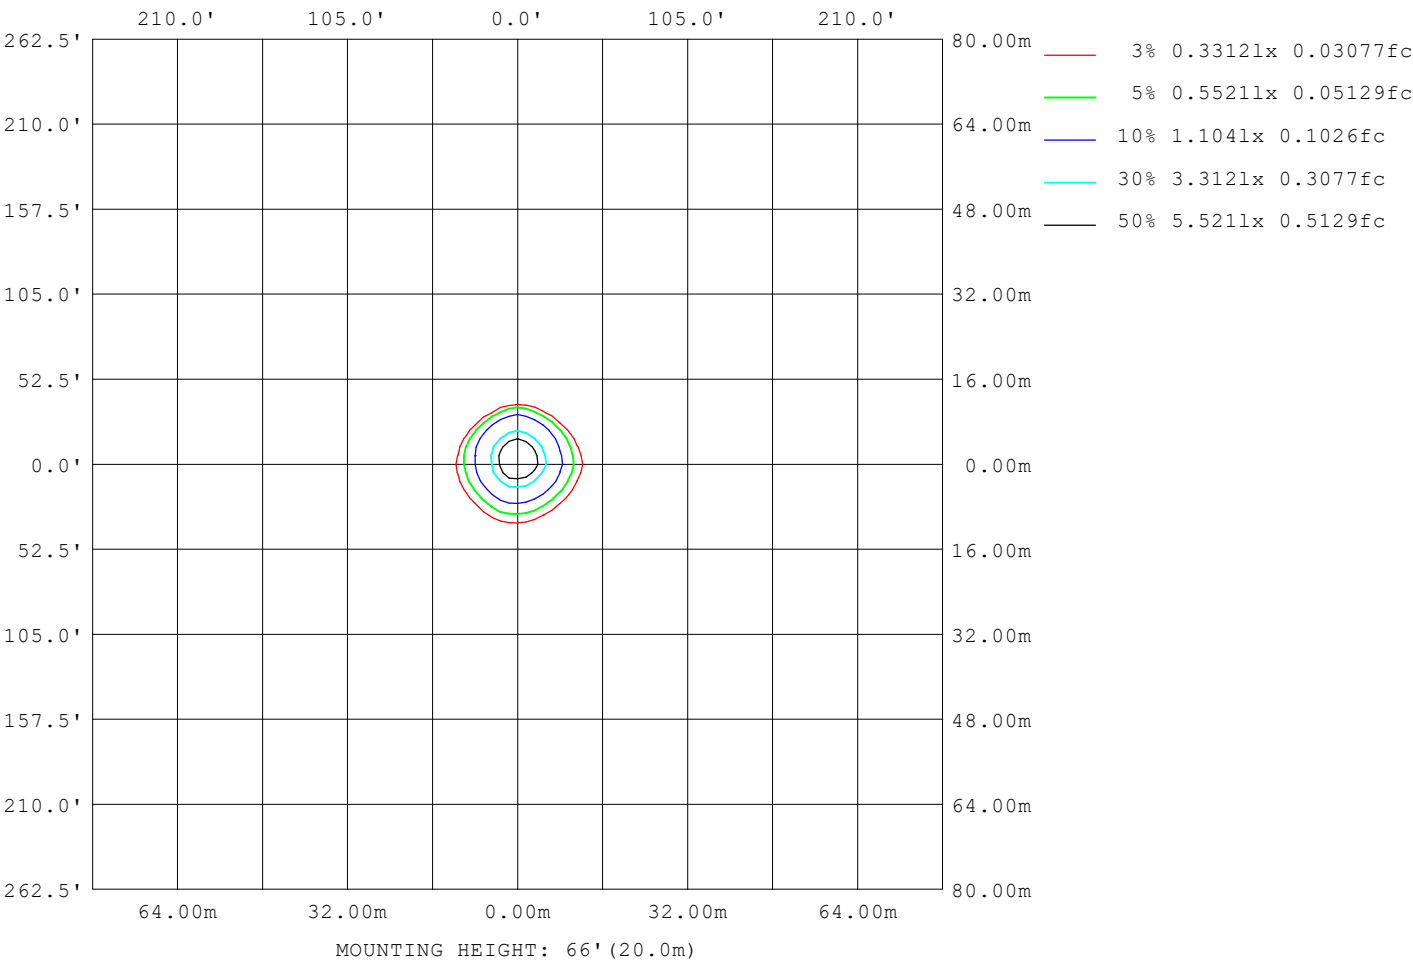

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

Planar Illuminance Curve

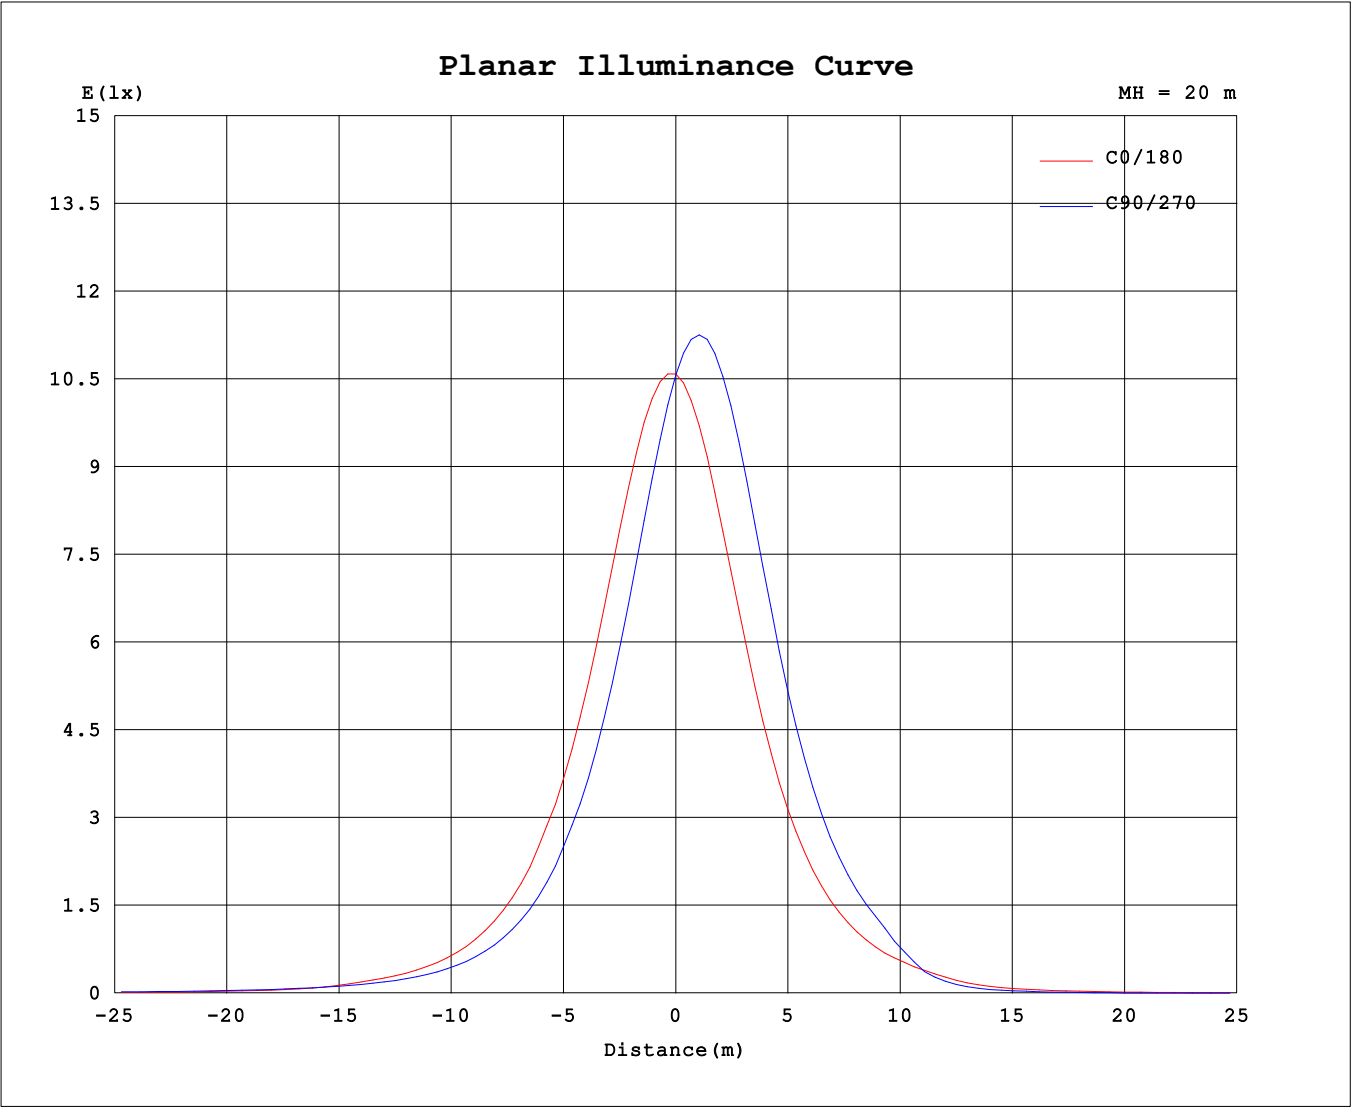

C Range: 0 - 360DEG	γ Range: 0 - 180DEG
C Interval: 22.5DEG	γ Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Temperature:25.3℃	Humidity:45%
Operators:Allen	Test Distance:2.900m [K=0.8783]
Test Date:2026-01-29	Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.000V I:1.4478A P:14.409W PF:0.7951 Freq:60.01Hz Lamp Flux:971.9x1 lm																	
NAME:									TYPE:						WEIGHT:		
SPEC.:									DIM.:						SERIAL No.:		
MFR.:									SUR.:						Shielding Angle:		

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	4235	4234	4230	4226	4227	4380	4353	4310	4235	4234	4230	4226	4227	4380	4353	4310			
5	3738	3454	3222	3060	2983	3252	3315	3459	3461	3750	4042	4287	4426	4296	4142	3870			
10	2489	2168	1931	1807	1748	1933	1971	2126	2197	2514	2842	3154	3359	3084	2900	2621			
15	1434	1207	1042	977	965	1055	1051	1166	1230	1436	1625	1847	2032	1794	1646	1492			
20	788	643	544	519	526	565	548	604	670	781	861	989	1122	971	867	801			
25	432	347	285	279	293	309	289	321	370	425	437	494	599	495	451	425			
30	244	195	161	159	173	178	162	180	205	161	121	127	169	138	153	218			
35	140	121	101	100	110	110	99.4	107	83.9	57.9	40.2	38.2	46.3	41.1	53.3	81.0			
40	67.1	78.1	69.1	68.6	73.3	73.2	66.5	60.6	41.8	27.5	19.7	17.8	18.9	18.4	24.7	38.0			
45	37.3	49.9	50.9	50.1	51.4	51.5	47.0	37.6	23.3	14.0	7.45	4.94	5.85	5.55	12.3	21.4			
50	21.5	32.2	38.1	37.7	37.6	38.0	32.8	23.4	12.7	4.66	0.86	0.19	0.37	0.42	2.69	11.0			
55	12.1	19.9	26.9	28.3	27.7	27.8	21.5	13.9	4.97	0.85	0.00	0.00	0.00	0.00	0.21	3.10			
60	4.90	11.6	17.1	20.2	19.8	18.8	13.0	6.77	1.26	0.17	0.00	0.00	0.00	0.00	0.03	0.74			
65	1.37	5.25	9.83	12.9	13.3	11.4	6.63	2.23	0.42	0.10	0.00	0.00	0.00	0.00	0.00	0.24			
70	0.48	1.69	4.34	6.72	6.93	5.52	2.43	0.81	0.30	0.00	0.00	0.00	0.00	0.00	0.00	0.15			
75	0.34	0.62	1.45	2.35	2.36	1.87	0.91	0.47	0.17	0.00	0.00	0.00	0.00	0.00	0.00	0.01			
80	0.19	0.43	0.62	0.77	0.76	0.70	0.54	0.34	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
85	0.03	0.28	0.48	0.60	0.62	0.57	0.41	0.18	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
90	0.00	0.13	0.33	0.46	0.48	0.42	0.26	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
95	0.00	0.00	0.18	0.31	0.32	0.27	0.11	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
100	0.00	0.00	0.04	0.16	0.17	0.12	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
105	0.00	0.00	0.00	0.02	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
135	0.00	0.00	0.00	0.00	0.01	0.00	0.00	0.00	0.06	0.03	0.01	0.00	0.00	0.02	0.02	0.04			
140	0.11	0.15	0.19	0.23	0.25	0.21	0.21	0.18	0.35	0.30	0.26	0.23	0.21	0.26	0.28	0.31			
145	0.29	0.34	0.39	0.43	0.46	0.46	0.47	0.43	0.78	0.72	0.65	0.59	0.55	0.63	0.66	0.71			
150	0.40	0.43	0.47	0.50	0.53	0.55	0.58	0.58	1.22	1.18	1.12	1.05	1.01	1.11	1.15	1.20			
155	0.54	0.55	0.56	0.58	0.60	0.62	0.66	0.68	1.64	1.63	1.60	1.57	1.54	1.64	1.67	1.71			
160	0.57	0.56	0.57	0.58	0.61	0.65	0.69	0.71	1.88	1.89	1.93	1.93	1.93	1.98	2.01	2.03			
165	0.54	0.54	0.55	0.57	0.60	0.63	0.67	0.70	1.82	1.83	1.92	1.97	2.02	2.05	2.08	2.09			
170	0.55	0.54	0.54	0.56	0.59	0.64	0.68	0.73	1.60	1.61	1.71	1.82	1.91	1.93	1.98	1.98			
175	0.62	0.63	0.66	0.69	0.73	0.73	0.78	0.81	1.26	1.27	1.37	1.49	1.59	1.58	1.63	1.63			
180	0.84	0.91	0.99	1.07	1.15	1.11	1.14	1.12	0.84	0.85	0.91	0.99	1.07	1.06	1.11	1.14			

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks: