


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:12.000V I:2.6695A P:25.308W PF:0.8293 Freq:59.98Hz Lamp Flux:1849.8x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 73.09 lm/W
MODEL	SMART FIXTURE 2700K	Imax (cd)	6268	S/MH(C0/180)	0.43	
NOMINAL POWER(W)		LOR(%)	100.0	S/MH(C90/270)	0.55	
RATED VOLTAGE(V)		TOTAL FLUX(lm)	1849.8	η UP,DN(C0-180)	0.1,47.6	
NOMINAL FLUX(lm)	1849.8	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,52.2	
LAMPS INSIDE	1	η up (%)	0.2	CIBSE SHR NOM	0.00	
TEST VOLTAGE(V)		η down (%)	99.8	CIBSE SHR MAX	0.30	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

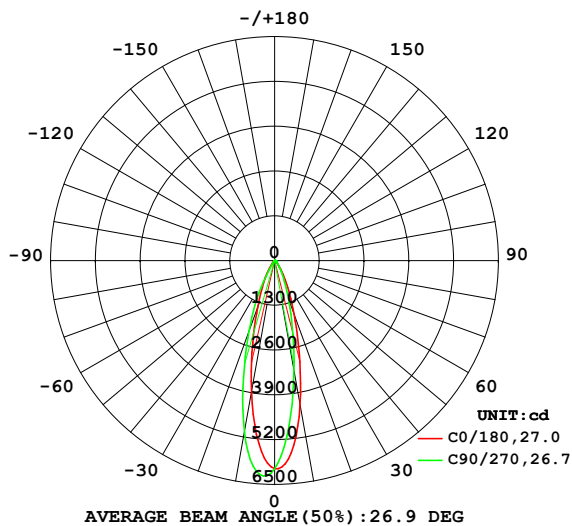

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

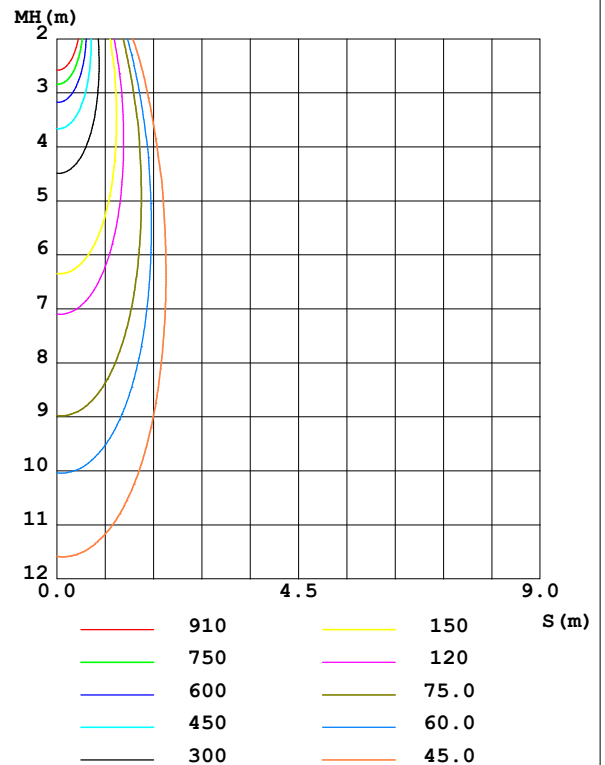

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3 °C
Operators: Allen
Test Date: 2026-01-29

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity: 45%
Test Distance: 2.900m [K=0.8783]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	4268	3582	3259	3636	3884	4590	5062	4647	0- 10	479.4	479.4	25.9,25.9
20	1660	1253	1196	1266	1461	1789	2176	1807	10- 20	732.1	1212	65.5,65.5
30	574.9	396.3	428.2	396.3	497.8	339.5	422.3	394.7	20- 30	407.8	1619	87.5,87.5
40	164.6	162.4	179.9	157.5	105.3	41.85	41.15	51.67	30- 40	139.5	1759	95.1,95.1
50	45.04	81.89	86.05	71.09	27.26	1.996	0.7828	5.075	40- 50	53.22	1812	98,98
60	10.05	35.94	43.22	27.88	3.130	0.1480	0	0.2827	50- 60	23.04	1835	99.2,99.2
70	1.267	9.615	15.38	6.087	0.9251	0	0	0	60- 70	8.879	1844	99.7,99.7
80	0.6447	1.608	2.034	1.484	0.2585	0	0	0	70- 80	2.066	1846	99.8,99.8
90	0.0003	0.9864	1.352	0.8676	0	0	0	0	80- 90	0.6220	1847	99.8,99.8
100	0	0.3488	0.6602	0.2348	0	0	0	0	90-100	0.2984	1847	99.8,99.8
110	0	0	0.1101	0	0	0	0	0	100-110	0.0765	1847	99.8,99.8
120	0	0	0	0	0	0	0	0	110-120	0.0015	1847	99.8,99.8
130	0	0.0001	0.0074	0.0004	0.0635	0.0275	0.0180	0.0385	120-130	0.0011	1847	99.8,99.8
140	0.4235	0.5342	0.6045	0.5553	0.9037	0.7671	0.6718	0.8058	130-140	0.2071	1847	99.9,99.9
150	0.9039	1.006	1.106	1.158	2.333	2.207	2.047	2.266	140-150	0.7158	1848	99.9,99.9
160	1.297	1.308	1.384	1.494	3.471	3.522	3.529	3.659	150-160	0.9670	1849	99.9,99.9
170	1.338	1.320	1.402	1.553	3.122	3.262	3.521	3.632	160-170	0.7063	1850	100,100
180	1.987	2.188	2.437	2.403	1.980	2.073	2.305	2.354	170-180	0.2228	1850	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 1791.1 lm

%lum = 96.8%

%lamp = 96.8%

Conical surface Flux(120deg): 1835 lm

%lum = 99.2%


%lamp = 99.2%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:Allen
 Test Date:2026-01-29

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity:45%
 Test Distance:2.900m [K=0.8783]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:12.000V I:2.6695A P:25.308W PF:0.8293 Freq:59.98Hz Lamp Flux:1849.8x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

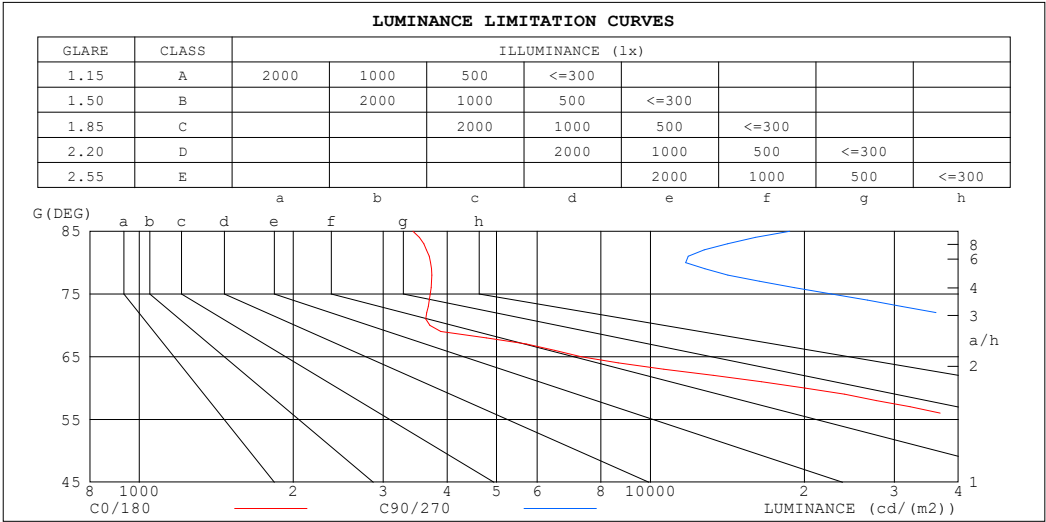

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	3432	18735
80	3713	11716
75	3710	22620
70	3703	44957
65	7324	68135
60	20095	86433
55	41634	107061
50	70072	133877
45	120417	174735


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:12.000V I:2.6695A P:25.308W PF:0.8293 Freq:59.98Hz		
Lamp Flux:1849.8x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0														
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
pfc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Coefficients of Utilization(CU)														
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00														
1.0	1.12	1.10	1.08	1.10	1.08	1.06	1.06	1.04	1.03	1.02	1.01	.00	.99	.98	.97	.95														
2.0	1.06	1.02	.00	1.04	1.01	.98	1.01	.98	.96	.98	.96	.94	.95	.94	.92	.91														
3.0	1.00	.96	.93	.99	.95	.92	.96	.93	.91	.94	.91	.89	.92	.90	.88	.87														
4.0	.95	.91	.87	.94	.90	.87	.92	.89	.86	.90	.87	.85	.89	.86	.84	.83														
5.0	.91	.86	.83	.90	.86	.82	.89	.85	.82	.87	.84	.81	.85	.83	.80	.79														
6.0	.87	.82	.79	.86	.82	.79	.85	.81	.78	.84	.80	.78	.82	.79	.77	.76														
7.0	.84	.79	.75	.83	.78	.75	.82	.78	.75	.81	.77	.74	.80	.76	.74	.73														
8.0	.80	.76	.72	.80	.75	.72	.79	.75	.72	.78	.74	.71	.77	.74	.71	.70														
9.0	.77	.73	.69	.77	.72	.69	.76	.72	.69	.75	.71	.69	.74	.71	.69	.68														
10.0	.75	.70	.67	.74	.70	.67	.73	.69	.67	.73	.69	.66	.72	.69	.66	.65														

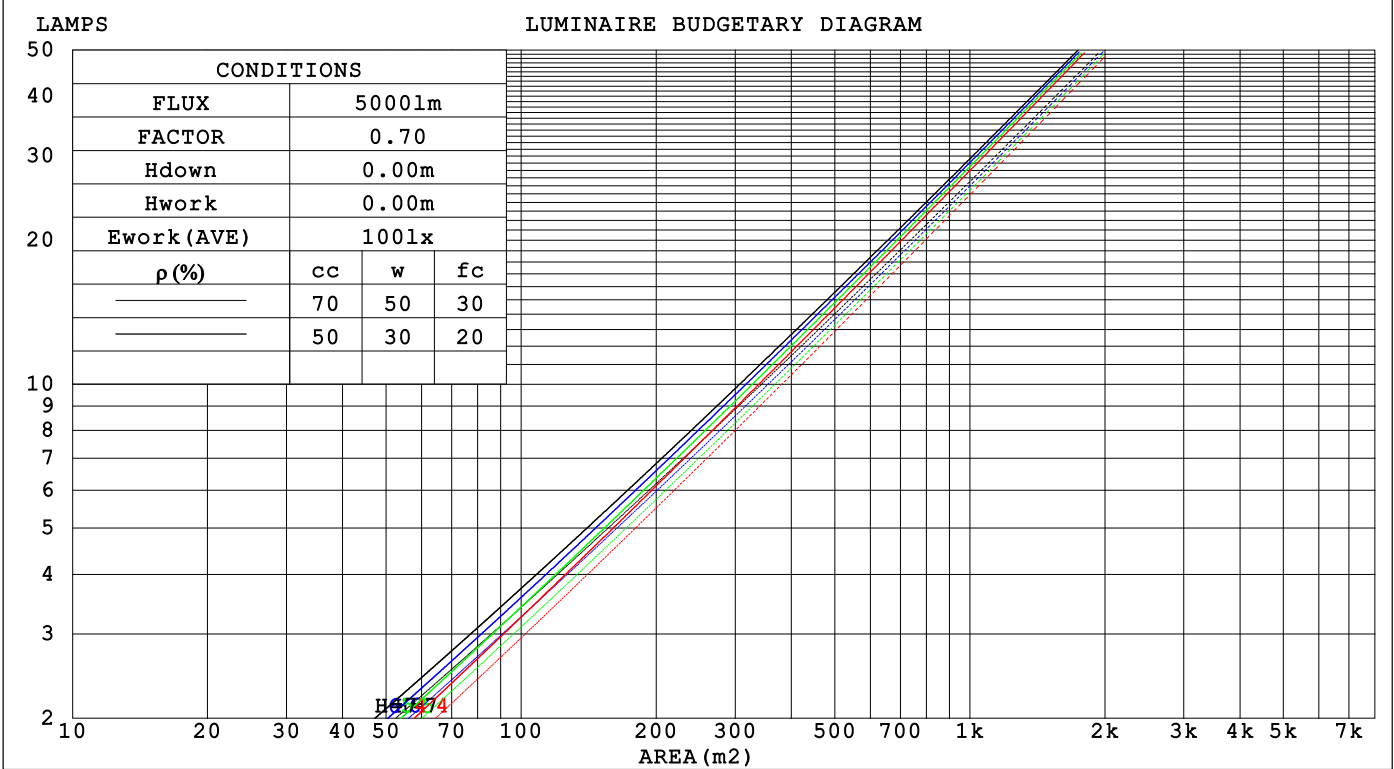

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

WEC AND CCEC

Test:U:12.000V I:2.6695A P:25.308W PF:0.8293 Freq:59.98Hz Lamp Flux:1849.8x1 lm					
NAME:		TYPE:		WEIGHT:	
SPEC.:		DIM.:		SERIAL No.:	
MFR.:		SUR.:		Shielding Angle:	

pcc	80%			70%			50%			30%			10%			0														
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
pfc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Wall Exitance Coefficients(WEC)														
0.0																														
1.0	.153	.087	.028	.146	.083	.027	.134	.077	.025	.122	.071	.023	.112	.065	.021															
2.0	.144	.079	.024	.138	.076	.023	.128	.071	.022	.118	.066	.021	.109	.062	.019															
3.0	.135	.072	.022	.131	.070	.021	.122	.066	.020	.114	.062	.019	.106	.059	.018															
4.0	.128	.066	.020	.124	.065	.019	.116	.062	.018	.109	.059	.018	.103	.056	.017															
5.0	.121	.062	.018	.117	.060	.018	.111	.058	.017	.105	.055	.016	.099	.053	.016															
6.0	.115	.057	.016	.112	.056	.016	.106	.054	.016	.101	.052	.015	.096	.051	.015															
7.0	.109	.054	.015	.107	.053	.015	.102	.051	.015	.097	.050	.014	.093	.048	.014															
8.0	.104	.051	.014	.102	.050	.014	.098	.049	.014	.093	.047	.014	.090	.046	.013															
9.0	.100	.048	.013	.098	.048	.013	.094	.046	.013	.090	.045	.013	.087	.044	.013															
10.0	.095	.046	.013	.094	.045	.013	.090	.044	.012	.087	.043	.012	.084	.042	.012															

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.171	.159	.148	.146	.136	.127	.100	.094	.088	.058	.054	.051	.018	.017	.017	
2.0	.154	.134	.117	.132	.115	.101	.090	.080	.071	.052	.046	.041	.017	.015	.014	
3.0	.140	.115	.095	.120	.099	.082	.082	.069	.058	.048	.040	.034	.015	.013	.011	
4.0	.128	.100	.078	.110	.086	.068	.076	.060	.048	.044	.035	.028	.014	.011	.009	
5.0	.118	.088	.065	.102	.076	.056	.070	.053	.040	.041	.031	.024	.013	.010	.008	
6.0	.110	.078	.055	.095	.067	.048	.065	.047	.034	.038	.028	.020	.012	.009	.007	
7.0	.103	.070	.047	.089	.061	.041	.061	.042	.029	.036	.025	.017	.011	.008	.006	
8.0	.097	.063	.040	.083	.055	.035	.058	.039	.025	.034	.023	.015	.011	.007	.005	
9.0	.091	.058	.035	.079	.050	.031	.054	.035	.022	.032	.021	.013	.010	.007	.004	
10.0	.086	.053	.031	.075	.046	.027	.052	.033	.019	.030	.019	.012	.010	.006	.004	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:12.000V I:2.6695A P:25.308W PF:0.8293 Freq:59.98Hz Lamp Flux:1849.8x1 lm										
NAME:			TYPE:			WEIGHT:				
SPEC.:			DIM.:			SERIAL No.:				
MFR.:			SUR.:			Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	21.4	22.2	21.6	22.3	22.5	22.3	23.0	22.5	23.2	23.3
3H	21.3	22.0	21.5	22.2	22.4	22.6	23.3	22.8	23.5	23.7
4H	21.2	21.9	21.5	22.1	22.3	22.6	23.2	22.8	23.4	23.7
6H	21.1	21.7	21.4	22.0	22.2	22.5	23.1	22.8	23.4	23.6
8H	21.1	21.7	21.4	21.9	22.2	22.5	23.1	22.8	23.3	23.6
12H	21.0	21.6	21.3	21.9	22.1	22.4	23.0	22.7	23.3	23.5
4H 2H	21.5	22.2	21.8	22.4	22.6	22.3	23.0	22.5	23.2	23.4
3H	21.4	21.9	21.7	22.2	22.5	22.6	23.2	22.9	23.5	23.8
4H	21.3	21.8	21.6	22.1	22.4	22.6	23.2	23.0	23.5	23.8
6H	21.2	21.7	21.6	22.0	22.3	22.6	23.0	22.9	23.4	23.7
8H	21.1	21.6	21.5	21.9	22.3	22.5	23.0	22.9	23.3	23.7
12H	21.1	21.5	21.5	21.9	22.2	22.5	22.9	22.9	23.3	23.7
8H 4H	21.2	21.6	21.6	22.0	22.3	22.5	22.9	22.9	23.3	23.7
6H	21.1	21.4	21.5	21.8	22.2	22.4	22.8	22.9	23.2	23.6
8H	21.0	21.3	21.5	21.8	22.2	22.4	22.7	22.8	23.1	23.6
12H	21.0	21.2	21.4	21.7	22.2	22.4	22.6	22.8	23.1	23.6
12H 4H	21.1	21.5	21.5	21.9	22.3	22.4	22.8	22.9	23.2	23.6
6H	21.0	21.3	21.5	21.8	22.2	22.4	22.7	22.8	23.1	23.6
8H	21.0	21.2	21.4	21.7	22.2	22.3	22.6	22.8	23.1	23.5
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 2.4 / - 5.0					+ 1.2 / - 1.7				
1.5H	+ 3.4 / - 4.0					+ 1.9 / - 1.0				
2.0H	+ 3.3 / - 6.5					+ 2.2 / - 2.0				

CIE Pub.117, 1850 lm Total Lamp Luminous Flux Correct ($8\log(F/F_0) = 2.1$)
Area: 0.001 m²

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-29

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:12.000V I:2.6695A P:25.308W PF:0.8293 Freq:59.98Hz Lamp Flux:1849.8x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	88	82	79	88	82	79	87	82	78	75
0.80	96	90	87	95	90	86	94	89	86	82
1.00	100	95	91	99	94	91	98	94	90	86
1.25	104	99	95	103	98	95	101	97	94	90
1.50	106	102	99	105	101	98	103	100	97	93
2.00	109	105	102	108	104	101	105	102	100	94
2.50	111	107	104	109	106	103	106	103	101	95
3.00	112	109	106	110	107	105	107	105	103	96
4.00	114	111	109	112	110	108	108	107	105	98
5.00	115	113	111	113	111	110	109	108	107	99
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3℃
 Operators: Allen
 Test Date: 2026-01-29

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity: 45%
 Test Distance: 2.900m [K=0.8783]
 Remarks:

ISOCANDELA DIAGRAM


Test:U:12.000V I:2.6695A P:25.308W PF:0.8293 Freq:59.98Hz Lamp Flux:1849.8x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

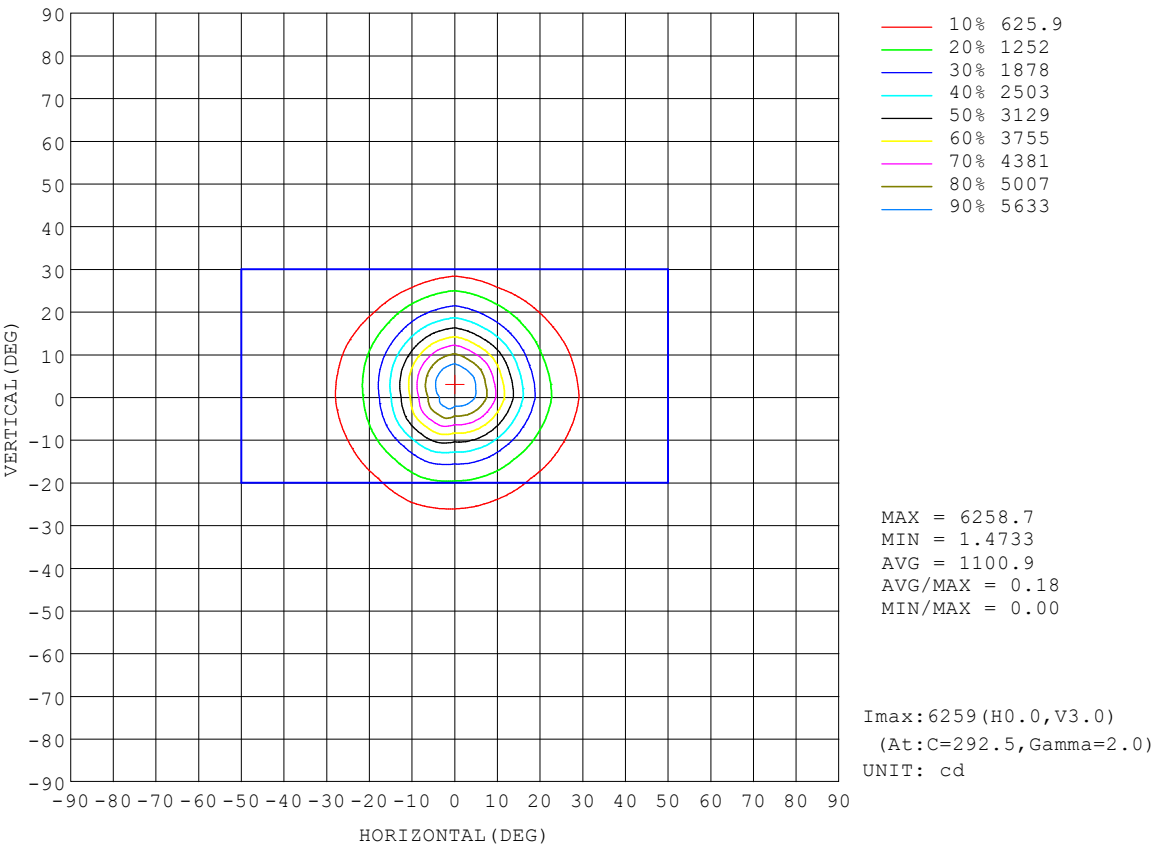

C Range: 0 - 360DEG	γ Range: 0 - 180DEG
C Interval: 22.5DEG	γ Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Temperature:25.3℃	Humidity:45%
Operators:Allen	Test Distance:2.900m [K=0.8783]
Test Date:2026-01-29	Remarks:

AAI Figure

Test:U:12.000V I:2.6695A P:25.308W PF:0.8293 Freq:59.98Hz Lamp Flux:1849.8x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

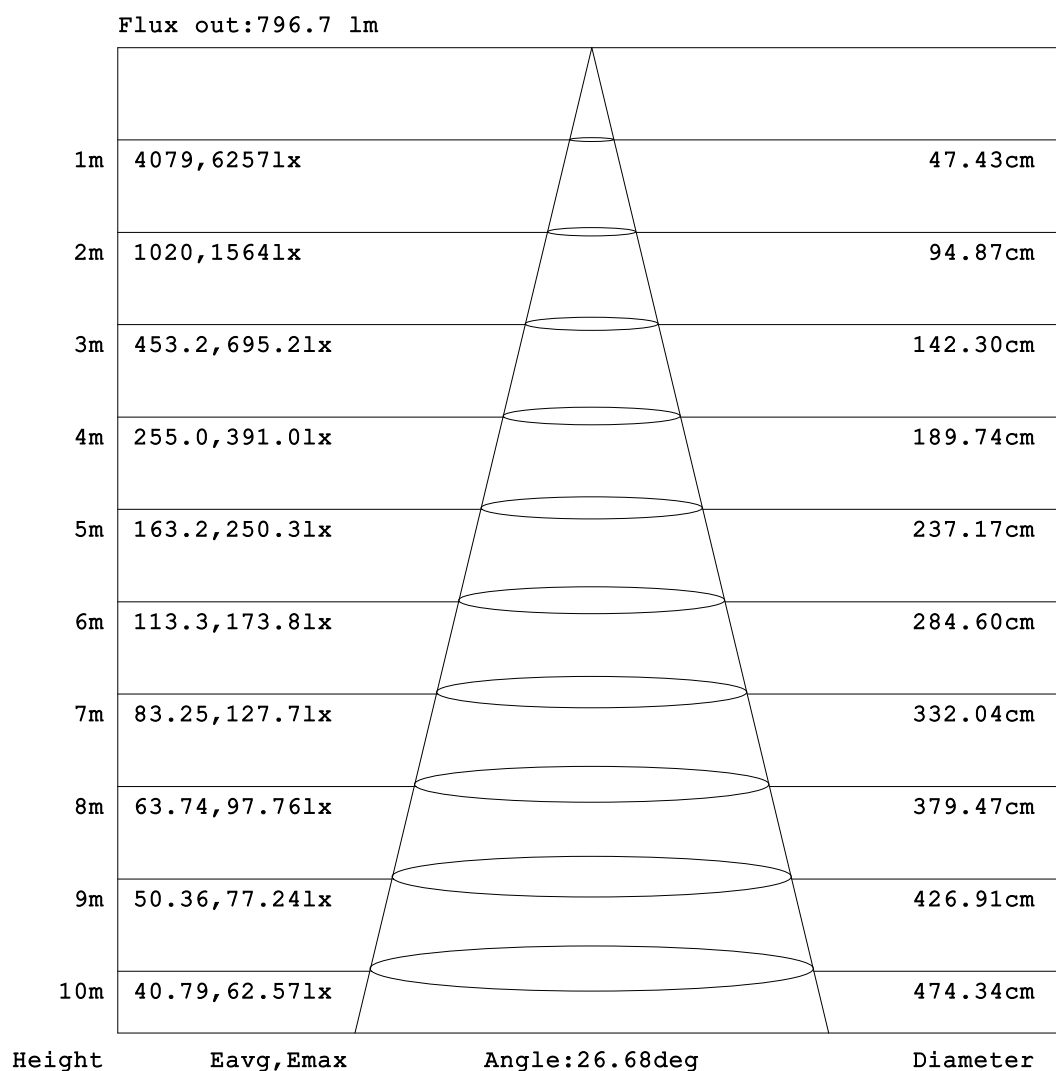


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3℃
 Operators: Allen
 Test Date: 2026-01-29

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity: 45%
 Test Distance: 2.900m [K=0.8783]
 Remarks:

ISOLUX DIAGRAM


Test:U:12.000V I:2.6695A P:25.308W PF:0.8293 Freq:59.98Hz Lamp Flux:1849.8x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

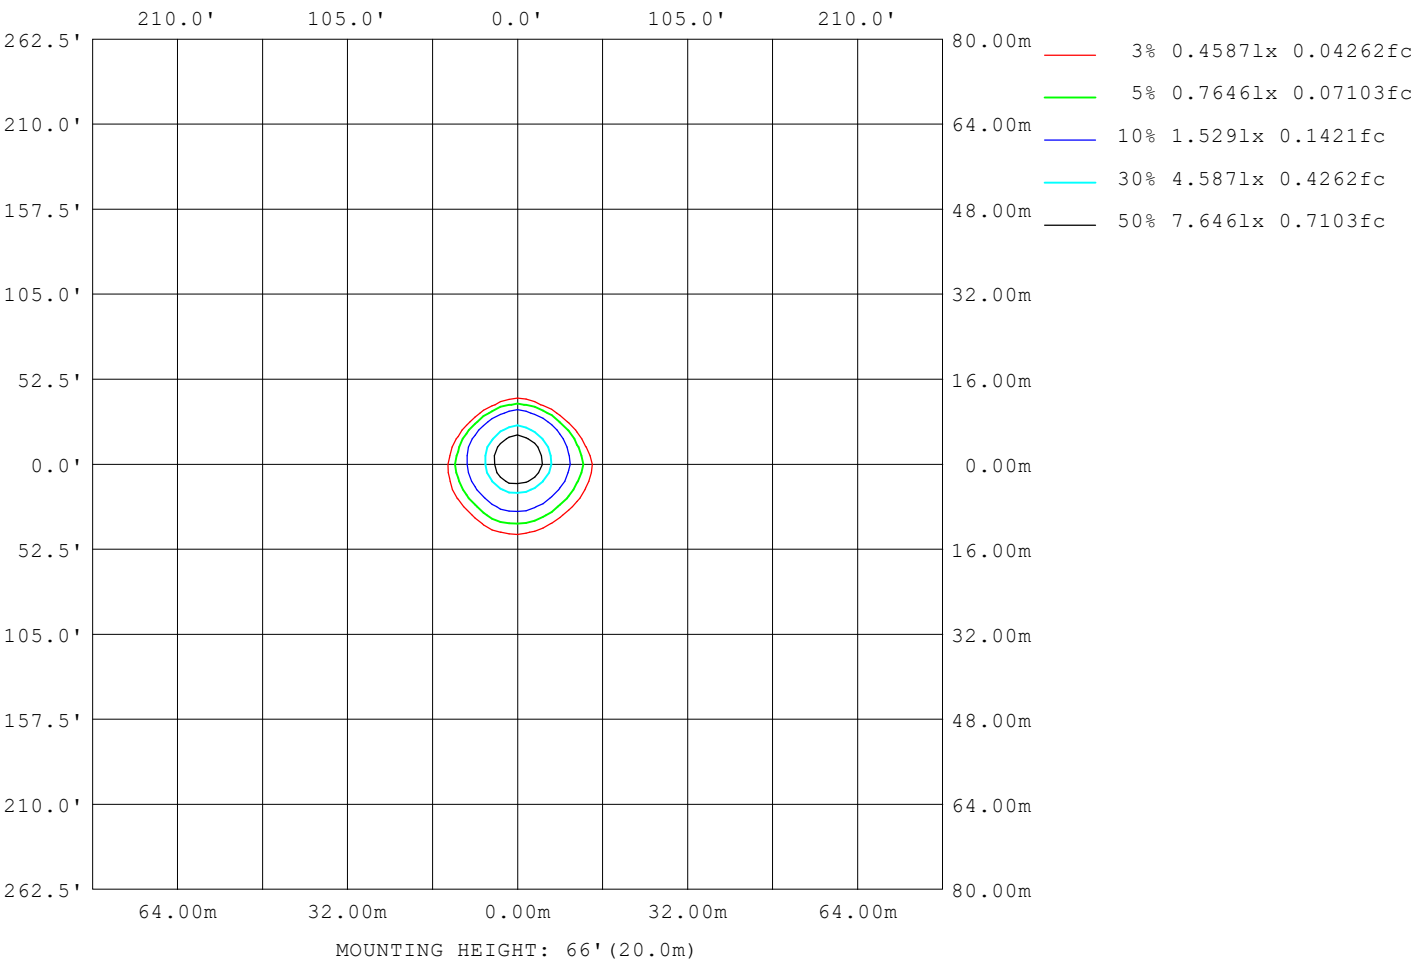

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

Planar Illuminance Curve

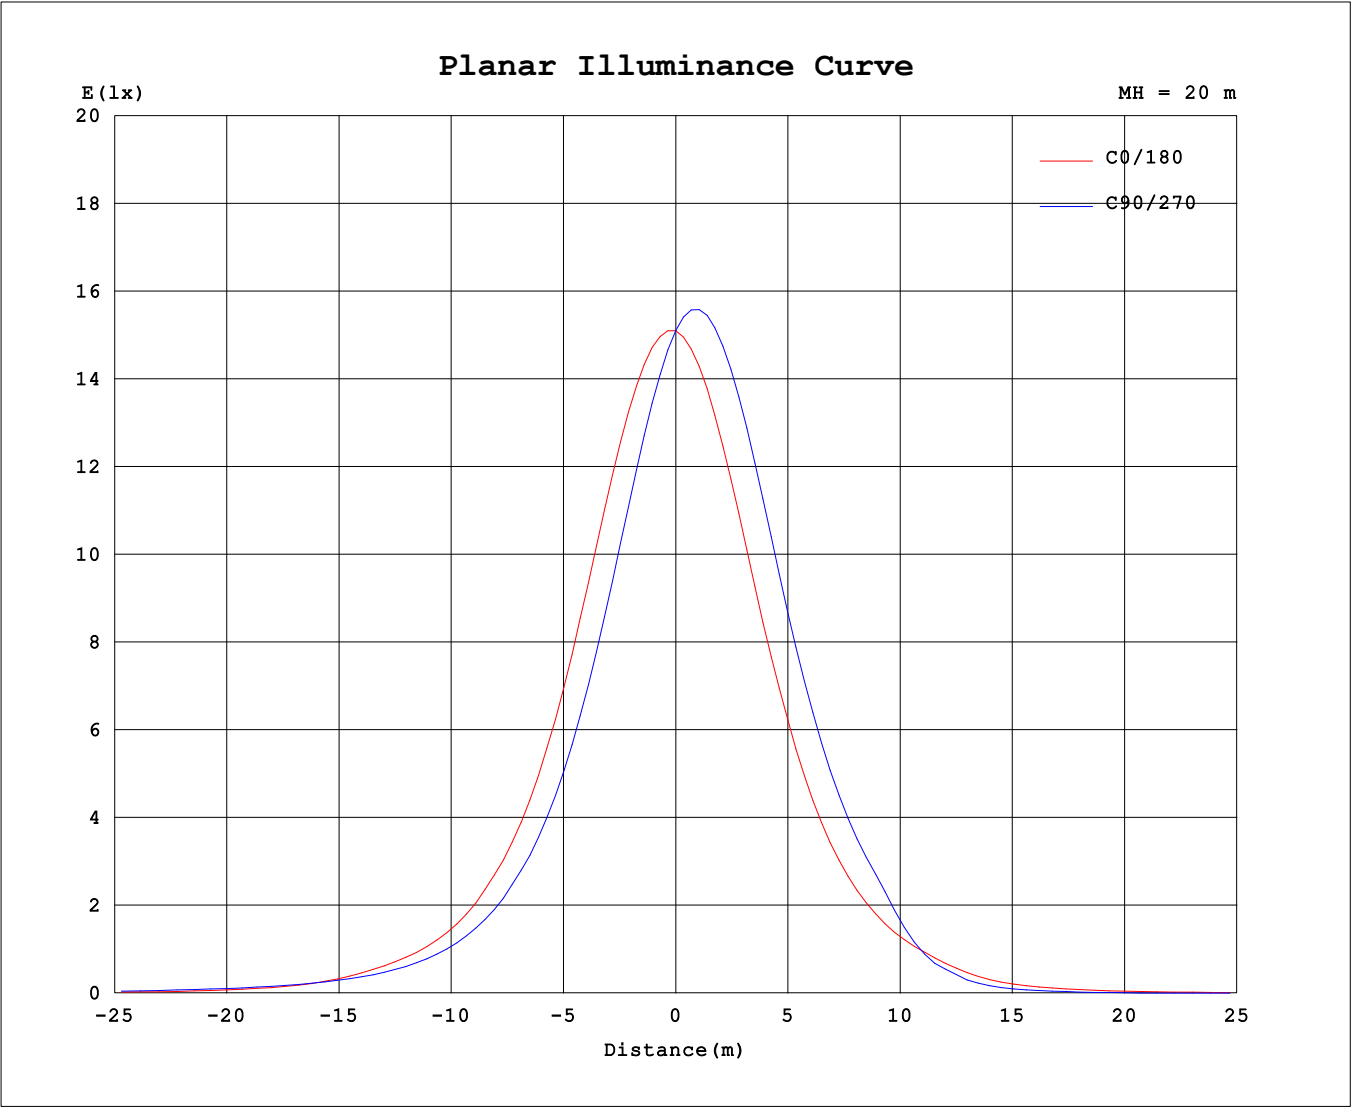

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.000V I:2.6695A P:25.308W PF:0.8293 Freq:59.98Hz Lamp Flux:1849.8x1 lm																	
NAME:									TYPE:						WEIGHT:		
SPEC.:									DIM.:						SERIAL No.:		
MFR.:									SUR.:						Shielding Angle:		

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	6039	6042	6034	6037	6043	6162	6150	6105	6039	6042	6034	6037	6043	6162	6150	6105			
5	5598	5333	5100	4915	4824	5108	5179	5334	5326	5587	5830	6033	6138	6029	5919	5700			
10	4268	3886	3582	3377	3259	3539	3636	3853	3884	4242	4590	4887	5062	4791	4647	4360			
15	2769	2436	2187	2065	2001	2175	2214	2393	2471	2771	3046	3316	3503	3213	3090	2857			
20	1660	1412	1253	1207	1196	1282	1266	1364	1461	1640	1789	2004	2176	1942	1807	1680			
25	969	805	686	680	703	734	693	763	853	946	969	1077	1248	1051	997	950			
30	575	471	396	400	428	437	396	438	498	417	340	352	422	364	395	507			
35	339	291	245	249	272	272	241	263	225	155	103	98.2	123	104	129	199			
40	165	188	162	164	180	178	157	149	105	62.4	41.8	37.3	41.2	38.5	51.7	85.7			
45	85.1	116	114	114	124	122	107	85.1	52.0	29.7	15.0	9.44	11.2	10.3	23.3	42.8			
50	45.0	69.9	81.9	82.5	86.1	85.8	71.1	51.0	27.3	10.1	2.00	0.44	0.78	0.78	5.08	21.0			
55	23.9	41.7	56.4	60.5	61.4	61.3	46.4	29.5	11.1	2.08	0.22	0.00	0.00	0.00	0.01	0.52	6.06		
60	10.0	23.3	35.9	43.2	43.2	41.2	27.9	14.7	3.13	0.63	0.15	0.00	0.00	0.00	0.00	0.28	1.66		
65	3.10	11.2	20.2	27.5	28.8	24.7	14.5	5.57	1.19	0.47	0.00	0.00	0.00	0.00	0.00	0.14	0.75		
70	1.27	3.92	9.61	14.4	15.4	12.5	6.09	2.21	0.93	0.20	0.00	0.00	0.00	0.00	0.00	0.00	0.53		
75	0.96	1.61	3.48	5.72	5.85	4.78	2.43	1.30	0.64	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.22		
80	0.64	1.17	1.61	2.06	2.03	1.87	1.48	1.02	0.26	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
85	0.30	0.86	1.30	1.59	1.63	1.53	1.20	0.68	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
90	0.00	0.53	0.99	1.29	1.35	1.23	0.87	0.33	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
95	0.00	0.24	0.65	0.95	1.01	0.89	0.53	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
100	0.00	0.00	0.35	0.61	0.66	0.56	0.23	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
105	0.00	0.00	0.10	0.31	0.35	0.27	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
110	0.00	0.00	0.00	0.07	0.11	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
130	0.00	0.00	0.00	0.00	0.01	0.00	0.00	0.00	0.06	0.04	0.03	0.02	0.02	0.04	0.04	0.05			
135	0.12	0.15	0.18	0.20	0.22	0.19	0.20	0.18	0.37	0.33	0.29	0.27	0.25	0.30	0.31	0.34			
140	0.42	0.47	0.53	0.57	0.60	0.55	0.56	0.52	0.90	0.83	0.77	0.71	0.67	0.78	0.81	0.85			
145	0.71	0.77	0.85	0.90	0.94	0.93	0.95	0.90	1.61	1.54	1.46	1.37	1.30	1.43	1.48	1.55			
150	0.90	0.95	1.01	1.06	1.11	1.12	1.16	1.13	2.33	2.28	2.21	2.12	2.05	2.21	2.27	2.34			
155	1.17	1.19	1.22	1.26	1.31	1.32	1.36	1.37	3.03	3.01	2.99	2.94	2.89	3.05	3.10	3.16			
160	1.30	1.29	1.31	1.34	1.38	1.44	1.49	1.53	3.47	3.48	3.52	3.53	3.53	3.61	3.66	3.68			
165	1.30	1.29	1.31	1.33	1.39	1.45	1.51	1.56	3.42	3.43	3.53	3.61	3.68	3.73	3.78	3.79			
170	1.34	1.32	1.32	1.35	1.40	1.48	1.55	1.64	3.12	3.13	3.26	3.40	3.52	3.57	3.63	3.63			
175	1.52	1.54	1.58	1.64	1.71	1.69	1.76	1.82	2.63	2.64	2.78	2.93	3.08	3.05	3.13	3.12			
180	1.99	2.08	2.19	2.30	2.44	2.36	2.40	2.39	1.98	1.99	2.07	2.19	2.31	2.29	2.35	2.40			

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks: