


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:12.000V I:1.4274A P:14.100W PF:0.7903 Freq:59.99Hz Lamp Flux:695.94lx1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 49.36 lm/W
MODEL	SMART FIXTURE 2700K	Imax (cd)	609.3	S/MH(C0/180)	0.91	
NOMINAL POWER(W)		LOR(%)	100.0	S/MH(C90/270)	0.91	
RATED VOLTAGE(V)		TOTAL FLUX(lm)	695.94	η UP,DN(C0-180)	0.1,58.1	
NOMINAL FLUX(lm)	695.941	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,41.8	
LAMPS INSIDE	1	η up (%)	0.1	CIBSE SHR NOM	1.00	
TEST VOLTAGE(V)		η down (%)	99.9	CIBSE SHR MAX	1.00	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

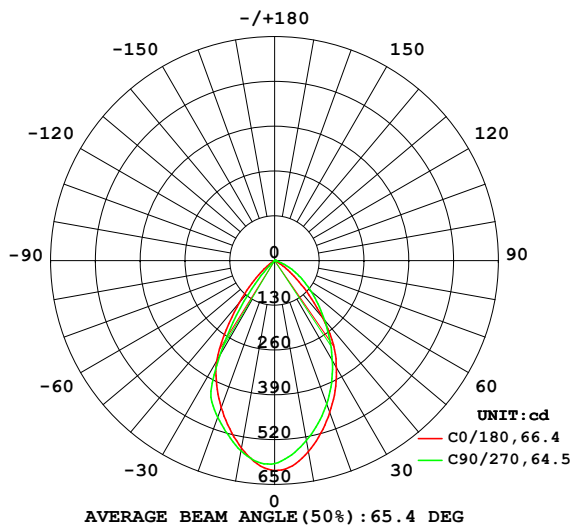

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

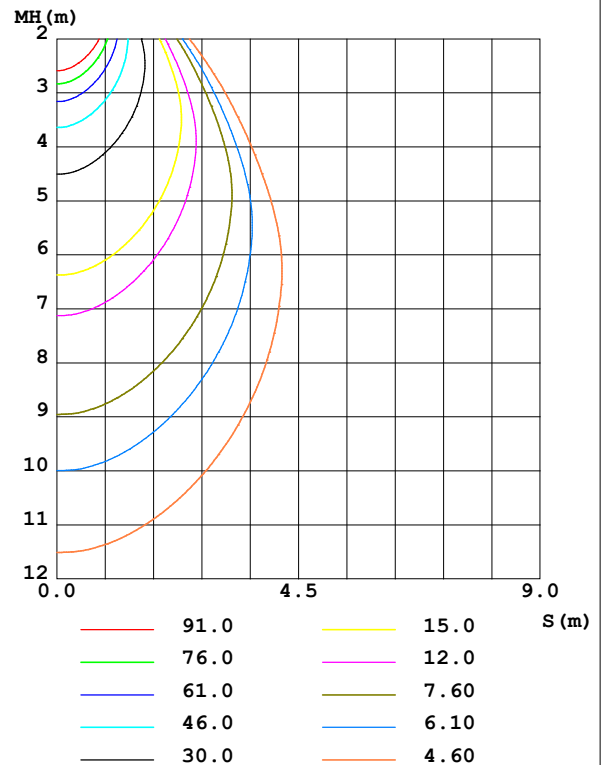

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-29

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	563.6	539.0	530.7	530.8	553.5	557.3	561.2	558.9	0- 10	54.35	54.35	7.81,7.81
20	469.2	447.4	442.7	446.1	453.9	469.8	483.4	481.2	10- 20	142.1	196.5	28.2,28.2
30	359.7	350.8	335.7	351.1	337.3	308.1	320.7	364.2	20- 30	187.1	383.6	55.1,55.1
40	216.8	251.4	226.2	247.9	159.5	99.95	88.52	148.1	30- 40	160.2	543.8	78.1,78.1
50	83.44	160.5	138.1	132.9	46.62	2.349	1.038	17.86	40- 50	91.93	635.7	91.3,91.3
60	15.83	70.74	72.53	46.90	3.582	0.3707	0	0.6363	50- 60	41.50	677.2	97.3,97.3
70	1.882	15.65	21.66	6.682	1.339	0	0	0	60- 70	14.51	691.7	99.4,99.4
80	0.9410	2.099	2.449	1.851	0.3554	0	0	0	70- 80	2.673	694.4	99.8,99.8
90	0.0197	1.176	1.589	0.9194	0	0	0	0	80- 90	0.7685	695.1	99.9,99.9
100	0	0.3227	0.5932	0.1484	0	0	0	0	90-100	0.3073	695.4	99.9,99.9
110	0	0	0.0282	0	0	0	0	0	100-110	0.0541	695.5	99.9,99.9
120	0	0	0	0	0	0	0	0	110-120	0.0001	695.5	99.9,99.9
130	0	0	0	0	0	0	0	0	120-130	0	695.5	99.9,99.9
140	0.0180	0.0000	0	0.0141	0.1527	0.1596	0.1627	0.1478	130-140	0.0220	695.5	99.9,99.9
150	0.1338	0.1014	0.1087	0.1322	0.3753	0.3739	0.3783	0.3700	140-150	0.1015	695.6	100,100
160	0.2661	0.2448	0.2452	0.2707	0.5435	0.5374	0.5383	0.5421	150-160	0.1500	695.8	100,100
170	0.3605	0.3399	0.3424	0.3662	0.5648	0.5597	0.5630	0.5718	160-170	0.1205	695.9	100,100
180	0.5169	0.5181	0.5338	0.5321	0.5174	0.5118	0.5137	0.5244	170-180	0.0465	695.9	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 598.12 lm

%lum = 85.9%

%lamp = 85.9%

Conical surface Flux(120deg): 677.19 lm

%lum = 97.3%


%lamp = 97.3%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:Allen
 Test Date:2026-01-29

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity:45%
 Test Distance:2.900m [K=0.8783]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:12.000V I:1.4274A P:14.100W PF:0.7903 Freq:59.99Hz Lamp Flux:695.941x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

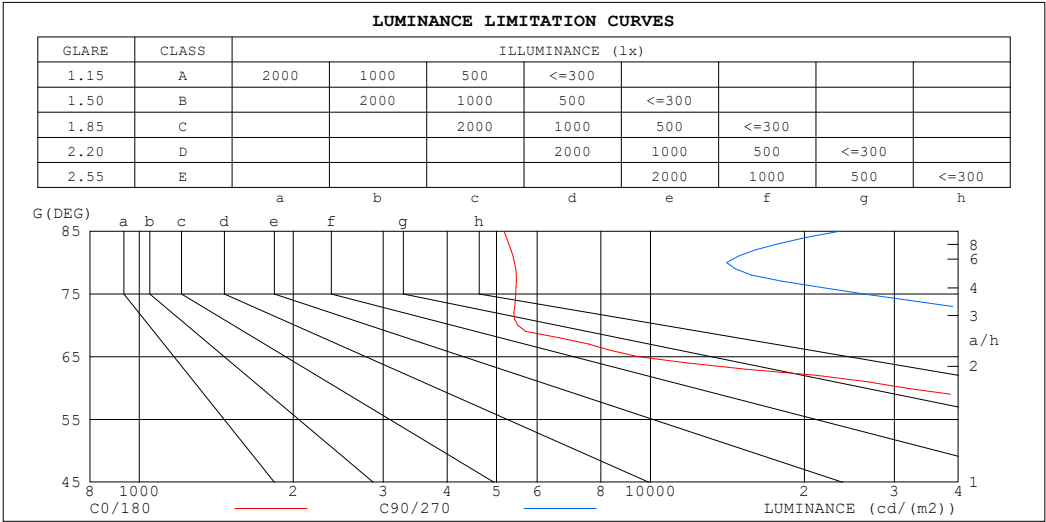

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	5167	23424
80	5419	14101
75	5452	26150
70	5503	63341
65	9496	109705
60	31654	145067
55	71730	178958
50	129803	214862
45	199872	252856


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:12.000V I:1.4274A P:14.100W PF:0.7903 Freq:59.99Hz		
Lamp Flux:695.941x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
p _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
p _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

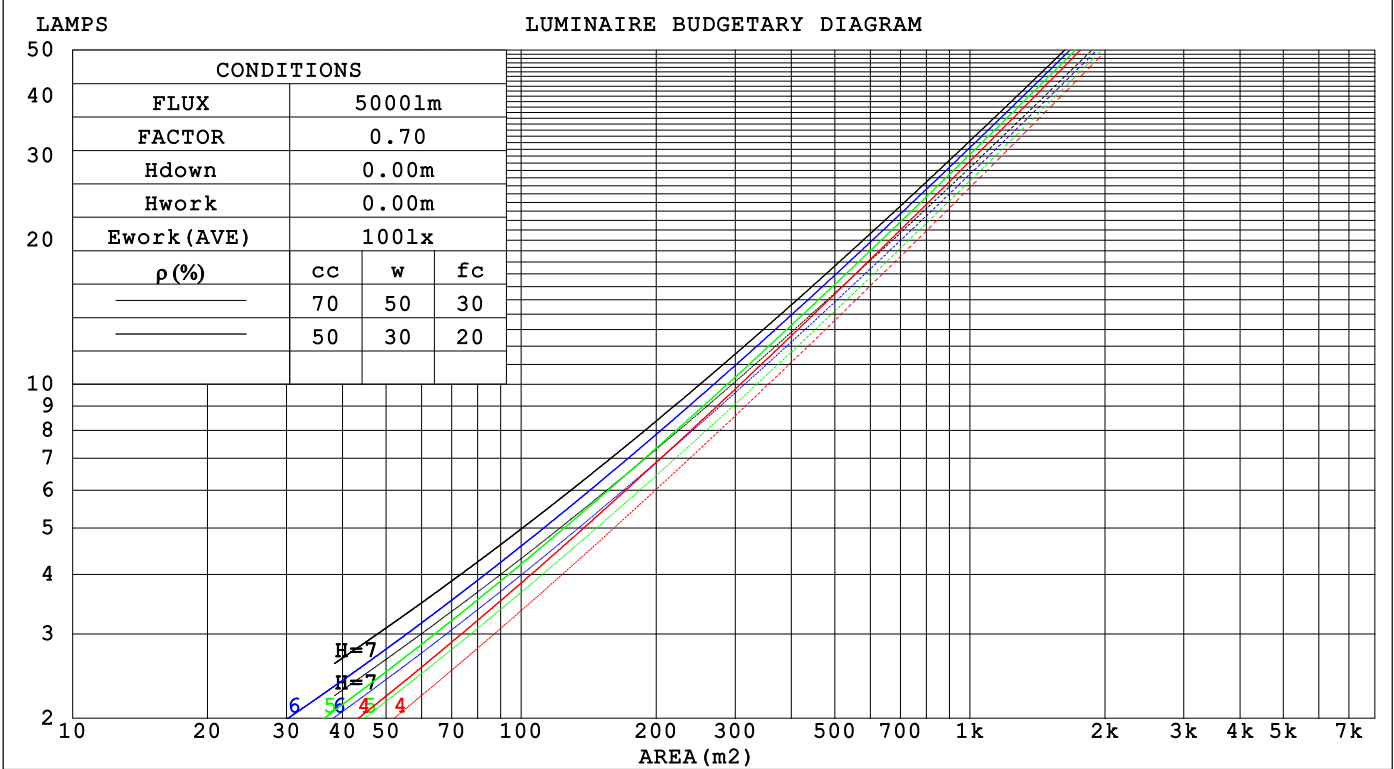

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

WEC AND CCEC

Test:U:12.000V I:1.4274A P:14.100W PF:0.7903 Freq:59.99Hz Lamp Flux:695.941x1 lm					
NAME:		TYPE:		WEIGHT:	
SPEC.:		DIM.:		SERIAL No.:	
MFR.:		SUR.:		Shielding Angle:	

pcc	80%			70%			50%			30%			10%			0														
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
pfc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Wall Exitance Coefficients(WEC)														
0.0																														
1.0	.203	.116	.037	.197	.112	.036	.184	.105	.034	.172	.099	.032	.161	.093	.030															
2.0	.197	.108	.033	.192	.106	.033	.181	.101	.031	.171	.096	.030	.161	.091	.029															
3.0	.189	.101	.030	.184	.098	.030	.174	.095	.029	.166	.091	.028	.158	.087	.027															
4.0	.180	.093	.027	.175	.092	.027	.167	.089	.026	.160	.086	.026	.152	.083	.025															
5.0	.171	.087	.025	.167	.086	.025	.160	.083	.024	.153	.081	.024	.147	.078	.024															
6.0	.162	.081	.023	.159	.080	.023	.153	.078	.023	.147	.076	.022	.141	.074	.022															
7.0	.154	.076	.022	.151	.075	.022	.146	.074	.021	.140	.072	.021	.135	.070	.021															
8.0	.147	.072	.020	.144	.071	.020	.139	.070	.020	.134	.068	.020	.130	.067	.019															
9.0	.140	.068	.019	.138	.067	.019	.133	.066	.019	.129	.065	.018	.125	.063	.018															
10.0	.134	.064	.018	.132	.064	.018	.127	.062	.018	.123	.061	.017	.120	.060	.017															

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.191	.191	.191	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.174	.158	.144	.149	.136	.124	.102	.093	.086	.059	.054	.050	.019	.017	.016	
2.0	.161	.133	.110	.138	.115	.095	.094	.079	.067	.054	.046	.039	.017	.015	.013	
3.0	.150	.115	.087	.128	.099	.075	.088	.069	.053	.051	.040	.031	.016	.013	.010	
4.0	.141	.100	.070	.121	.087	.060	.083	.060	.043	.048	.035	.025	.015	.012	.008	
5.0	.133	.089	.057	.114	.077	.050	.079	.054	.035	.046	.032	.021	.015	.010	.007	
6.0	.126	.080	.047	.108	.069	.041	.075	.049	.029	.043	.029	.017	.014	.009	.006	
7.0	.120	.073	.040	.103	.063	.035	.071	.044	.025	.041	.026	.015	.013	.009	.005	
8.0	.114	.067	.035	.098	.058	.030	.068	.041	.021	.039	.024	.013	.013	.008	.004	
9.0	.109	.062	.030	.094	.054	.026	.065	.038	.019	.038	.022	.011	.012	.007	.004	
10.0	.104	.058	.027	.090	.050	.023	.062	.035	.016	.036	.021	.010	.012	.007	.003	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:12.000V I:1.4274A P:14.100W PF:0.7903 Freq:59.99Hz Lamp Flux:695.941x1 lm										
NAME:			TYPE:			WEIGHT:				
SPEC.:			DIM.:			SERIAL No.:				
MFR.:			SUR.:			Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	30.5	31.6	30.8	31.8	32.0	32.4	33.5	32.6	33.7	33.9
3H	30.4	31.4	30.6	31.6	31.8	32.7	33.7	32.9	33.9	34.1
4H	30.3	31.2	30.6	31.5	31.7	32.6	33.6	32.9	33.8	34.0
6H	30.2	31.1	30.5	31.3	31.6	32.5	33.4	32.8	33.7	33.9
8H	30.1	31.0	30.5	31.3	31.5	32.5	33.4	32.8	33.6	33.9
12H	30.1	30.9	30.4	31.2	31.5	32.4	33.3	32.8	33.6	33.8
4H 2H	30.8	31.8	31.1	32.0	32.2	32.4	33.4	32.7	33.6	33.9
3H	30.7	31.5	31.0	31.8	32.1	32.8	33.6	33.1	33.9	34.2
4H	30.6	31.3	31.0	31.6	32.0	32.7	33.5	33.1	33.8	34.1
6H	30.5	31.2	30.9	31.5	31.9	32.7	33.3	33.0	33.7	34.0
8H	30.5	31.1	30.9	31.4	31.8	32.6	33.2	33.0	33.6	34.0
12H	30.4	31.0	30.8	31.3	31.7	32.6	33.1	33.0	33.5	33.9
8H 4H	30.5	31.1	30.9	31.5	31.8	32.6	33.2	33.0	33.6	34.0
6H	30.4	30.9	30.9	31.3	31.7	32.5	33.0	33.0	33.4	33.9
8H	30.4	30.8	30.8	31.2	31.7	32.5	32.9	33.0	33.4	33.8
12H	30.3	30.7	30.8	31.2	31.6	32.5	32.8	32.9	33.3	33.8
12H 4H	30.5	31.0	30.9	31.4	31.8	32.6	33.1	33.0	33.5	33.9
6H	30.4	30.8	30.8	31.2	31.7	32.5	32.9	32.9	33.3	33.8
8H	30.3	30.7	30.8	31.2	31.6	32.5	32.8	32.9	33.3	33.7
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 1.7 / - 3.6					+ 0.9 / - 1.3				
1.5H	+ 1.1 / - 2.9					+ 0.3 / - 1.0				
2.0H	+ 2.8 / - 7.3					+ 1.3 / - 1.7				

CIE Pub.117, 695.9 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -1.3)
Area: 0.001 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:12.000V I:1.4274A P:14.100W PF:0.7903 Freq:59.99Hz Lamp Flux:695.941x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	78	69	65	77	69	65	76	69	64	60
0.80	86	79	74	86	78	74	84	78	73	69
1.00	93	86	81	92	85	81	90	85	80	75
1.25	98	91	87	97	91	87	95	90	86	81
1.50	101	95	91	100	95	91	98	93	90	84
2.00	105	100	96	104	99	96	101	97	94	88
2.50	108	103	99	106	102	98	103	99	96	90
3.00	110	105	102	108	104	101	104	101	99	92
4.00	112	109	106	110	107	104	106	104	102	94
5.00	113	111	108	111	109	107	107	105	103	95
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3℃
 Operators: Allen
 Test Date: 2026-01-29

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity: 45%
 Test Distance: 2.900m [K=0.8783]
 Remarks:

ISOCANDELA DIAGRAM


Test:U:12.000V I:1.4274A P:14.100W PF:0.7903 Freq:59.99Hz Lamp Flux:695.941x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

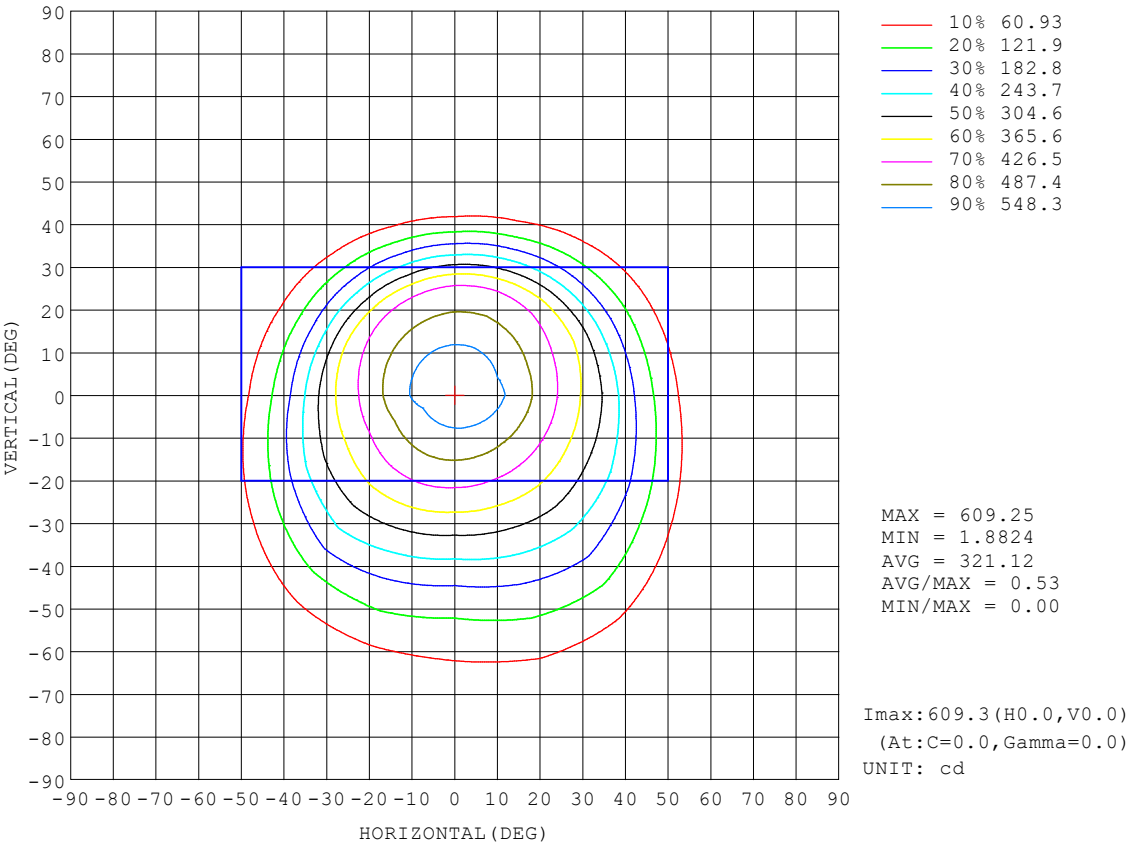

C Range: 0 - 360DEG	γ Range: 0 - 180DEG
C Interval: 22.5DEG	γ Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Temperature:25.3℃	Humidity:45%
Operators:Allen	Test Distance:2.900m [K=0.8783]
Test Date:2026-01-29	Remarks:

AAI Figure

Test:U:12.000V I:1.4274A P:14.100W PF:0.7903 Freq:59.99Hz Lamp Flux:695.941x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

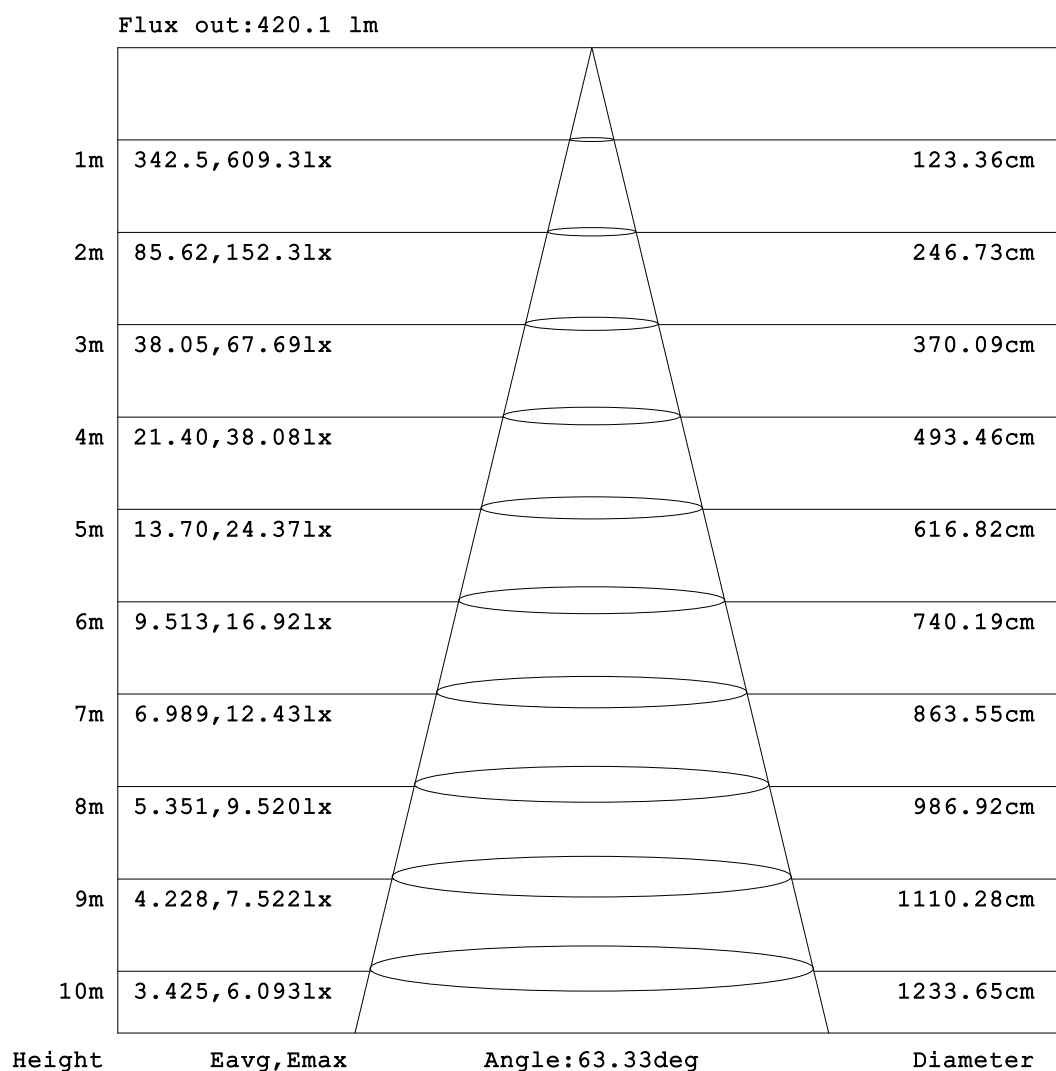


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3℃
 Operators: Allen
 Test Date: 2026-01-29

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity: 45%
 Test Distance: 2.900m [K=0.8783]
 Remarks:


ISOLUX DIAGRAM

Test:U:12.000V I:1.4274A P:14.100W PF:0.7903 Freq:59.99Hz Lamp Flux:695.941x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

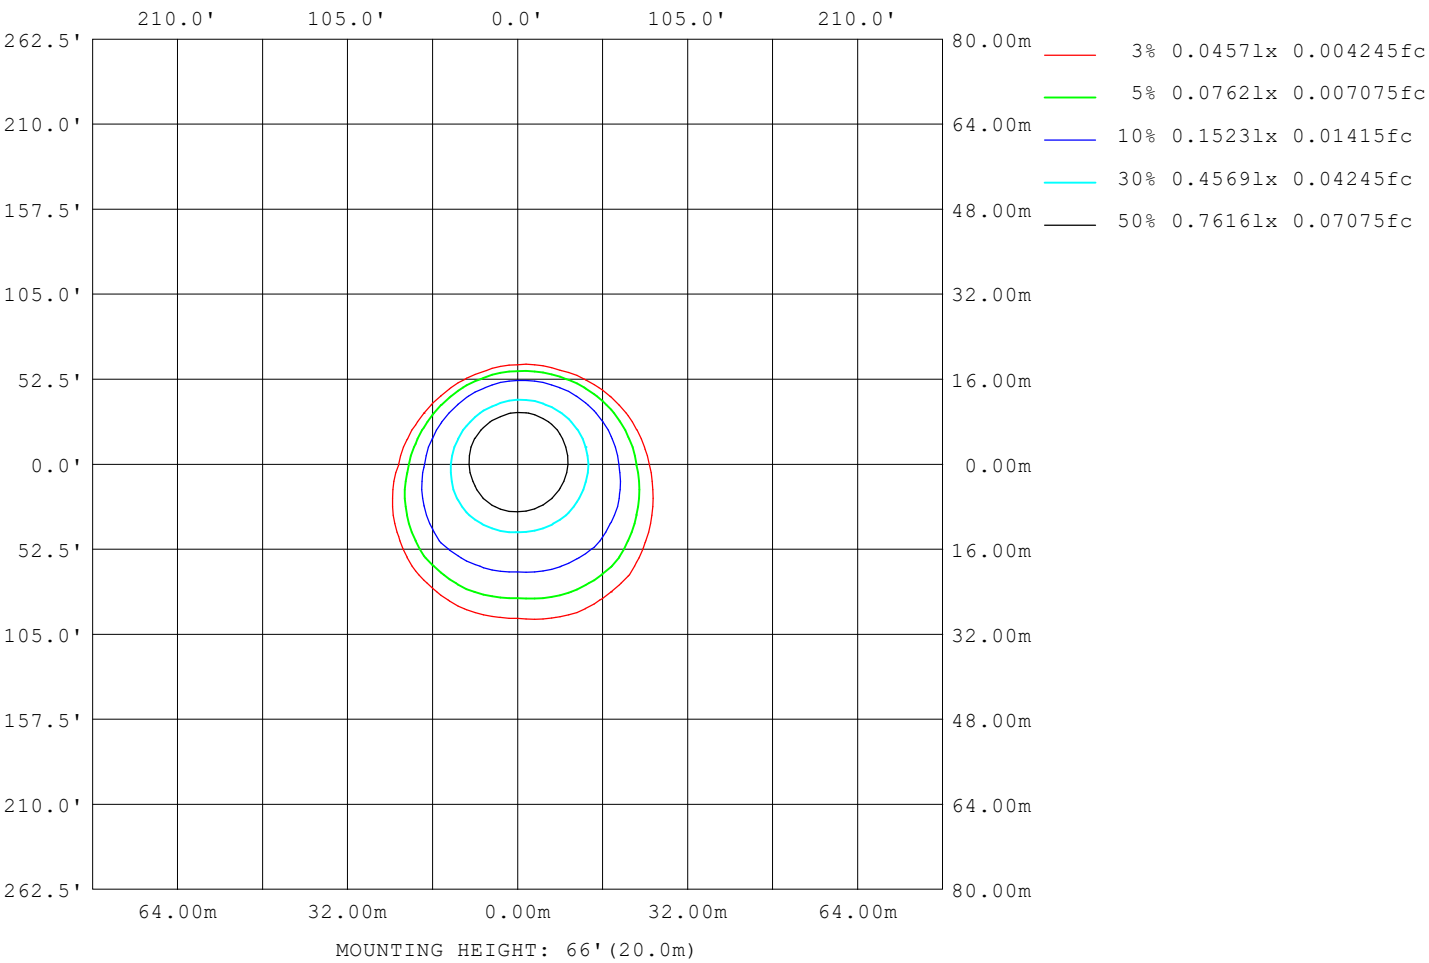

C Range: 0 - 360DEG C Interval: 22.5DEG Test Speed: HIGH Temperature:25.3℃ Operators:Allen Test Date:2026-01-29	γ Range: 0 - 180DEG γ Interval: 1.0DEG Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459 Humidity:45% Test Distance:2.900m [K=0.8783] Remarks:
--	---

Planar Illuminance Curve

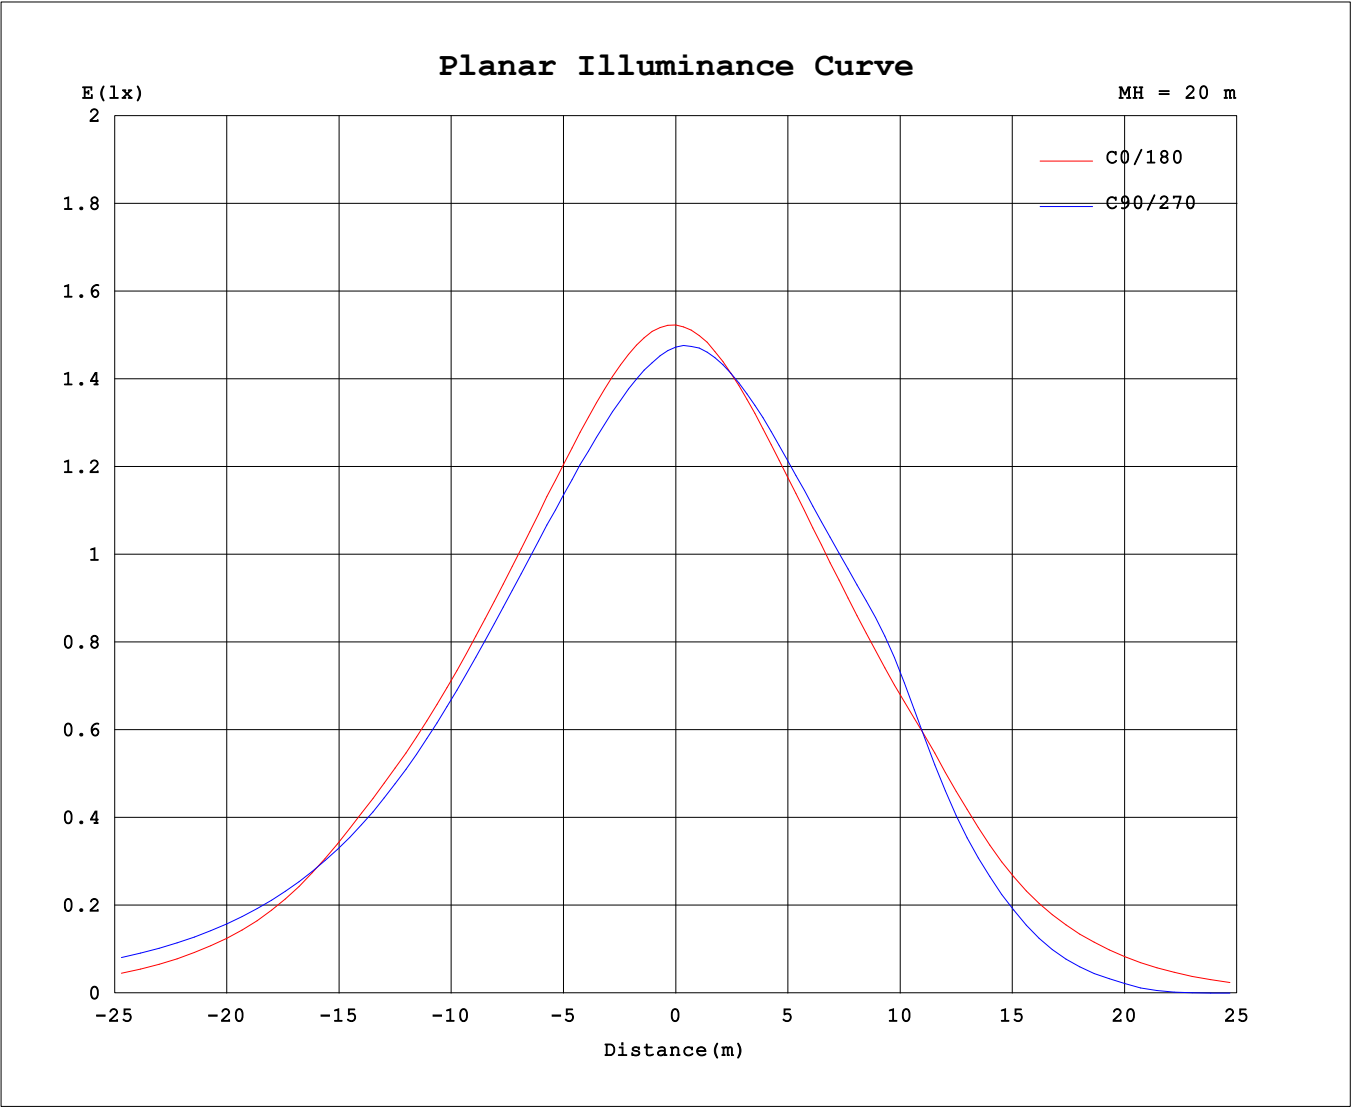

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.000V I:1.4274A P:14.100W PF:0.7903 Freq:59.99Hz Lamp Flux:695.941x1 lm																	
NAME:									TYPE:						WEIGHT:		
SPEC.:									DIM.:						SERIAL No.:		
MFR.:									SUR.:						Shielding Angle:		

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	609	603	597	593	589	587	586	585	609	603	597	593	589	587	586	585			
5	598	586	577	570	566	565	565	567	592	590	589	588	586	585	583	579			
10	564	550	539	533	531	530	531	532	553	555	557	560	561	562	559	554			
15	519	505	495	490	489	490	490	490	506	511	515	520	524	526	523	517			
20	469	457	447	443	443	446	446	443	454	462	470	477	483	487	481	473			
25	416	406	400	392	391	397	400	393	399	411	419	426	438	443	437	425			
30	360	353	351	341	336	344	351	342	337	322	308	306	321	341	364	371			
35	298	299	301	289	279	288	300	288	246	212	195	187	194	217	248	281			
40	217	245	251	240	226	234	248	216	159	125	99.9	87.0	88.5	108	148	185			
45	141	185	205	194	179	186	192	146	94.5	59.3	35.4	22.3	24.8	36.3	68.5	108			
50	83.4	125	161	153	138	142	133	91.2	46.6	18.5	2.35	0.70	1.04	2.02	17.9	51.9			
55	41.1	76.1	113	117	103	103	83.6	48.6	17.3	2.50	0.47	0.07	0.00	0.17	1.73	16.9			
60	15.8	39.5	70.7	84.1	72.5	65.1	46.9	20.7	3.58	1.06	0.37	0.00	0.00	0.11	0.64	2.88			
65	4.01	16.4	38.5	51.3	46.4	35.8	20.9	5.58	1.70	0.81	0.02	0.00	0.00	0.00	0.46	1.32			
70	1.88	5.06	15.6	24.5	21.7	14.8	6.68	2.26	1.34	0.39	0.00	0.00	0.00	0.00	0.00	1.01			
75	1.41	2.16	4.47	7.60	6.77	4.41	2.44	1.71	0.90	0.00	0.00	0.00	0.00	0.00	0.00	0.57			
80	0.94	1.61	2.10	2.48	2.45	2.22	1.85	1.27	0.36	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
85	0.45	1.13	1.66	1.99	2.04	1.84	1.41	0.75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
90	0.02	0.65	1.18	1.54	1.59	1.34	0.92	0.30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
95	0.00	0.27	0.69	1.01	1.05	0.85	0.47	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
100	0.00	0.00	0.32	0.56	0.59	0.44	0.15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
105	0.00	0.00	0.06	0.23	0.26	0.15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
110	0.00	0.00	0.00	0.00	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.05	0.06	0.06	0.06	0.05	0.05	0.03			
140	0.02	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.15	0.16	0.16	0.16	0.16	0.16	0.15	0.13			
145	0.08	0.06	0.05	0.05	0.05	0.06	0.07	0.09	0.27	0.27	0.27	0.27	0.27	0.27	0.26	0.25			
150	0.13	0.12	0.10	0.10	0.11	0.12	0.13	0.15	0.38	0.37	0.37	0.38	0.38	0.38	0.37	0.36			
155	0.21	0.19	0.18	0.18	0.18	0.19	0.21	0.23	0.47	0.47	0.47	0.47	0.47	0.47	0.47	0.46			
160	0.27	0.25	0.24	0.24	0.25	0.26	0.27	0.28	0.54	0.54	0.54	0.53	0.54	0.54	0.54	0.54			
165	0.30	0.29	0.28	0.28	0.28	0.29	0.31	0.32	0.56	0.56	0.56	0.55	0.56	0.56	0.56	0.56			
170	0.36	0.35	0.34	0.33	0.34	0.36	0.37	0.38	0.56	0.56	0.56	0.56	0.56	0.57	0.57	0.57			
175	0.45	0.44	0.44	0.44	0.45	0.45	0.46	0.47	0.56	0.55	0.55	0.55	0.56	0.56	0.57	0.57			
180	0.52	0.52	0.52	0.52	0.53	0.53	0.53	0.53	0.52	0.51	0.51	0.51	0.51	0.53	0.52	0.53			

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks: