


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:12.000V I:1.4094A P:13.800W PF:0.7521 Freq:60.03Hz Lamp Flux:983.183x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 71.25 lm/W
MODEL	SMART FIXTURE 3000K	Imax (cd)	4703	S/MH(C0/180)	0.37	
NOMINAL POWER(W)		LOR(%)	100.0	S/MH(C90/270)	0.32	
RATED VOLTAGE(V)		TOTAL FLUX(lm)	983.18	η UP,DN(C0-180)	0.1,56.4	
NOMINAL FLUX(lm)	983.183	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,43.4	
LAMPS INSIDE	1	η up (%)	0.2	CIBSE SHR NOM	0.00	
TEST VOLTAGE(V)		η down (%)	99.8	CIBSE SHR MAX	0.30	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

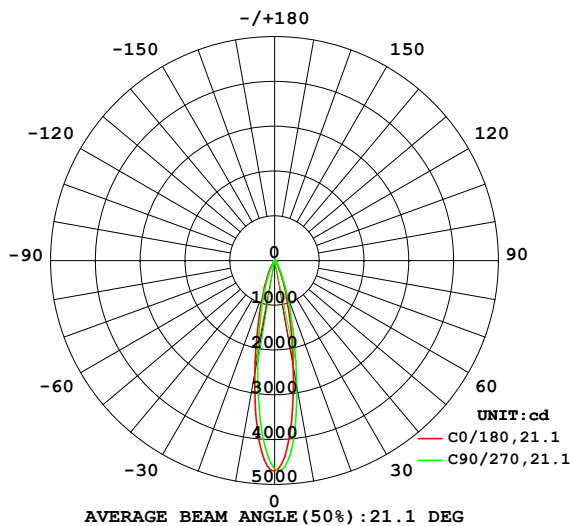

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

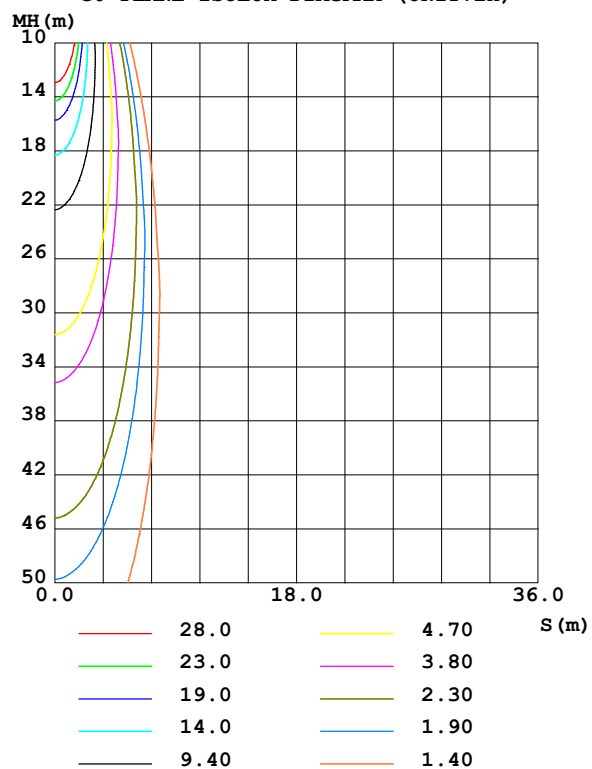

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	2427	2500	2866	2876	2571	2515	2181	2179	0- 10	329.2	329.2	33.5,33.5
20	672.1	703.2	822.0	836.6	728.2	720.3	605.0	608.3	10- 20	384.6	713.9	72.6,72.6
30	191.9	202.6	231.6	238.4	163.4	82.12	57.65	108.6	20- 30	167.9	881.8	89.7,89.7
40	66.49	80.18	87.91	87.94	31.97	13.56	9.233	22.38	30- 40	56.03	937.8	95.4,95.4
50	25.61	43.50	46.03	35.54	8.198	0	0	2.545	40- 50	24.61	962.4	97.9,97.9
60	7.693	23.61	26.25	13.31	0.3283	0	0	0.0894	50- 60	12.36	974.8	99.1,99.1
70	0.8799	7.982	10.51	2.011	0.0895	0	0	0	60- 70	5.291	980.1	99.7,99.7
80	0.3352	1.059	1.304	0.4348	0	0	0	0	70- 80	1.274	981.4	99.8,99.8
90	0.0337	0.6200	0.5630	0.1665	0	0	0	0	80- 90	0.2678	981.6	99.8,99.8
100	0	0.2651	0.2570	0	0	0	0	0	90-100	0.1265	981.8	99.9,99.9
110	0	0	0	0	0	0	0	0	100-110	0.0263	981.8	99.9,99.9
120	0	0	0	0	0	0	0	0	110-120	0	981.8	99.9,99.9
130	0	0	0	0	0	0	0	0	120-130	0	981.8	99.9,99.9
140	0.1591	0.1468	0.0967	0.1000	0.3172	0.3409	0.4251	0.4273	130-140	0.0492	981.8	99.9,99.9
150	0.4949	0.5227	0.4923	0.4884	1.198	1.253	1.362	1.370	140-150	0.3576	982.2	99.9,99.9
160	0.6411	0.6672	0.6779	0.6690	1.951	1.983	1.996	1.998	150-160	0.5310	982.7	100,100
170	0.6216	0.6207	0.6282	0.6207	1.755	1.739	1.679	1.666	160-170	0.3613	983.1	100,100
180	0.9815	0.9440	0.8709	0.8665	0.9771	0.9659	0.8724	0.8752	170-180	0.1017	983.2	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 952.34 lm

%lum = 96.9%

%lamp = 96.9%

Conical surface Flux(120deg): 974.8 lm

%lum = 99.1%


%lamp = 99.1%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:Allen
 Test Date:2026-01-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity:45%
 Test Distance:2.900m [K=0.8783]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:12.000V I:1.4094A P:13.800W PF:0.7521 Freq:60.03Hz Lamp Flux:983.183x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

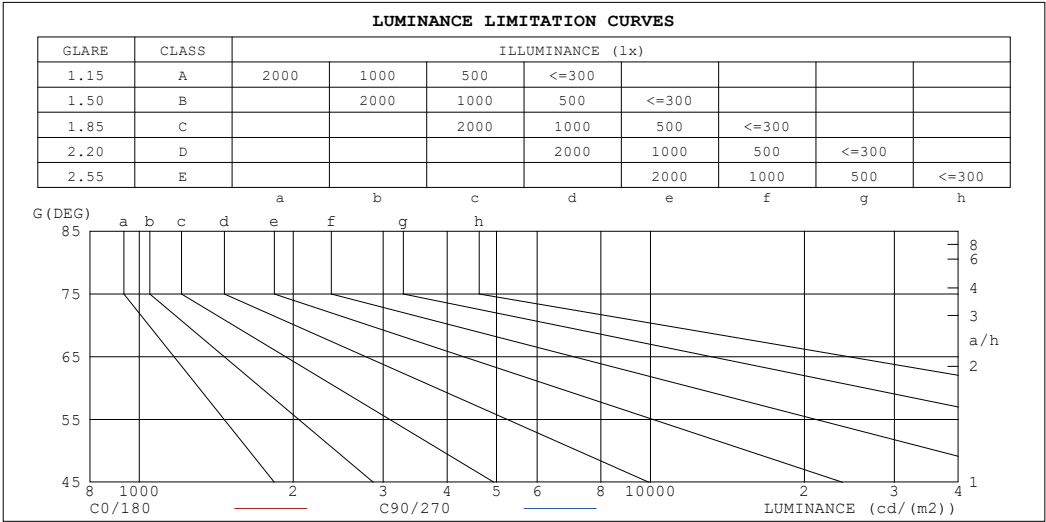

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	216408	781732
80	193047	750710
75	177288	1745878
70	257267	3073959
65	581682	4240152
60	1538628	5249529
55	2663678	6120570
50	3984858	7160580
45	5840846	8718691


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:12.000V I:1.4094A P:13.800W PF:0.7521 Freq:60.03Hz		
Lamp Flux:983.183x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0														
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
pfc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Coefficients of Utilization(CU)														
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00														
1.0	1.12	1.10	1.09	1.10	1.08	1.07	1.06	1.05	1.04	1.03	1.01	1.00	.99	.98	.98	.96														
2.0	1.07	1.03	1.01	1.05	1.02	.00	1.02	.99	.97	.99	.97	.95	.96	.95	.93	.92														
3.0	1.02	.98	.95	1.00	.97	.94	.98	.95	.92	.95	.93	.91	.93	.91	.90	.88														
4.0	.97	.93	.90	.96	.92	.89	.94	.91	.88	.92	.89	.87	.90	.88	.86	.85														
5.0	.93	.89	.85	.92	.88	.85	.91	.87	.84	.89	.86	.84	.88	.85	.83	.82														
6.0	.90	.85	.82	.89	.85	.82	.88	.84	.81	.86	.83	.81	.85	.82	.80	.79														
7.0	.86	.82	.79	.86	.82	.79	.85	.81	.78	.84	.80	.78	.83	.80	.77	.76														
8.0	.83	.79	.76	.83	.79	.76	.82	.78	.76	.81	.78	.75	.80	.77	.75	.74														
9.0	.81	.76	.73	.80	.76	.73	.80	.76	.73	.79	.75	.73	.78	.75	.73	.72														
10.0	.78	.74	.71	.78	.74	.71	.77	.74	.71	.77	.73	.71	.76	.73	.71	.70														

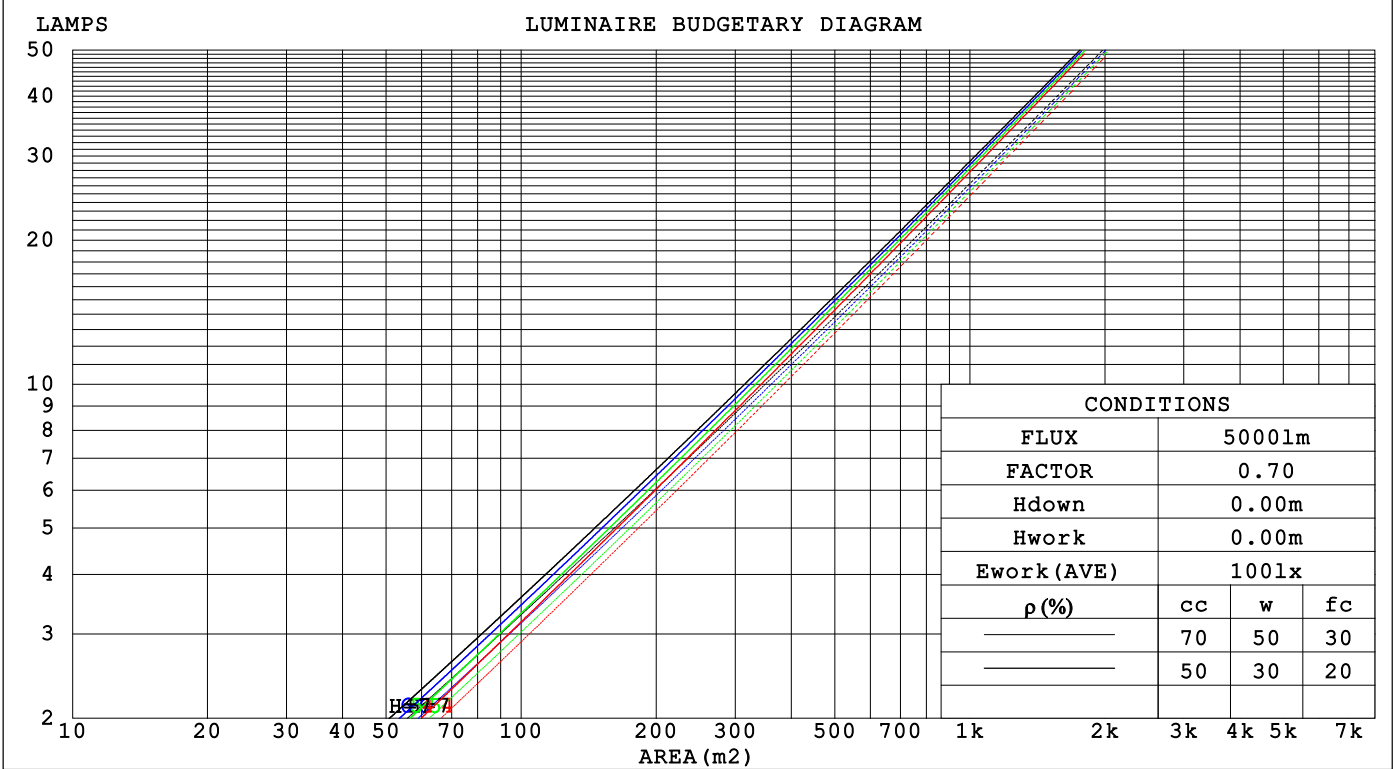

C Range: 0 - 360DEG

C Interval: 22.5DEG

Test Speed: HIGH

Temperature:25.3℃

Operators:Allen

Test Date:2026-01-27

γ Range: 0 - 180DEG

γ Intmval: 1.0DEG

Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459

Humidity:45%

Test Distance:2.900m [K=0.8783]

Remarks:

WEC AND CCEC

Test:U:12.000V I:1.4094A P:13.800W PF:0.7521 Freq:60.03Hz Lamp Flux:983.183x1 lm					
NAME:		TYPE:		WEIGHT:	
SPEC.:		DIM.:		SERIAL No.:	
MFR.:		SUR.:		Shielding Angle:	

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.146	.083	.026	.139	.079	.025	.126	.073	.023	.115	.066	.021	.104	.060	.019		
2.0	.136	.075	.023	.131	.072	.022	.120	.067	.021	.111	.062	.019	.102	.058	.018		
3.0	.127	.068	.020	.123	.066	.020	.114	.062	.019	.106	.058	.018	.099	.055	.017		
4.0	.120	.062	.018	.116	.061	.018	.108	.057	.017	.102	.055	.016	.095	.052	.016		
5.0	.113	.057	.017	.109	.056	.016	.103	.054	.016	.097	.051	.015	.092	.049	.015		
6.0	.107	.054	.015	.104	.052	.015	.098	.050	.015	.093	.048	.014	.089	.047	.014		
7.0	.101	.050	.014	.099	.049	.014	.094	.048	.014	.090	.046	.013	.085	.044	.013		
8.0	.096	.047	.013	.094	.046	.013	.090	.045	.013	.086	.044	.013	.082	.042	.012		
9.0	.092	.045	.012	.090	.044	.012	.086	.043	.012	.083	.042	.012	.080	.040	.012		
10.0	.088	.042	.012	.086	.042	.012	.083	.041	.011	.080	.040	.011	.077	.039	.011		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.170	.159	.149	.146	.136	.128	.100	.094	.088	.057	.054	.051	.018	.017	.017	
2.0	.153	.134	.118	.131	.115	.102	.090	.080	.071	.052	.046	.042	.017	.015	.014	
3.0	.138	.115	.096	.119	.099	.083	.081	.069	.058	.047	.040	.034	.015	.013	.011	
4.0	.126	.099	.079	.108	.086	.068	.074	.060	.048	.043	.035	.029	.014	.011	.009	
5.0	.116	.087	.066	.100	.075	.057	.069	.053	.040	.040	.031	.024	.013	.010	.008	
6.0	.107	.077	.056	.092	.067	.049	.064	.047	.034	.037	.028	.020	.012	.009	.007	
7.0	.100	.069	.048	.086	.060	.042	.059	.042	.029	.034	.025	.018	.011	.008	.006	
8.0	.093	.063	.041	.080	.054	.036	.056	.038	.026	.032	.022	.015	.010	.007	.005	
9.0	.088	.057	.036	.076	.049	.032	.052	.035	.022	.031	.021	.013	.010	.007	.004	
10.0	.083	.052	.032	.071	.045	.028	.050	.032	.020	.029	.019	.012	.009	.006	.004	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:12.000V I:1.4094A P:13.800W PF:0.7521 Freq:60.03Hz Lamp Flux:983.183x1 lm										
NAME:			TYPE:			WEIGHT:				
SPEC.:			DIM.:			SERIAL No.:				
MFR.:			SUR.:			Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	36.6	37.3	36.8	37.4	37.6	38.5	39.2	38.7	39.4	39.5
3H	36.5	37.2	36.8	37.4	37.5	39.0	39.7	39.3	39.9	40.1
4H	36.4	37.1	36.7	37.3	37.5	39.1	39.7	39.3	39.9	40.1
6H	36.4	36.9	36.6	37.2	37.4	39.0	39.6	39.3	39.8	40.1
8H	36.3	36.9	36.6	37.1	37.4	39.0	39.5	39.3	39.8	40.1
12H	36.3	36.8	36.6	37.1	37.3	38.9	39.5	39.3	39.8	40.0
4H 2H	36.9	37.6	37.2	37.8	38.0	38.6	39.3	38.9	39.5	39.7
3H	36.9	37.5	37.2	37.7	38.0	39.2	39.8	39.5	40.0	40.3
4H	36.8	37.3	37.2	37.6	37.9	39.3	39.8	39.6	40.1	40.4
6H	36.8	37.2	37.1	37.5	37.9	39.3	39.7	39.6	40.0	40.4
8H	36.7	37.1	37.1	37.5	37.8	39.2	39.6	39.6	40.0	40.3
12H	36.7	37.0	37.1	37.4	37.8	39.2	39.5	39.6	39.9	40.3
8H 4H	36.8	37.2	37.2	37.6	37.9	39.2	39.6	39.6	39.9	40.3
6H	36.7	37.1	37.1	37.4	37.9	39.1	39.5	39.6	39.9	40.3
8H	36.7	37.0	37.1	37.4	37.8	39.1	39.4	39.5	39.8	40.2
12H	36.6	36.9	37.1	37.3	37.8	39.0	39.3	39.5	39.7	40.2
12H 4H	36.8	37.1	37.2	37.5	37.9	39.1	39.5	39.5	39.9	40.3
6H	36.7	37.0	37.1	37.4	37.8	39.1	39.4	39.5	39.8	40.2
8H	36.6	36.9	37.1	37.3	37.8	39.0	39.3	39.5	39.7	40.2
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 1.3 / - 2.6					+ 0.8 / - 1.1				
1.5H	+ 1.4 / - 2.4					+ 1.3 / - 0.7				
2.0H	+ 2.0 / - 4.7					+ 1.4 / - 1.3				

CIE Pub.117, 983.2 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -0.1)
Area: 1e-005 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:12.000V I:1.4094A P:13.800W PF:0.7521 Freq:60.03Hz Lamp Flux:983.183x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	89	83	79	88	82	79	87	82	79	75
0.80	96	90	87	95	90	87	94	89	86	83
1.00	100	95	91	99	94	91	98	94	90	87
1.25	104	99	96	103	98	95	101	97	94	90
1.50	106	102	99	105	101	98	103	100	97	93
2.00	109	105	102	108	104	101	105	102	100	94
2.50	111	107	104	109	106	103	106	103	101	95
3.00	112	109	106	110	107	105	107	105	103	97
4.00	114	111	109	112	110	108	108	107	105	98
5.00	115	113	111	113	111	110	109	108	107	99
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: Allen
 Test Date: 2026-01-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity: 45%
 Test Distance: 2.900m [K=0.8783]
 Remarks:

ISOCANDELA DIAGRAM


Test:U:12.000V I:1.4094A P:13.800W PF:0.7521 Freq:60.03Hz Lamp Flux:983.183x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

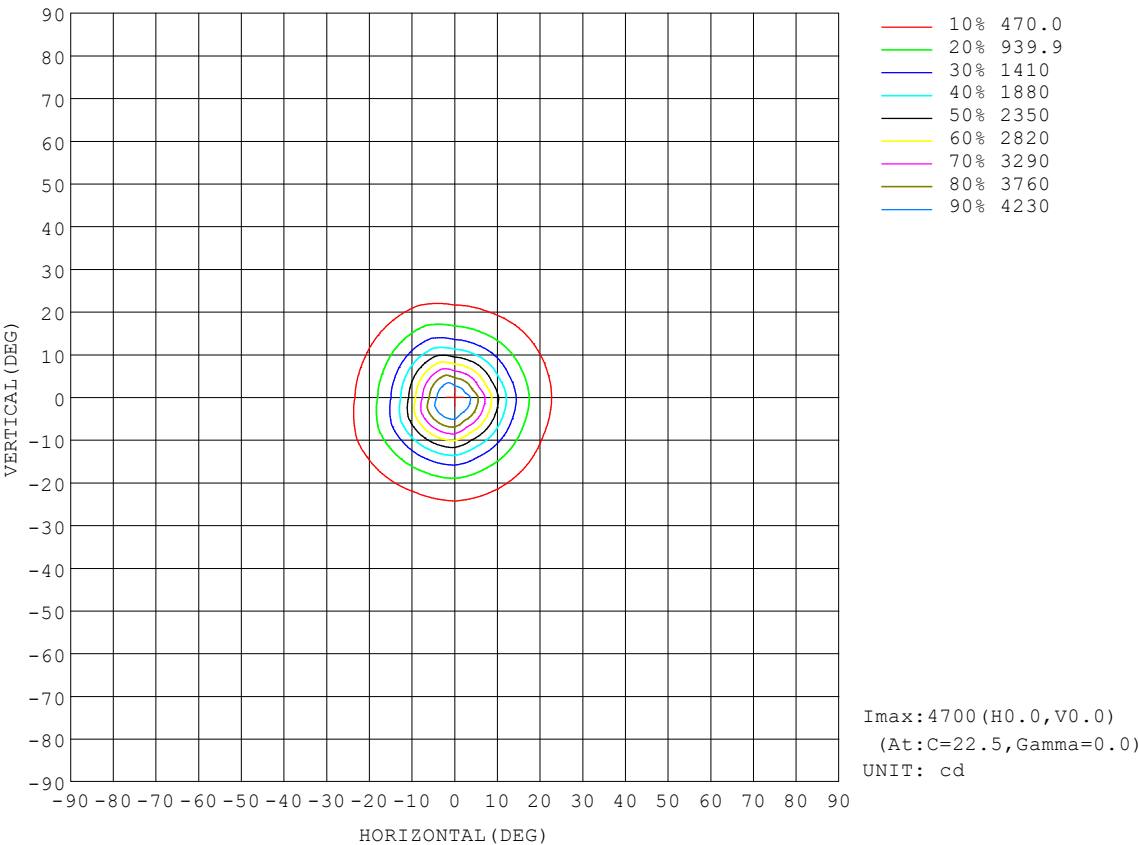

C Range: 0 - 360DEG	γ Range: 0 - 180DEG
C Interval: 22.5DEG	γ Interval: 1.0DEG
Test Speed: HIGH	Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Temperature: 25.3℃	Humidity: 45%
Operators: Allen	Test Distance: 2.900m [K=0.8783]
Test Date: 2026-01-27	Remarks:

AAI Figure

Test:U:12.000V I:1.4094A P:13.800W PF:0.7521 Freq:60.03Hz Lamp Flux:983.183x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

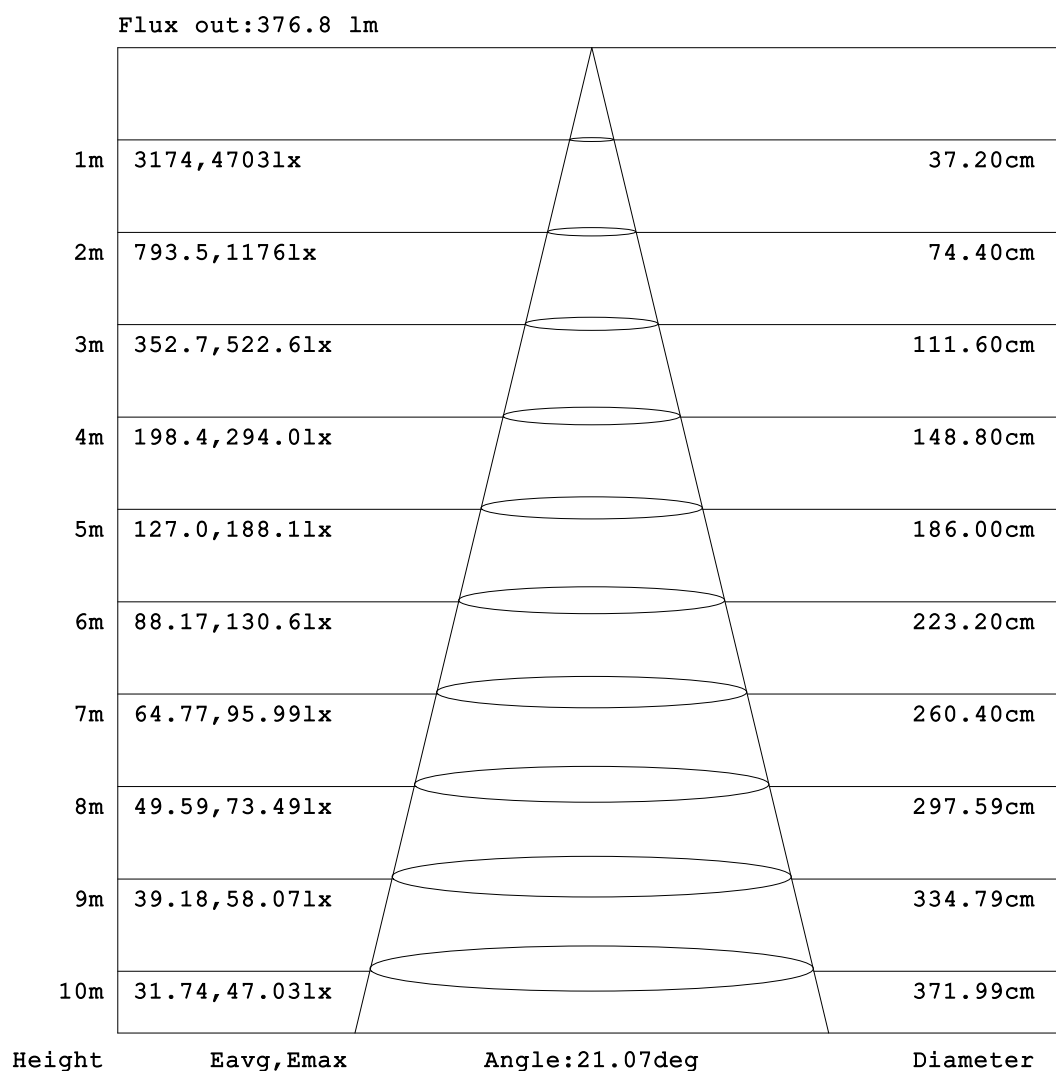


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3℃
 Operators: Allen
 Test Date: 2026-01-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity: 45%
 Test Distance: 2.900m [K=0.8783]
 Remarks:


ISOLUX DIAGRAM

Test:U:12.000V I:1.4094A P:13.800W PF:0.7521 Freq:60.03Hz Lamp Flux:983.183x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

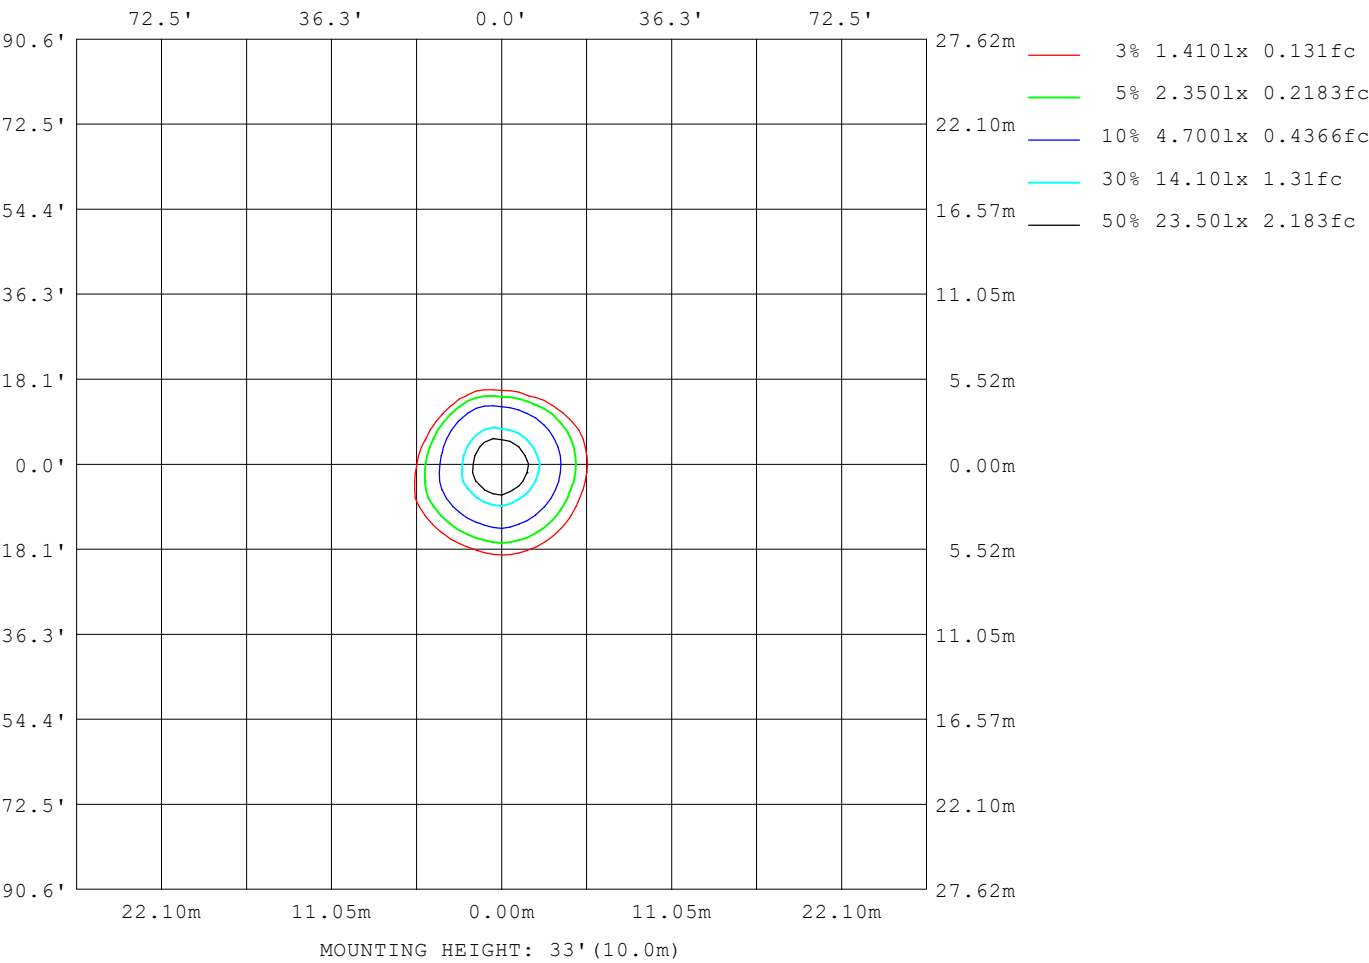

C Range: 0 - 360DEG C Interval: 22.5DEG Test Speed: HIGH Temperature:25.3℃ Operators:Allen Test Date:2026-01-27	γ Range: 0 - 180DEG γ Interval: 1.0DEG Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459 Humidity:45% Test Distance:2.900m [K=0.8783] Remarks:
--	---

Planar Illuminance Curve

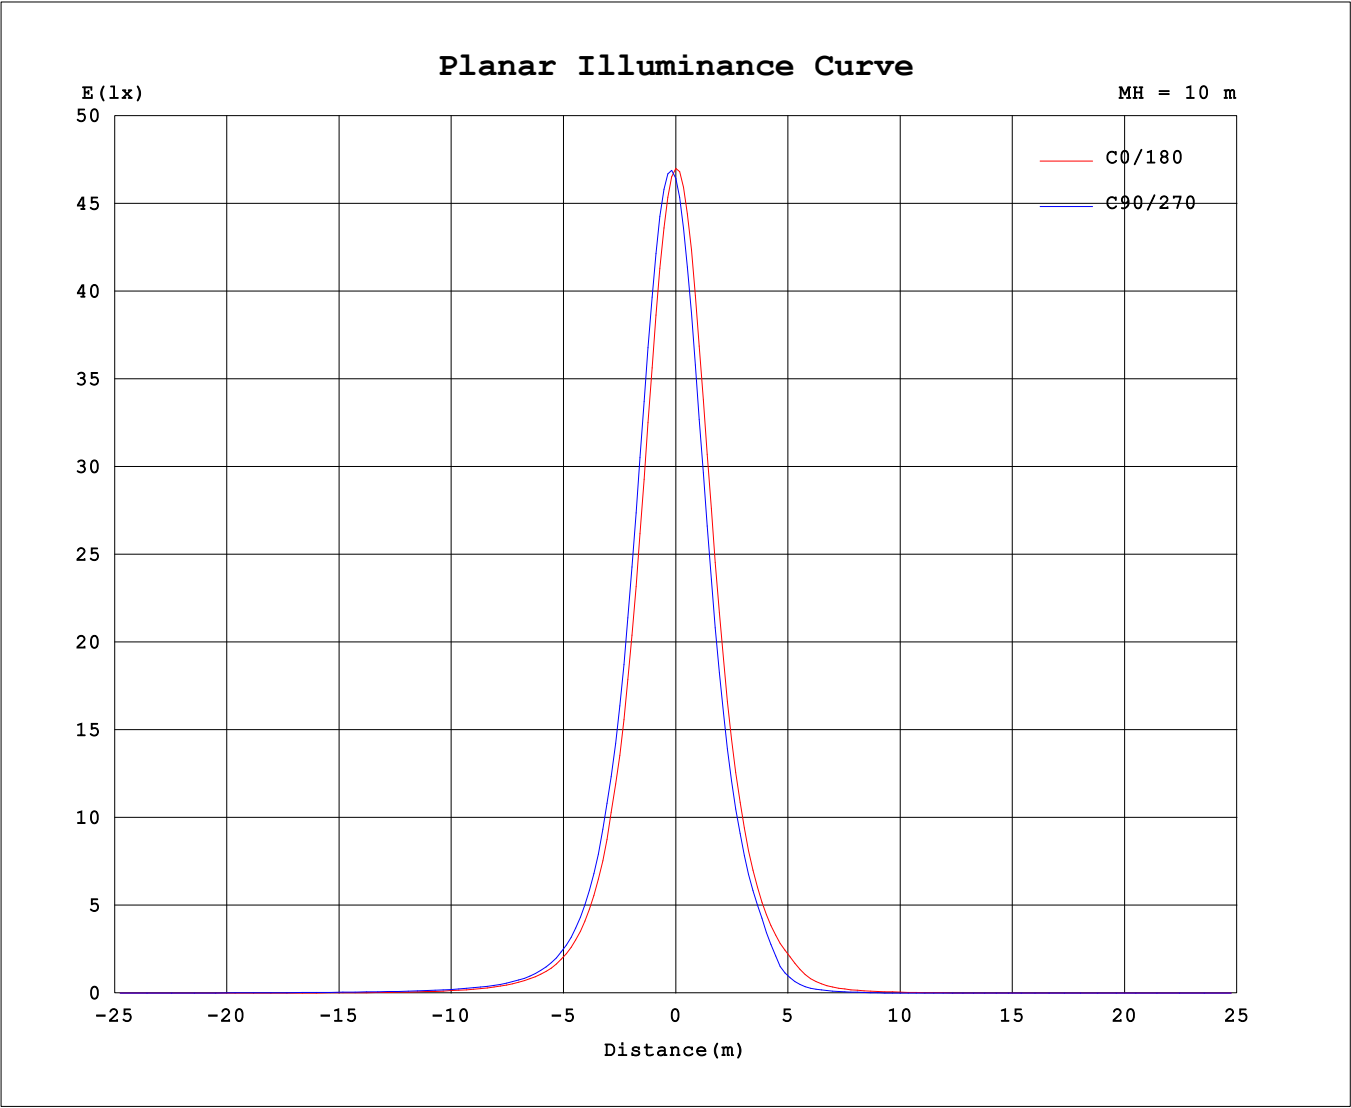

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.000V I:1.4094A P:13.800W PF:0.7521 Freq:60.03Hz Lamp Flux:983.183x1 lm																	
NAME:									TYPE:						WEIGHT:		
SPEC.:									DIM.:						SERIAL No.:		
MFR.:									SUR.:						Shielding Angle:		

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	4700	4703	4697	4697	4643	4637	4641	4644	4700	4703	4697	4697	4643	4637	4641	4644			
5	3909	3935	3976	4012	4264	4277	4269	4254	4022	3990	3952	3930	3621	3598	3607	3618			
10	2427	2436	2500	2553	2866	2869	2876	2861	2571	2534	2515	2504	2181	2152	2179	2200			
15	1322	1311	1348	1401	1579	1565	1596	1609	1396	1355	1372	1381	1164	1129	1167	1192			
20	672	658	703	744	822	803	837	859	728	697	720	739	605	577	608	633			
25	351	338	369	399	429	412	439	461	382	332	304	307	204	213	304	345			
30	192	183	203	222	232	220	238	256	163	103	82.1	81.8	57.7	66.7	109	177			
35	115	110	123	135	138	130	139	135	64.1	38.3	29.7	28.0	22.6	28.1	43.3	78.3			
40	66.5	74.2	80.2	87.3	87.9	83.1	87.9	63.6	32.0	20.0	13.6	11.5	9.23	13.5	22.4	39.7			
45	41.3	53.8	57.4	61.1	61.7	58.9	54.6	35.4	18.1	8.47	2.30	1.56	0.90	2.74	11.2	22.6			
50	25.6	38.6	43.5	45.1	46.0	44.4	35.5	20.9	8.20	1.16	0.00	0.00	0.00	0.09	2.55	12.3			
55	15.3	26.3	33.3	34.0	35.1	32.5	22.5	11.7	1.74	0.04	0.00	0.00	0.00	0.00	0.40	4.35			
60	7.69	16.3	23.6	25.2	26.2	21.8	13.3	4.56	0.33	0.00	0.00	0.00	0.00	0.00	0.09	1.06			
65	2.46	8.95	14.7	17.6	17.9	13.1	6.36	1.22	0.19	0.00	0.00	0.00	0.00	0.00	0.02	0.33			
70	0.88	3.46	7.98	10.9	10.5	6.43	2.01	0.43	0.09	0.00	0.00	0.00	0.00	0.00	0.00	0.23			
75	0.46	1.22	2.99	4.37	4.52	2.17	0.69	0.30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.11			
80	0.34	0.66	1.06	1.27	1.30	0.73	0.43	0.17	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
85	0.19	0.53	0.76	0.78	0.68	0.52	0.31	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
90	0.03	0.37	0.62	0.66	0.56	0.39	0.17	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
95	0.00	0.20	0.45	0.49	0.42	0.24	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
100	0.00	0.04	0.27	0.32	0.26	0.11	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
105	0.00	0.00	0.09	0.15	0.11	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.05	0.05	0.06	0.10	0.11	0.10	0.09			
140	0.16	0.16	0.15	0.14	0.10	0.10	0.10	0.10	0.32	0.34	0.34	0.34	0.43	0.43	0.43	0.41			
145	0.37	0.39	0.38	0.38	0.34	0.34	0.34	0.33	0.73	0.76	0.78	0.77	0.88	0.89	0.88	0.87			
150	0.49	0.52	0.52	0.52	0.49	0.49	0.49	0.47	1.20	1.23	1.25	1.25	1.36	1.37	1.37	1.35			
155	0.62	0.64	0.65	0.65	0.63	0.63	0.62	0.60	1.67	1.68	1.72	1.72	1.80	1.81	1.80	1.79			
160	0.64	0.65	0.67	0.67	0.68	0.68	0.67	0.65	1.95	1.95	1.98	1.98	2.00	2.00	2.00	1.98			
165	0.62	0.63	0.63	0.64	0.64	0.63	0.62	0.62	1.94	1.94	1.94	1.95	1.91	1.91	1.91	1.89			
170	0.62	0.62	0.62	0.62	0.63	0.63	0.62	0.63	1.75	1.75	1.74	1.74	1.68	1.67	1.67	1.65			
175	0.70	0.70	0.69	0.69	0.66	0.67	0.67	0.67	1.42	1.42	1.40	1.39	1.28	1.27	1.27	1.26			
180	0.98	0.96	0.94	0.91	0.87	0.86	0.87	0.86	0.98	0.98	0.97	0.95	0.87	0.88	0.88	0.87			

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks: