


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:12.000V I:2.6823A P:27.000W PF:0.8145 Freq:59.99Hz Lamp Flux:1495.24x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 55.38 lm/W
MODEL	SMART FIXTURE 3000K	Imax (cd)	1371	S/MH(C0/180)	0.91	
NOMINAL POWER(W)		LOR(%)	100.0	S/MH(C90/270)	0.82	
RATED VOLTAGE(V)		TOTAL FLUX(lm)	1495.2	η UP,DN(C0-180)	0.1,62.3	
NOMINAL FLUX(lm)	1495.24	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,37.5	
LAMPS INSIDE	1	η up (%)	0.2	CIBSE SHR NOM	0.75	
TEST VOLTAGE(V)		η down (%)	99.8	CIBSE SHR MAX	0.95	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

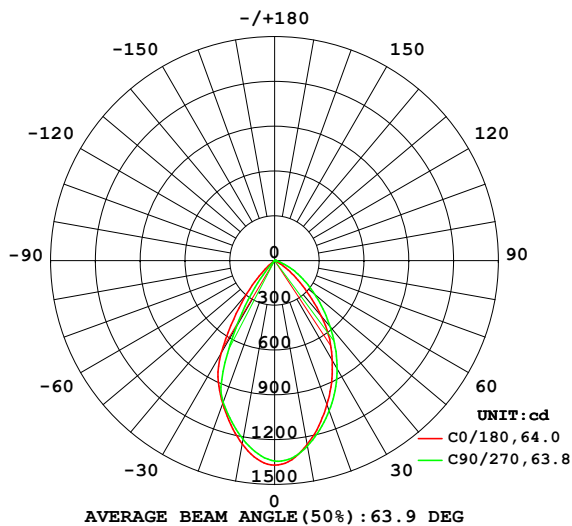

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

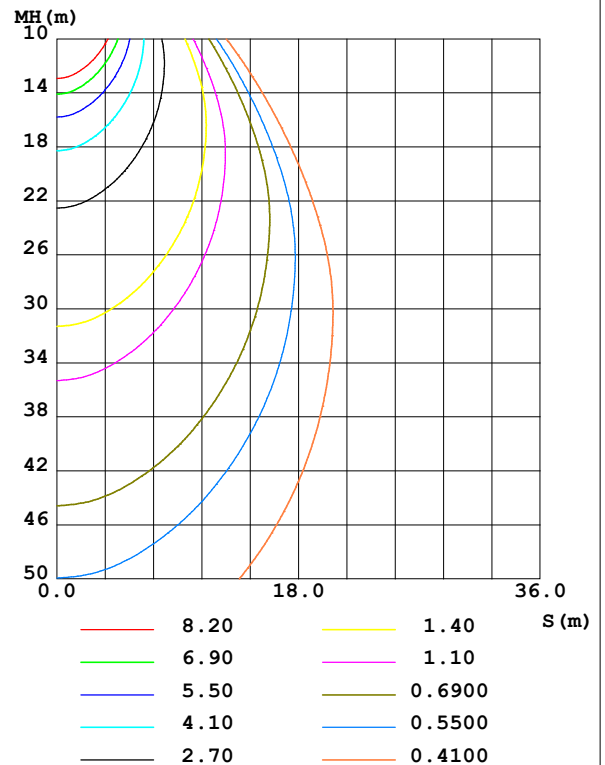

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1253	1255	1262	1247	1249	1219	1217	1222	0- 10	123.2	123.2	8.24,8.24
20	1027	1050	1071	1041	1018	997.9	1010	1006	10- 20	319.0	442.1	29.6,29.6
30	773.4	807.4	839.4	786.2	717.3	523.5	522.2	657.1	20- 30	403.3	845.4	56.5,56.5
40	488.8	553.3	580.3	530.1	290.3	107.1	98.12	232.1	30- 40	324.5	1170	78.2,78.2
50	205.1	338.0	351.2	251.0	58.01	0.5609	0.2738	29.10	40- 50	187.1	1357	90.8,90.8
60	48.51	173.6	182.6	74.57	3.006	0.1763	0.0000	1.765	50- 60	91.07	1448	96.9,96.9
70	5.684	52.30	58.41	9.976	1.632	0	0	0.6386	60- 70	34.79	1483	99.2,99.2
80	2.859	6.711	6.633	3.354	0	0	0	0	70- 80	7.478	1490	99.7,99.7
90	1.038	4.268	3.854	1.649	0	0	0	0	80- 90	1.945	1492	99.8,99.8
100	0	2.053	1.887	0.2799	0	0	0	0	90-100	0.9978	1493	99.9,99.9
110	0	0.3915	0.4801	0	0	0	0	0	100-110	0.3100	1494	99.9,99.9
120	0	0	0	0	0	0.0114	0.0156	0	110-120	0.0253	1494	99.9,99.9
130	0.0336	0	0	0.0196	0.1801	0.2181	0.2250	0.1743	120-130	0.0347	1494	99.9,99.9
140	0.2776	0.2060	0.1943	0.2598	0.5994	0.6396	0.6500	0.6032	130-140	0.1903	1494	99.9,99.9
150	0.5282	0.4415	0.4301	0.5007	1.086	1.101	1.120	1.089	140-150	0.3803	1494	99.9,99.9
160	0.8223	0.7456	0.7299	0.7852	1.457	1.438	1.431	1.430	150-160	0.4388	1495	100,100
170	1.062	0.9765	0.9607	1.013	1.523	1.496	1.457	1.458	160-170	0.3293	1495	100,100
180	1.411	1.354	1.354	1.345	1.411	1.377	1.325	1.329	170-180	0.1238	1495	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 1279 lm

%lum = 85.5%

%lamp = 85.5%

Conical surface Flux(120deg): 1448.2 lm

%lum = 96.9%


%lamp = 96.9%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:Allen
 Test Date:2026-01-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity:45%
 Test Distance:2.900m [K=0.8783]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:12.000V I:2.6823A P:27.000W PF:0.8145 Freq:59.99Hz Lamp Flux:1495.24x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

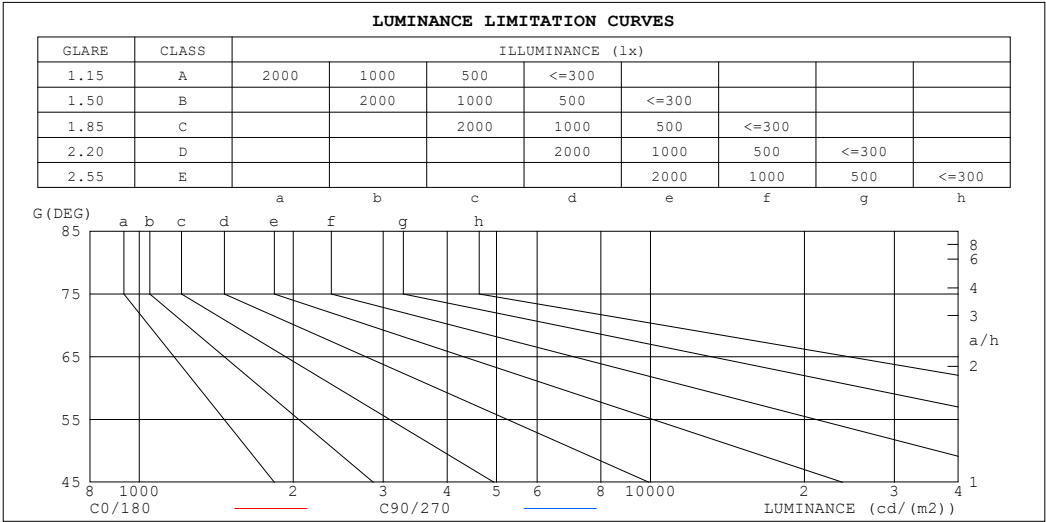

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	2243425	5272521
80	1646697	3819686
75	1405634	8145235
70	1661755	17077008
65	3578076	27051121
60	9701605	36517414
55	19355463	45170245
50	31902112	54630904
45	46779772	64952822


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:12.000V I:2.6823A P:27.000W PF:0.8145 Freq:59.99Hz		
Lamp Flux:1495.24x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.09	1.07	1.04	1.07	1.05	1.02	1.03	1.01	.99	.99	.98	.96	.96	.94	.93	.91
2.0	1.00	.96	.92	.98	.94	.91	.95	.92	.89	.92	.89	.87	.89	.87	.85	.83
3.0	.92	.86	.82	.91	.85	.81	.88	.83	.80	.85	.82	.78	.83	.80	.77	.75
4.0	.85	.78	.74	.84	.78	.73	.81	.76	.72	.79	.75	.71	.77	.74	.70	.69
5.0	.78	.72	.67	.77	.71	.66	.75	.70	.66	.74	.69	.65	.72	.68	.65	.63
6.0	.73	.66	.61	.72	.65	.61	.70	.65	.60	.69	.64	.60	.67	.63	.59	.58
7.0	.68	.61	.56	.67	.60	.56	.65	.60	.56	.64	.59	.55	.63	.58	.55	.53
8.0	.63	.56	.52	.62	.56	.52	.61	.55	.51	.60	.55	.51	.59	.54	.51	.49
9.0	.59	.52	.48	.59	.52	.48	.57	.52	.48	.57	.51	.48	.56	.51	.47	.46
10.0	.55	.49	.45	.55	.49	.45	.54	.48	.44	.53	.48	.44	.52	.48	.44	.43

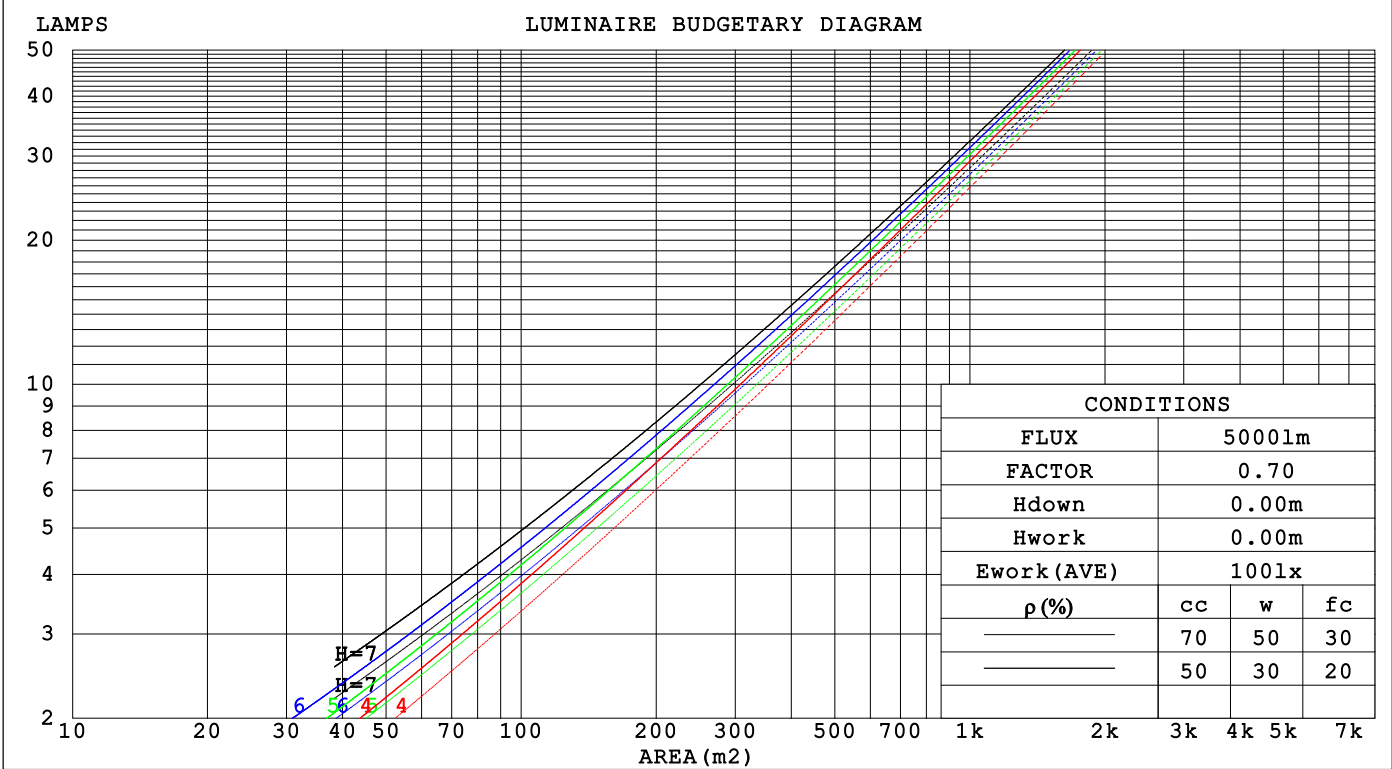

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

WEC AND CCEC

Test:U:12.000V I:2.6823A P:27.000W PF:0.8145 Freq:59.99Hz Lamp Flux:1495.24x1 lm					
NAME:		TYPE:		WEIGHT:	
SPEC.:		DIM.:		SERIAL No.:	
MFR.:		SUR.:		Shielding Angle:	

pcc	80%			70%			50%			30%			10%			0														
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
pfc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Wall Exitance Coefficients(WEC)														
0.0																														
1.0	.203	.116	.037	.197	.112	.036	.184	.105	.034	.172	.099	.032	.161	.093	.030															
2.0	.197	.108	.033	.191	.105	.032	.180	.100	.031	.170	.095	.030	.161	.091	.029															
3.0	.188	.100	.030	.183	.098	.030	.174	.094	.029	.165	.090	.028	.157	.087	.027															
4.0	.179	.093	.027	.175	.091	.027	.166	.088	.026	.159	.085	.026	.152	.082	.025															
5.0	.170	.087	.025	.166	.085	.025	.159	.083	.024	.152	.080	.024	.146	.078	.023															
6.0	.161	.081	.023	.158	.080	.023	.152	.078	.023	.146	.076	.022	.140	.074	.022															
7.0	.153	.076	.021	.150	.075	.021	.145	.073	.021	.139	.071	.021	.134	.070	.020															
8.0	.146	.071	.020	.143	.071	.020	.138	.069	.020	.133	.068	.019	.129	.066	.019															
9.0	.139	.067	.019	.137	.067	.019	.132	.065	.018	.128	.064	.018	.124	.063	.018															
10.0	.133	.064	.018	.130	.063	.018	.126	.062	.017	.122	.061	.017	.119	.060	.017															

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.174	.159	.144	.149	.136	.124	.102	.094	.086	.059	.054	.050	.019	.017	.016	
2.0	.161	.134	.111	.138	.115	.096	.095	.080	.067	.055	.046	.039	.017	.015	.013	
3.0	.150	.115	.087	.129	.099	.076	.088	.069	.053	.051	.040	.031	.016	.013	.010	
4.0	.141	.101	.070	.121	.087	.061	.083	.061	.043	.048	.036	.025	.015	.012	.008	
5.0	.133	.090	.058	.114	.078	.050	.079	.054	.035	.046	.032	.021	.015	.010	.007	
6.0	.126	.081	.048	.108	.070	.042	.075	.049	.030	.043	.029	.018	.014	.009	.006	
7.0	.120	.073	.041	.103	.064	.036	.071	.045	.025	.041	.026	.015	.013	.009	.005	
8.0	.114	.067	.035	.098	.058	.031	.068	.041	.022	.040	.024	.013	.013	.008	.004	
9.0	.109	.062	.031	.094	.054	.027	.065	.038	.019	.038	.022	.011	.012	.007	.004	
10.0	.104	.058	.027	.090	.050	.024	.062	.035	.017	.036	.021	.010	.012	.007	.003	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:12.000V I:2.6823A P:27.000W PF:0.8145 Freq:59.99Hz Lamp Flux:1495.24x1 lm											
NAME:			TYPE:			WEIGHT:					
SPEC.:			DIM.:			SERIAL No.:					
MFR.:			SUR.:			Shielding Angle:					
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	Viewed crosswise					Viewed endwise					
x = 2H y = 2H	2H	47.4	48.5	47.7	48.7	48.9	48.7	49.8	48.9	50.0	50.2
	3H	47.3	48.3	47.6	48.5	48.8	49.1	50.1	49.4	50.3	50.5
	4H	47.2	48.2	47.5	48.4	48.6	49.1	50.0	49.4	50.3	50.5
	6H	47.1	48.0	47.4	48.3	48.5	49.0	49.9	49.3	50.1	50.4
	8H	47.1	48.0	47.4	48.2	48.5	48.9	49.8	49.3	50.1	50.3
	12H	47.0	47.9	47.4	48.1	48.4	48.9	49.7	49.2	50.0	50.3
4H	2H	47.7	48.7	48.0	48.9	49.1	48.9	49.8	49.1	50.0	50.3
	3H	47.7	48.5	48.0	48.8	49.1	49.3	50.1	49.6	50.4	50.7
	4H	47.6	48.3	47.9	48.6	49.0	49.3	50.1	49.7	50.4	50.7
	6H	47.5	48.2	47.9	48.5	48.9	49.2	49.9	49.6	50.2	50.6
	8H	47.5	48.1	47.9	48.4	48.8	49.2	49.8	49.6	50.2	50.5
	12H	47.4	48.0	47.8	48.3	48.7	49.2	49.7	49.6	50.1	50.5
8H	4H	47.5	48.1	47.9	48.5	48.9	49.2	49.8	49.6	50.2	50.5
	6H	47.4	47.9	47.9	48.3	48.8	49.1	49.6	49.6	50.0	50.5
	8H	47.4	47.8	47.9	48.3	48.7	49.1	49.5	49.6	50.0	50.4
	12H	47.4	47.7	47.8	48.2	48.7	49.1	49.5	49.6	49.9	50.4
12H	4H	47.5	48.0	47.9	48.4	48.8	49.2	49.7	49.6	50.1	50.5
	6H	47.4	47.8	47.9	48.3	48.7	49.1	49.5	49.6	50.0	50.4
	8H	47.4	47.7	47.8	48.2	48.7	49.1	49.4	49.5	49.9	50.4
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H		+ 1.4 / - 2.6				+ 0.7 / - 1.0					
1.5H		+ 0.7 / - 2.5				+ 0.4 / - 0.4					
2.0H		+ 2.3 / - 6.0				+ 1.6 / - 1.6					

CIE Pub.117, 1495 lm Total Lamp Luminous Flux Correct ($8\log(F/F_0) = 1.4$)
Area: 1e-005 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:12.000V I:2.6823A P:27.000W PF:0.8145 Freq:59.99Hz Lamp Flux:1495.24x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	78	70	65	77	69	65	76	69	65	60
0.80	86	79	74	86	78	74	84	78	73	69
1.00	93	86	81	92	85	81	90	85	80	75
1.25	98	91	87	97	91	87	95	89	86	81
1.50	101	95	91	100	95	91	98	93	90	84
2.00	105	100	96	104	99	95	101	97	94	88
2.50	108	103	99	106	102	98	103	99	96	90
3.00	110	105	102	108	104	101	104	101	99	92
4.00	112	109	106	110	107	104	106	104	102	94
5.00	113	110	108	111	109	106	107	105	103	95
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3℃
 Operators: Allen
 Test Date: 2026-01-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity: 45%
 Test Distance: 2.900m [K=0.8783]
 Remarks:

ISOCANDELA DIAGRAM


Test:U:12.000V I:2.6823A P:27.000W PF:0.8145 Freq:59.99Hz Lamp Flux:1495.24x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

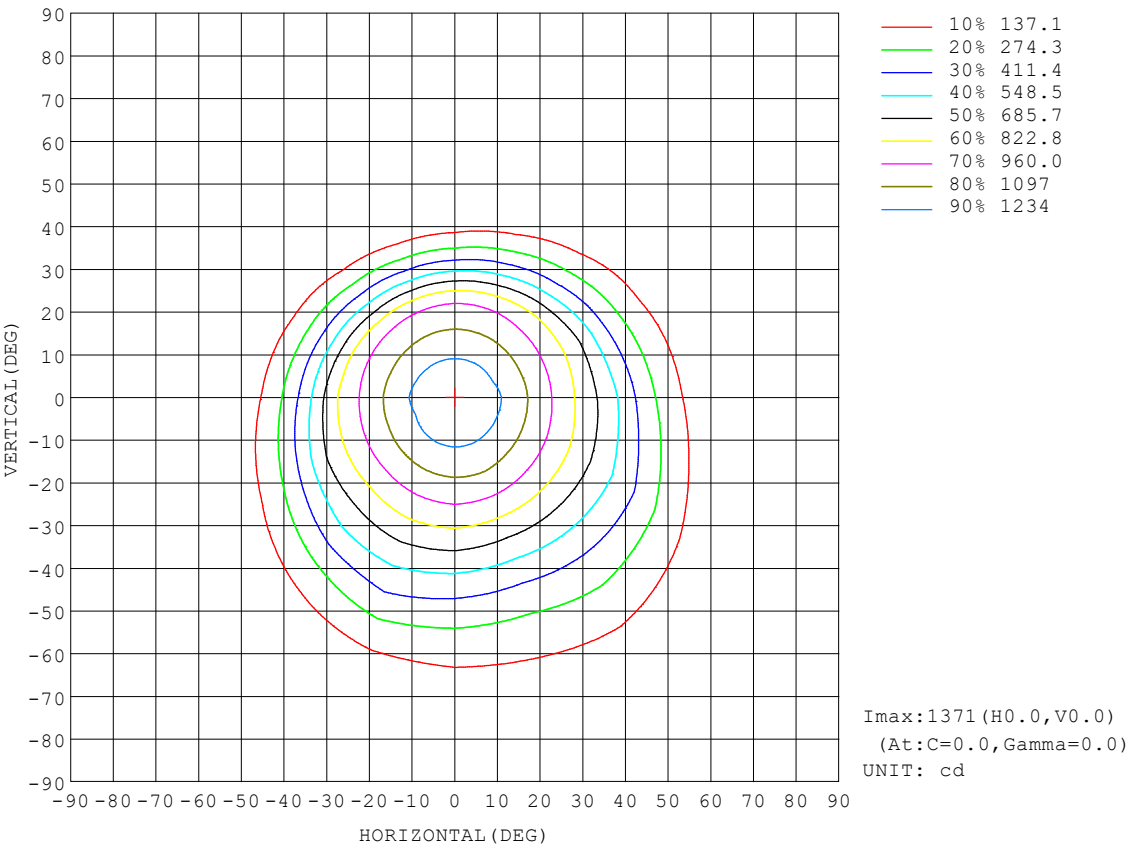

C Range: 0 - 360DEG	γ Range: 0 - 180DEG
C Interval: 22.5DEG	γ Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Temperature:25.3℃	Humidity:45%
Operators:Allen	Test Distance:2.900m [K=0.8783]
Test Date:2026-01-27	Remarks:

AAI Figure

Test:U:12.000V I:2.6823A P:27.000W PF:0.8145 Freq:59.99Hz Lamp Flux:1495.24x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

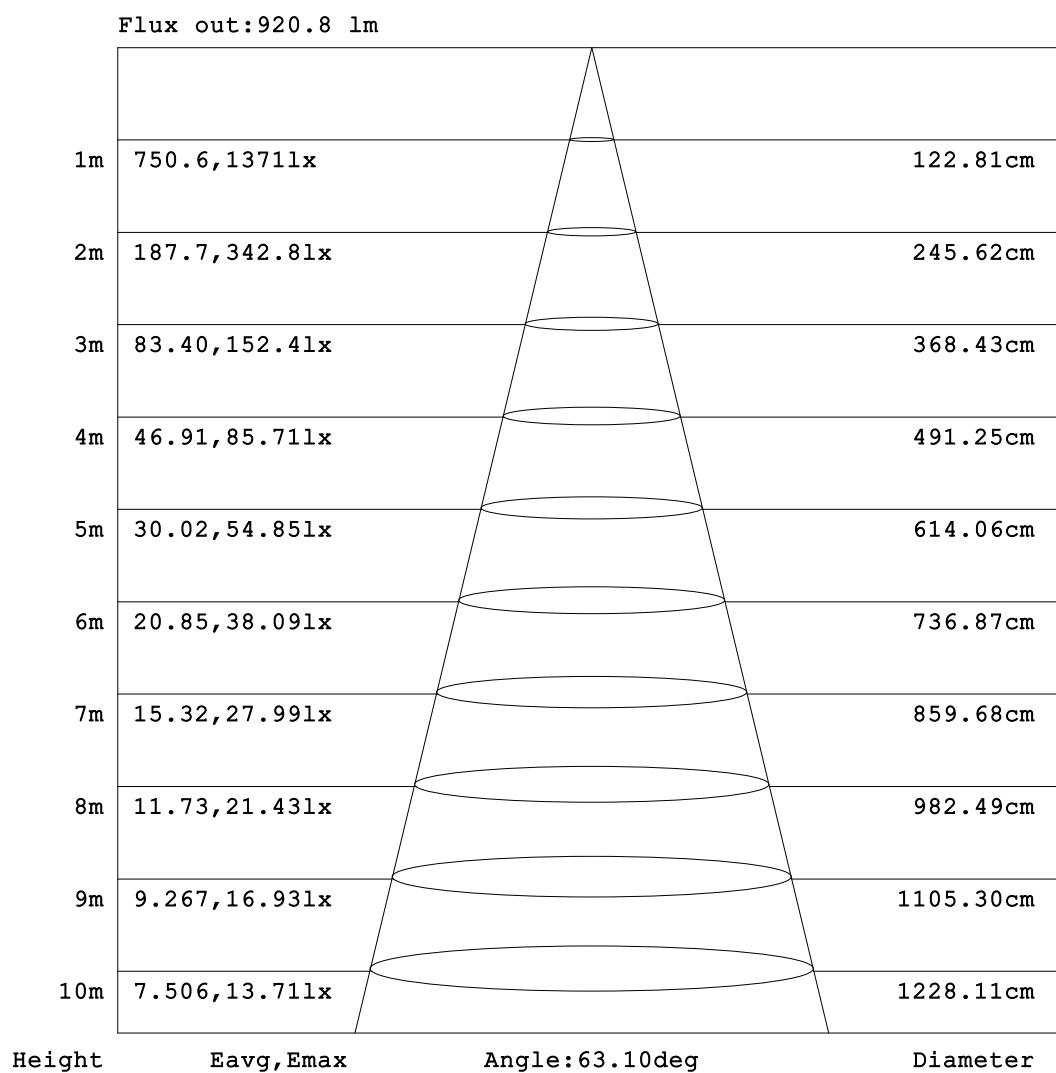


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3℃
Operators: Allen
Test Date: 2026-01-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity: 45%
Test Distance: 2.900m [K=0.8783]
Remarks:


ISOLUX DIAGRAM

Test:U:12.000V I:2.6823A P:27.000W PF:0.8145 Freq:59.99Hz Lamp Flux:1495.24x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

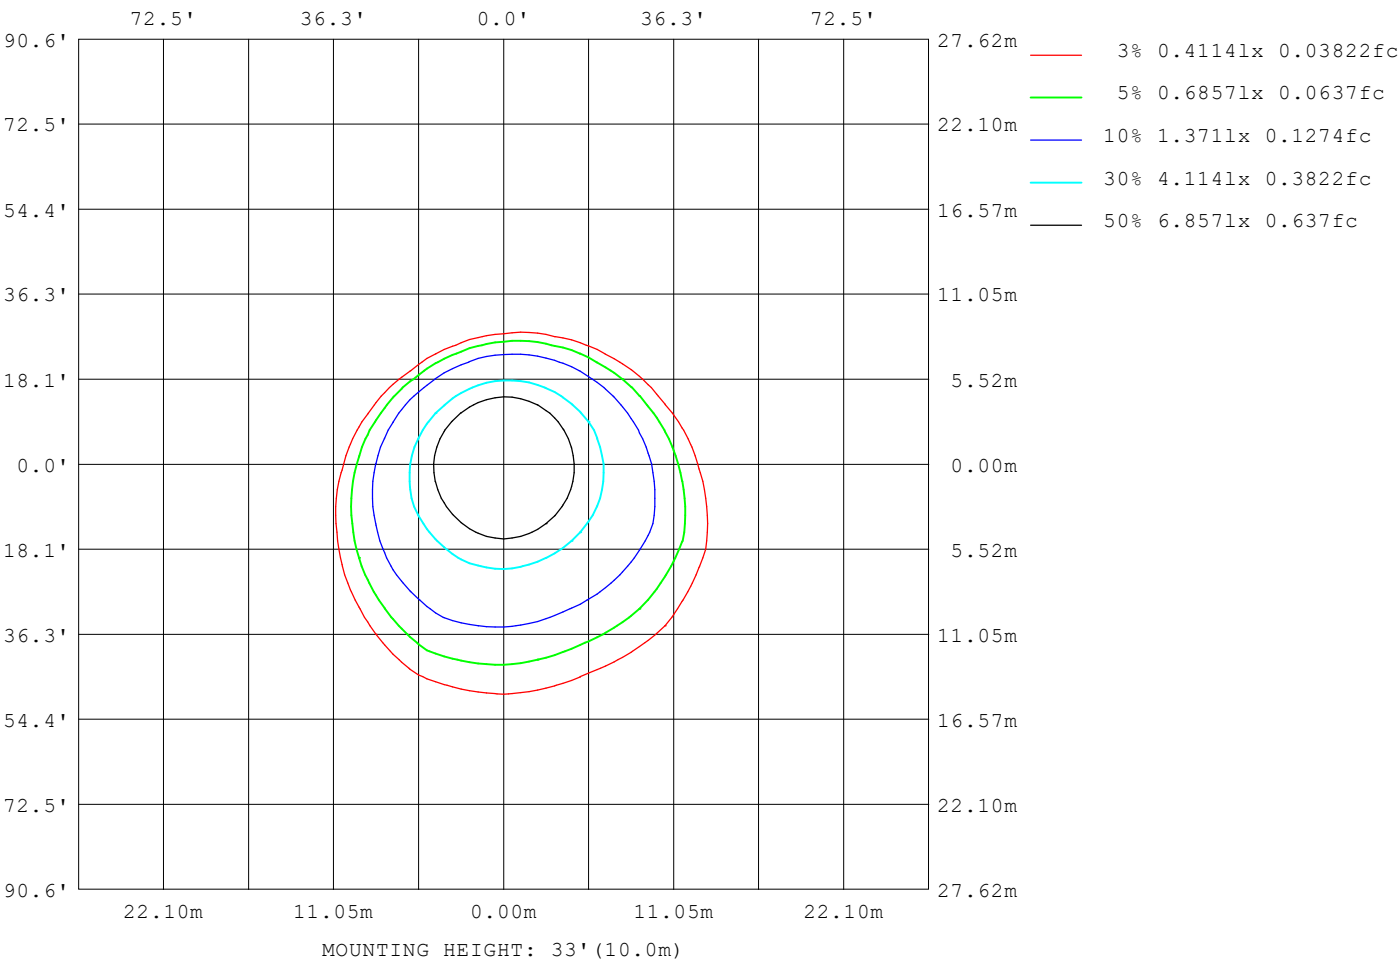

C Range: 0 - 360DEG	γ Range: 0 - 180DEG
C Interval: 22.5DEG	γ Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Temperature:25.3℃	Humidity:45%
Operators:Allen	Test Distance:2.900m [K=0.8783]
Test Date:2026-01-27	Remarks:

Planar Illuminance Curve

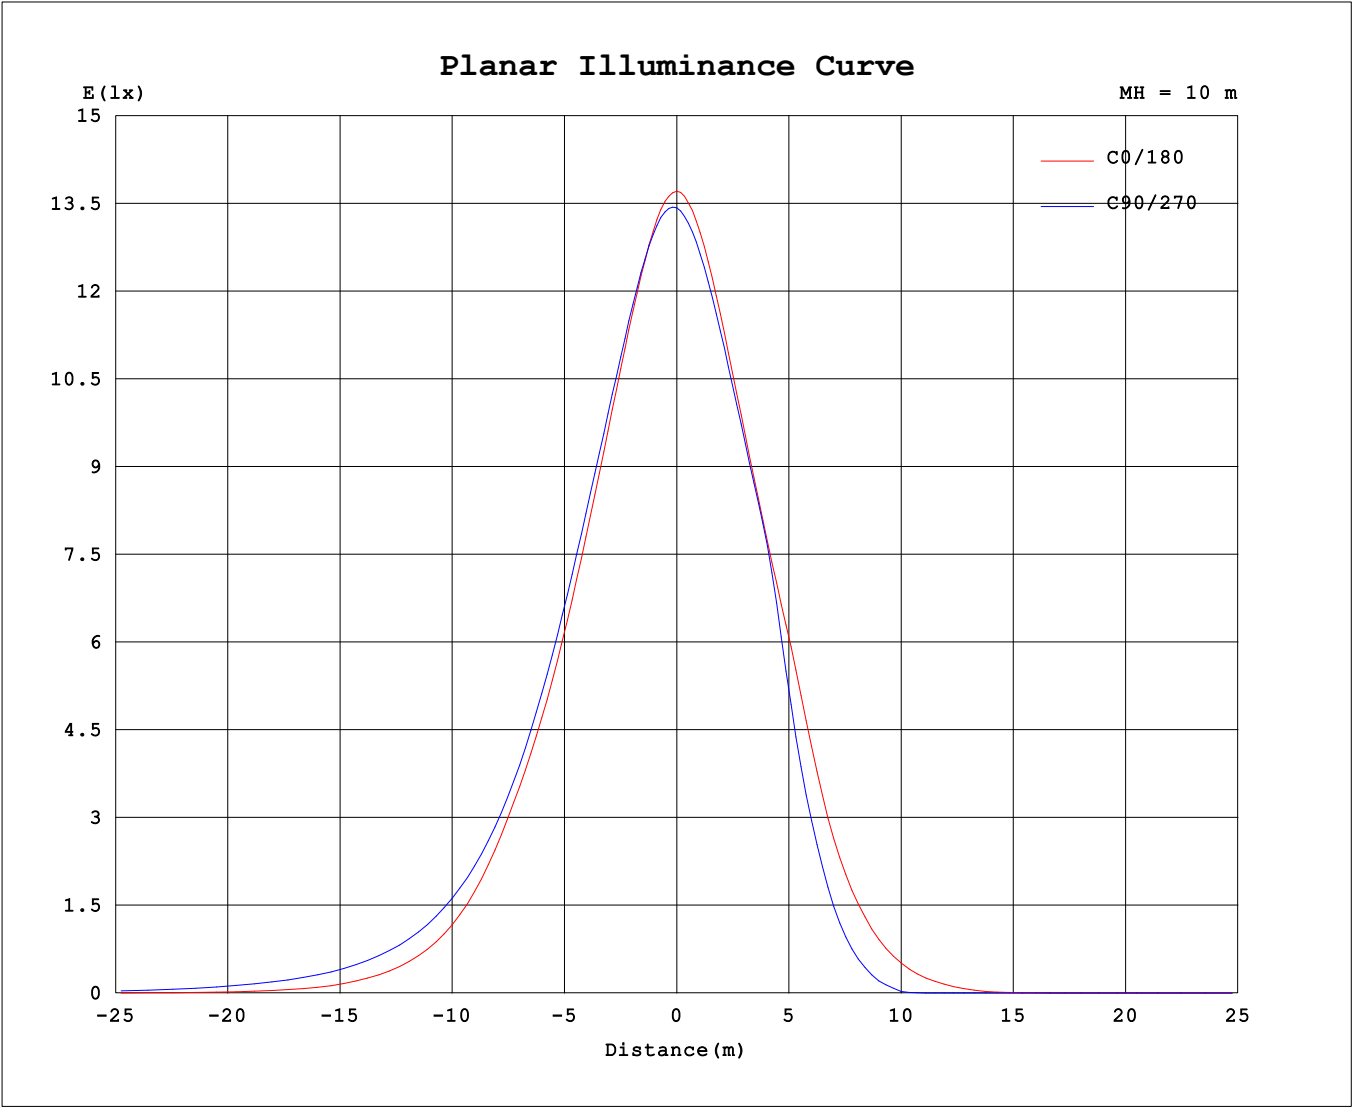

C Range: 0 - 360DEG	γ Range: 0 - 180DEG
C Interval: 22.5DEG	γ Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Temperature:25.3℃	Humidity:45%
Operators:Allen	Test Distance:2.900m [K=0.8783]
Test Date:2026-01-27	Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.000V I:2.6823A P:27.000W PF:0.8145 Freq:59.99Hz Lamp Flux:1495.24x1 lm																		
NAME:									TYPE:					WEIGHT:				
SPEC.:									DIM.:					SERIAL No.:				
MFR.:									SUR.:					Shielding Angle:				

Table--1

UNIT: cd

γ (DEG)	C (DEG)																	
	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5		
0	1371	1360	1353	1348	1342	1338	1336	1334	1371	1360	1353	1348	1342	1338	1336	1334		
5	1338	1333	1331	1331	1328	1323	1315	1307	1335	1318	1308	1302	1299	1297	1300	1303		
10	1253	1252	1255	1262	1262	1257	1247	1234	1249	1230	1219	1216	1217	1218	1222	1227		
15	1146	1149	1157	1169	1172	1165	1152	1137	1138	1120	1113	1114	1117	1118	1121	1128		
20	1027	1038	1050	1071	1071	1059	1041	1027	1018	1004	998	1003	1010	1008	1006	1013		
25	903	923	934	950	962	946	917	904	894	866	812	801	819	849	877	889		
30	773	804	807	818	839	827	786	772	717	608	523	497	522	573	657	750		
35	643	682	678	681	710	706	657	606	481	369	278	247	270	334	420	548		
40	489	562	553	548	580	586	530	412	290	180	107	84.9	98.1	146	232	352		
45	331	449	438	428	459	472	385	256	146	62.9	11.6	6.95	8.25	37.4	103	201		
50	205	327	338	325	351	365	251	139	58.0	5.73	0.56	0.17	0.27	2.52	29.1	96.0		
55	111	215	253	240	259	253	149	62.3	9.91	1.36	0.38	0.06	0.15	0.74	4.01	36.5		
60	48.5	130	174	170	183	155	74.6	19.8	3.01	1.11	0.18	0.00	0.00	0.52	1.76	7.49		
65	15.1	64.7	105	113	114	84.0	30.6	6.27	2.29	0.56	0.00	0.00	0.00	0.00	1.35	3.33		
70	5.68	25.0	52.3	64.1	58.4	35.4	9.98	3.51	1.63	0.00	0.00	0.00	0.00	0.00	0.64	2.62		
75	3.64	7.34	18.7	23.7	21.1	10.8	4.29	2.73	0.67	0.00	0.00	0.00	0.00	0.00	0.00	1.85		
80	2.86	4.64	6.71	7.77	6.63	4.58	3.35	1.85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.94		
85	1.96	3.82	5.12	5.26	4.60	3.71	2.51	0.93	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.06		
90	1.04	2.84	4.27	4.55	3.85	2.87	1.65	0.13	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
95	0.30	1.83	3.14	3.49	2.88	1.95	0.89	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
100	0.00	0.95	2.05	2.35	1.89	1.19	0.28	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
105	0.00	0.28	1.10	1.40	1.09	0.57	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
110	0.00	0.00	0.39	0.63	0.48	0.09	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
115	0.00	0.00	0.00	0.12	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.02	0.00	0.00	0.00		
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.08	0.09	0.09	0.09	0.07	0.04	0.00		
130	0.03	0.00	0.00	0.00	0.00	0.00	0.02	0.06	0.18	0.21	0.22	0.23	0.23	0.21	0.17	0.13		
135	0.14	0.10	0.07	0.06	0.06	0.08	0.12	0.17	0.37	0.39	0.41	0.42	0.41	0.40	0.36	0.32		
140	0.28	0.24	0.21	0.19	0.19	0.22	0.26	0.30	0.60	0.62	0.64	0.66	0.65	0.63	0.60	0.55		
145	0.41	0.37	0.33	0.31	0.32	0.35	0.39	0.43	0.85	0.87	0.88	0.90	0.90	0.89	0.86	0.81		
150	0.53	0.48	0.44	0.42	0.43	0.46	0.50	0.54	1.09	1.09	1.10	1.12	1.12	1.11	1.09	1.05		
155	0.69	0.64	0.60	0.58	0.59	0.62	0.65	0.70	1.30	1.30	1.29	1.30	1.31	1.30	1.29	1.26		
160	0.82	0.78	0.75	0.72	0.73	0.75	0.79	0.82	1.46	1.45	1.44	1.43	1.43	1.43	1.43	1.41		
165	0.92	0.89	0.84	0.82	0.82	0.85	0.87	0.91	1.51	1.49	1.48	1.46	1.45	1.44	1.46	1.44		
170	1.06	1.02	0.98	0.95	0.96	0.99	1.01	1.05	1.52	1.51	1.50	1.47	1.46	1.45	1.46	1.46		
175	1.25	1.22	1.19	1.17	1.17	1.18	1.20	1.23	1.50	1.50	1.48	1.45	1.43	1.42	1.44	1.43		
180	1.41	1.38	1.35	1.33	1.35	1.33	1.34	1.35	1.41	1.40	1.38	1.35	1.33	1.34	1.33	1.34		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks: