


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:12.000V I:2.7071A P:27.000W PF:0.8100 Freq:60.00Hz Lamp Flux:2132.28x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 78.97 lm/W			
MODEL	SMART FIXTURE 3000K	Imax (cd)	12693	S/MH(C0/180)	0.30
NOMINAL POWER(W)		LOR(%)	100.0	S/MH(C90/270)	0.30
RATED VOLTAGE(V)		TOTAL FLUX(lm)	2132.3	η UP,DN(C0-180)	0.1,56.5
NOMINAL FLUX(lm)	2132.28	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,43.4
LAMPS INSIDE	1	η up (%)	0.2	CIBSE SHR NOM	0.00
TEST VOLTAGE(V)		η down (%)	99.8	CIBSE SHR MAX	0.30

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

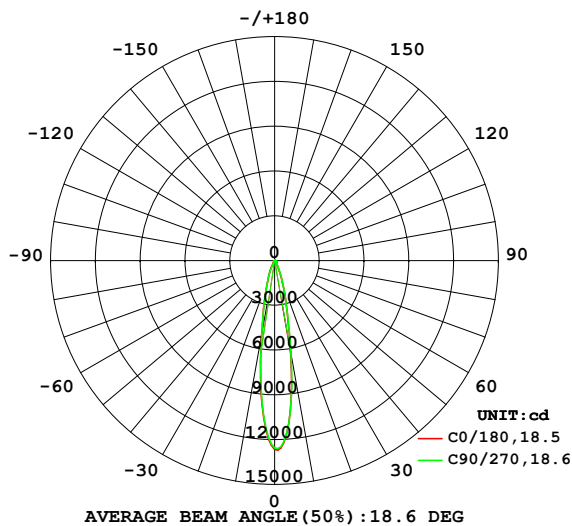

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

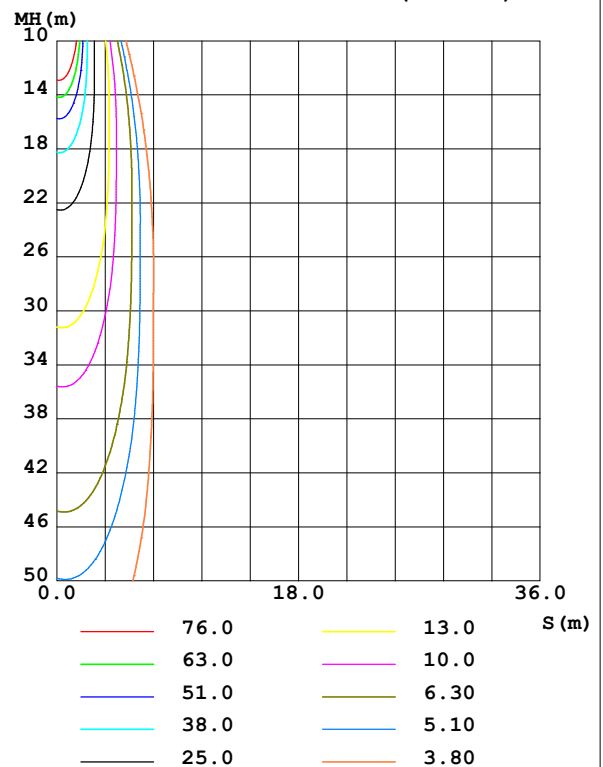

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	627.1	664.4	640.8	569.5	510.7	489.6	502.1	553.7	0- 10	828.1	828.1	38.8,38.8
20	156.3	164.9	159.6	143.2	131.5	124.9	130.0	142.1	10- 20	802.7	1631	76.5,76.5
30	36.84	39.72	38.62	35.77	20.16	10.09	10.24	20.04	20- 30	312.5	1943	91.1,91.1
40	13.05	15.13	14.88	13.51	5.476	2.339	2.167	4.879	30- 40	94.95	2038	95.6,95.6
50	5.610	9.279	9.107	6.382	1.437	0.0042	0.0000	0.8104	40- 50	47.21	2086	97.8,97.8
60	2.124	5.548	5.550	2.672	0.0764	0	0	0.0418	50- 60	26.47	2112	99,99
70	0.2325	2.271	2.408	0.3270	0.0358	0	0	0.0071	60- 70	12.53	2125	99.6,99.6
80	0.0930	0.2724	0.2633	0.1028	0	0	0	0	70- 80	3.078	2128	99.8,99.8
90	0.0325	0.1488	0.1294	0.0471	0	0	0	0	80- 90	0.6524	2128	99.8,99.8
100	0	0.0778	0.0662	0	0	0	0	0	90-100	0.3375	2129	99.8,99.8
110	0	0.0127	0.0138	0	0	0	0	0	100-110	0.1073	2129	99.8,99.8
120	0	0	0	0	0	0	0	0	110-120	0.0058	2129	99.8,99.8
130	0	0	0	0	0.0034	0.0052	0.0040	0.0009	120-130	0.0009	2129	99.8,99.8
140	0.0495	0.0468	0.0482	0.0549	0.1025	0.1082	0.1035	0.0922	130-140	0.2054	2129	99.8,99.8
150	0.1392	0.1409	0.1398	0.1414	0.3213	0.3340	0.3257	0.3106	140-150	0.9518	2130	99.9,99.9
160	0.1671	0.1694	0.1649	0.1591	0.4811	0.4857	0.4813	0.4776	150-160	1.331	2131	99.9,99.9
170	0.1579	0.1529	0.1486	0.1469	0.4104	0.4003	0.3939	0.3992	160-170	0.8706	2132	100,100
180	0.2174	0.2005	0.1985	0.2023	0.2177	0.2090	0.1985	0.2012	170-180	0.2374	2132	100,100
DEG	LUMINOUS INTENSITY:X10cd									UNIT:lm		

Conical surface Flux(90deg): 2065.3 lm

%lum = 96.9%

%lamp = 96.9%

Conical surface Flux(120deg): 2112 lm

%lum = 99.0%


%lamp = 99.0%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:Allen
 Test Date:2026-01-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity:45%
 Test Distance:2.900m [K=0.8783]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:12.000V I:2.7071A P:27.000W PF:0.8100 Freq:60.00Hz Lamp Flux:2132.28x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

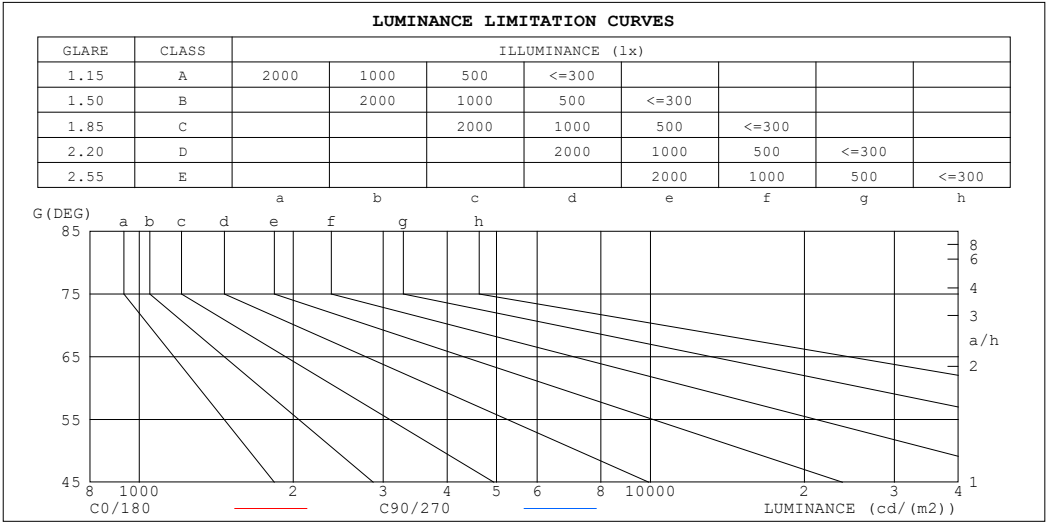

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	733722	1770161
80	535645	1516321
75	455165	3436545
70	679849	7040229
65	1509590	9642467
60	4247170	11100620
55	6767700	12579545
50	8728225	14167200
45	12471159	16071376


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:12.000V I:2.7071A P:27.000W PF:0.8100 Freq:60.00Hz		
Lamp Flux:2132.28x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	Coefficients of Utilization(CU)															
	RCR:Room Cavity Ratio															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.13	1.11	1.09	1.10	1.09	1.07	1.06	1.05	1.04	1.03	1.02	1.01	.99	.99	.98	.96
2.0	1.07	1.04	1.01	1.05	1.03	1.00	1.02	1.00	.98	.99	.98	.96	.97	.95	.94	.93
3.0	1.02	.99	.96	1.01	.98	.95	.99	.96	.93	.96	.94	.92	.94	.92	.91	.89
4.0	.98	.94	.91	.97	.93	.90	.95	.92	.89	.93	.91	.88	.91	.89	.87	.86
5.0	.94	.90	.87	.94	.90	.87	.92	.89	.86	.90	.88	.85	.89	.87	.85	.83
6.0	.91	.87	.84	.90	.86	.84	.89	.86	.83	.88	.85	.82	.87	.84	.82	.81
7.0	.88	.84	.81	.88	.84	.81	.87	.83	.80	.85	.82	.80	.84	.82	.80	.79
8.0	.86	.81	.78	.85	.81	.78	.84	.81	.78	.83	.80	.78	.82	.80	.77	.76
9.0	.83	.79	.76	.83	.79	.76	.82	.78	.76	.81	.78	.76	.80	.77	.75	.74
10.0	.81	.77	.74	.80	.77	.74	.80	.76	.74	.79	.76	.74	.78	.76	.73	.73

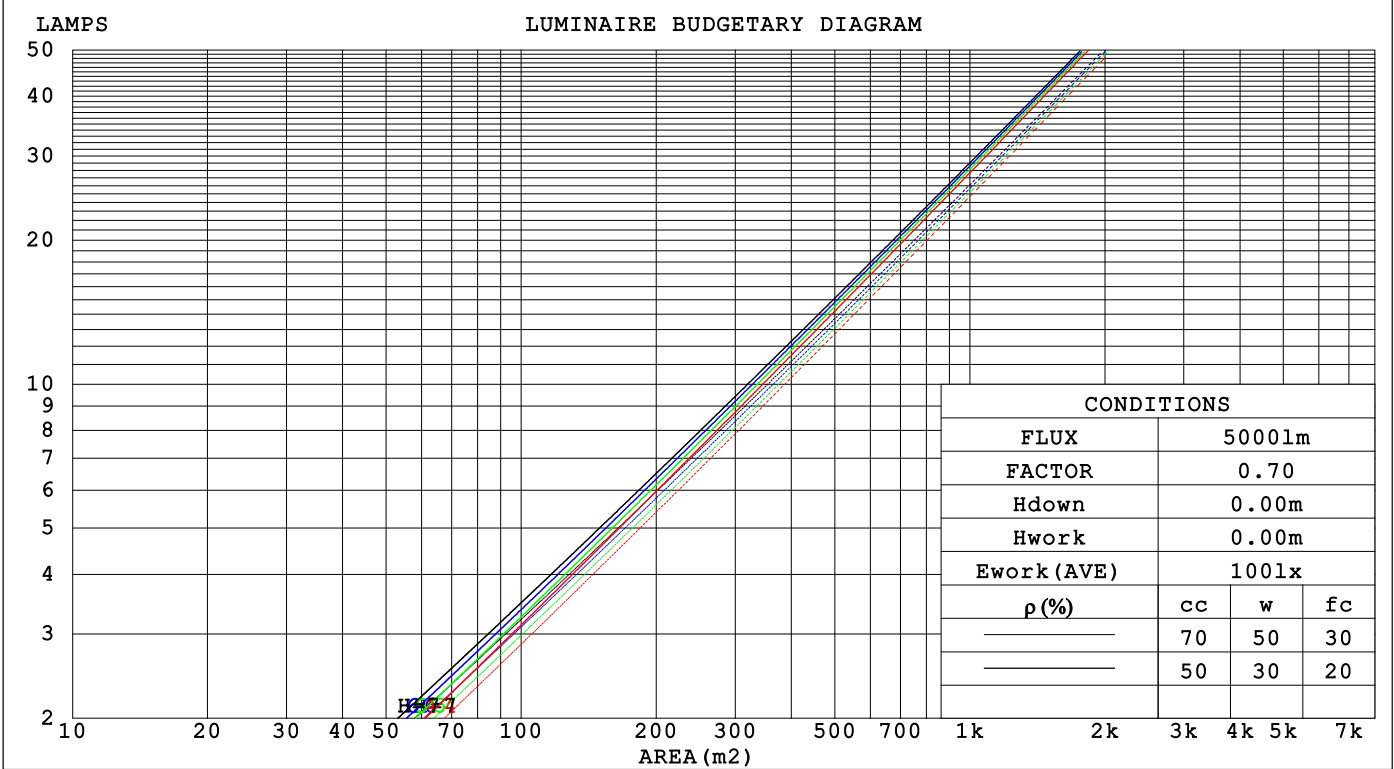

C Range: 0 - 360DEG

C Interval: 22.5DEG

Test Speed: HIGH

Temperature:25.3℃

Operators:Allen

Test Date:2026-01-27

γ Range: 0 - 180DEG

γ Interval: 1.0DEG

Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459

Humidity:45%

Test Distance:2.900m [K=0.8783]

Remarks:

WEC AND CCEC

Test:U:12.000V I:2.7071A P:27.000W PF:0.8100 Freq:60.00Hz Lamp Flux:2132.28x1 lm					
NAME:		TYPE:		WEIGHT:	
SPEC.:		DIM.:		SERIAL No.:	
MFR.:		SUR.:		Shielding Angle:	

pcc	80%			70%			50%			30%			10%			0														
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
pfc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Wall Exitance Coefficients(WEC)														
0.0																														
1.0	.141	.080	.025	.134	.077	.024	.122	.070	.022	.110	.064	.020	.100	.058	.019															
2.0	.131	.072	.022	.126	.069	.021	.115	.064	.020	.106	.059	.019	.097	.055	.017															
3.0	.122	.065	.019	.118	.063	.019	.109	.059	.018	.101	.055	.017	.094	.052	.016															
4.0	.115	.060	.017	.111	.058	.017	.103	.055	.016	.097	.052	.016	.090	.049	.015															
5.0	.108	.055	.016	.104	.054	.016	.098	.051	.015	.092	.049	.014	.087	.046	.014															
6.0	.102	.051	.015	.099	.050	.014	.093	.048	.014	.088	.046	.013	.084	.044	.013															
7.0	.096	.048	.013	.094	.047	.013	.089	.045	.013	.085	.043	.013	.081	.042	.012															
8.0	.092	.045	.013	.089	.044	.012	.085	.043	.012	.081	.041	.012	.078	.040	.012															
9.0	.087	.042	.012	.085	.042	.012	.082	.040	.011	.078	.039	.011	.075	.038	.011															
10.0	.083	.040	.011	.082	.039	.011	.078	.038	.011	.075	.037	.011	.072	.036	.010															

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)										
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021		
1.0	.170	.159	.149	.146	.137	.128	.100	.094	.089	.057	.054	.052	.018	.017	.017		
2.0	.152	.134	.119	.130	.115	.103	.089	.080	.072	.052	.046	.042	.017	.015	.014		
3.0	.138	.115	.097	.118	.099	.084	.081	.069	.059	.047	.040	.035	.015	.013	.011		
4.0	.125	.099	.080	.107	.086	.069	.074	.060	.049	.043	.035	.029	.014	.011	.010		
5.0	.115	.087	.067	.099	.075	.058	.068	.053	.041	.039	.031	.024	.013	.010	.008		
6.0	.106	.077	.057	.091	.067	.049	.063	.047	.035	.036	.028	.021	.012	.009	.007		
7.0	.098	.069	.049	.084	.060	.042	.058	.042	.030	.034	.025	.018	.011	.008	.006		
8.0	.092	.062	.042	.079	.054	.037	.055	.038	.026	.032	.022	.016	.010	.007	.005		
9.0	.086	.057	.037	.074	.049	.032	.051	.035	.023	.030	.020	.014	.010	.007	.005		
10.0	.081	.052	.033	.070	.045	.028	.048	.032	.020	.028	.019	.012	.009	.006	.004		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:12.000V I:2.7071A P:27.000W PF:0.8100 Freq:60.00Hz Lamp Flux:2132.28x1 lm										
NAME:					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.:					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	36.6	37.2	36.8	37.4	37.5	38.0	38.7	38.2	38.9	39.0
3H	36.6	37.2	36.8	37.4	37.6	38.8	39.4	39.1	39.6	39.8
4H	36.5	37.1	36.8	37.3	37.5	38.9	39.5	39.2	39.7	39.9
6H	36.4	37.0	36.7	37.2	37.5	38.9	39.4	39.1	39.6	39.9
8H	36.4	36.9	36.7	37.2	37.4	38.8	39.4	39.1	39.6	39.9
12H	36.3	36.9	36.6	37.1	37.4	38.8	39.3	39.1	39.6	39.8
4H	2H	37.1	37.7	37.4	37.9	38.1	38.4	38.9	38.6	39.2
	3H	37.2	37.7	37.5	38.0	38.2	39.3	39.8	39.6	40.0
	4H	37.1	37.6	37.5	37.9	38.2	39.4	39.9	39.7	40.1
	6H	37.0	37.5	37.4	37.8	38.1	39.3	39.7	39.7	40.1
	8H	37.0	37.4	37.4	37.7	38.1	39.3	39.7	39.7	40.0
	12H	36.9	37.3	37.3	37.7	38.1	39.2	39.6	39.6	40.0
8H	4H	37.1	37.5	37.5	37.9	38.2	39.3	39.7	39.7	40.0
	6H	37.0	37.4	37.5	37.8	38.2	39.2	39.5	39.6	39.9
	8H	37.0	37.3	37.4	37.7	38.1	39.2	39.5	39.6	39.9
	12H	36.9	37.2	37.4	37.6	38.1	39.1	39.4	39.6	39.8
12H	4H	37.1	37.4	37.5	37.8	38.2	39.2	39.6	39.6	40.0
	6H	37.0	37.3	37.4	37.7	38.1	39.2	39.5	39.6	39.9
	8H	36.9	37.2	37.4	37.6	38.1	39.1	39.4	39.6	39.8
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 1.0 / - 1.7					+ 0.5 / - 0.8				
1.5H	+ 0.7 / - 1.8					+ 0.5 / - 0.6				
2.0H	+ 1.4 / - 3.6					+ 0.7 / - 0.9				

CIE Pub.117, 2132 lm Total Lamp Luminous Flux Correct ($8\log(F/F_0) = 2.6$)
Area: 1e-005 m²

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:12.000V I:2.7071A P:27.000W PF:0.8100 Freq:60.00Hz Lamp Flux:2132.28x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	89	83	79	88	83	79	88	82	79	75
0.80	96	90	87	95	90	87	94	89	86	83
1.00	100	95	91	99	94	91	98	94	91	87
1.25	104	99	96	103	98	95	101	97	94	90
1.50	107	102	99	105	101	98	103	100	97	93
2.00	109	105	102	108	104	101	105	102	100	94
2.50	111	107	104	109	106	103	106	103	101	95
3.00	112	109	106	110	107	105	107	105	103	97
4.00	114	111	109	112	110	108	108	107	105	98
5.00	115	113	111	113	111	110	109	108	107	99
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3℃
 Operators: Allen
 Test Date: 2026-01-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity: 45%
 Test Distance: 2.900m [K=0.8783]
 Remarks:

ISOCANDELA DIAGRAM


Test:U:12.000V I:2.7071A P:27.000W PF:0.8100 Freq:60.00Hz Lamp Flux:2132.28x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

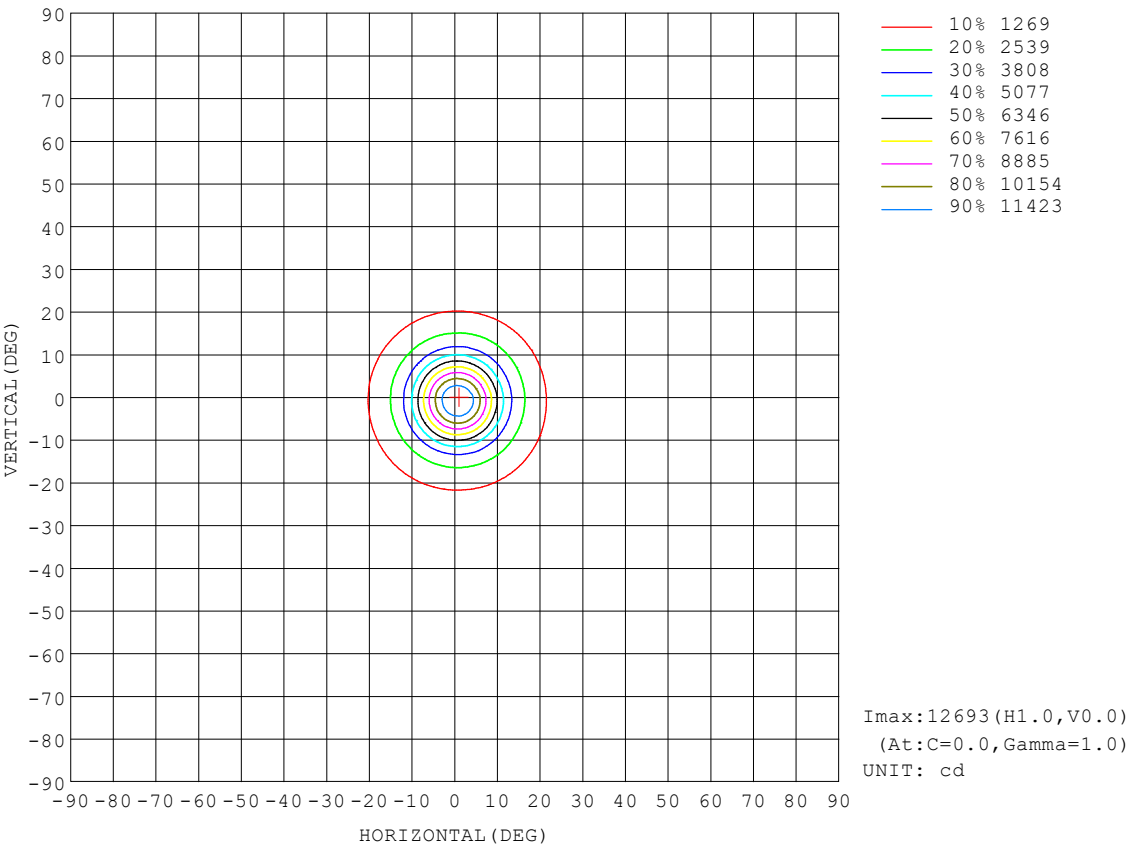

C Range: 0 - 360DEG	γ Range: 0 - 180DEG
C Interval: 22.5DEG	γ Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Temperature:25.3℃	Humidity:45%
Operators:Allen	Test Distance:2.900m [K=0.8783]
Test Date:2026-01-27	Remarks:

AAI Figure

Test:U:12.000V I:2.7071A P:27.000W PF:0.8100 Freq:60.00Hz Lamp Flux:2132.28x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

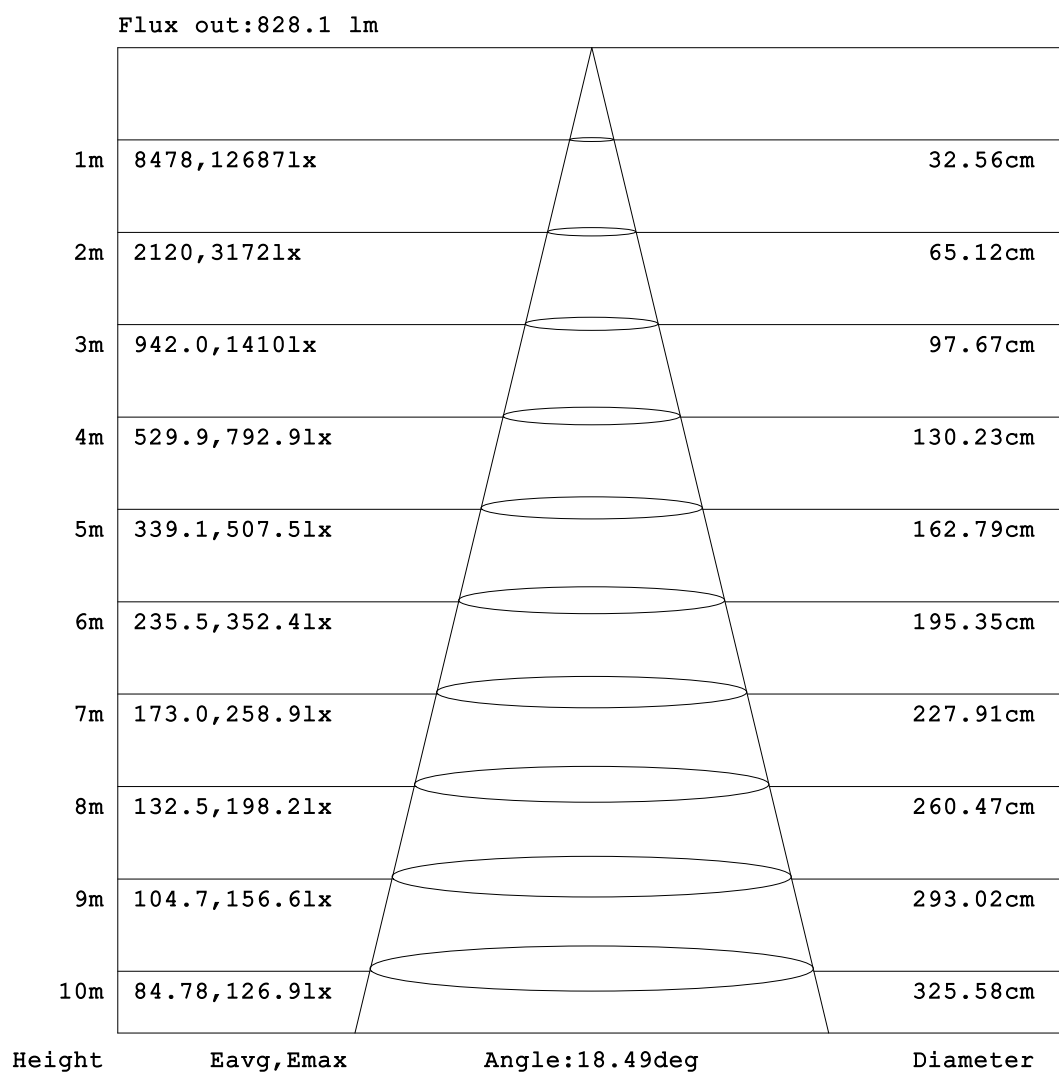


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:


ISOLUX DIAGRAM

Test:U:12.000V I:2.7071A P:27.000W PF:0.8100 Freq:60.00Hz Lamp Flux:2132.28x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

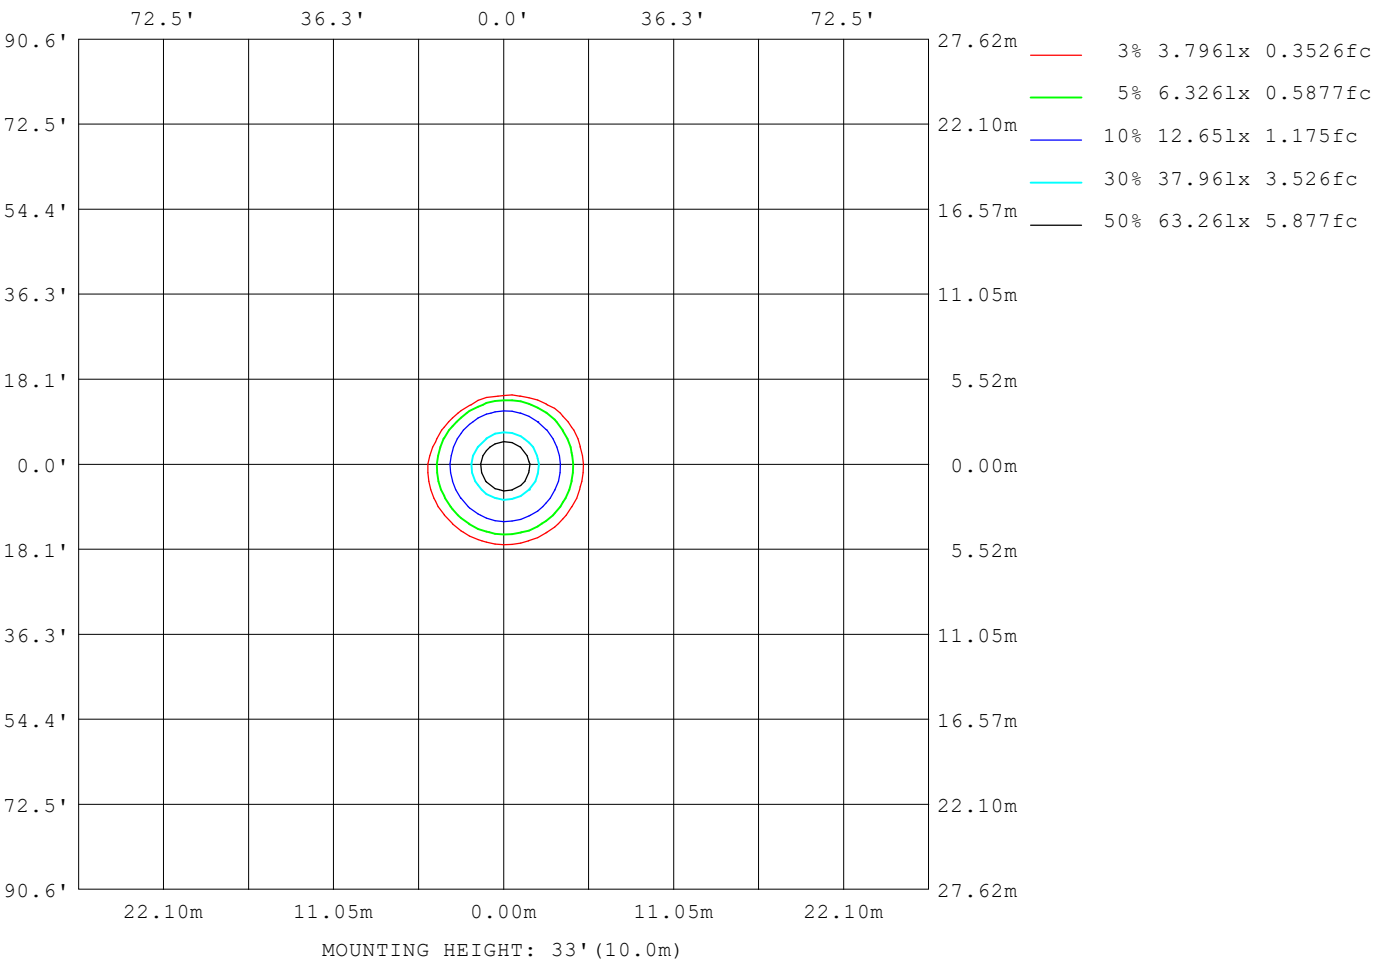

C Range: 0 - 360DEG C Interval: 22.5DEG Test Speed: HIGH Temperature:25.3℃ Operators:Allen Test Date:2026-01-27	γ Range: 0 - 180DEG γ Interval: 1.0DEG Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459 Humidity:45% Test Distance:2.900m [K=0.8783] Remarks:
--	---

Planar Illuminance Curve

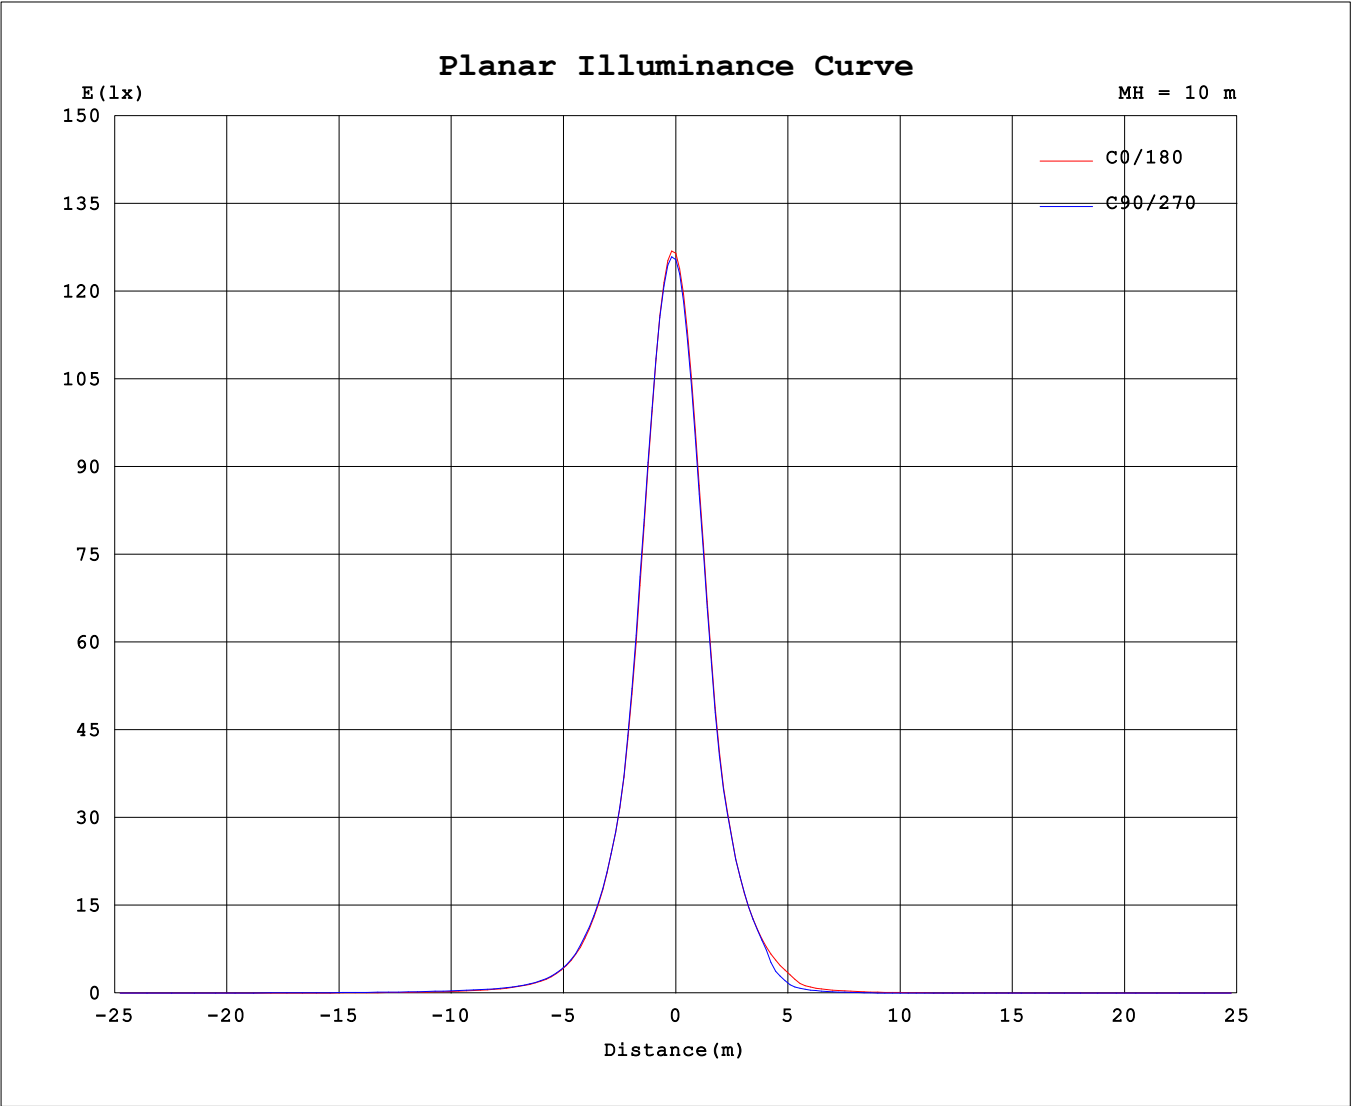

C Range: 0 - 360DEG	γ Range: 0 - 180DEG
C Interval: 22.5DEG	γ Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Temperature:25.3℃	Humidity:45%
Operators:Allen	Test Distance:2.900m [K=0.8783]
Test Date:2026-01-27	Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.000V I:2.7071A P:27.000W PF:0.8100 Freq:60.00Hz Lamp Flux:2132.28x1 lm																	
NAME:									TYPE:						WEIGHT:		
SPEC.:									DIM.:						SERIAL No.:		
MFR.:									SUR.:						Shielding Angle:		

Table--1

UNIT: X10cd

γ (DEG) \ C (DEG)	C (DEG)																			
	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5				
0	1265	1260	1259	1256	1254	1252	1252	1255	1265	1260	1259	1256	1254	1252	1252	1255				
5	1095	1116	1123	1119	1098	1069	1035	998	974	954	947	947	959	982	1015	1048				
10	627	649	664	661	641	610	570	538	511	494	490	488	502	522	554	586				
15	305	313	317	316	306	293	277	262	255	249	246	248	254	268	282	297				
20	156	162	165	164	160	152	143	136	132	128	125	127	130	135	142	149				
25	75.4	78.4	80.6	80.1	77.2	74.4	70.3	66.8	63.7	46.2	36.9	34.9	39.5	45.3	67.5	71.0				
30	36.8	38.6	39.7	39.7	38.6	37.5	35.8	34.0	20.2	13.0	10.1	9.65	10.2	12.7	20.0	33.7				
35	21.2	22.1	22.7	23.0	22.4	21.9	20.9	15.3	9.71	6.23	4.81	4.40	4.59	5.72	9.18	14.3				
40	13.0	14.9	15.1	15.3	14.9	14.5	13.5	9.36	5.48	3.61	2.34	1.99	2.17	3.10	4.88	8.60				
45	8.82	11.4	11.6	11.7	11.4	11.1	9.31	5.70	3.31	1.46	0.29	0.21	0.25	0.84	2.78	5.08				
50	5.61	8.64	9.28	9.33	9.11	8.81	6.38	3.86	1.44	0.19	0.00	0.00	0.00	0.08	0.81	3.24				
55	3.88	6.02	7.39	7.43	7.22	6.57	4.40	2.06	0.28	0.03	0.00	0.00	0.00	0.01	0.15	1.42				
60	2.12	4.22	5.55	5.74	5.55	4.54	2.67	0.62	0.08	0.02	0.00	0.00	0.00	0.00	0.04	0.30				
65	0.64	2.53	3.94	4.40	4.08	2.86	1.12	0.21	0.06	0.00	0.00	0.00	0.00	0.00	0.03	0.10				
70	0.23	1.01	2.27	2.93	2.41	1.29	0.33	0.10	0.04	0.00	0.00	0.00	0.00	0.00	0.01	0.07				
75	0.12	0.31	0.80	1.21	0.89	0.37	0.13	0.07	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.05				
80	0.09	0.16	0.27	0.33	0.26	0.15	0.10	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02				
85	0.06	0.13	0.18	0.18	0.15	0.12	0.08	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
90	0.03	0.10	0.15	0.15	0.13	0.09	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
95	0.00	0.07	0.11	0.12	0.10	0.06	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
100	0.00	0.03	0.08	0.09	0.07	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
105	0.00	0.01	0.04	0.05	0.04	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
110	0.00	0.00	0.01	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00	0.00	0.00	0.00	0.00				
135	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.04	0.04	0.04	0.04	0.04	0.03	0.03	0.03				
140	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.06	0.10	0.11	0.11	0.11	0.10	0.10	0.09	0.09				
145	0.10	0.10	0.10	0.10	0.10	0.11	0.11	0.11	0.21	0.21	0.22	0.22	0.21	0.20	0.20	0.19				
150	0.14	0.14	0.14	0.14	0.14	0.14	0.14	0.14	0.32	0.33	0.33	0.33	0.33	0.32	0.31	0.30				
155	0.17	0.17	0.17	0.17	0.17	0.17	0.17	0.16	0.43	0.43	0.44	0.44	0.43	0.43	0.42	0.41				
160	0.17	0.17	0.17	0.17	0.16	0.16	0.16	0.16	0.48	0.48	0.49	0.48	0.48	0.48	0.48	0.47				
165	0.16	0.16	0.16	0.15	0.15	0.15	0.15	0.15	0.47	0.47	0.46	0.46	0.46	0.46	0.46	0.46				
170	0.16	0.16	0.15	0.15	0.15	0.15	0.15	0.15	0.41	0.41	0.40	0.40	0.39	0.40	0.40	0.40				
175	0.17	0.16	0.16	0.16	0.16	0.16	0.16	0.16	0.32	0.32	0.31	0.30	0.30	0.30	0.30	0.31				
180	0.22	0.21	0.20	0.20	0.20	0.20	0.20	0.21	0.22	0.22	0.21	0.20	0.20	0.20	0.20	0.20				

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks: