


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:12.000V I:2.6884A P:27.100W PF:0.8105 Freq:59.99Hz Lamp Flux:2029.31x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 74.88 lm/W
MODEL	SMART FIXTURE 3000K	Imax (cd)	9577	S/MH(C0/180)	0.35	
NOMINAL POWER(W)		LOR(%)	100.0	S/MH(C90/270)	0.35	
RATED VOLTAGE(V)		TOTAL FLUX(lm)	2029.3	η UP,DN(C0-180)	0.1,55.0	
NOMINAL FLUX(lm)	2029.31	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,44.9	
LAMPS INSIDE	1	η up (%)	0.2	CIBSE SHR NOM	0.00	
TEST VOLTAGE(V)		η down (%)	99.8	CIBSE SHR MAX	0.30	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

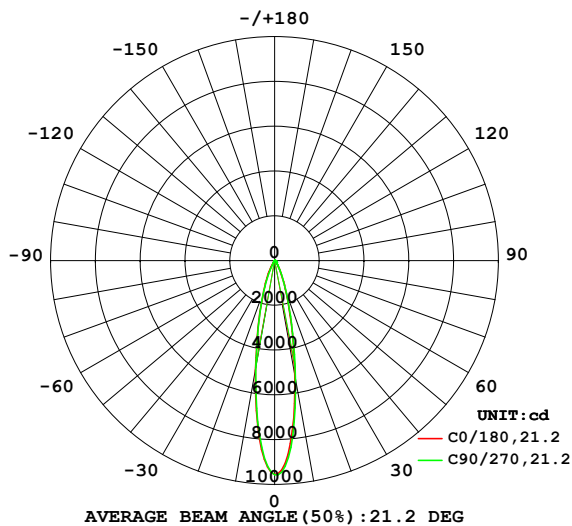

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

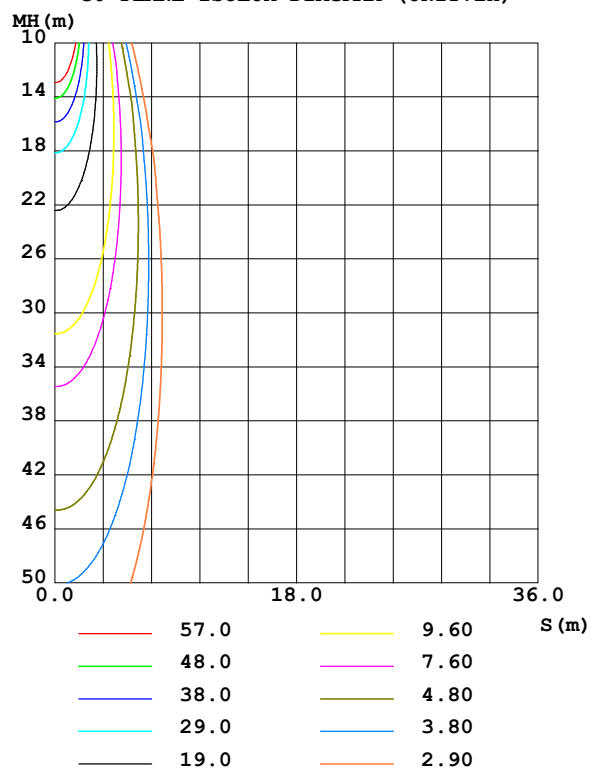

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	5250	5427	5411	5221	4964	4848	4859	5057	0- 10	672.6	672.6	33.1,33.1
20	1511	1578	1556	1507	1428	1413	1403	1469	10- 20	790.3	1463	72.1,72.1
30	434.5	456.9	450.3	445.5	326.5	154.3	147.3	297.1	20- 30	352.8	1816	89.5,89.5
40	149.3	177.8	176.5	168.2	62.21	26.01	23.28	52.70	30- 40	117.7	1933	95.3,95.3
50	56.84	95.04	93.91	67.76	15.54	0.0513	0	8.276	40- 50	51.76	1985	97.8,97.8
60	17.14	52.32	53.22	24.06	0.8527	0	0	0.4430	50- 60	25.90	2011	99.1,99.1
70	2.261	17.88	19.74	3.454	0.3987	0	0	0.0861	60- 70	11.04	2022	99.6,99.6
80	0.9748	2.672	2.610	1.095	0	0	0	0	70- 80	2.758	2025	99.8,99.8
90	0.3350	1.593	1.392	0.5273	0	0	0	0	80- 90	0.6878	2026	99.8,99.8
100	0	0.8387	0.7374	0.0161	0	0	0	0	90-100	0.3663	2026	99.8,99.8
110	0	0.1317	0.1632	0	0	0	0	0	100-110	0.1182	2026	99.8,99.8
120	0	0	0	0	0	0	0	0	110-120	0.0066	2026	99.8,99.8
130	0	0	0	0	0.0407	0.0618	0.0549	0.0343	120-130	0.0014	2026	99.8,99.8
140	0.5253	0.4965	0.5031	0.5336	0.9459	0.9949	0.9759	0.9298	130-140	0.2147	2026	99.8,99.8
150	1.233	1.266	1.252	1.273	2.781	2.891	2.865	2.804	140-150	0.8648	2027	99.9,99.9
160	1.576	1.602	1.590	1.559	4.270	4.307	4.294	4.288	150-160	1.186	2028	99.9,99.9
170	1.543	1.505	1.486	1.487	3.802	3.741	3.715	3.732	160-170	0.8056	2029	100,100
180	2.244	2.126	2.124	2.122	2.237	2.186	2.098	2.116	170-180	0.2328	2029	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 1963.9 lm

%lum = 96.8%

%lamp = 96.8%

Conical surface Flux(120deg): 2011 lm

%lum = 99.1%


%lamp = 99.1%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:Allen
 Test Date:2026-01-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity:45%
 Test Distance:2.900m [K=0.8783]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:12.000V I:2.6884A P:27.100W PF:0.8105 Freq:59.99Hz Lamp Flux:2029.31x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

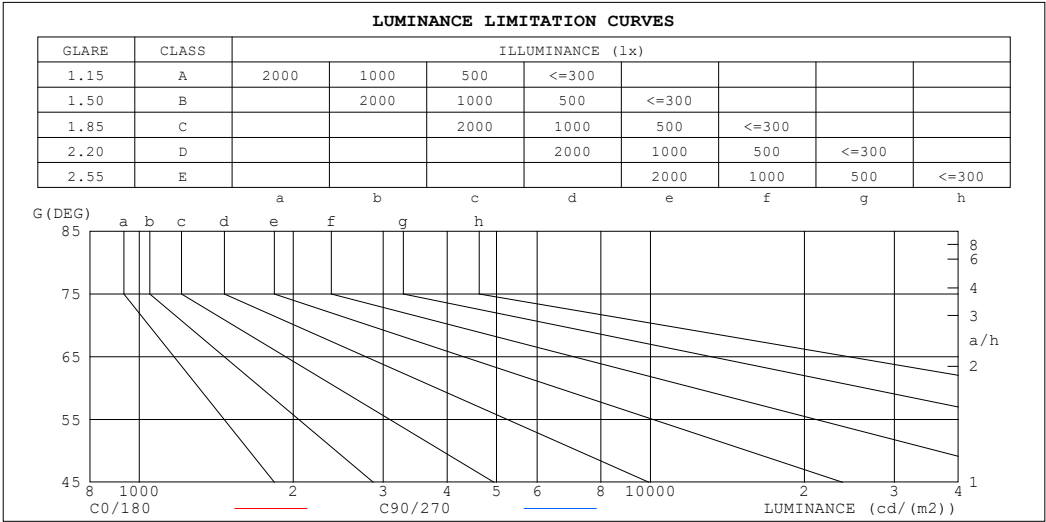

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	766054	1887406
80	561392	1503308
75	477335	3198042
70	661111	5772029
65	1416237	8447893
60	3427621	10643922
55	5971472	12473196
50	8842683	14610013
45	12948662	17829789


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:12.000V I:2.6884A P:27.100W PF:0.8105 Freq:59.99Hz		
Lamp Flux:2029.31x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0														
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
pfc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Coefficients of Utilization(CU)														
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00														
1.0	1.12	1.10	1.08	1.10	1.08	1.07	1.06	1.05	1.03	1.02	1.01	1.00	.99	.98	.97	.96														
2.0	1.07	1.03	1.01	1.05	1.02	.99	1.02	.99	.97	.99	.97	.95	.96	.95	.93	.92														
3.0	1.01	.98	.94	1.00	.97	.94	.98	.95	.92	.95	.93	.91	.93	.91	.89	.88														
4.0	.97	.93	.89	.96	.92	.89	.94	.91	.88	.92	.89	.87	.90	.88	.86	.85														
5.0	.93	.89	.85	.92	.88	.85	.90	.87	.84	.89	.86	.83	.87	.85	.83	.82														
6.0	.89	.85	.82	.89	.84	.81	.87	.84	.81	.86	.83	.80	.85	.82	.80	.79														
7.0	.86	.82	.79	.86	.81	.78	.84	.81	.78	.83	.80	.78	.82	.79	.77	.76														
8.0	.83	.79	.76	.83	.79	.76	.82	.78	.75	.81	.77	.75	.80	.77	.75	.74														
9.0	.81	.76	.73	.80	.76	.73	.79	.76	.73	.79	.75	.73	.78	.75	.72	.71														
10.0	.78	.74	.71	.78	.74	.71	.77	.73	.71	.76	.73	.70	.76	.73	.70	.69														

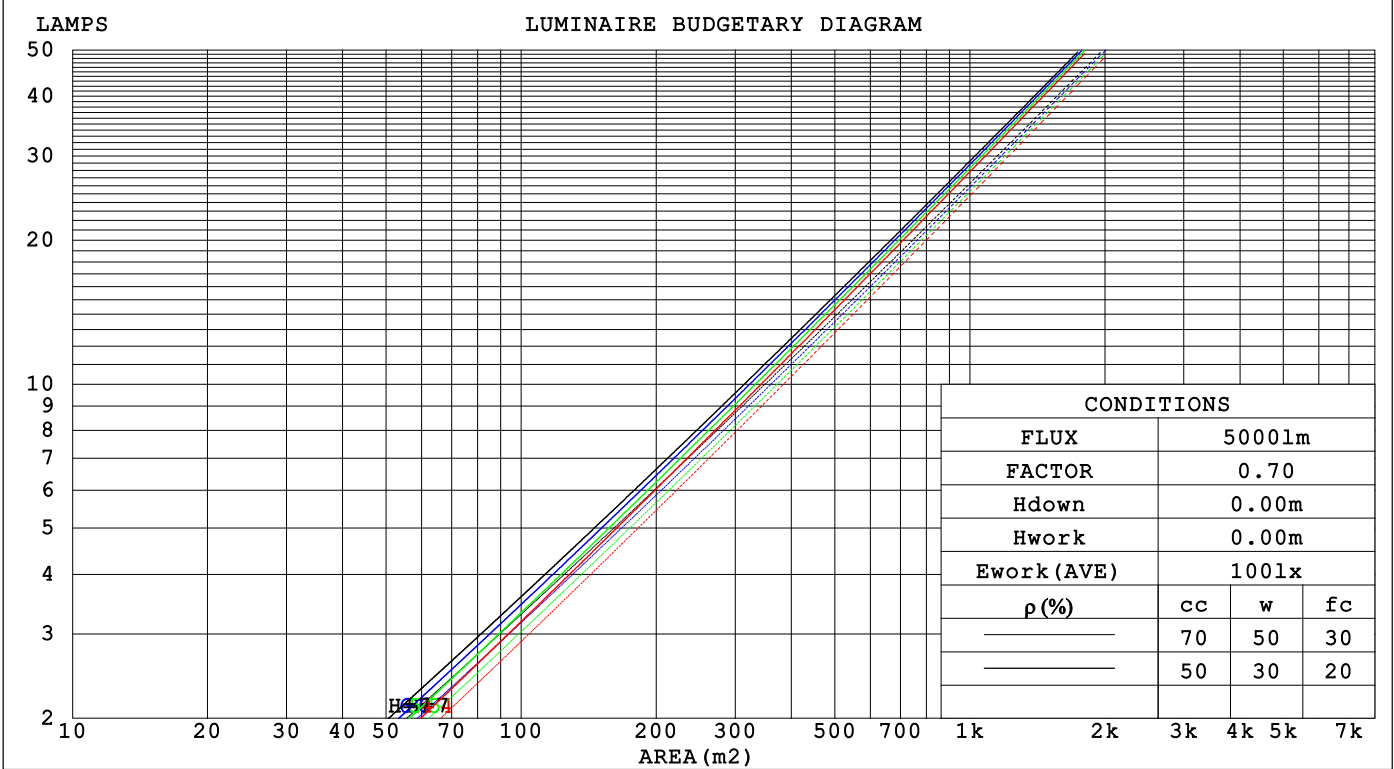

C Range: 0 - 360DEG

C Interval: 22.5DEG

Test Speed: HIGH

Temperature:25.3℃

Operators:Allen

Test Date:2026-01-27

γ Range: 0 - 180DEG

γ Intmval: 1.0DEG

Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459

Humidity:45%

Test Distance:2.900m [K=0.8783]

Remarks:

WEC AND CCEC

Test:U:12.000V I:2.6884A P:27.100W PF:0.8105 Freq:59.99Hz Lamp Flux:2029.31x1 lm					
NAME:		TYPE:		WEIGHT:	
SPEC.:		DIM.:		SERIAL No.:	
MFR.:		SUR.:		Shielding Angle:	

pcc	80%			70%			50%			30%			10%			0														
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
pfc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Wall Exitance Coefficients(WEC)														
0.0																														
1.0	.146	.083	.026	.140	.080	.025	.127	.073	.023	.115	.067	.021	.105	.061	.020															
2.0	.137	.075	.023	.131	.072	.022	.121	.067	.021	.111	.062	.020	.102	.058	.018															
3.0	.128	.068	.020	.123	.066	.020	.115	.062	.019	.107	.058	.018	.099	.055	.017															
4.0	.120	.062	.018	.116	.061	.018	.109	.058	.017	.102	.055	.017	.096	.052	.016															
5.0	.113	.058	.017	.110	.056	.016	.104	.054	.016	.098	.052	.015	.092	.049	.015															
6.0	.107	.054	.015	.104	.053	.015	.099	.051	.015	.094	.049	.014	.089	.047	.014															
7.0	.102	.050	.014	.099	.049	.014	.095	.048	.014	.090	.046	.013	.086	.045	.013															
8.0	.097	.047	.013	.095	.047	.013	.091	.045	.013	.087	.044	.013	.083	.043	.012															
9.0	.093	.045	.013	.091	.044	.012	.087	.043	.012	.083	.042	.012	.080	.041	.012															
10.0	.089	.042	.012	.087	.042	.012	.084	.041	.012	.080	.040	.011	.077	.039	.011															

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.170	.159	.149	.146	.136	.128	.100	.094	.089	.057	.054	.051	.018	.017	.017	
2.0	.153	.134	.118	.131	.115	.102	.090	.080	.071	.052	.046	.042	.017	.015	.014	
3.0	.139	.115	.096	.119	.099	.083	.082	.069	.058	.047	.040	.034	.015	.013	.011	
4.0	.127	.100	.079	.109	.086	.069	.075	.060	.048	.043	.035	.029	.014	.011	.009	
5.0	.116	.087	.066	.100	.076	.057	.069	.053	.041	.040	.031	.024	.013	.010	.008	
6.0	.108	.078	.056	.093	.067	.049	.064	.047	.034	.037	.028	.020	.012	.009	.007	
7.0	.100	.069	.048	.086	.060	.042	.060	.042	.030	.035	.025	.018	.011	.008	.006	
8.0	.094	.063	.041	.081	.054	.036	.056	.038	.026	.033	.023	.015	.011	.007	.005	
9.0	.088	.057	.036	.076	.050	.032	.053	.035	.022	.031	.021	.013	.010	.007	.004	
10.0	.083	.053	.032	.072	.046	.028	.050	.032	.020	.029	.019	.012	.009	.006	.004	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:12.000V I:2.6884A P:27.100W PF:0.8105 Freq:59.99Hz Lamp Flux:2029.31x1 lm										
NAME:			TYPE:			WEIGHT:				
SPEC.:			DIM.:			SERIAL No.:				
MFR.:			SUR.:			Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	37.1	37.8	37.3	38.0	38.1	38.8	39.5	39.0	39.6	39.8
3H	37.0	37.7	37.3	37.9	38.1	39.2	39.9	39.5	40.1	40.3
4H	37.0	37.6	37.2	37.8	38.0	39.3	39.9	39.5	40.1	40.3
6H	36.9	37.5	37.2	37.7	38.0	39.2	39.8	39.5	40.0	40.3
8H	36.8	37.4	37.1	37.7	37.9	39.2	39.8	39.5	40.0	40.3
12H	36.8	37.4	37.1	37.6	37.9	39.1	39.7	39.5	40.0	40.2
4H 2H	37.5	38.1	37.7	38.3	38.5	38.9	39.6	39.2	39.8	40.0
3H	37.5	38.0	37.8	38.3	38.6	39.5	40.0	39.8	40.3	40.6
4H	37.4	37.9	37.7	38.2	38.5	39.6	40.1	39.9	40.4	40.7
6H	37.3	37.7	37.7	38.1	38.4	39.5	40.0	39.9	40.3	40.6
8H	37.3	37.7	37.6	38.0	38.4	39.5	39.9	39.9	40.2	40.6
12H	37.2	37.6	37.6	38.0	38.3	39.4	39.8	39.8	40.2	40.6
8H 4H	37.4	37.8	37.7	38.1	38.5	39.5	39.9	39.8	40.2	40.6
6H	37.3	37.6	37.7	38.0	38.4	39.4	39.7	39.8	40.1	40.6
8H	37.2	37.5	37.7	37.9	38.4	39.4	39.7	39.8	40.1	40.5
12H	37.2	37.4	37.6	37.9	38.4	39.3	39.6	39.8	40.0	40.5
12H 4H	37.3	37.7	37.7	38.1	38.4	39.4	39.8	39.8	40.2	40.5
6H	37.2	37.5	37.7	37.9	38.4	39.3	39.7	39.8	40.1	40.5
8H	37.2	37.4	37.6	37.9	38.4	39.3	39.6	39.8	40.0	40.5
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 1.3 / - 2.5					+ 0.9 / - 1.2				
1.5H	+ 1.5 / - 2.4					+ 1.1 / - 1.0				
2.0H	+ 1.9 / - 4.7					+ 1.4 / - 1.1				

CIE Pub.117, 2029 lm Total Lamp Luminous Flux Correct ($8\log(F/F_0) = 2.5$)
Area: 1e-005 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:12.000V I:2.6884A P:27.100W PF:0.8105 Freq:59.99Hz Lamp Flux:2029.31x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	89	82	79	88	82	79	87	82	79	75
0.80	96	90	87	95	90	87	94	89	86	83
1.00	100	95	91	99	94	91	98	94	90	87
1.25	104	99	96	103	98	95	101	97	94	90
1.50	106	102	99	105	101	98	103	100	97	93
2.00	109	105	102	108	104	101	105	102	100	94
2.50	111	107	104	109	106	103	106	103	101	95
3.00	112	109	106	110	107	105	107	105	103	96
4.00	114	111	109	112	110	108	108	107	105	98
5.00	115	113	111	113	111	110	109	108	107	99
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3℃
 Operators: Allen
 Test Date: 2026-01-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity: 45%
 Test Distance: 2.900m [K=0.8783]
 Remarks:

ISOCANDELA DIAGRAM


Test:U:12.000V I:2.6884A P:27.100W PF:0.8105 Freq:59.99Hz Lamp Flux:2029.31x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

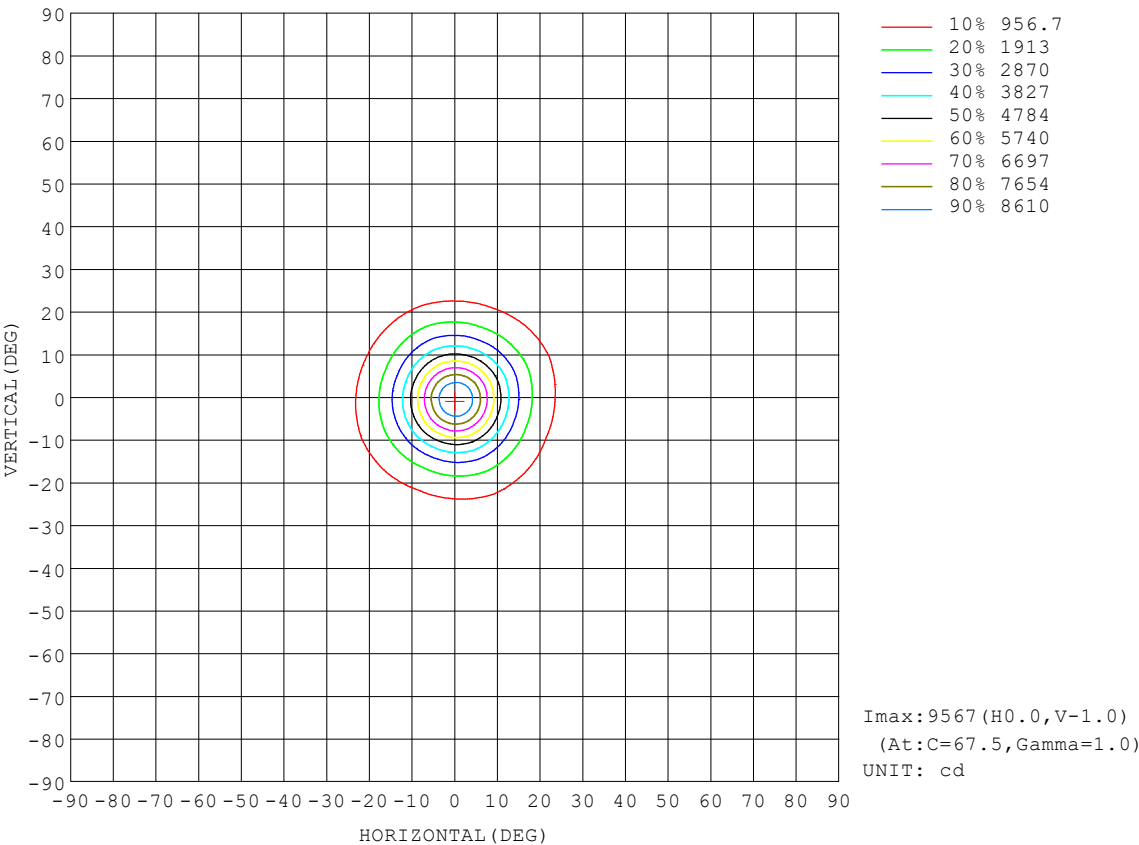

C Range: 0 - 360DEG	γ Range: 0 - 180DEG
C Interval: 22.5DEG	γ Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Temperature:25.3℃	Humidity:45%
Operators:Allen	Test Distance:2.900m [K=0.8783]
Test Date:2026-01-27	Remarks:

AAI Figure

Test:U:12.000V I:2.6884A P:27.100W PF:0.8105 Freq:59.99Hz Lamp Flux:2029.31lx1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

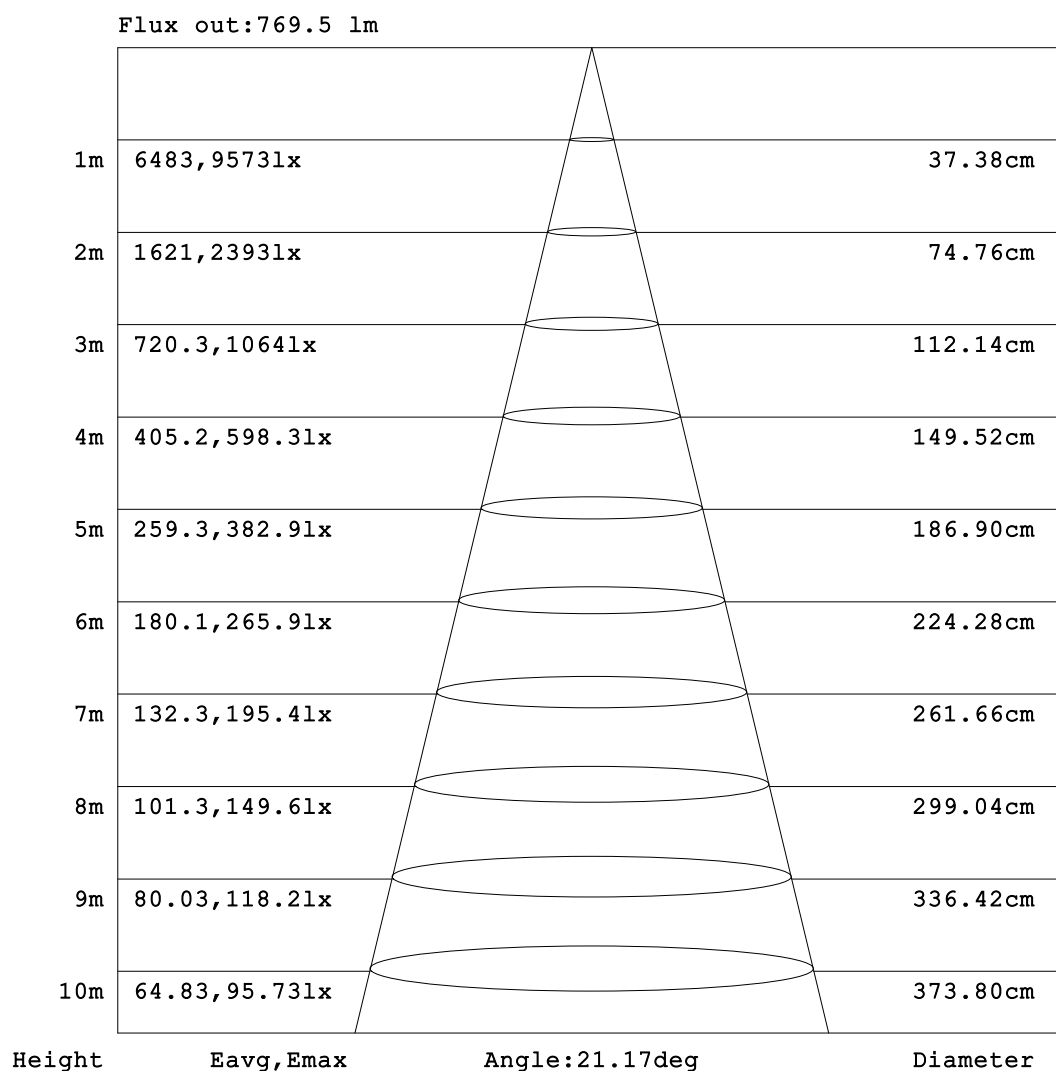


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:


ISOLUX DIAGRAM

Test:U:12.000V I:2.6884A P:27.100W PF:0.8105 Freq:59.99Hz Lamp Flux:2029.31x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

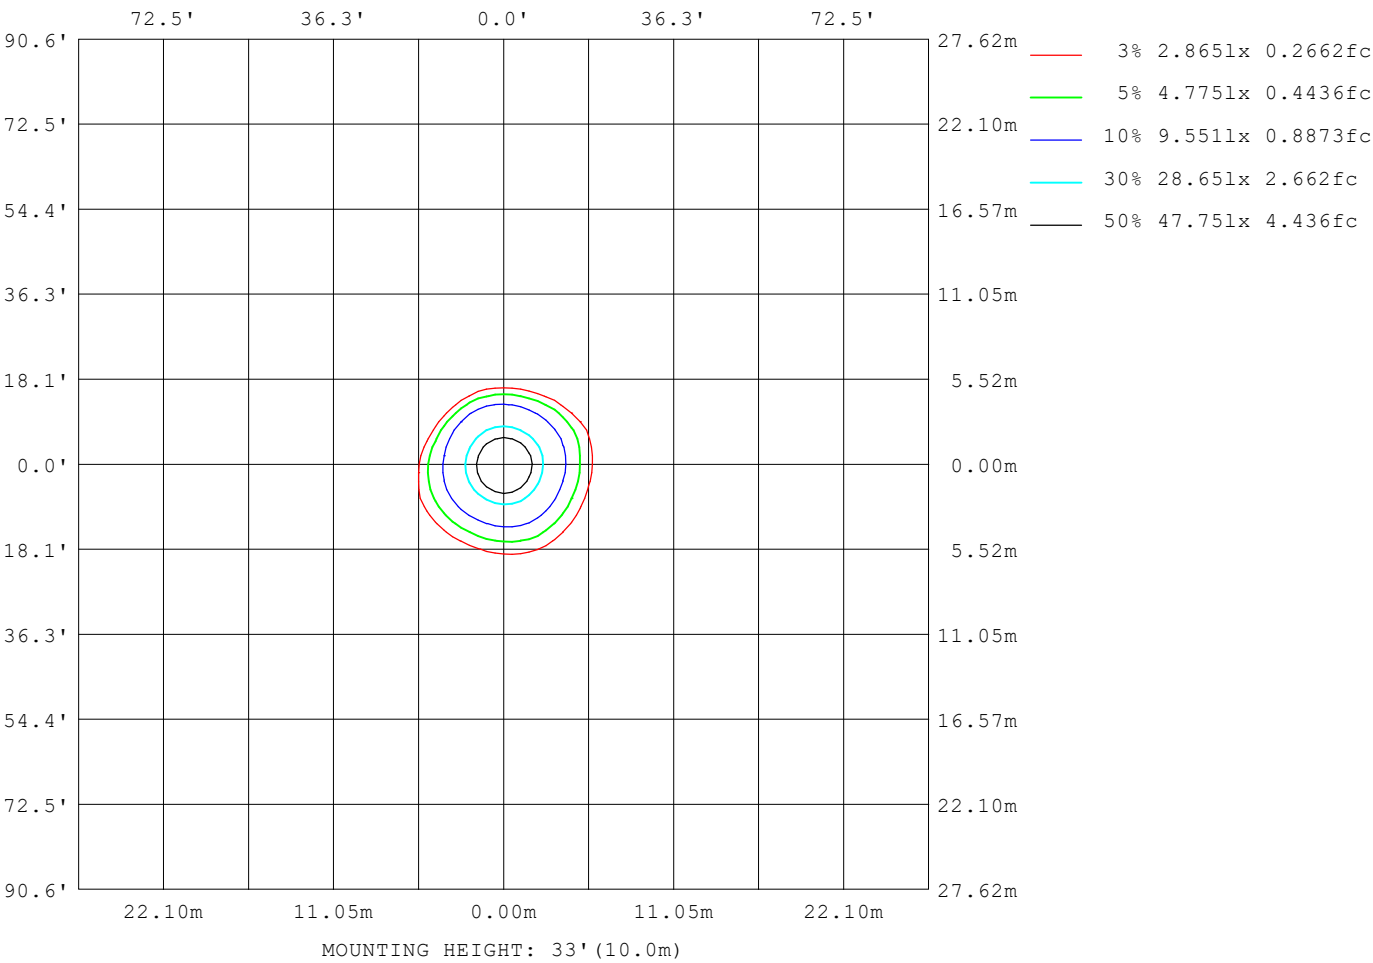

C Range: 0 - 360DEG C Interval: 22.5DEG Test Speed: HIGH Temperature:25.3℃ Operators:Allen Test Date:2026-01-27	γ Range: 0 - 180DEG γ Interval: 1.0DEG Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459 Humidity:45% Test Distance:2.900m [K=0.8783] Remarks:
--	---

Planar Illuminance Curve

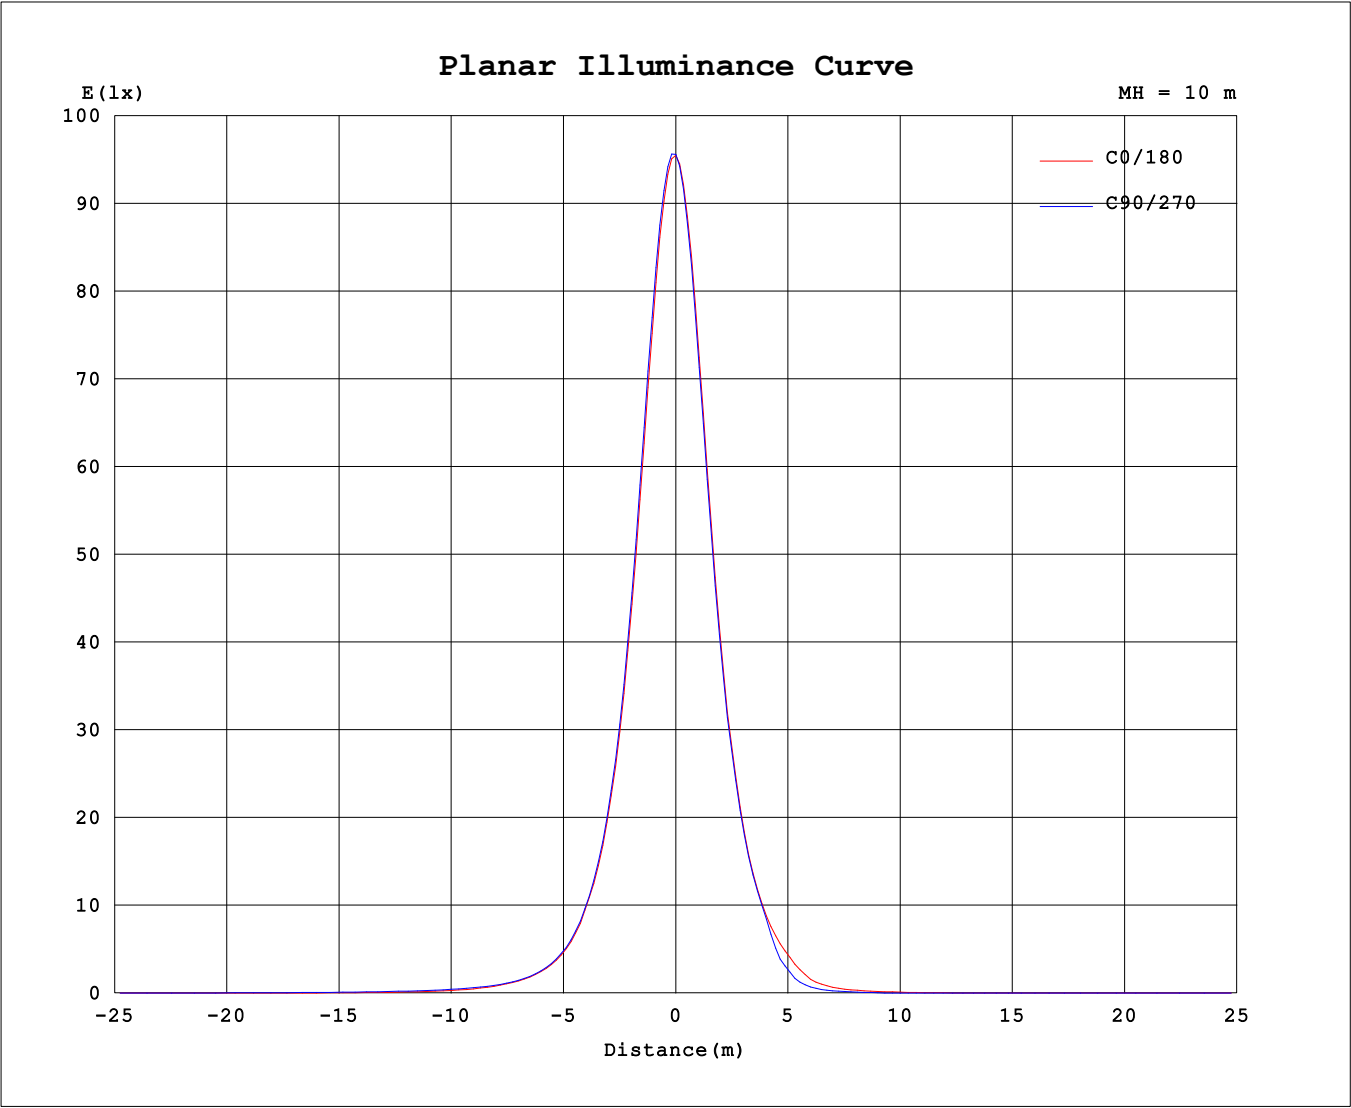

C Range: 0 - 360DEG	γ Range: 0 - 180DEG
C Interval: 22.5DEG	γ Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Temperature:25.3℃	Humidity:45%
Operators:Allen	Test Distance:2.900m [K=0.8783]
Test Date:2026-01-27	Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.000V I:2.6884A P:27.100W PF:0.8105 Freq:59.99Hz Lamp Flux:2029.31x1 lm																	
NAME:									TYPE:						WEIGHT:		
SPEC.:									DIM.:						SERIAL No.:		
MFR.:									SUR.:						Shielding Angle:		

Table--1

UNIT: cd

γ (DEG)	C (DEG)																
	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5	
0	9551	9552	9552	9564	9561	9562	9559	9551	9551	9552	9552	9564	9561	9562	9559	9551	
5	8192	8330	8374	8400	8363	8262	8144	8007	7940	7844	7806	7794	7820	7908	8011	8141	
10	5250	5323	5427	5479	5411	5287	5221	5071	4964	4848	4848	4865	4859	4920	5057	5215	
15	2874	2867	2979	3057	2959	2841	2849	2798	2745	2646	2697	2747	2695	2693	2821	2936	
20	1511	1487	1578	1645	1556	1471	1507	1510	1428	1354	1413	1467	1403	1377	1469	1572	
25	793	767	832	886	818	763	803	819	758	620	536	551	520	571	767	845	
30	434	415	457	497	450	415	446	463	327	194	154	156	147	175	297	461	
35	257	247	272	298	269	248	265	226	125	74.6	56.4	52.3	52.5	64.7	109	201	
40	149	165	178	193	176	164	168	115	62.2	39.2	26.0	22.0	23.3	33.0	52.7	99.4	
45	91.6	119	127	135	126	118	104	64.1	35.6	15.5	3.79	2.73	3.07	9.07	28.3	54.2	
50	56.8	85.2	95.0	98.6	93.9	88.8	67.8	38.1	15.5	2.24	0.05	0.00	0.00	1.01	8.28	30.9	
55	34.3	58.5	72.8	74.3	71.5	63.9	42.4	19.5	3.32	0.30	0.00	0.00	0.00	0.11	1.60	12.9	
60	17.1	36.8	52.3	55.2	53.2	42.1	24.1	6.79	0.85	0.22	0.00	0.00	0.00	0.04	0.44	3.12	
65	5.99	20.1	33.4	39.0	35.7	24.3	10.8	2.23	0.62	0.04	0.00	0.00	0.00	0.00	0.31	1.03	
70	2.26	8.40	17.9	24.1	19.7	11.5	3.45	1.05	0.40	0.00	0.00	0.00	0.00	0.00	0.09	0.78	
75	1.24	3.03	7.31	10.5	8.28	3.82	1.41	0.81	0.08	0.00	0.00	0.00	0.00	0.00	0.00	0.54	
80	0.97	1.67	2.67	3.19	2.61	1.60	1.09	0.52	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.23	
85	0.67	1.39	1.88	1.90	1.64	1.29	0.82	0.21	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.33	1.06	1.59	1.66	1.39	1.00	0.53	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
95	0.04	0.70	1.22	1.32	1.07	0.70	0.25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
100	0.00	0.35	0.84	0.95	0.74	0.42	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
105	0.00	0.06	0.45	0.58	0.43	0.17	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
110	0.00	0.00	0.13	0.25	0.16	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.05	0.06	0.06	0.05	0.04	0.03	0.01	
135	0.15	0.13	0.11	0.11	0.11	0.13	0.14	0.16	0.35	0.37	0.38	0.37	0.37	0.35	0.33	0.30	
140	0.53	0.52	0.50	0.49	0.50	0.53	0.53	0.55	0.95	0.98	0.99	0.98	0.98	0.97	0.93	0.88	
145	0.95	0.98	0.96	0.95	0.97	0.99	0.99	0.98	1.82	1.89	1.91	1.89	1.89	1.87	1.83	1.76	
150	1.23	1.27	1.27	1.25	1.25	1.27	1.27	1.25	2.78	2.85	2.89	2.87	2.86	2.85	2.80	2.73	
155	1.51	1.55	1.55	1.55	1.54	1.54	1.53	1.50	3.71	3.75	3.81	3.81	3.79	3.78	3.75	3.69	
160	1.58	1.59	1.60	1.60	1.59	1.58	1.56	1.54	4.27	4.26	4.31	4.30	4.29	4.29	4.29	4.24	
165	1.53	1.53	1.53	1.52	1.51	1.50	1.48	1.48	4.21	4.20	4.18	4.18	4.17	4.17	4.18	4.16	
170	1.54	1.53	1.51	1.49	1.49	1.49	1.49	1.50	3.80	3.80	3.74	3.72	3.72	3.73	3.73	3.73	
175	1.70	1.67	1.64	1.62	1.62	1.63	1.64	1.66	3.11	3.12	3.05	2.99	2.97	2.97	3.00	3.00	
180	2.24	2.19	2.13	2.09	2.12	2.11	2.12	2.13	2.24	2.25	2.19	2.13	2.10	2.12	2.12	2.13	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks: