


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:12.000V I:2.6876A P:27.000W PF:0.8108 Freq:59.99Hz Lamp Flux:1927.95x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 71.41 lm/W
MODEL	SMART FIXTURE 3000K	Imax (cd)	5089	S/MH(C0/180)	0.52	
NOMINAL POWER(W)		LOR(%)	100.0	S/MH(C90/270)	0.50	
RATED VOLTAGE(V)		TOTAL FLUX(lm)	1927.9	η UP,DN(C0-180)	0.1,55.6	
NOMINAL FLUX(lm)	1927.95	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,44.3	
LAMPS INSIDE	1	η up (%)	0.2	CIBSE SHR NOM	0.50	
TEST VOLTAGE(V)		η down (%)	99.8	CIBSE SHR MAX	0.55	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

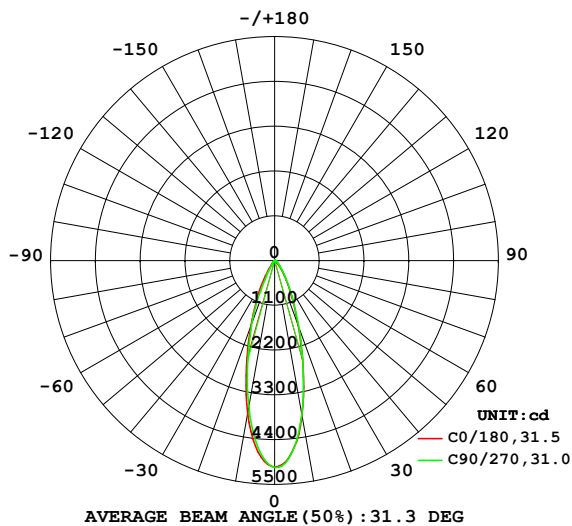

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

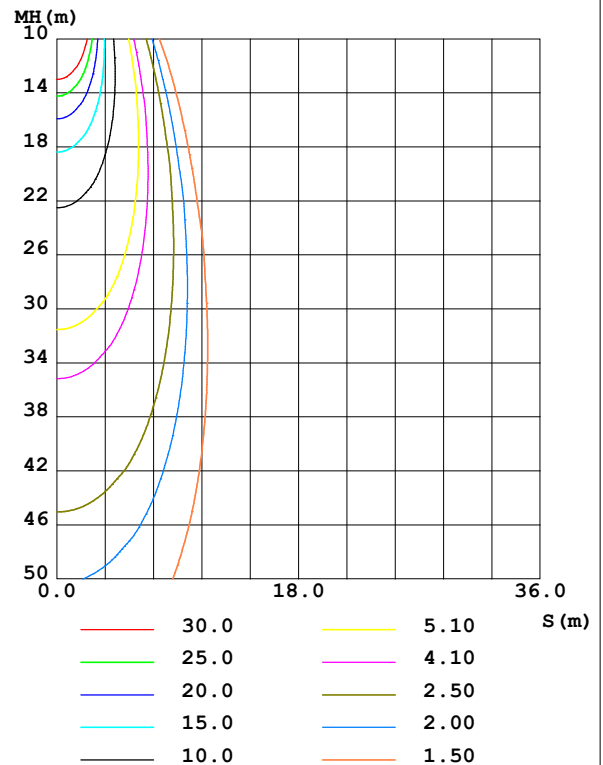

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	3878	3831	3851	3925	3820	3658	3660	3828	0- 10	421.1	421.1	21.8,21.8
20	1713	1763	1755	1785	1704	1662	1638	1725	10- 20	737.3	1158	60.1,60.1
30	618.2	669.7	649.5	663.4	527.2	330.3	301.0	477.0	20- 30	466.6	1625	84.3,84.3
40	219.3	267.8	259.1	257.6	91.57	34.85	29.39	71.24	30- 40	182.6	1808	93.8,93.8
50	66.57	122.9	119.8	84.92	17.32	0.1050	0.0007	8.965	40- 50	70.66	1878	97.4,97.4
60	17.63	57.78	59.55	25.96	1.149	0	0	0.6114	50- 60	30.13	1908	99,99
70	2.746	18.95	21.32	4.262	0.5662	0	0	0.1554	60- 70	12.06	1920	99.6,99.6
80	1.279	3.305	3.203	1.441	0	0	0	0	70- 80	3.129	1924	99.8,99.8
90	0.4629	2.081	1.825	0.7357	0	0	0	0	80- 90	0.8983	1924	99.8,99.8
100	0	1.115	0.9934	0.0789	0	0	0	0	90-100	0.4908	1925	99.8,99.8
110	0	0.2024	0.2517	0	0	0	0	0	100-110	0.1647	1925	99.9,99.9
120	0	0	0	0	0	0	0	0	110-120	0.0114	1925	99.9,99.9
130	0.0186	0	0.0000	0.0033	0.1110	0.1356	0.1284	0.1113	120-130	0.0077	1925	99.9,99.9
140	0.5094	0.4677	0.4674	0.5018	0.9412	0.9736	0.9735	0.9550	130-140	0.2534	1925	99.9,99.9
150	1.009	1.004	0.9999	0.9994	2.259	2.324	2.333	2.302	140-150	0.7412	1926	99.9,99.9
160	1.464	1.465	1.462	1.449	3.363	3.379	3.394	3.388	150-160	0.9558	1927	100,100
170	1.611	1.567	1.550	1.562	3.227	3.202	3.187	3.192	160-170	0.6906	1928	100,100
180	2.358	2.265	2.270	2.260	2.345	2.306	2.235	2.245	170-180	0.2232	1928	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 1850.6 lm

%lum = 96.0%

%lamp = 96.0%

Conical surface Flux(120deg): 1908.3 lm

%lum = 99.0%


%lamp = 99.0%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:Allen
 Test Date:2026-01-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity:45%
 Test Distance:2.900m [K=0.8783]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:12.000V I:2.6876A P:27.000W PF:0.8108 Freq:59.99Hz Lamp Flux:1927.95x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

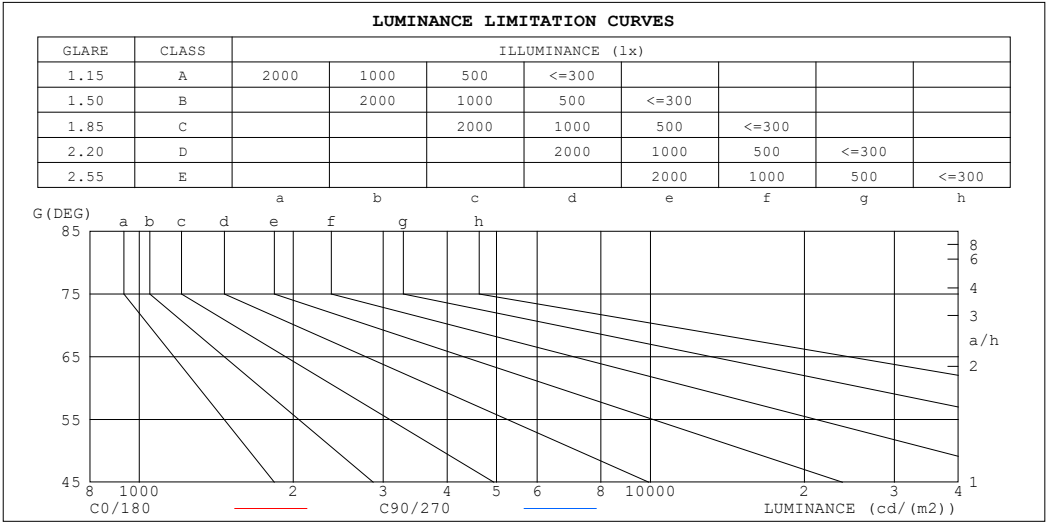

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	1018084	2457482
80	736683	1844662
75	621973	3542993
70	802882	6233611
65	1591753	9201799
60	3526430	11910255
55	6244848	14698799
50	10356982	18642934
45	17316075	24555960


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:12.000V I:2.6876A P:27.000W PF:0.8108 Freq:59.99Hz		
Lamp Flux:1927.95x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.12	1.09	1.07	1.09	1.08	1.06	1.05	1.04	1.02	1.02	1.00	.99	.98	.97	.96	.95
2.0	1.05	1.02	.99	1.03	1.00	.97	1.00	.98	.95	.97	.95	.93	.94	.93	.91	.90
3.0	.99	.95	.91	.98	.94	.91	.95	.92	.89	.93	.90	.88	.91	.88	.86	.85
4.0	.94	.89	.86	.93	.88	.85	.91	.87	.84	.89	.86	.83	.87	.84	.82	.81
5.0	.89	.84	.81	.88	.84	.80	.87	.83	.80	.85	.82	.79	.84	.81	.78	.77
6.0	.85	.80	.76	.84	.80	.76	.83	.79	.76	.82	.78	.75	.80	.77	.75	.73
7.0	.81	.76	.73	.81	.76	.72	.79	.75	.72	.78	.75	.72	.77	.74	.71	.70
8.0	.78	.73	.69	.77	.72	.69	.76	.72	.69	.75	.71	.69	.74	.71	.68	.67
9.0	.75	.70	.66	.74	.69	.66	.73	.69	.66	.72	.69	.66	.72	.68	.65	.64
10.0	.72	.67	.64	.71	.67	.63	.71	.66	.63	.70	.66	.63	.69	.66	.63	.62

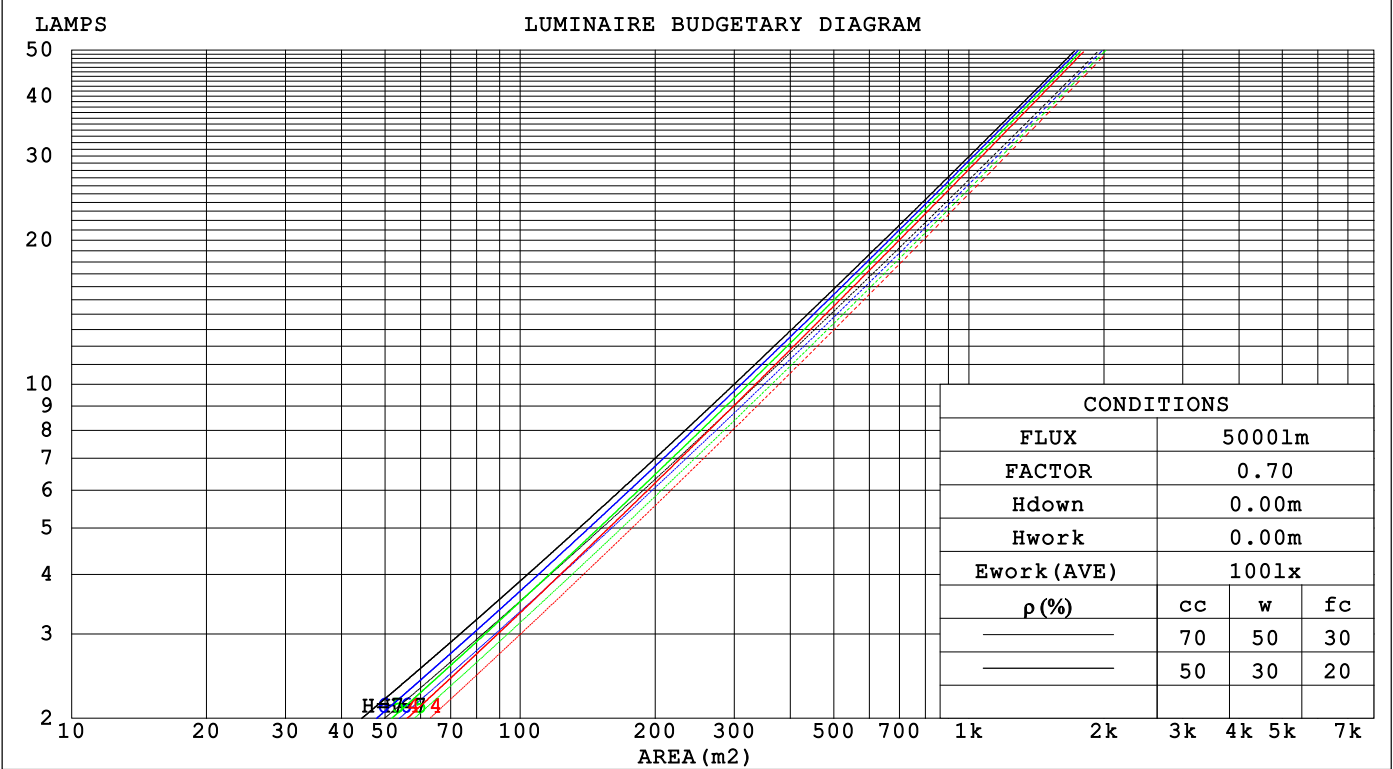

C Range: 0 - 360DEG

C Interval: 22.5DEG

Test Speed: HIGH

Temperature:25.3℃

Operators:Allen

Test Date:2026-01-27

γ Range: 0 - 180DEG

γ Interval: 1.0DEG

Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459

Humidity:45%

Test Distance:2.900m [K=0.8783]

Remarks:

WEC AND CCEC

Test:U:12.000V I:2.6876A P:27.000W PF:0.8108 Freq:59.99Hz Lamp Flux:1927.95x1 lm					
NAME:		TYPE:		WEIGHT:	
SPEC.:		DIM.:		SERIAL No.:	
MFR.:		SUR.:		Shielding Angle:	

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.160	.091	.029	.153	.087	.028	.140	.081	.026	.129	.074	.024	.118	.069	.022		
2.0	.151	.083	.025	.145	.080	.025	.135	.075	.023	.125	.070	.022	.116	.066	.021		
3.0	.142	.076	.023	.138	.074	.022	.129	.070	.021	.121	.066	.020	.113	.063	.019		
4.0	.135	.070	.021	.131	.068	.020	.123	.065	.019	.116	.062	.019	.109	.059	.018		
5.0	.128	.065	.019	.124	.064	.019	.118	.061	.018	.111	.059	.017	.106	.056	.017		
6.0	.121	.061	.017	.118	.060	.017	.112	.058	.017	.107	.056	.016	.102	.054	.016		
7.0	.115	.057	.016	.113	.056	.016	.108	.054	.016	.103	.053	.015	.099	.051	.015		
8.0	.110	.054	.015	.108	.053	.015	.103	.052	.015	.099	.050	.014	.095	.049	.014		
9.0	.105	.051	.014	.103	.050	.014	.099	.049	.014	.096	.048	.014	.092	.047	.014		
10.0	.101	.048	.013	.099	.048	.013	.096	.047	.013	.092	.046	.013	.089	.045	.013		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.171	.159	.148	.147	.136	.127	.100	.094	.088	.058	.054	.051	.018	.017	.017	
2.0	.155	.134	.116	.133	.115	.101	.091	.080	.070	.052	.046	.041	.017	.015	.013	
3.0	.141	.115	.094	.121	.099	.081	.083	.069	.057	.048	.040	.034	.015	.013	.011	
4.0	.130	.100	.077	.112	.086	.067	.077	.060	.047	.044	.035	.028	.014	.011	.009	
5.0	.121	.088	.064	.104	.076	.056	.071	.053	.039	.041	.031	.023	.013	.010	.008	
6.0	.112	.078	.054	.097	.068	.047	.067	.047	.033	.039	.028	.020	.012	.009	.007	
7.0	.105	.070	.046	.091	.061	.040	.063	.043	.028	.036	.025	.017	.012	.008	.006	
8.0	.099	.064	.040	.085	.056	.035	.059	.039	.025	.034	.023	.015	.011	.008	.005	
9.0	.094	.059	.035	.081	.051	.030	.056	.036	.022	.033	.021	.013	.011	.007	.004	
10.0	.089	.054	.031	.077	.047	.027	.053	.033	.019	.031	.020	.011	.010	.006	.004	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:12.000V I:2.6876A P:27.000W PF:0.8108 Freq:59.99Hz Lamp Flux:1927.95x1 lm										
NAME:			TYPE:			WEIGHT:				
SPEC.:			DIM.:			SERIAL No.:				
MFR.:			SUR.:			Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	39.3	40.1	39.5	40.3	40.4	41.0	41.8	41.2	42.0	42.1
3H	39.2	40.0	39.5	40.2	40.4	41.3	42.0	41.5	42.2	42.4
4H	39.1	39.8	39.4	40.1	40.3	41.3	42.0	41.6	42.2	42.4
6H	39.1	39.7	39.3	40.0	40.2	41.2	41.9	41.5	42.1	42.4
8H	39.0	39.7	39.3	39.9	40.2	41.2	41.8	41.5	42.1	42.3
12H	39.0	39.6	39.3	39.9	40.1	41.2	41.8	41.5	42.0	42.3
4H 2H	39.5	40.2	39.8	40.4	40.7	41.0	41.8	41.3	42.0	42.2
3H	39.5	40.1	39.8	40.3	40.6	41.4	42.0	41.7	42.3	42.6
4H	39.4	39.9	39.7	40.2	40.5	41.4	42.0	41.8	42.3	42.6
6H	39.3	39.8	39.7	40.1	40.5	41.4	41.9	41.7	42.2	42.5
8H	39.2	39.7	39.6	40.1	40.4	41.3	41.8	41.7	42.1	42.5
12H	39.2	39.6	39.6	40.0	40.4	41.3	41.7	41.7	42.1	42.5
8H 4H	39.3	39.8	39.7	40.1	40.5	41.3	41.8	41.7	42.1	42.5
6H	39.2	39.6	39.7	40.0	40.4	41.3	41.6	41.7	42.0	42.5
8H	39.2	39.5	39.6	39.9	40.4	41.2	41.6	41.7	42.0	42.4
12H	39.1	39.4	39.6	39.9	40.4	41.2	41.5	41.7	41.9	42.4
12H 4H	39.3	39.7	39.7	40.1	40.5	41.3	41.7	41.7	42.1	42.4
6H	39.2	39.5	39.6	39.9	40.4	41.2	41.5	41.7	42.0	42.4
8H	39.1	39.4	39.6	39.9	40.3	41.2	41.5	41.6	41.9	42.4
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 1.8 / - 3.7					+ 1.3 / - 1.9				
1.5H	+ 2.3 / - 3.3					+ 1.7 / - 1.4				
2.0H	+ 2.7 / - 5.2					+ 2.2 / - 1.6				

CIE Pub.117, 1928 lm Total Lamp Luminous Flux Correct ($8\log(F/F_0) = 2.3$)
Area: 1e-005 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:12.000V I:2.6876A P:27.000W PF:0.8108 Freq:59.99Hz Lamp Flux:1927.95x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	88	81	78	87	81	77	86	81	77	74
0.80	95	89	86	94	89	85	93	88	85	81
1.00	99	94	90	99	93	90	97	93	89	86
1.25	103	98	95	102	98	94	100	96	94	89
1.50	106	101	98	105	101	98	103	99	96	92
2.00	109	105	101	107	103	101	104	101	99	94
2.50	110	107	104	109	105	103	106	103	101	95
3.00	112	108	106	110	107	105	107	104	102	96
4.00	114	111	109	112	109	108	108	106	105	98
5.00	115	113	111	113	111	109	109	108	106	99
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3℃
 Operators: Allen
 Test Date: 2026-01-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity: 45%
 Test Distance: 2.900m [K=0.8783]
 Remarks:

ISOCANDELA DIAGRAM


Test:U:12.000V I:2.6876A P:27.000W PF:0.8108 Freq:59.99Hz Lamp Flux:1927.95x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

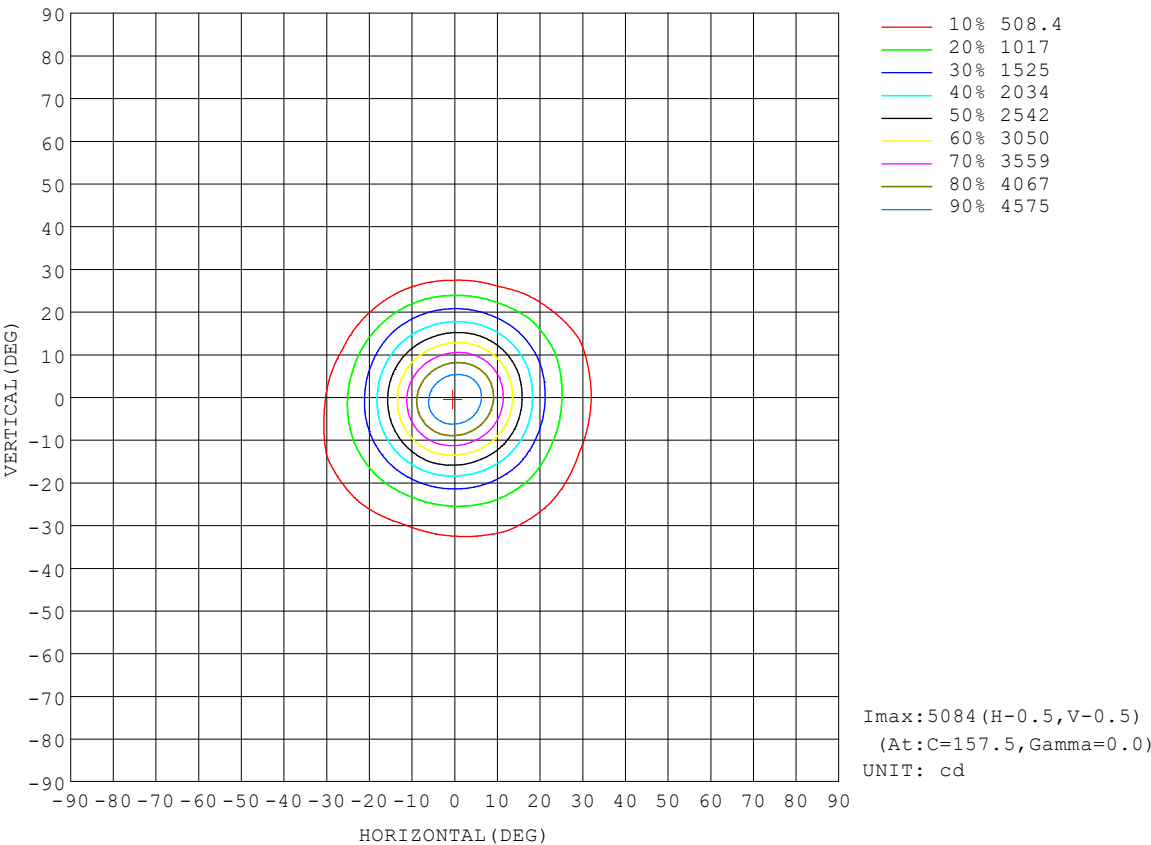

C Range: 0 - 360DEG	γ Range: 0 - 180DEG
C Interval: 22.5DEG	γ Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Temperature:25.3℃	Humidity:45%
Operators:Allen	Test Distance:2.900m [K=0.8783]
Test Date:2026-01-27	Remarks:

AAI Figure

Test:U:12.000V I:2.6876A P:27.000W PF:0.8108 Freq:59.99Hz Lamp Flux:1927.95x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

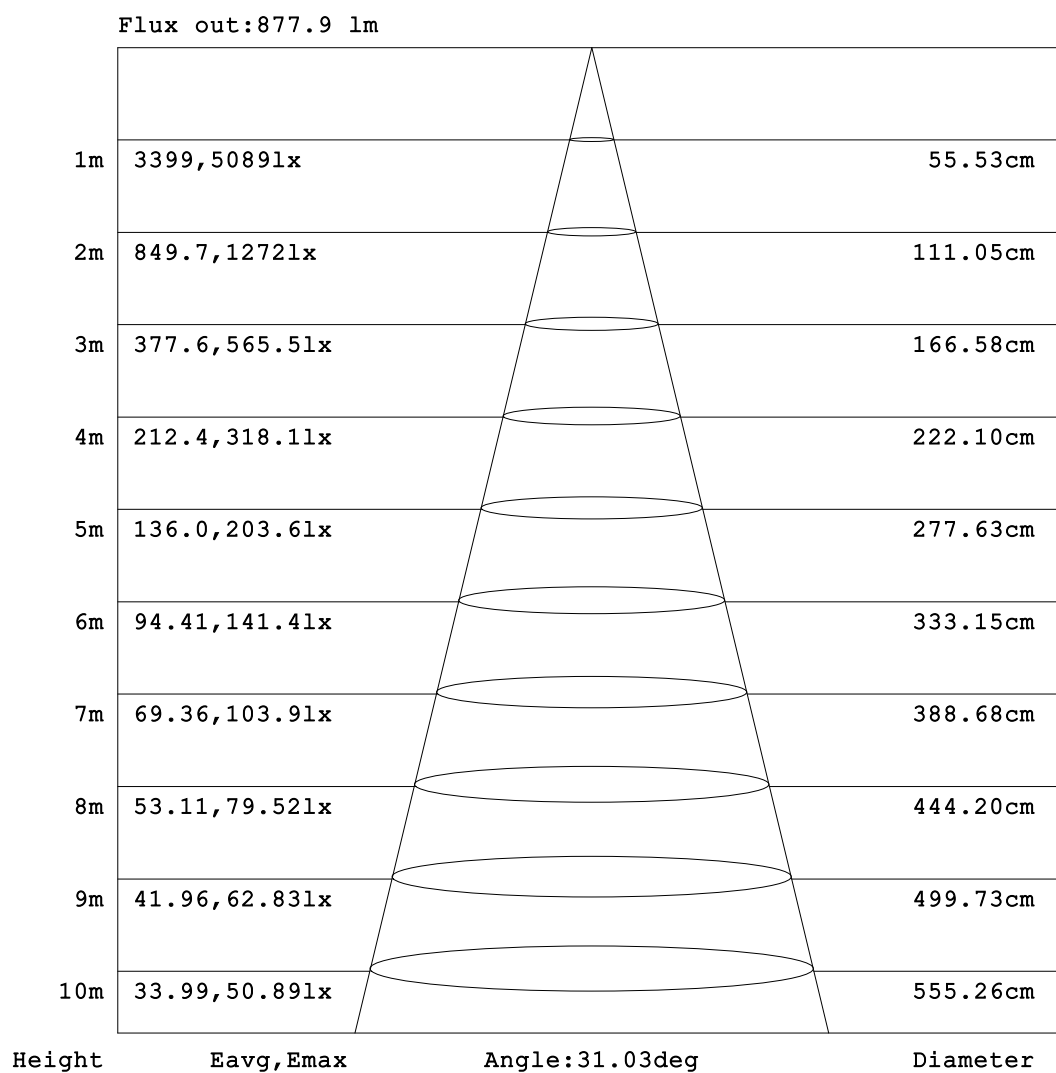


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

ISOLUX DIAGRAM


Test:U:12.000V I:2.6876A P:27.000W PF:0.8108 Freq:59.99Hz Lamp Flux:1927.95x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

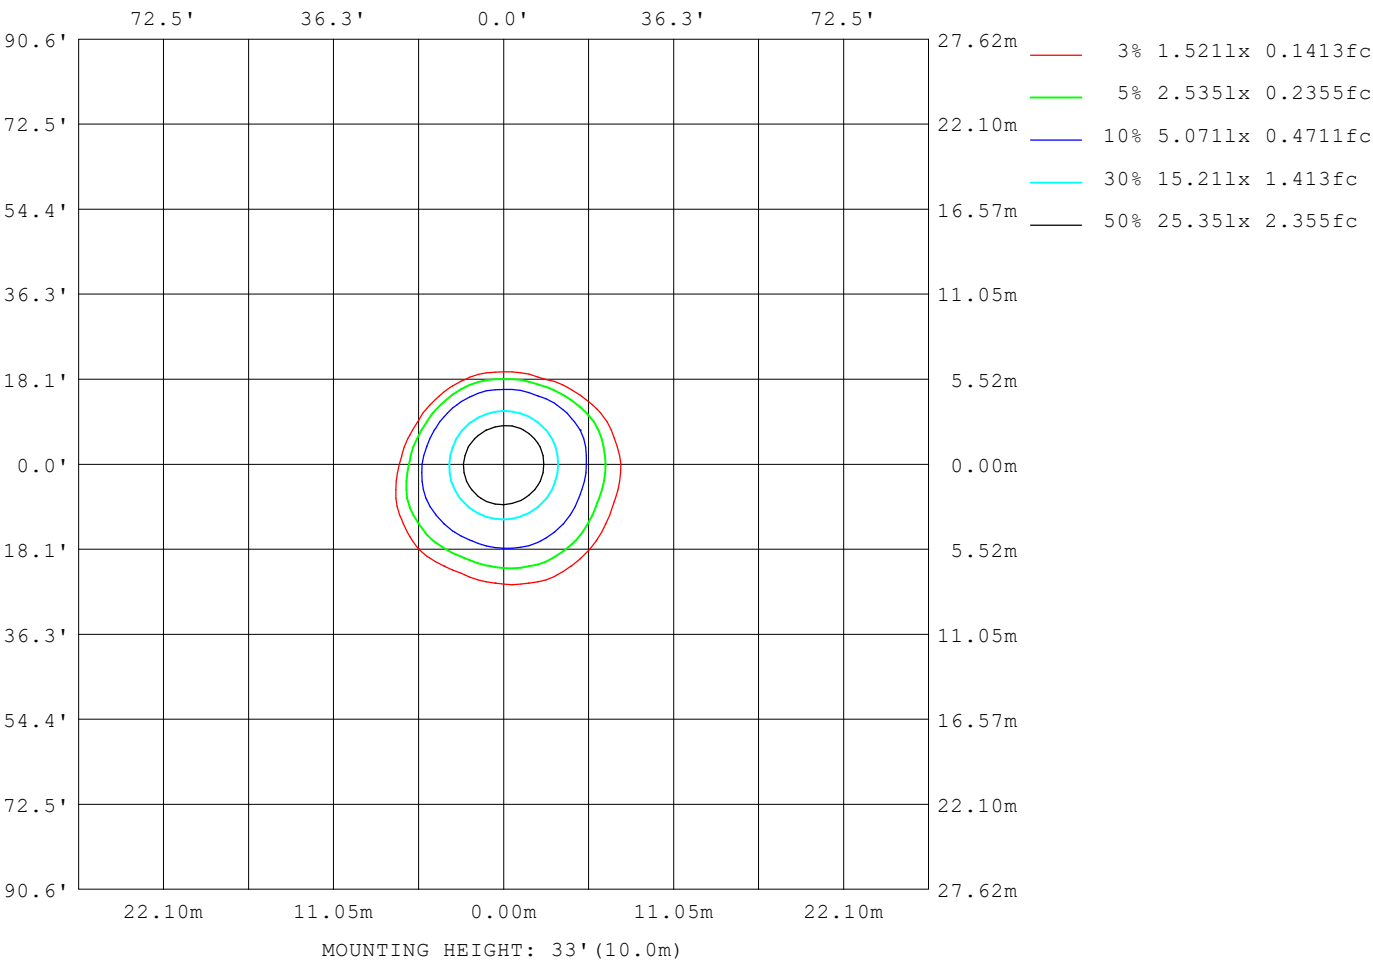

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

Planar Illuminance Curve

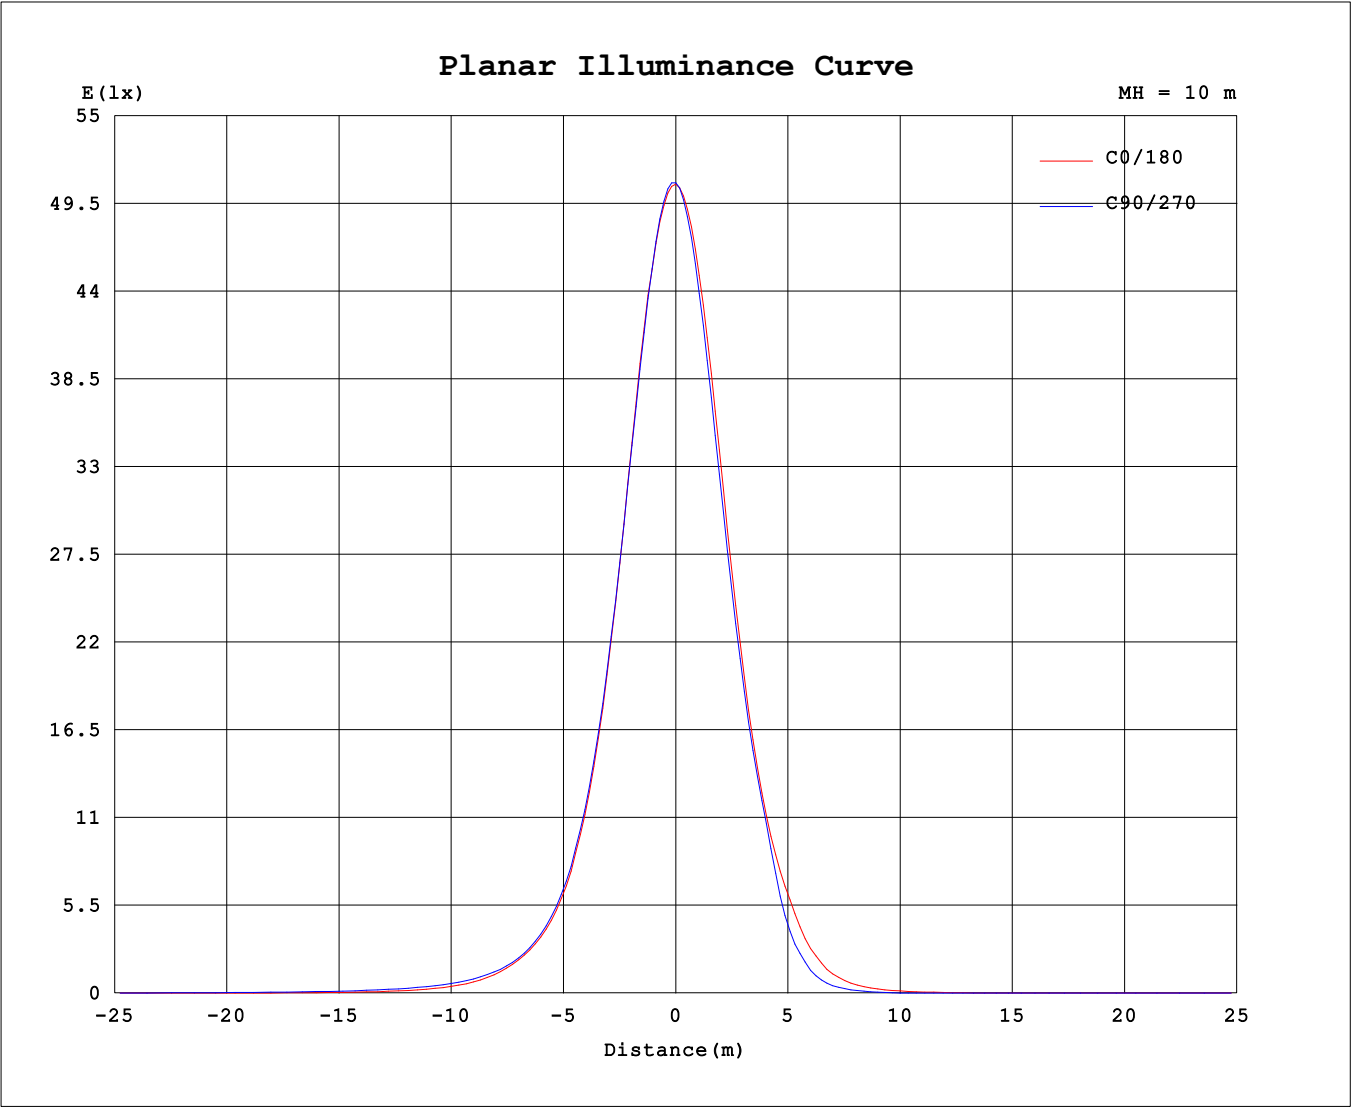

C Range: 0 - 360DEG	γ Range: 0 - 180DEG
C Interval: 22.5DEG	γ Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Temperature:25.3℃	Humidity:45%
Operators:Allen	Test Distance:2.900m [K=0.8783]
Test Date:2026-01-27	Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.000V I:2.6876A P:27.000W PF:0.8108 Freq:59.99Hz Lamp Flux:1927.95x1 lm																	
NAME:									TYPE:						WEIGHT:		
SPEC.:									DIM.:						SERIAL No.:		
MFR.:									SUR.:						Shielding Angle:		

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	5071	5073	5077	5081	5080	5083	5088	5089	5071	5073	5077	5081	5080	5083	5088	5089			
5	4755	4757	4752	4772	4766	4788	4797	4784	4718	4667	4622	4608	4626	4668	4723	4761			
10	3878	3852	3831	3817	3851	3906	3925	3898	3820	3739	3658	3624	3660	3743	3828	3875			
15	2716	2725	2723	2702	2732	2797	2787	2746	2696	2638	2578	2541	2571	2646	2714	2745			
20	1713	1724	1763	1752	1755	1779	1785	1761	1704	1664	1662	1638	1638	1667	1725	1751			
25	1028	1026	1090	1098	1069	1052	1087	1085	1027	939	868	840	817	871	1039	1076			
30	618	604	670	689	649	615	663	673	527	380	330	321	301	329	477	653			
35	381	367	417	439	403	370	410	376	221	130	101	92.7	85.9	99.8	190	335			
40	219	236	268	286	259	234	258	182	91.6	49.6	34.9	30.2	29.4	37.6	71.2	154			
45	122	158	178	192	174	157	148	90.3	41.3	17.6	4.78	3.41	3.70	9.75	31.1	69.5			
50	66.6	101	123	132	120	108	84.9	44.6	17.3	2.79	0.10	0.00	0.00	1.25	8.96	33.4			
55	35.8	64.3	85.6	90.7	84.3	71.6	48.3	21.7	4.21	0.42	0.03	0.00	0.00	0.17	1.94	13.4			
60	17.6	38.5	57.8	63.2	59.6	45.5	26.0	8.20	1.15	0.31	0.00	0.00	0.00	0.09	0.61	3.67			
65	6.73	20.7	35.8	43.1	38.9	26.0	12.0	2.84	0.84	0.10	0.00	0.00	0.00	0.00	0.44	1.34			
70	2.75	9.16	18.9	26.1	21.3	12.5	4.26	1.39	0.57	0.00	0.00	0.00	0.00	0.00	0.16	1.03			
75	1.61	3.65	8.16	11.3	9.17	4.63	1.83	1.09	0.17	0.00	0.00	0.00	0.00	0.00	0.00	0.72			
80	1.28	2.17	3.30	3.84	3.20	2.07	1.44	0.72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.34			
85	0.89	1.81	2.45	2.47	2.14	1.69	1.10	0.33	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
90	0.46	1.39	2.08	2.17	1.82	1.34	0.74	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
95	0.09	0.93	1.62	1.75	1.42	0.95	0.39	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
100	0.00	0.48	1.12	1.26	0.99	0.60	0.08	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
105	0.00	0.11	0.62	0.79	0.60	0.27	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
110	0.00	0.00	0.20	0.36	0.25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
115	0.00	0.00	0.00	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
130	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.11	0.13	0.14	0.13	0.13	0.13	0.11	0.09			
135	0.20	0.18	0.16	0.15	0.15	0.17	0.19	0.21	0.43	0.45	0.45	0.45	0.45	0.45	0.43	0.40			
140	0.51	0.49	0.47	0.46	0.47	0.49	0.50	0.51	0.94	0.97	0.97	0.97	0.97	0.98	0.96	0.91			
145	0.80	0.80	0.78	0.77	0.78	0.79	0.80	0.80	1.59	1.62	1.64	1.64	1.64	1.65	1.62	1.57			
150	1.01	1.02	1.00	0.99	1.00	1.00	1.00	0.99	2.26	2.29	2.32	2.33	2.33	2.34	2.30	2.24			
155	1.28	1.29	1.28	1.28	1.28	1.28	1.27	1.27	2.93	2.93	2.97	2.98	2.99	2.99	2.96	2.91			
160	1.46	1.47	1.46	1.46	1.46	1.46	1.45	1.45	3.36	3.36	3.38	3.38	3.39	3.40	3.39	3.34			
165	1.53	1.52	1.51	1.51	1.50	1.49	1.48	1.50	3.40	3.40	3.39	3.39	3.39	3.39	3.39	3.36			
170	1.61	1.59	1.57	1.55	1.55	1.55	1.56	1.59	3.23	3.23	3.20	3.19	3.19	3.19	3.19	3.17			
175	1.85	1.83	1.80	1.78	1.78	1.79	1.80	1.82	2.88	2.88	2.84	2.81	2.79	2.78	2.80	2.79			
180	2.36	2.32	2.26	2.23	2.27	2.24	2.26	2.27	2.35	2.35	2.31	2.26	2.24	2.26	2.25	2.26			

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks: