


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:12.000V I:1.3600A P:13.800W PF:0.7530 Freq:60.01Hz Lamp Flux:701.605x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 50.84 lm/W
MODEL	SMART FIXTURE 3000K	Imax (cd)	629.4	S/MH(C0/180)	0.92	
NOMINAL POWER(W)		LOR(%)	100.0	S/MH(C90/270)	0.84	
RATED VOLTAGE(V)		TOTAL FLUX(lm)	701.61	η UP,DN(C0-180)	0.1,62.3	
NOMINAL FLUX(lm)	701.605	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,37.5	
LAMPS INSIDE	1	η up (%)	0.1	CIBSE SHR NOM	0.75	
TEST VOLTAGE(V)		η down (%)	99.9	CIBSE SHR MAX	0.95	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

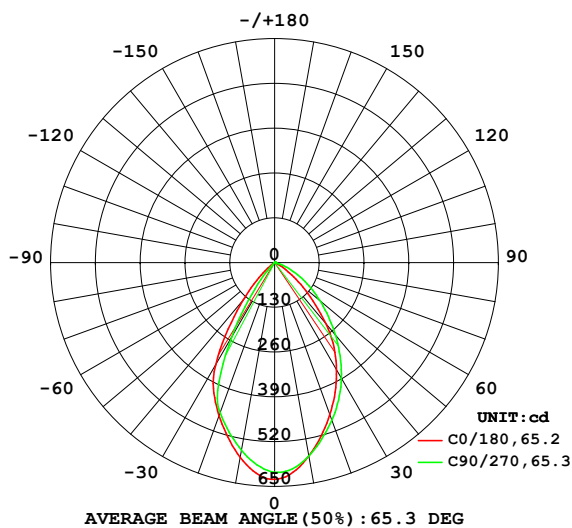

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

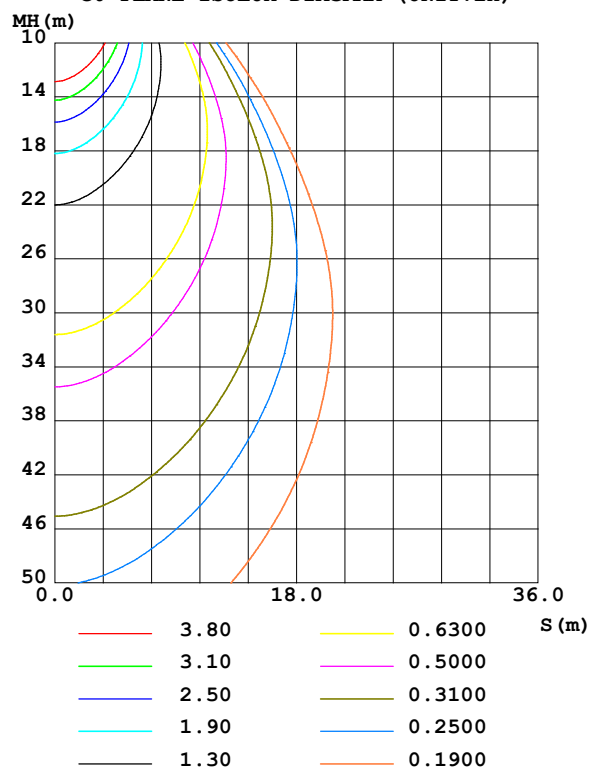

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	570.8	568.6	570.5	562.8	574.2	556.9	553.5	551.9	0- 10	55.90	55.90	7.97,7.97
20	469.7	478.8	486.6	474.8	472.5	460.2	463.9	459.0	10- 20	145.2	201.1	28.7,28.7
30	359.3	373.4	387.8	367.5	343.2	252.7	250.3	307.9	20- 30	186.8	387.9	55.3,55.3
40	231.4	261.4	275.0	256.1	144.1	56.03	50.76	113.9	30- 40	154.5	542.4	77.3,77.3
50	99.44	163.7	171.5	126.6	31.35	0.2106	0.0480	14.01	40- 50	91.24	633.6	90.3,90.3
60	23.97	85.55	91.46	39.08	1.454	0	0	0.8031	50- 60	45.16	678.8	96.7,96.7
70	2.628	25.55	29.20	4.600	0.7365	0	0	0.2249	60- 70	17.32	696.1	99.2,99.2
80	1.291	3.097	3.112	1.580	0	0	0	0	70- 80	3.609	699.7	99.7,99.7
90	0.3829	1.953	1.779	0.7119	0	0	0	0	80- 90	0.8894	700.6	99.9,99.9
100	0	0.8626	0.7945	0.0319	0	0	0	0	90-100	0.4313	701.0	99.9,99.9
110	0	0.0675	0.1169	0	0	0	0	0	100-110	0.1113	701.2	99.9,99.9
120	0	0	0	0	0	0	0	0	110-120	0.0032	701.2	99.9,99.9
130	0	0	0	0	0	0.0001	0.0001	0	120-130	0.0000	701.2	99.9,99.9
140	0.0206	0	0	0.0073	0.1647	0.1853	0.1893	0.1675	130-140	0.0280	701.2	99.9,99.9
150	0.1386	0.0940	0.0871	0.1185	0.3900	0.3972	0.4020	0.3901	140-150	0.1057	701.3	100,100
160	0.2716	0.2333	0.2239	0.2484	0.5630	0.5514	0.5435	0.5430	150-160	0.1506	701.4	100,100
170	0.3849	0.3411	0.3319	0.3543	0.5946	0.5755	0.5551	0.5560	160-170	0.1199	701.6	100,100
180	0.5467	0.5141	0.5091	0.5043	0.5444	0.5267	0.4978	0.4969	170-180	0.0464	701.6	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 595.34 lm

%lum = 84.9%

%lamp = 84.9%

Conical surface Flux(120deg): 678.79 lm

%lum = 96.7%


%lamp = 96.7%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:Allen
 Test Date:2026-01-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity:45%
 Test Distance:2.900m [K=0.8783]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:12.000V I:1.3600A P:13.800W PF:0.7530 Freq:60.01Hz Lamp Flux:701.605x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

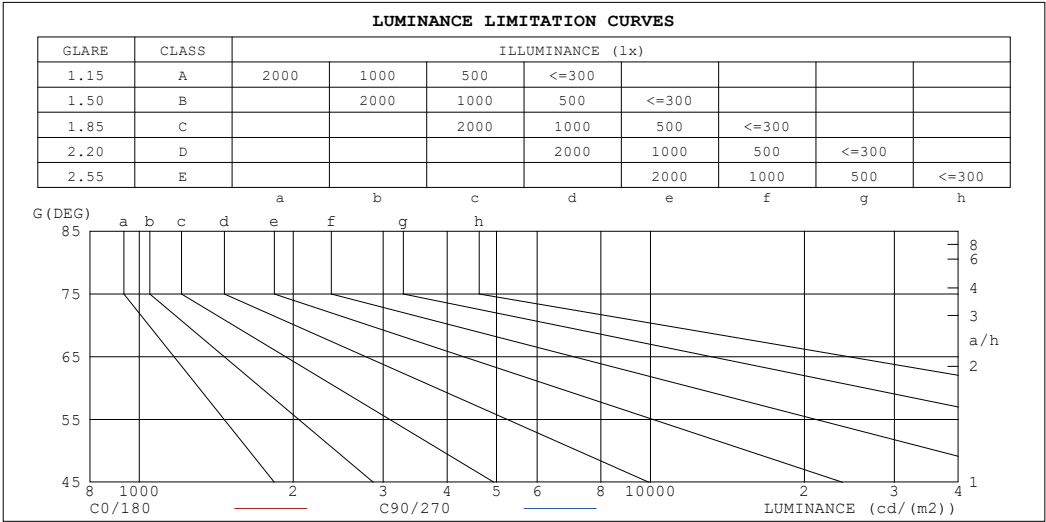

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	962326	2475558
80	743345	1792410
75	649814	4234395
70	768378	8538330
65	1763965	13547816
60	4794414	18292084
55	9432418	22401137
50	15469723	26683299
45	22344655	31236648


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:12.000V I:1.3600A P:13.800W PF:0.7530 Freq:60.01Hz Lamp Flux:701.605x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0														
p _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
p _{fc}	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Coefficients of Utilization(CU)														
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00														
1.0	1.09	1.06	1.04	1.07	1.05	1.02	1.03	1.01	.99	.99	.98	.96	.96	.94	.93	.91														
2.0	1.00	.95	.91	.98	.94	.90	.95	.91	.88	.92	.89	.86	.89	.87	.85	.83														
3.0	.92	.86	.81	.90	.85	.81	.88	.83	.79	.85	.81	.78	.83	.80	.77	.75														
4.0	.84	.78	.73	.83	.77	.73	.81	.76	.72	.79	.74	.71	.77	.73	.70	.68														
5.0	.78	.71	.66	.77	.71	.66	.75	.69	.65	.73	.68	.65	.72	.67	.64	.62														
6.0	.72	.65	.60	.71	.65	.60	.70	.64	.60	.68	.63	.59	.67	.62	.59	.57														
7.0	.67	.60	.55	.66	.60	.55	.65	.59	.55	.64	.58	.55	.62	.58	.54	.53														
8.0	.63	.56	.51	.62	.55	.51	.61	.55	.51	.60	.54	.50	.59	.54	.50	.49														
9.0	.58	.52	.47	.58	.52	.47	.57	.51	.47	.56	.51	.47	.55	.50	.47	.45														
10.0	.55	.48	.44	.54	.48	.44	.53	.48	.44	.53	.47	.44	.52	.47	.43	.42														

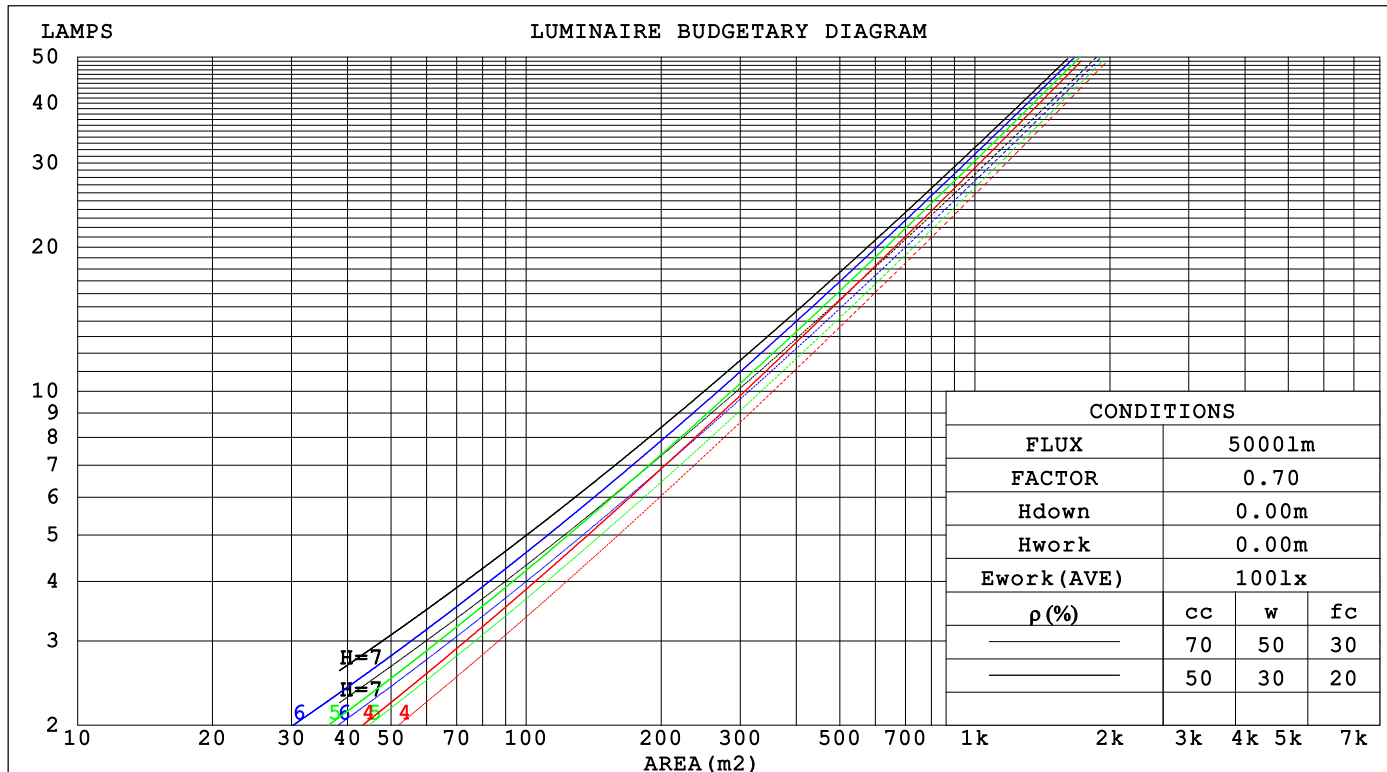

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: Allen
Test Date: 2026-01-27

```

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

```

WEC AND CCEC

Test:U:12.000V I:1.3600A P:13.800W PF:0.7530 Freq:60.01Hz Lamp Flux:701.605x1 lm					
NAME:		TYPE:		WEIGHT:	
SPEC.:		DIM.:		SERIAL No.:	
MFR.:		SUR.:		Shielding Angle:	

pcc	80%			70%			50%			30%			10%			0														
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
pfc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Wall Exitance Coefficients(WEC)														
0.0																														
1.0	.205	.117	.037	.198	.113	.036	.186	.106	.034	.174	.100	.032	.163	.094	.030															
2.0	.199	.109	.033	.193	.106	.033	.182	.101	.031	.172	.097	.030	.163	.092	.029															
3.0	.190	.101	.030	.185	.099	.030	.176	.095	.029	.167	.091	.028	.159	.088	.027															
4.0	.181	.094	.028	.176	.092	.027	.168	.089	.027	.161	.086	.026	.153	.083	.025															
5.0	.172	.087	.025	.168	.086	.025	.161	.084	.025	.154	.081	.024	.147	.079	.024															
6.0	.163	.082	.023	.160	.081	.023	.153	.078	.023	.147	.076	.022	.142	.074	.022															
7.0	.155	.077	.022	.152	.076	.022	.146	.074	.021	.141	.072	.021	.136	.070	.021															
8.0	.147	.072	.020	.145	.071	.020	.139	.070	.020	.135	.068	.020	.130	.067	.019															
9.0	.140	.068	.019	.138	.067	.019	.133	.066	.019	.129	.065	.018	.125	.063	.018															
10.0	.134	.064	.018	.132	.064	.018	.127	.062	.018	.124	.061	.017	.120	.060	.017															

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.174	.158	.144	.149	.136	.124	.102	.093	.086	.059	.054	.050	.019	.017	.016	
2.0	.161	.133	.110	.138	.115	.095	.094	.079	.067	.054	.046	.039	.017	.015	.013	
3.0	.150	.115	.087	.129	.099	.075	.088	.069	.053	.051	.040	.031	.016	.013	.010	
4.0	.141	.101	.070	.121	.087	.060	.083	.061	.043	.048	.035	.025	.015	.012	.008	
5.0	.133	.089	.057	.114	.077	.050	.079	.054	.035	.046	.032	.021	.015	.010	.007	
6.0	.126	.080	.048	.108	.070	.041	.075	.049	.029	.043	.029	.017	.014	.009	.006	
7.0	.120	.073	.040	.103	.063	.035	.071	.044	.025	.041	.026	.015	.013	.009	.005	
8.0	.114	.067	.035	.098	.058	.030	.068	.041	.021	.040	.024	.013	.013	.008	.004	
9.0	.109	.062	.030	.094	.054	.026	.065	.038	.019	.038	.022	.011	.012	.007	.004	
10.0	.104	.058	.027	.090	.050	.023	.062	.035	.017	.036	.021	.010	.012	.007	.003	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:12.000V I:1.3600A P:13.800W PF:0.7530 Freq:60.01Hz Lamp Flux:701.605x1 lm										
NAME:			TYPE:			WEIGHT:				
SPEC.:			DIM.:			SERIAL No.:				
MFR.:			SUR.:			Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	47.6	48.7	47.8	48.9	49.1	49.0	50.1	49.2	50.3	50.4
3H	47.5	48.5	47.8	48.7	48.9	49.4	50.4	49.6	50.6	50.8
4H	47.4	48.4	47.7	48.6	48.8	49.3	50.3	49.6	50.5	50.8
6H	47.3	48.2	47.6	48.5	48.7	49.3	50.2	49.6	50.4	50.7
8H	47.3	48.1	47.6	48.4	48.7	49.2	50.1	49.5	50.4	50.6
12H	47.2	48.0	47.5	48.3	48.6	49.2	50.0	49.5	50.3	50.6
4H 2H	47.9	48.9	48.2	49.1	49.3	49.1	50.1	49.4	50.3	50.5
3H	47.9	48.7	48.2	49.0	49.3	49.6	50.4	49.9	50.7	51.0
4H	47.8	48.5	48.1	48.8	49.2	49.6	50.3	49.9	50.6	51.0
6H	47.7	48.4	48.1	48.7	49.0	49.5	50.2	49.9	50.5	50.9
8H	47.6	48.3	48.0	48.6	49.0	49.5	50.1	49.9	50.5	50.8
12H	47.6	48.2	48.0	48.5	48.9	49.4	50.0	49.9	50.4	50.8
8H 4H	47.7	48.3	48.1	48.7	49.1	49.5	50.1	49.9	50.4	50.8
6H	47.6	48.1	48.1	48.5	49.0	49.4	49.9	49.9	50.3	50.7
8H	47.6	48.0	48.0	48.5	48.9	49.4	49.8	49.8	50.2	50.7
12H	47.6	47.9	48.0	48.4	48.9	49.4	49.7	49.8	50.2	50.6
12H 4H	47.7	48.2	48.1	48.6	49.0	49.4	50.0	49.8	50.4	50.8
6H	47.6	48.0	48.0	48.5	48.9	49.4	49.8	49.8	50.2	50.7
8H	47.6	47.9	48.0	48.4	48.9	49.3	49.7	49.8	50.2	50.6
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 1.4 / - 2.5					+ 0.7 / - 0.9				
1.5H	+ 0.7 / - 2.4					+ 0.3 / - 0.4				
2.0H	+ 2.3 / - 6.0					+ 1.4 / - 1.6				

CIE Pub.117, 701.6 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -1.2)
Area: 1e-005 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:12.000V I:1.3600A P:13.800W PF:0.7530 Freq:60.01Hz Lamp Flux:701.605x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	77	69	64	76	69	64	76	68	64	59
0.80	86	78	73	85	78	73	84	77	73	68
1.00	92	85	80	91	85	80	90	85	80	75
1.25	98	91	86	96	90	86	94	89	85	80
1.50	101	95	91	100	94	90	97	93	89	84
2.00	105	100	96	104	99	95	101	97	94	88
2.50	107	103	99	106	101	98	102	99	96	90
3.00	109	105	102	108	104	101	104	101	99	92
4.00	112	108	106	110	107	104	106	103	101	94
5.00	113	110	108	111	109	106	107	105	103	95
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: Allen
 Test Date: 2026-01-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity: 45%
 Test Distance: 2.900m [K=0.8783]
 Remarks:

ISOCANDELA DIAGRAM


Test:U:12.000V I:1.3600A P:13.800W PF:0.7530 Freq:60.01Hz Lamp Flux:701.605x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

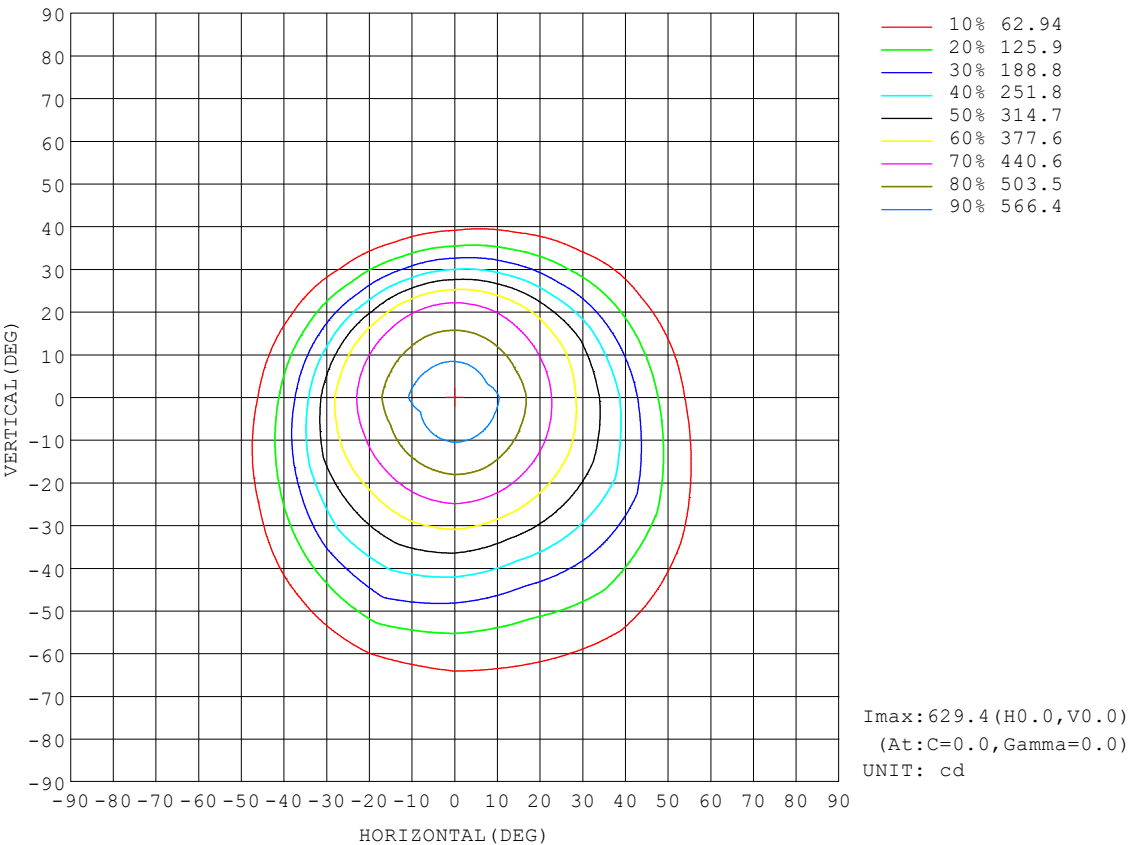

C Range: 0 - 360DEG	γ Range: 0 - 180DEG
C Interval: 22.5DEG	γ Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Temperature:25.3℃	Humidity:45%
Operators:Allen	Test Distance:2.900m [K=0.8783]
Test Date:2026-01-27	Remarks:

AAI Figure

Test:U:12.000V I:1.3600A P:13.800W PF:0.7530 Freq:60.01Hz Lamp Flux:701.605x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

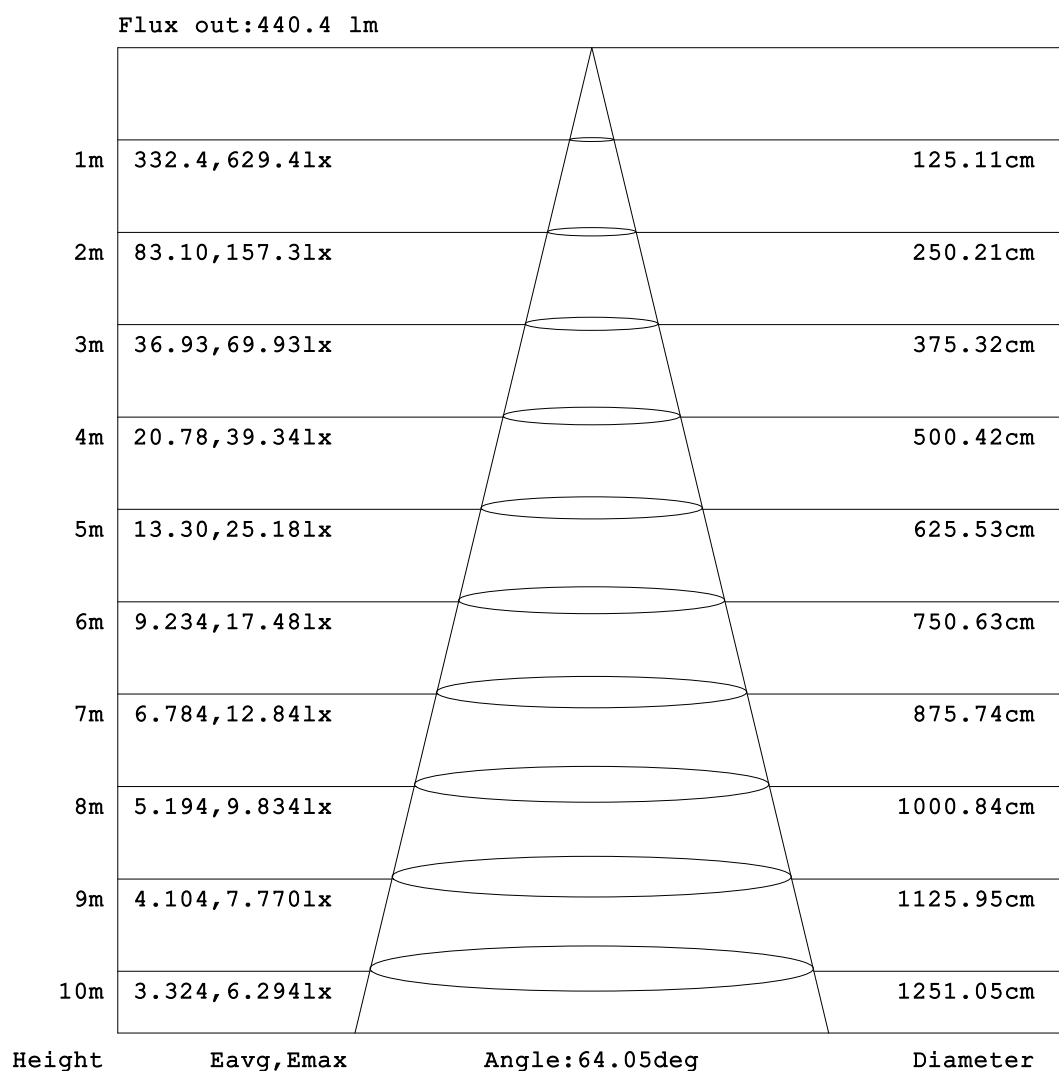


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3℃
 Operators: Allen
 Test Date: 2026-01-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity: 45%
 Test Distance: 2.900m [K=0.8783]
 Remarks:


ISOLUX DIAGRAM

Test:U:12.000V I:1.3600A P:13.800W PF:0.7530 Freq:60.01Hz Lamp Flux:701.605x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

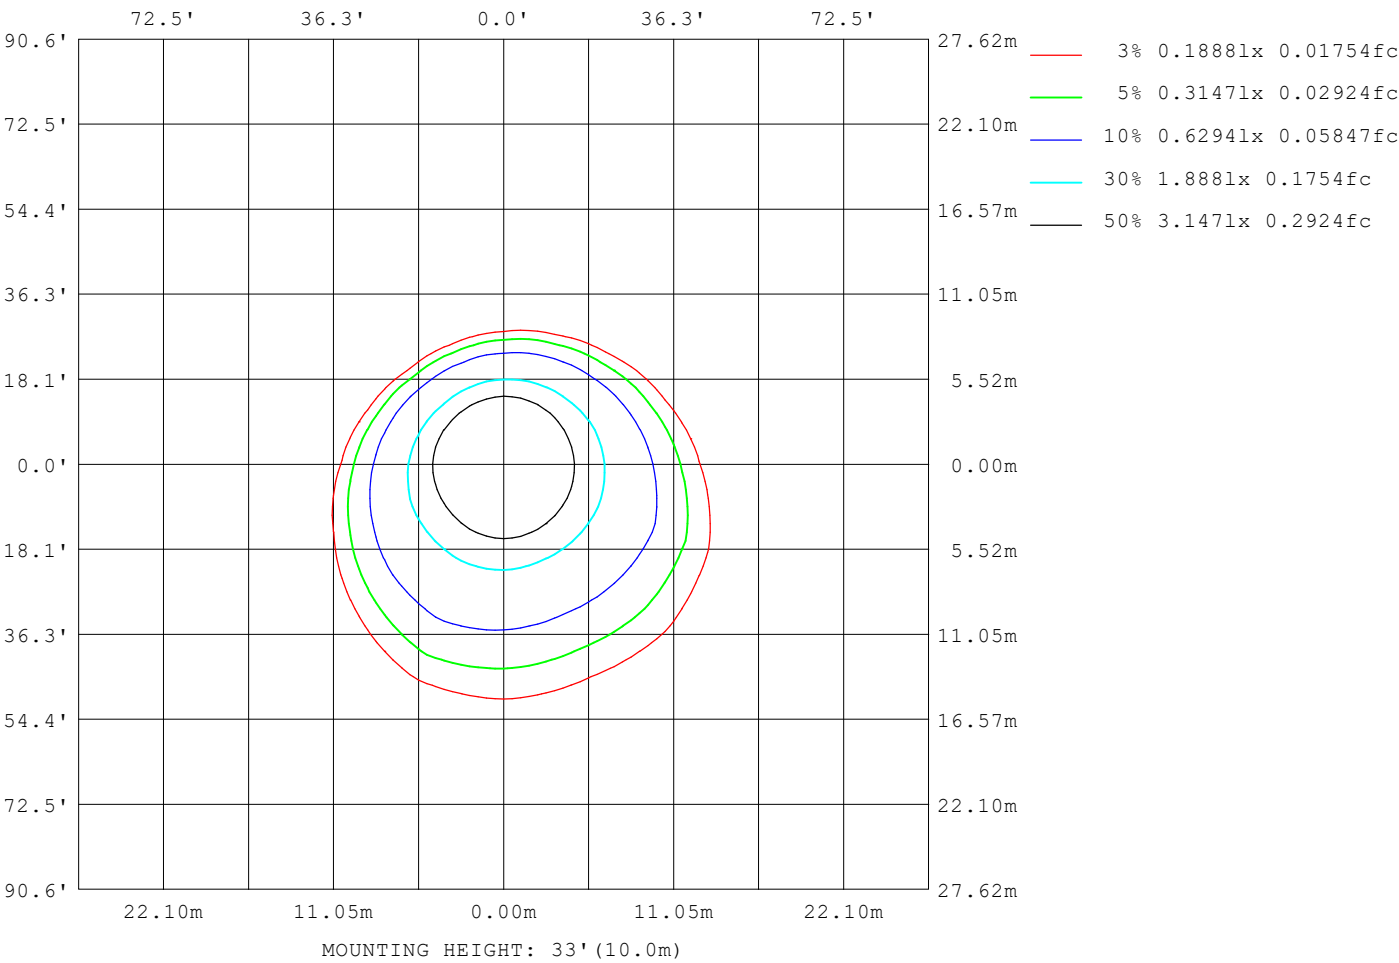

C Range: 0 - 360DEG	γ Range: 0 - 180DEG
C Interval: 22.5DEG	γ Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Temperature:25.3℃	Humidity:45%
Operators:Allen	Test Distance:2.900m [K=0.8783]
Test Date:2026-01-27	Remarks:

Planar Illuminance Curve

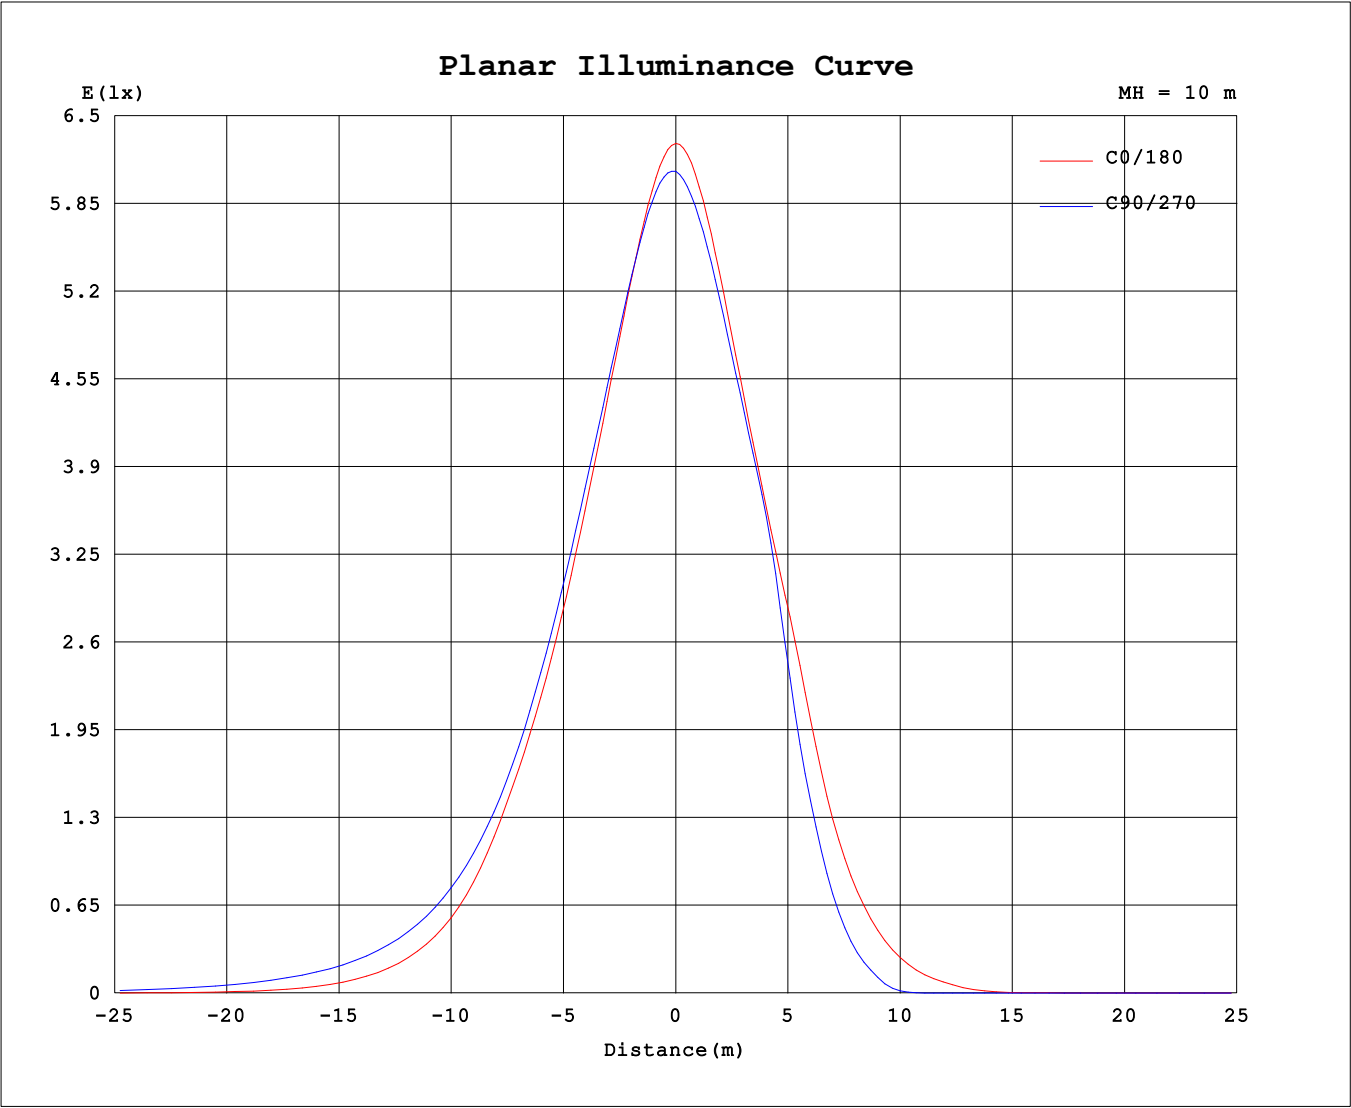

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.000V I:1.3600A P:13.800W PF:0.7530 Freq:60.01Hz Lamp Flux:701.605x1 lm																	
NAME:									TYPE:						WEIGHT:		
SPEC.:									DIM.:						SERIAL No.:		
MFR.:									SUR.:						Shielding Angle:		

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	629	621	616	612	609	606	603	601	629	621	616	612	609	606	603	601			
5	611	606	604	602	601	598	594	589	614	603	596	592	590	588	587	587			
10	571	568	569	570	570	568	563	557	574	564	557	554	553	552	552	553			
15	522	521	525	529	530	527	521	515	524	514	510	510	510	509	508	509			
20	470	473	479	485	487	482	475	469	473	464	460	463	464	462	459	462			
25	416	424	428	435	440	434	423	418	418	406	382	379	383	394	404	409			
30	359	372	373	378	388	383	368	363	343	294	253	241	250	272	308	351			
35	302	320	317	318	332	331	312	291	235	183	139	125	134	161	201	261			
40	231	267	261	259	275	279	256	202	144	92.2	56.0	45.5	50.8	73.7	114	172			
45	158	215	210	204	221	229	190	129	74.7	34.9	7.11	4.32	4.75	18.2	52.0	101			
50	99.4	158	164	158	172	180	127	71.5	31.4	3.29	0.21	0.00	0.05	1.25	14.0	49.3			
55	54.1	105	124	118	128	126	76.4	32.8	5.58	0.60	0.09	0.00	0.00	0.28	1.94	18.6			
60	24.0	63.0	85.5	84.6	91.5	78.4	39.1	10.9	1.45	0.47	0.00	0.00	0.00	0.17	0.80	3.69			
65	7.45	31.3	51.7	56.5	57.3	42.6	15.9	3.10	1.06	0.21	0.00	0.00	0.00	0.00	0.59	1.58			
70	2.63	12.1	25.5	31.4	29.2	17.7	4.60	1.67	0.74	0.00	0.00	0.00	0.00	0.00	0.22	1.22			
75	1.68	3.38	9.11	11.6	11.0	5.12	2.06	1.28	0.26	0.00	0.00	0.00	0.00	0.00	0.00	0.83			
80	1.29	2.14	3.10	3.58	3.11	2.16	1.58	0.83	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.36			
85	0.84	1.74	2.39	2.46	2.16	1.73	1.15	0.36	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
90	0.38	1.26	1.95	2.10	1.78	1.30	0.71	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
95	0.02	0.76	1.39	1.56	1.29	0.84	0.33	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
100	0.00	0.33	0.86	1.00	0.79	0.47	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
105	0.00	0.01	0.40	0.54	0.41	0.16	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
110	0.00	0.00	0.07	0.18	0.12	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.06	0.07	0.08	0.08	0.08	0.07	0.06	0.04			
140	0.02	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.16	0.18	0.19	0.19	0.19	0.18	0.17	0.14			
145	0.08	0.06	0.04	0.03	0.04	0.05	0.07	0.09	0.28	0.29	0.30	0.30	0.30	0.30	0.28	0.26			
150	0.14	0.11	0.09	0.08	0.09	0.10	0.12	0.14	0.39	0.39	0.40	0.40	0.40	0.40	0.39	0.37			
155	0.21	0.19	0.17	0.16	0.16	0.17	0.19	0.21	0.49	0.49	0.48	0.49	0.49	0.49	0.48	0.47			
160	0.27	0.25	0.23	0.22	0.22	0.23	0.25	0.26	0.56	0.56	0.55	0.54	0.54	0.54	0.54	0.53			
165	0.32	0.30	0.28	0.26	0.27	0.28	0.29	0.31	0.59	0.58	0.57	0.56	0.55	0.55	0.55	0.55			
170	0.38	0.37	0.34	0.33	0.33	0.34	0.35	0.37	0.59	0.59	0.58	0.56	0.56	0.55	0.56	0.55			
175	0.47	0.46	0.44	0.43	0.43	0.43	0.44	0.45	0.59	0.58	0.57	0.55	0.55	0.54	0.55	0.54			
180	0.55	0.53	0.51	0.50	0.51	0.50	0.50	0.51	0.54	0.54	0.53	0.51	0.50	0.50	0.50	0.50			

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks: