
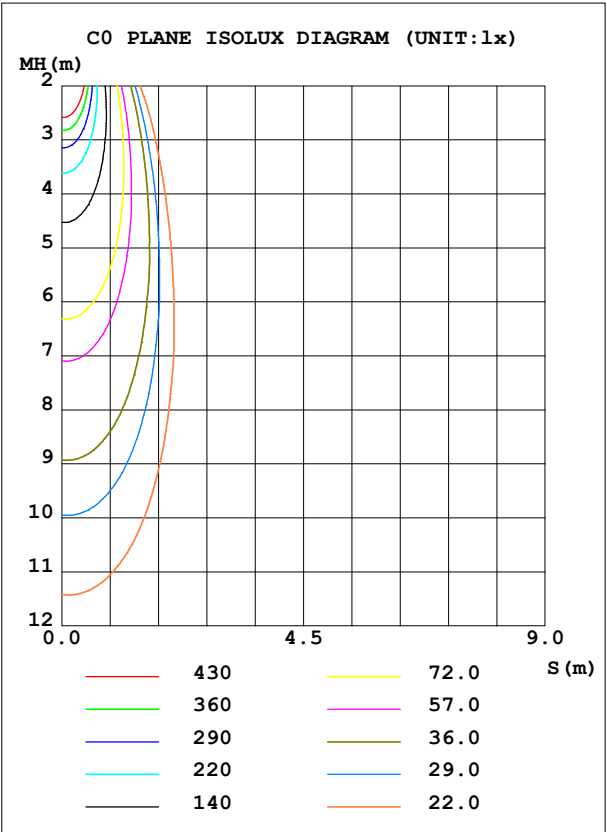


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.000V I:1.4651A P:14.400W PF:0.7908 Freq:60.02Hz Lamp Flux:953.468x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 66.21 lm/W
MODEL	SMART FIXTURE 2700K	Imax (cd)	2990	S/MH(C0/180)	0.45	
NOMINAL POWER(W)		LOR(%)	100.0	S/MH(C90/270)	0.58	
RATED VOLTAGE(V)		TOTAL FLUX(lm)	953.47	η UP,DN(C0-180)	0.1,45.5	
NOMINAL FLUX(lm)	953.468	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,54.4	
LAMPS INSIDE	1	η up (%)	0.1	CIBSE SHR NOM	0.50	
TEST VOLTAGE(V)		η down (%)	99.9	CIBSE SHR MAX	0.50	

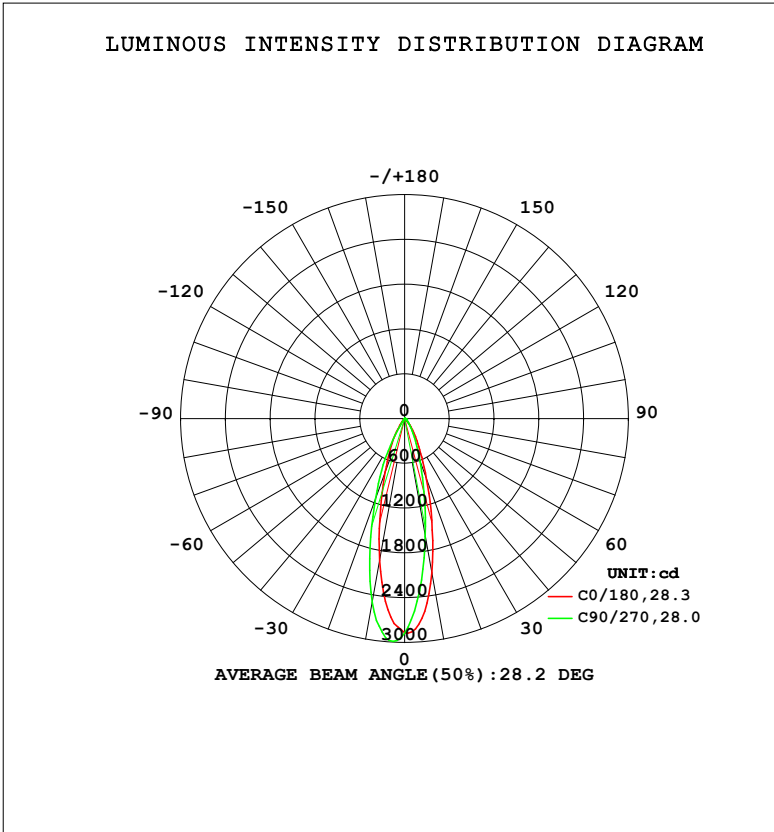

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	2102	1763	1604	1644	1932	2281	2502	2458	0- 10	231.7	231.7	24.3,24.3
20	864.6	641.5	612.1	579.8	764.8	949.1	1147	1074	10- 20	374.5	606.2	63.6,63.6
30	312.4	212.6	231.2	192.0	269.4	183.8	250.0	286.0	20- 30	222.7	828.9	86.9,86.9
40	93.03	86.86	98.03	77.32	56.48	22.76	25.03	34.18	30- 40	78.24	907.1	95.1,95.1
50	23.84	42.51	45.84	32.64	13.42	0.9907	0.4305	4.324	40- 50	28.15	935.3	98.1,98.1
60	5.280	17.93	22.08	12.12	1.458	0	0	0.0759	50- 60	11.48	946.8	99.3,99.3
70	0.6032	4.693	7.487	2.225	0.3896	0	0	0	60- 70	4.209	951.0	99.7,99.7
80	0.2637	0.7553	0.9184	0.6413	0.0306	0	0	0	70- 80	0.9098	951.9	99.8,99.8
90	0	0.4249	0.6033	0.3062	0	0	0	0	80- 90	0.2651	952.1	99.9,99.9
100	0	0.0831	0.2352	0.0001	0	0	0	0	90-100	0.1074	952.3	99.9,99.9
110	0	0	0	0	0	0	0	0	100-110	0.0140	952.3	99.9,99.9
120	0	0	0	0	0	0	0	0	110-120	0	952.3	99.9,99.9
130	0	0	0	0	0	0	0	0	120-130	0	952.3	99.9,99.9
140	0.1137	0.1721	0.2100	0.2298	0.3635	0.2929	0.2411	0.2524	130-140	0.0464	952.3	99.9,99.9
150	0.3475	0.4011	0.4552	0.5001	1.066	0.9965	0.9166	0.9450	140-150	0.2917	952.6	99.9,99.9
160	0.5573	0.5662	0.6081	0.6728	1.627	1.650	1.649	1.683	150-160	0.4317	953.0	100,100
170	0.5876	0.5812	0.6286	0.7157	1.465	1.541	1.670	1.755	160-170	0.3273	953.4	100,100
180	0.9278	1.039	1.172	1.222	0.9222	0.9743	1.096	1.196	170-180	0.1061	953.5	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 924.42 lm

%lum = 97.0%

%lamp = 97.0%

Conical surface Flux(120deg): 946.76 lm

%lum = 99.3%


%lamp = 99.3%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:Allen
 Test Date:2026-01-29

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity:45%
 Test Distance:2.900m [K=0.8783]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:12.000V I:1.4651A P:14.400W PF:0.7908 Freq:60.02Hz Lamp Flux:953.468x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

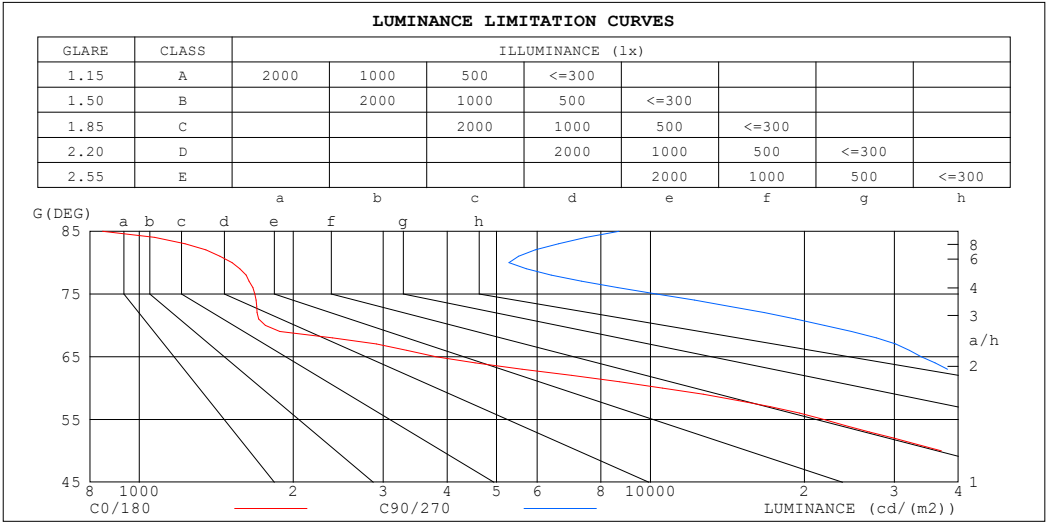

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	847	8680
80	1518	5289
75	1682	10275
70	1764	21891
65	3804	33868
60	10561	44166
55	21850	55721
50	37082	71317
45	66549	94053


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:12.000V I:1.4651A P:14.400W PF:0.7908 Freq:60.02Hz		
Lamp Flux:953.468x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

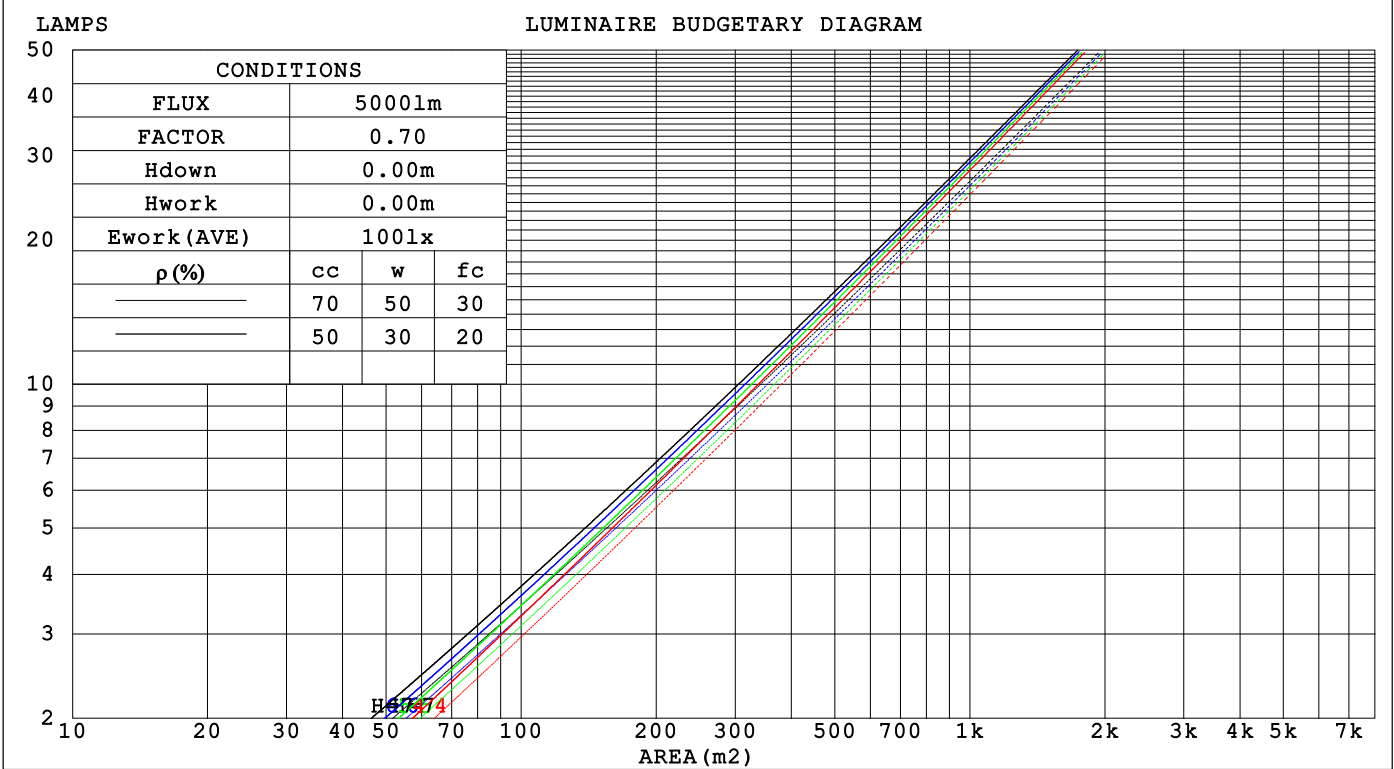

C Range: 0 - 360DEG

C Interval: 22.5DEG

Test Speed: HIGH

Temperature:25.3℃

Operators:Allen

Test Date:2026-01-29

γ Range: 0 - 180DEG

γ Interval: 1.0DEG

Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459

Humidity:45%

Test Distance:2.900m [K=0.8783]

Remarks:

WEC AND CCEC

Test:U:12.000V I:1.4651A P:14.400W PF:0.7908 Freq:60.02Hz Lamp Flux:953.468x1 lm					
NAME:		TYPE:		WEIGHT:	
SPEC.:		DIM.:		SERIAL No.:	
MFR.:		SUR.:		Shielding Angle:	

pcc	80%			70%			50%			30%			10%			0														
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
pfc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Wall Exitance Coefficients(WEC)														
0.0																														
1.0	.155	.088	.028	.148	.084	.027	.135	.078	.025	.124	.071	.023	.113	.066	.021															
2.0	.146	.080	.024	.140	.077	.024	.130	.072	.022	.120	.067	.021	.111	.063	.020															
3.0	.137	.073	.022	.132	.071	.021	.124	.067	.020	.115	.063	.019	.108	.060	.018															
4.0	.129	.067	.020	.126	.066	.019	.118	.063	.019	.111	.060	.018	.105	.057	.017															
5.0	.123	.063	.018	.119	.061	.018	.113	.059	.017	.107	.056	.017	.101	.054	.016															
6.0	.117	.058	.017	.114	.057	.017	.108	.055	.016	.103	.053	.016	.098	.051	.015															
7.0	.111	.055	.016	.108	.054	.015	.103	.052	.015	.099	.051	.015	.094	.049	.014															
8.0	.106	.052	.015	.104	.051	.014	.099	.050	.014	.095	.048	.014	.091	.047	.014															
9.0	.101	.049	.014	.099	.048	.014	.095	.047	.013	.092	.046	.013	.088	.045	.013															
10.0	.097	.047	.013	.095	.046	.013	.092	.045	.013	.089	.044	.013	.086	.043	.012															

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.171	.159	.148	.146	.136	.127	.100	.094	.088	.057	.054	.051	.018	.017	.017	
2.0	.154	.134	.117	.132	.115	.101	.090	.080	.070	.052	.046	.041	.017	.015	.013	
3.0	.140	.114	.094	.120	.099	.082	.082	.069	.057	.048	.040	.034	.015	.013	.011	
4.0	.128	.099	.077	.110	.086	.067	.076	.060	.047	.044	.035	.028	.014	.011	.009	
5.0	.119	.087	.064	.102	.076	.056	.070	.053	.039	.041	.031	.023	.013	.010	.008	
6.0	.110	.078	.054	.095	.067	.047	.065	.047	.033	.038	.028	.020	.012	.009	.007	
7.0	.103	.070	.046	.089	.060	.040	.061	.042	.029	.036	.025	.017	.012	.008	.006	
8.0	.097	.063	.040	.084	.055	.035	.058	.039	.025	.034	.023	.015	.011	.007	.005	
9.0	.092	.058	.035	.079	.050	.030	.055	.035	.022	.032	.021	.013	.010	.007	.004	
10.0	.087	.053	.031	.075	.046	.027	.052	.033	.019	.030	.019	.011	.010	.006	.004	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:12.000V I:1.4651A P:14.400W PF:0.7908 Freq:60.02Hz Lamp Flux:953.468x1 lm										
NAME:			TYPE:			WEIGHT:				
SPEC.:			DIM.:			SERIAL No.:				
MFR.:			SUR.:			Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	21.7	22.4	21.9	22.6	22.8	22.4	23.2	22.6	23.3	23.5
3H	21.5	22.3	21.8	22.4	22.6	22.7	23.4	22.9	23.6	23.8
4H	21.5	22.1	21.7	22.4	22.6	22.6	23.3	22.9	23.5	23.7
6H	21.4	22.0	21.7	22.3	22.5	22.6	23.2	22.8	23.4	23.7
8H	21.3	21.9	21.6	22.2	22.5	22.5	23.1	22.8	23.4	23.6
12H	21.3	21.9	21.6	22.1	22.4	22.5	23.1	22.8	23.3	23.6
4H 2H	21.7	22.4	22.0	22.6	22.8	22.4	23.1	22.7	23.3	23.5
3H	21.6	22.2	21.9	22.4	22.7	22.7	23.3	23.0	23.5	23.8
4H	21.5	22.0	21.8	22.3	22.6	22.7	23.2	23.0	23.5	23.8
6H	21.4	21.9	21.8	22.2	22.6	22.6	23.1	23.0	23.4	23.7
8H	21.4	21.8	21.7	22.1	22.5	22.6	23.0	22.9	23.3	23.7
12H	21.3	21.7	21.7	22.1	22.5	22.5	22.9	22.9	23.3	23.7
8H 4H	21.4	21.8	21.8	22.2	22.5	22.5	23.0	22.9	23.3	23.7
6H	21.3	21.7	21.7	22.0	22.5	22.5	22.8	22.9	23.2	23.6
8H	21.2	21.6	21.7	22.0	22.4	22.4	22.7	22.9	23.2	23.6
12H	21.2	21.5	21.6	21.9	22.4	22.4	22.7	22.9	23.1	23.6
12H 4H	21.3	21.7	21.7	22.1	22.5	22.5	22.9	22.9	23.3	23.6
6H	21.2	21.6	21.7	22.0	22.4	22.4	22.7	22.8	23.1	23.6
8H	21.2	21.5	21.6	21.9	22.4	22.4	22.6	22.8	23.1	23.6
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 2.6 / - 5.4					+ 1.4 / - 1.9				
1.5H	+ 3.7 / - 4.3					+ 2.2 / - 1.2				
2.0H	+ 3.5 / - 6.7					+ 2.5 / - 2.2				

CIE Pub.117, 953.5 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -0.2)
Area: 0.001 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:12.000V I:1.4651A P:14.400W PF:0.7908 Freq:60.02Hz Lamp Flux:953.468x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	89	82	79	88	82	79	87	82	78	75
0.80	96	90	87	95	90	86	94	89	86	82
1.00	100	95	91	99	94	91	98	94	90	87
1.25	104	99	96	103	98	95	101	97	94	90
1.50	106	102	99	105	101	98	103	100	97	93
2.00	109	105	102	108	104	101	105	102	100	94
2.50	111	107	104	109	106	103	106	103	101	95
3.00	112	109	106	110	107	105	107	105	103	96
4.00	114	111	109	112	110	108	108	107	105	98
5.00	115	113	111	113	111	110	109	108	107	99
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3℃
 Operators: Allen
 Test Date: 2026-01-29

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity: 45%
 Test Distance: 2.900m [K=0.8783]
 Remarks:

ISOCANDELA DIAGRAM


Test:U:12.000V I:1.4651A P:14.400W PF:0.7908 Freq:60.02Hz Lamp Flux:953.468x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

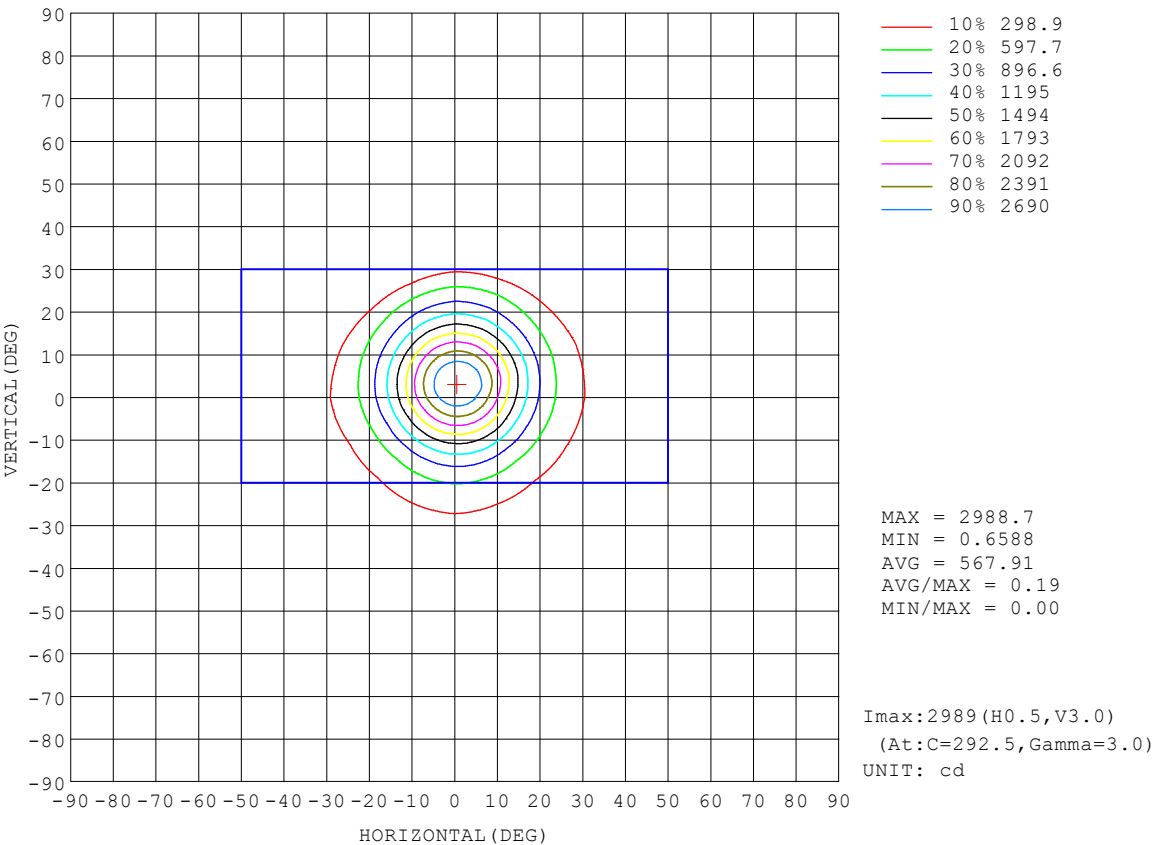

C Range: 0 - 360DEG C Interval: 22.5DEG Test Speed: HIGH Temperature:25.3℃ Operators:Allen Test Date:2026-01-29	γ Range: 0 - 180DEG γ Interval: 1.0DEG Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459 Humidity:45% Test Distance:2.900m [K=0.8783] Remarks:
--	---

AAI Figure

Test:U:12.000V I:1.4651A P:14.400W PF:0.7908 Freq:60.02Hz Lamp Flux:953.468x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

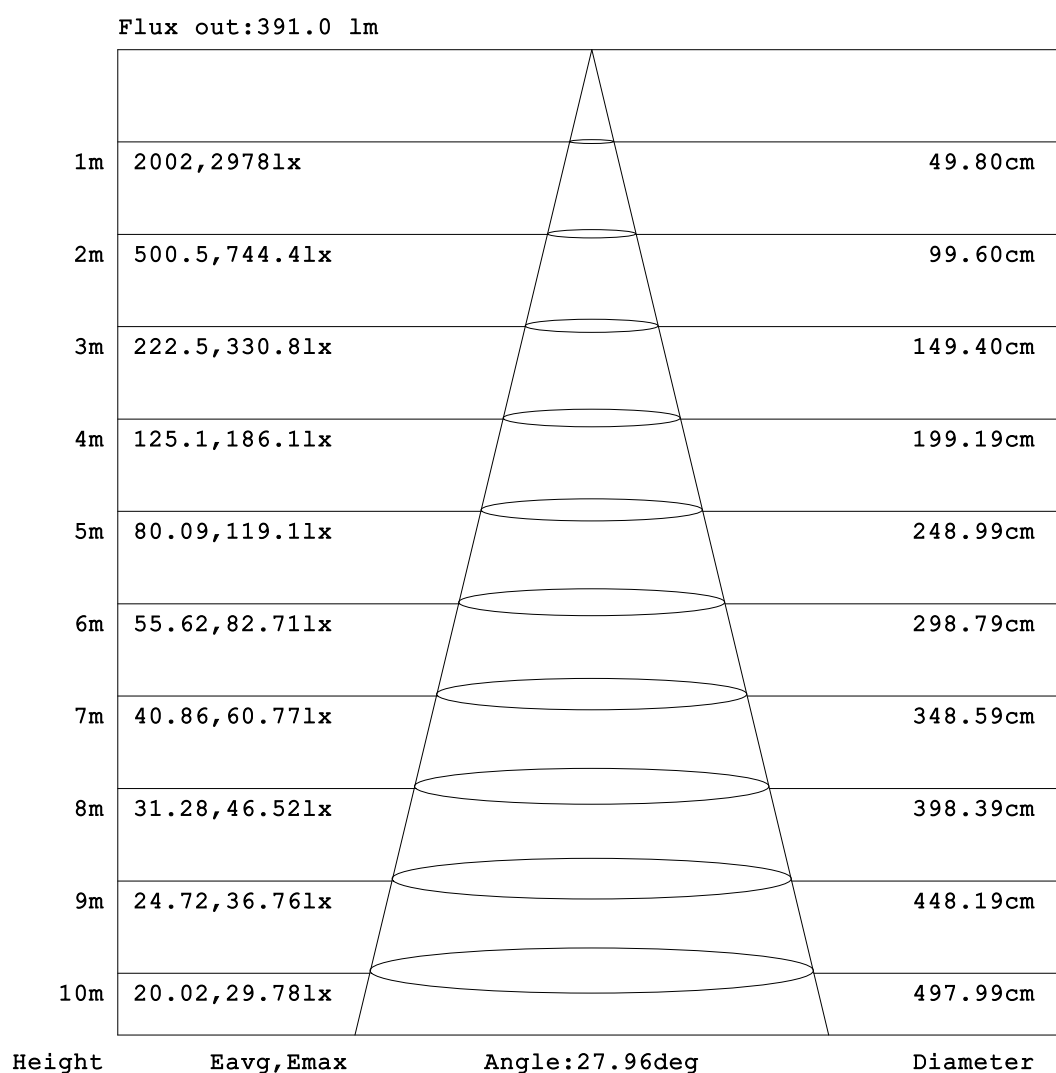


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

ISOLUX DIAGRAM


Test:U:12.000V I:1.4651A P:14.400W PF:0.7908 Freq:60.02Hz Lamp Flux:953.468x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

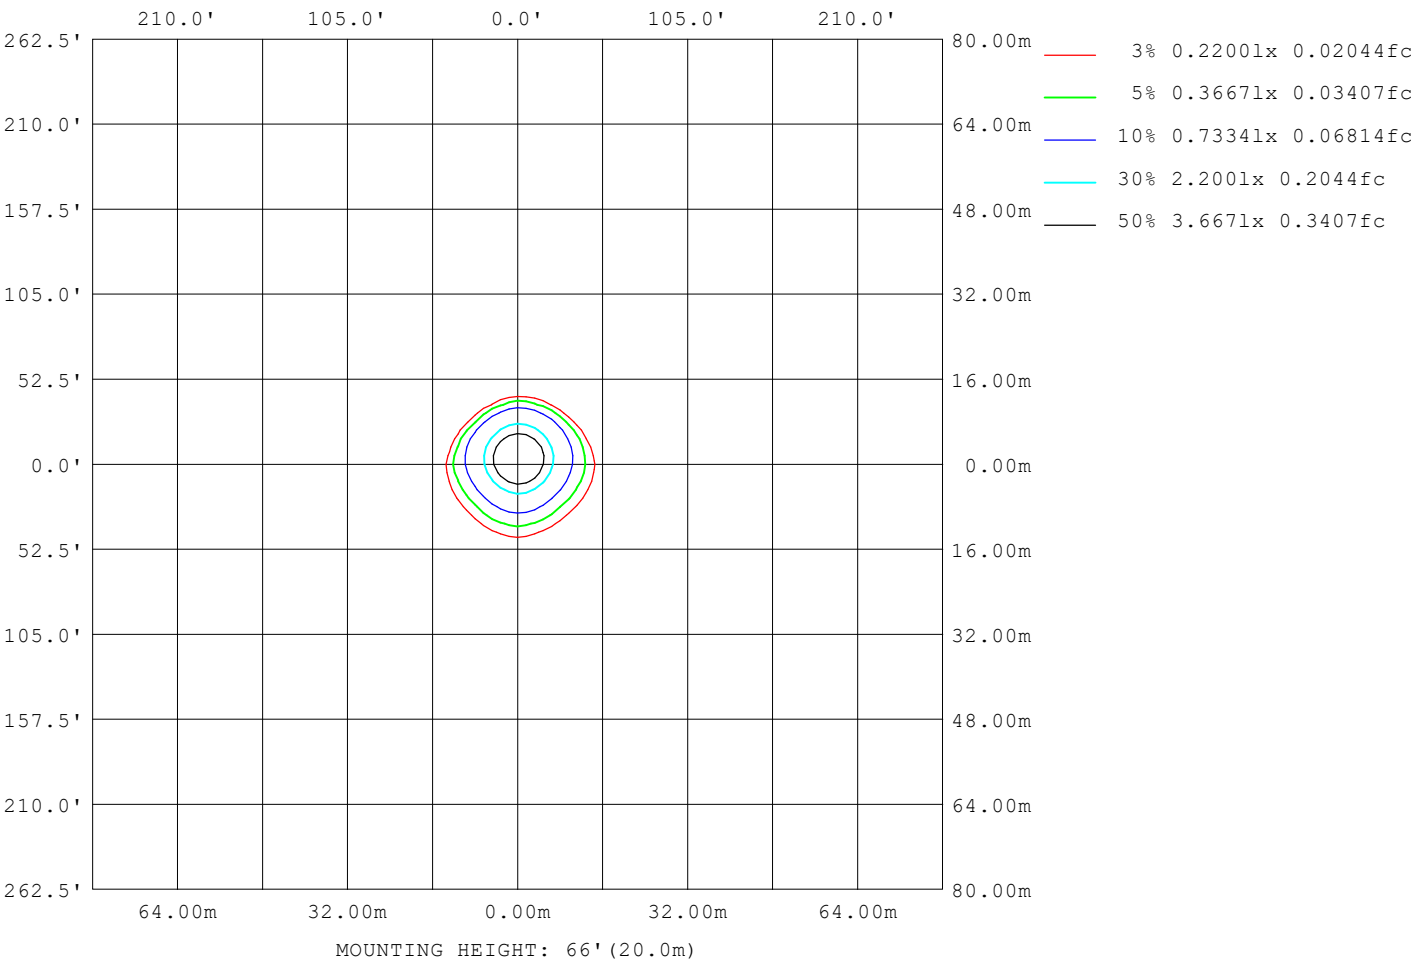

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

Planar Illuminance Curve

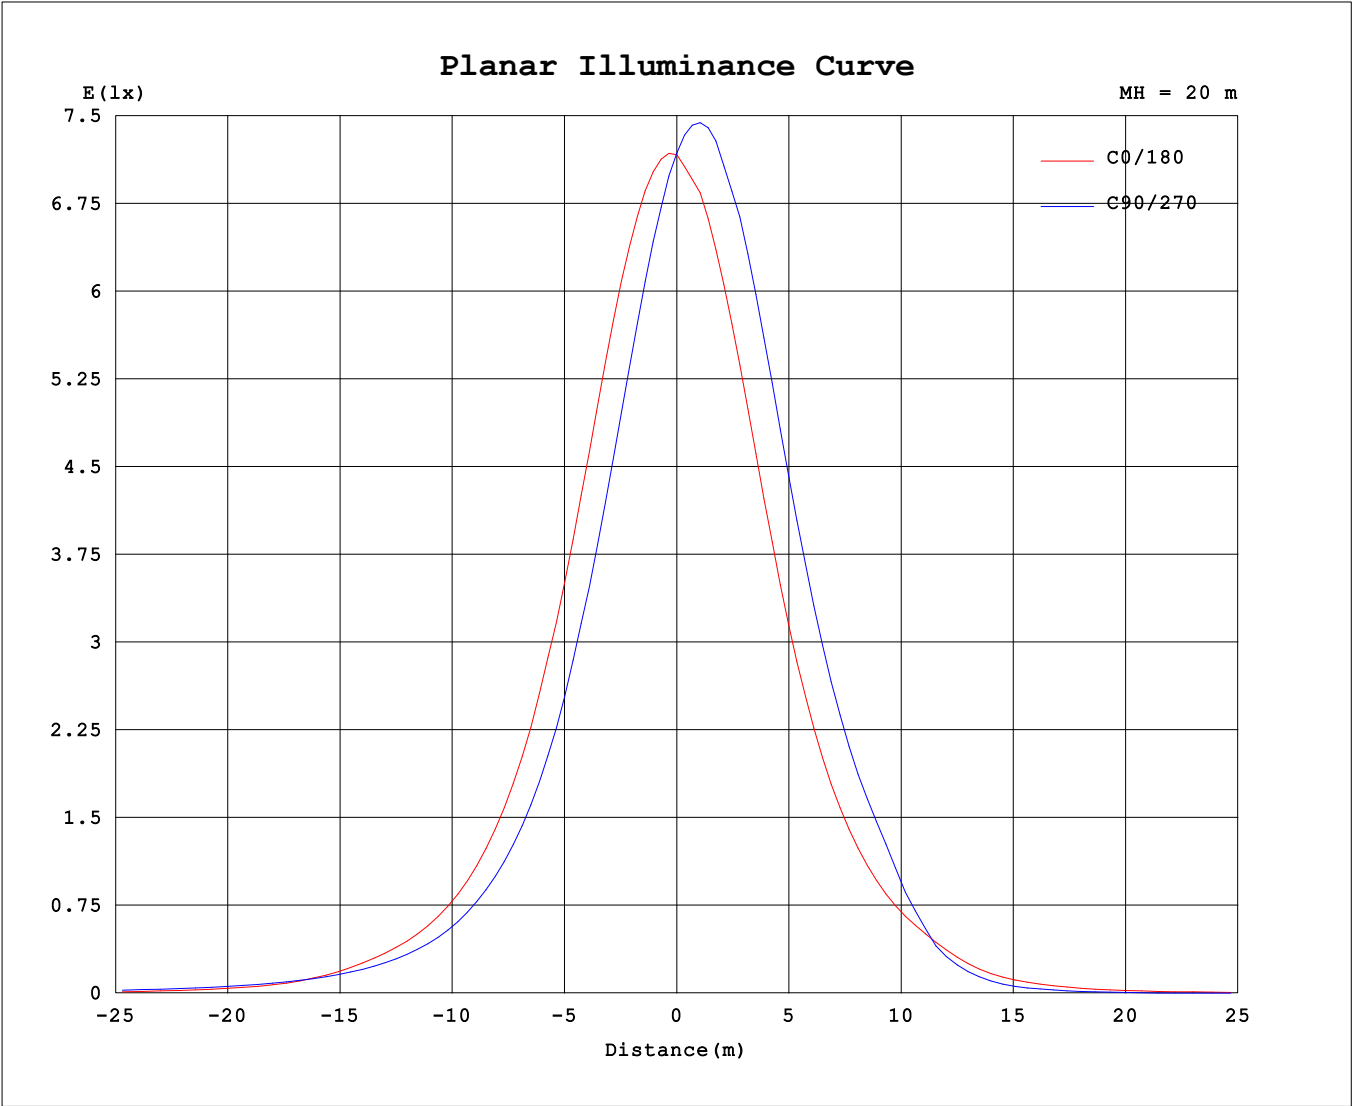

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.000V I:1.4651A P:14.400W PF:0.7908 Freq:60.02Hz Lamp Flux:953.468x1 lm																	
NAME:									TYPE:						WEIGHT:		
SPEC.:									DIM.:						SERIAL No.:		
MFR.:									SUR.:						Shielding Angle:		

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	2867	2868	2866	2870	2873	2876	2875	2879	2867	2868	2866	2870	2873	2876	2875	2879			
5	2687	2561	2447	2359	2318	2315	2360	2445	2572	2702	2790	2879	2948	2953	2913	2816			
10	2102	1913	1763	1657	1604	1593	1644	1751	1932	2112	2281	2421	2502	2517	2458	2326			
15	1409	1234	1106	1042	1007	991	1009	1092	1258	1413	1561	1712	1795	1803	1738	1610			
20	865	730	642	618	612	590	580	635	765	864	949	1067	1147	1140	1074	994			
25	517	426	364	361	372	351	328	363	457	511	533	599	685	673	615	580			
30	312	254	213	216	231	213	192	212	269	233	184	198	250	259	286	331			
35	189	158	133	136	148	136	120	128	123	86.8	59.3	58.6	76.2	81.3	94.4	140			
40	93.0	102	86.9	88.2	98.0	88.7	77.3	68.7	56.5	34.9	22.8	20.9	25.0	27.9	34.2	58.3			
45	47.1	61.7	60.4	60.6	66.5	60.2	50.7	39.1	27.6	15.2	7.91	5.26	6.45	8.52	15.3	27.3			
50	23.8	36.7	42.5	43.0	45.8	42.0	32.6	22.5	13.4	5.00	0.99	0.23	0.43	0.91	4.32	13.3			
55	12.5	21.4	28.7	31.0	32.0	29.0	20.5	12.6	5.33	0.98	0.02	0.00	0.00	0.00	0.66	4.60			
60	5.28	12.0	17.9	21.7	22.1	18.5	12.1	5.93	1.46	0.24	0.00	0.00	0.00	0.00	0.08	1.14			
65	1.61	5.63	10.2	13.7	14.3	10.8	5.97	2.02	0.52	0.16	0.00	0.00	0.00	0.00	0.01	0.35			
70	0.60	1.96	4.69	7.15	7.49	4.98	2.22	0.76	0.39	0.01	0.00	0.00	0.00	0.00	0.00	0.24			
75	0.44	0.75	1.68	2.66	2.66	1.72	0.88	0.55	0.23	0.00	0.00	0.00	0.00	0.00	0.00	0.08			
80	0.26	0.54	0.76	0.93	0.92	0.81	0.64	0.39	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
85	0.07	0.37	0.60	0.74	0.76	0.67	0.48	0.21	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
90	0.00	0.19	0.42	0.58	0.60	0.50	0.31	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
95	0.00	0.03	0.24	0.39	0.42	0.31	0.13	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
100	0.00	0.00	0.08	0.21	0.24	0.15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
105	0.00	0.00	0.00	0.06	0.08	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
135	0.00	0.00	0.00	0.01	0.02	0.03	0.03	0.02	0.09	0.07	0.05	0.04	0.03	0.02	0.03	0.03			
140	0.11	0.14	0.17	0.19	0.21	0.23	0.23	0.21	0.36	0.32	0.29	0.26	0.24	0.24	0.25	0.27			
145	0.25	0.29	0.32	0.35	0.37	0.39	0.40	0.38	0.71	0.67	0.63	0.58	0.55	0.55	0.57	0.60			
150	0.35	0.37	0.40	0.43	0.46	0.48	0.50	0.49	1.07	1.03	1.00	0.95	0.92	0.92	0.95	0.98			
155	0.49	0.50	0.51	0.54	0.56	0.59	0.61	0.62	1.41	1.40	1.38	1.35	1.33	1.33	1.36	1.39			
160	0.56	0.56	0.57	0.58	0.61	0.64	0.67	0.70	1.63	1.63	1.65	1.65	1.65	1.66	1.68	1.70			
165	0.56	0.56	0.57	0.59	0.61	0.65	0.68	0.72	1.60	1.61	1.66	1.70	1.73	1.76	1.79	1.80			
170	0.59	0.58	0.58	0.60	0.63	0.67	0.72	0.76	1.47	1.48	1.54	1.61	1.67	1.72	1.75	1.76			
175	0.69	0.71	0.73	0.76	0.80	0.84	0.88	0.90	1.24	1.24	1.32	1.40	1.47	1.53	1.57	1.57			
180	0.93	0.98	1.04	1.10	1.17	1.20	1.22	1.21	0.92	0.92	0.97	1.04	1.10	1.16	1.20	1.22			

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks: