


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:12.000V I:2.6818A P:27.000W PF:0.8135 Freq:60.00Hz Lamp Flux:1757.54x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 65.09 lm/W
MODEL	SMART FIXTURE 3000K	Imax (cd)	3670	S/MH(C0/180)	0.39	
NOMINAL POWER(W)		LOR(%)	100.0	S/MH(C90/270)	0.64	
RATED VOLTAGE(V)		TOTAL FLUX(lm)	1757.5	η UP,DN(C0-180)	0.1,61.8	
NOMINAL FLUX(lm)	1757.54	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,38.0	
LAMPS INSIDE	1	η up (%)	0.2	CIBSE SHR NOM	0.50	
TEST VOLTAGE(V)		η down (%)	99.8	CIBSE SHR MAX	0.55	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

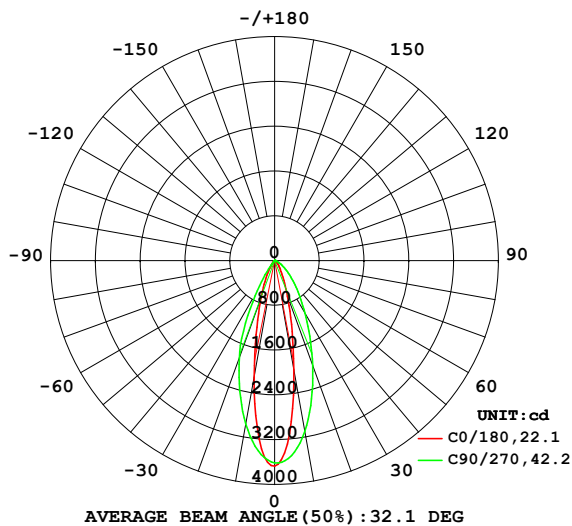

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

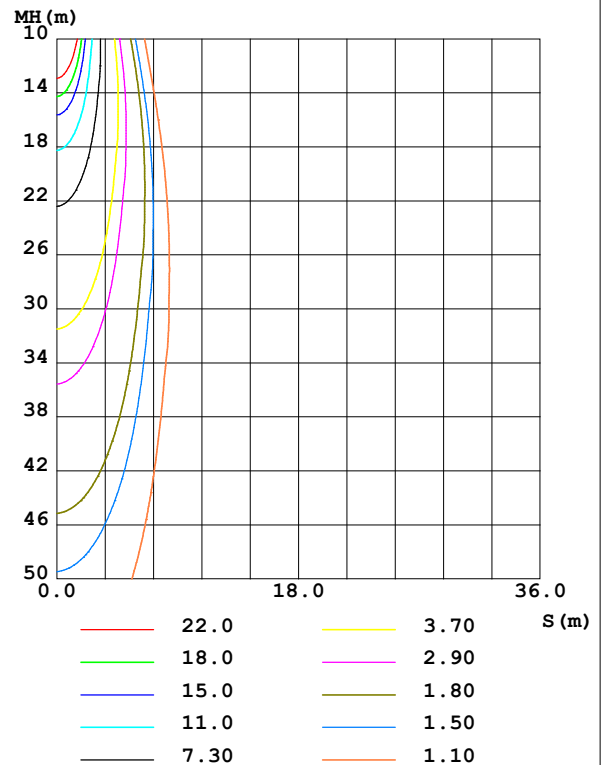

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1988	3068	3102	2498	2127	3102	2966	1573	0- 10	288.1	288.1	16.4,16.4
20	683.5	2004	1990	870.0	721.0	2086	1853	525.0	10- 20	520.1	808.2	46,46
30	240.7	1137	1089	301.5	220.3	815.9	623.0	132.8	20- 30	439.7	1248	71,71
40	111.8	602.9	571.3	143.0	65.94	105.6	57.57	40.71	30- 40	258.0	1506	85.7,85.7
50	53.70	297.5	282.4	75.84	17.88	0.2122	0.0366	4.911	40- 50	136.3	1642	93.4,93.4
60	18.25	118.5	125.7	33.58	1.118	0.0003	0	0.4459	50- 60	73.35	1716	97.6,97.6
70	3.188	27.30	32.30	6.630	0.4936	0	0	0.0011	60- 70	30.15	1746	99.3,99.3
80	1.394	6.413	6.232	1.693	0	0	0	0	70- 80	6.567	1752	99.7,99.7
90	0.4114	4.338	3.944	0.8267	0	0	0	0	80- 90	1.658	1754	99.8,99.8
100	0	2.117	2.010	0.1378	0	0	0	0	90-100	0.9348	1755	99.9,99.9
110	0	0.3997	0.5188	0	0	0	0	0	100-110	0.3233	1755	99.9,99.9
120	0	0	0	0	0	0.0914	0.0456	0	110-120	0.0363	1755	99.9,99.9
130	0	0.0296	0.0935	0	0.0060	0.4627	0.3421	0.0286	120-130	0.0430	1755	99.9,99.9
140	0.2372	0.3412	0.4871	0.1553	0.5748	1.178	0.9960	0.7191	130-140	0.2382	1756	99.9,99.9
150	0.6938	0.5736	0.7614	0.7711	1.769	1.965	1.688	1.890	140-150	0.5812	1756	99.9,99.9
160	1.140	0.8895	1.057	1.223	2.815	2.635	2.100	2.438	150-160	0.7152	1757	100,100
170	1.381	1.161	1.176	1.387	2.801	2.613	2.067	2.144	160-170	0.5144	1757	100,100
180	1.973	1.877	1.789	1.704	1.976	1.965	1.766	1.643	170-180	0.1745	1758	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 1584.5 lm

%lum = 90.2%

%lamp = 90.2%

Conical surface Flux(120deg): 1715.6 lm

%lum = 97.6%


%lamp = 97.6%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:Allen
 Test Date:2026-01-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity:45%
 Test Distance:2.900m [K=0.8783]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:12.000V I:2.6818A P:27.000W PF:0.8135 Freq:60.00Hz Lamp Flux:1757.54x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

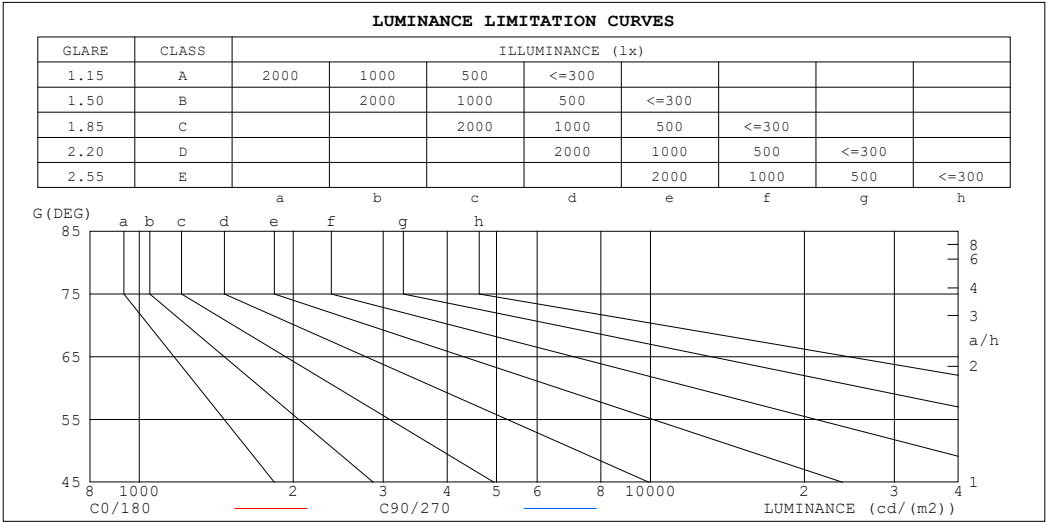

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	1011072	5343110
80	802703	3589087
75	733898	5450007
70	932061	9444561
65	1600444	16093637
60	3649806	25140255
55	6113909	33378076
50	8354986	43931623
45	11283177	57452086


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:12.000V I:2.6818A P:27.000W PF:0.8135 Freq:60.00Hz		
Lamp Flux:1757.54x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

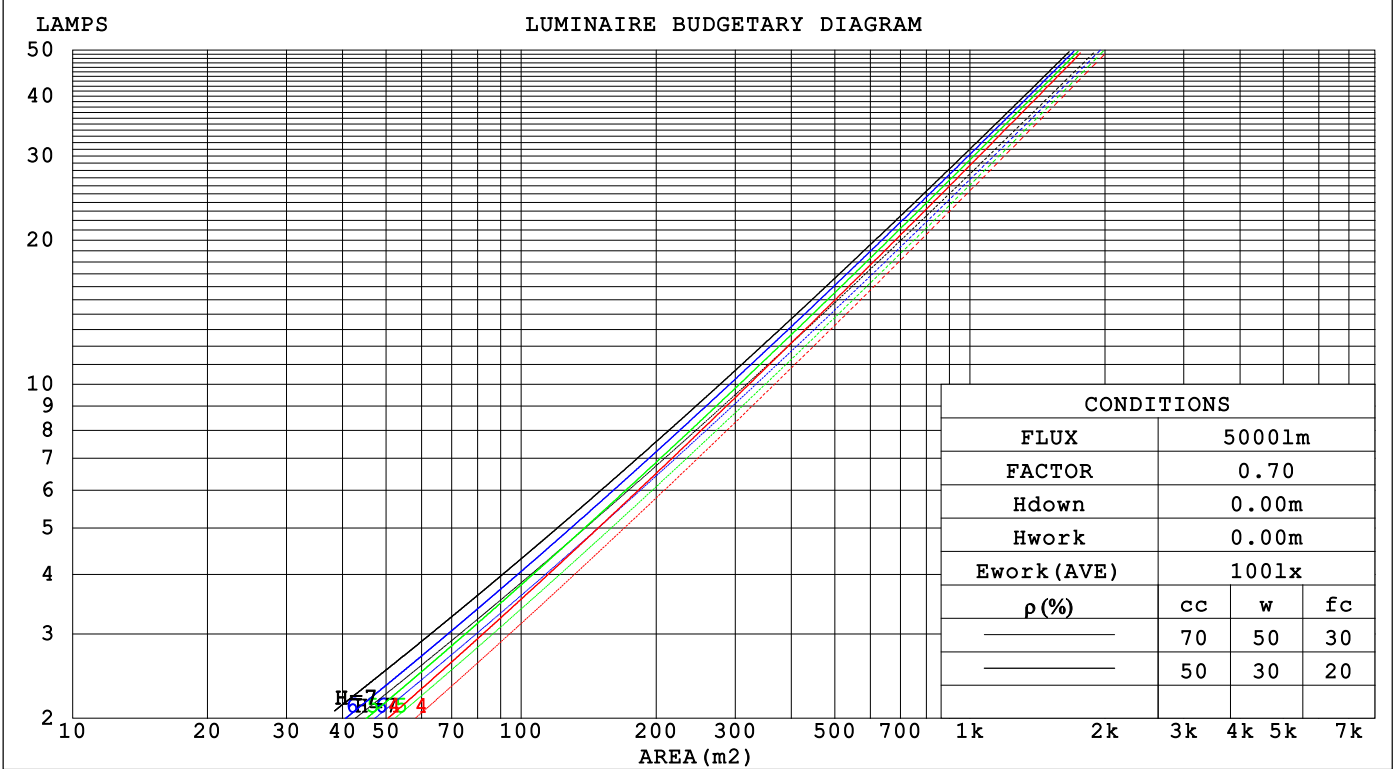

C Range: 0 - 360DEG

C Interval: 22.5DEG

Test Speed: HIGH

Temperature:25.3℃

Operators:Allen

Test Date:2026-01-27

γ Range: 0 - 180DEG

γ Interval: 1.0DEG

Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459

Humidity:45%

Test Distance:2.900m [K=0.8783]

Remarks:

WEC AND CCEC

Test:U:12.000V I:2.6818A P:27.000W PF:0.8135 Freq:60.00Hz Lamp Flux:1757.54x1 lm					
NAME:		TYPE:		WEIGHT:	
SPEC.:		DIM.:		SERIAL No.:	
MFR.:		SUR.:		Shielding Angle:	

pcc	80%			70%			50%			30%			10%			0														
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
pfc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Wall Exitance Coefficients(WEC)														
0.0																														
1.0	.181	.103	.033	.174	.100	.032	.162	.093	.030	.150	.087	.028	.139	.081	.026															
2.0	.174	.095	.029	.168	.092	.028	.157	.087	.027	.147	.083	.026	.138	.078	.025															
3.0	.165	.088	.026	.160	.086	.026	.151	.082	.025	.142	.078	.024	.134	.074	.023															
4.0	.156	.081	.024	.152	.079	.023	.144	.076	.023	.137	.073	.022	.130	.070	.021															
5.0	.148	.075	.022	.144	.074	.022	.137	.071	.021	.131	.069	.021	.125	.067	.020															
6.0	.140	.070	.020	.137	.069	.020	.131	.067	.020	.125	.065	.019	.120	.063	.019															
7.0	.133	.066	.019	.131	.065	.019	.125	.063	.018	.120	.062	.018	.115	.060	.018															
8.0	.127	.062	.017	.124	.061	.017	.120	.060	.017	.115	.058	.017	.111	.057	.017															
9.0	.121	.059	.016	.119	.058	.016	.115	.057	.016	.111	.055	.016	.107	.054	.016															
10.0	.116	.055	.015	.114	.055	.015	.110	.054	.015	.106	.053	.015	.103	.052	.015															

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.173	.159	.146	.148	.136	.126	.101	.094	.087	.058	.054	.051	.019	.017	.016	
2.0	.158	.134	.114	.135	.115	.098	.093	.080	.069	.053	.046	.040	.017	.015	.013	
3.0	.146	.115	.091	.125	.099	.079	.086	.069	.055	.050	.040	.033	.016	.013	.011	
4.0	.135	.100	.074	.116	.087	.064	.080	.061	.045	.046	.035	.027	.015	.012	.009	
5.0	.127	.089	.061	.109	.077	.053	.075	.054	.037	.043	.032	.022	.014	.010	.007	
6.0	.119	.080	.051	.102	.069	.045	.071	.048	.032	.041	.028	.019	.013	.009	.006	
7.0	.112	.072	.044	.097	.062	.038	.067	.044	.027	.039	.026	.016	.013	.008	.005	
8.0	.106	.066	.038	.092	.057	.033	.063	.040	.023	.037	.024	.014	.012	.008	.005	
9.0	.101	.060	.033	.087	.052	.029	.060	.037	.020	.035	.022	.012	.011	.007	.004	
10.0	.096	.056	.029	.083	.049	.025	.058	.034	.018	.034	.020	.011	.011	.007	.004	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:12.000V I:2.6818A P:27.000W PF:0.8135 Freq:60.00Hz Lamp Flux:1757.54x1 lm										
NAME:			TYPE:			WEIGHT:				
SPEC.:			DIM.:			SERIAL No.:				
MFR.:			SUR.:			Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	42.2	43.1	42.4	43.3	43.5	51.8	52.7	52.0	52.9	53.1
3H	42.1	42.9	42.3	43.1	43.3	51.9	52.8	52.2	53.0	53.2
4H	42.0	42.8	42.3	43.0	43.3	51.9	52.7	52.2	52.9	53.2
6H	41.9	42.7	42.2	42.9	43.2	51.8	52.6	52.1	52.8	53.1
8H	41.9	42.6	42.2	42.9	43.1	51.8	52.5	52.1	52.8	53.0
12H	41.8	42.5	42.1	42.8	43.1	51.7	52.4	52.0	52.7	53.0
4H 2H	44.1	44.9	44.3	45.1	45.3	51.6	52.5	51.9	52.7	52.9
3H	43.9	44.7	44.3	44.9	45.2	51.9	52.6	52.2	52.9	53.2
4H	43.9	44.5	44.2	44.8	45.1	51.9	52.5	52.2	52.8	53.1
6H	43.8	44.3	44.1	44.7	45.0	51.8	52.3	52.1	52.7	53.0
8H	43.7	44.3	44.1	44.6	45.0	51.7	52.2	52.1	52.6	53.0
12H	43.7	44.2	44.1	44.5	44.9	51.7	52.2	52.1	52.5	52.9
8H 4H	44.0	44.5	44.4	44.9	45.2	51.7	52.2	52.1	52.6	53.0
6H	43.9	44.3	44.3	44.7	45.1	51.6	52.1	52.1	52.5	52.9
8H	43.8	44.2	44.3	44.7	45.1	51.6	52.0	52.0	52.4	52.8
12H	43.8	44.1	44.3	44.6	45.1	51.5	51.9	52.0	52.3	52.8
12H 4H	43.9	44.4	44.3	44.8	45.2	51.7	52.1	52.1	52.5	52.9
6H	43.9	44.2	44.3	44.7	45.1	51.6	52.0	52.0	52.4	52.8
8H	43.8	44.1	44.3	44.6	45.1	51.5	51.9	52.0	52.3	52.8
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 2.1 / - 4.6					+ 1.5 / - 3.0				
1.5H	+ 2.2 / - 2.7					+ 1.8 / - 5.5				
2.0H	+ 3.5 / - 4.9					+ 2.9 / - 7.1				

CIE Pub.117, 1758 lm Total Lamp Luminous Flux Correct ($8\log(F/F_0) = 2.0$)
Area: 1e-005 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:12.000V I:2.6818A P:27.000W PF:0.8135 Freq:60.00Hz Lamp Flux:1757.54x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	82	75	71	82	75	71	81	75	71	67
0.80	91	84	80	90	83	79	89	83	79	75
1.00	96	90	85	95	89	85	93	89	85	80
1.25	100	95	91	99	94	90	97	93	89	85
1.50	104	98	94	102	97	94	100	96	93	88
2.00	107	102	99	105	101	98	103	99	96	91
2.50	109	105	101	107	103	100	104	101	98	92
3.00	111	107	104	109	105	103	105	103	100	94
4.00	113	110	107	111	108	106	107	105	103	96
5.00	114	112	110	112	110	108	108	106	105	97
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3℃
 Operators: Allen
 Test Date: 2026-01-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity: 45%
 Test Distance: 2.900m [K=0.8783]
 Remarks:

ISOCANDELA DIAGRAM


Test:U:12.000V I:2.6818A P:27.000W PF:0.8135 Freq:60.00Hz Lamp Flux:1757.54x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

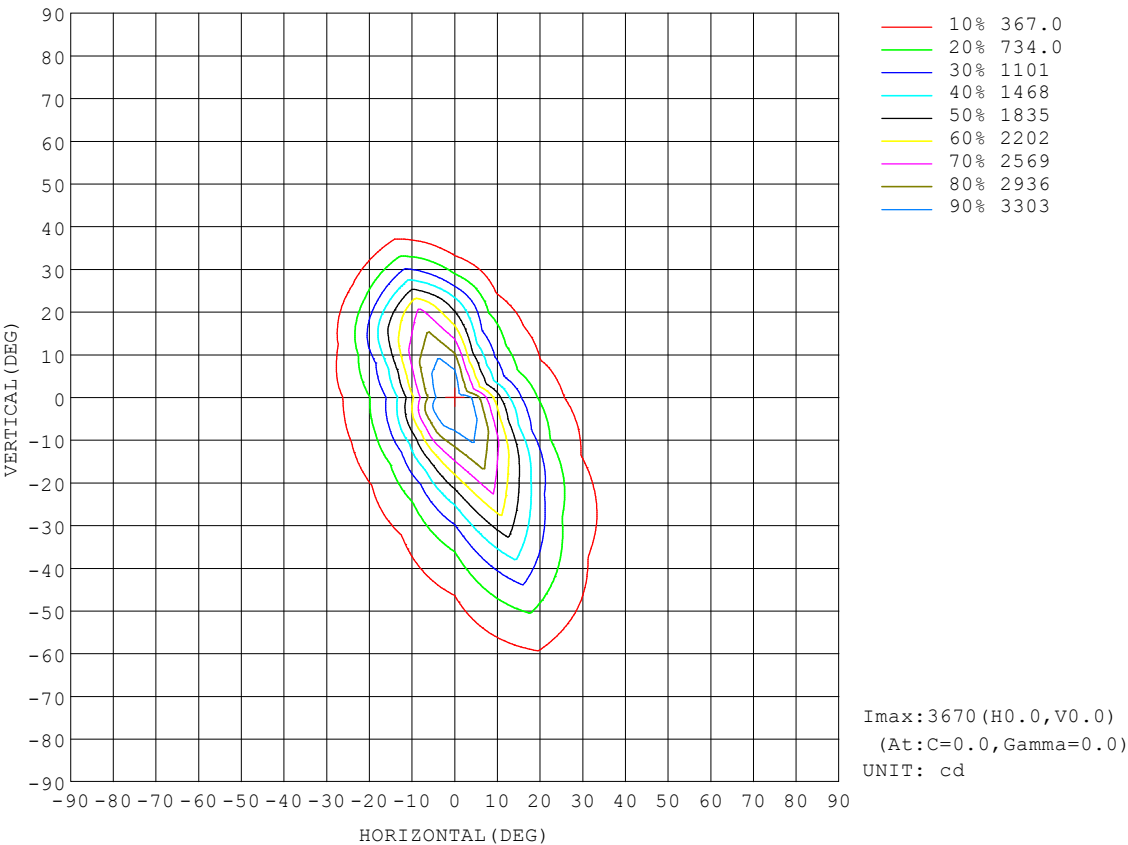

C Range: 0 - 360DEG	γ Range: 0 - 180DEG
C Interval: 22.5DEG	γ Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Temperature:25.3℃	Humidity:45%
Operators:Allen	Test Distance:2.900m [K=0.8783]
Test Date:2026-01-27	Remarks:

AAI Figure

Test:U:12.000V I:2.6818A P:27.000W PF:0.8135 Freq:60.00Hz Lamp Flux:1757.54x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

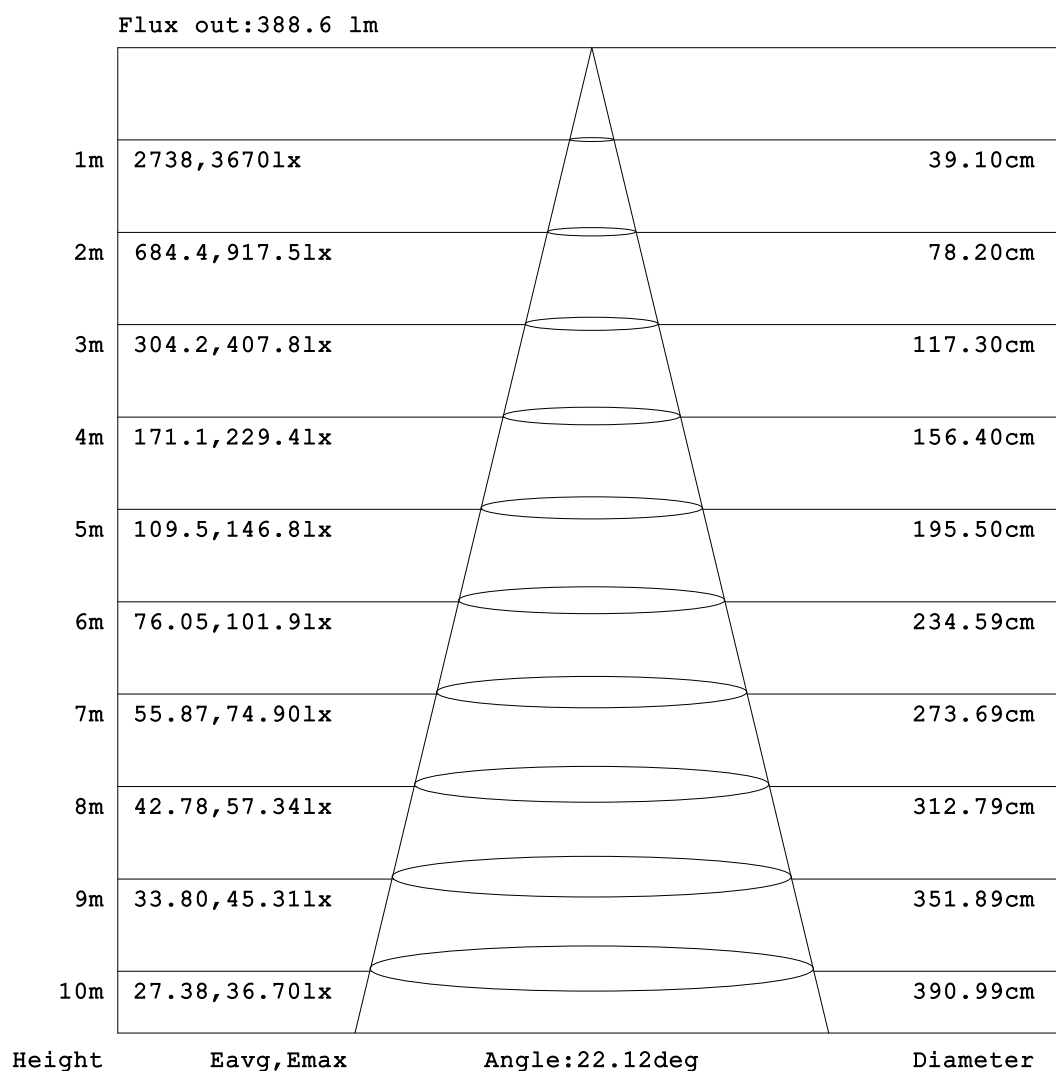


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3℃
Operators: Allen
Test Date: 2026-01-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity: 45%
Test Distance: 2.900m [K=0.8783]
Remarks:


ISOLUX DIAGRAM

Test:U:12.000V I:2.6818A P:27.000W PF:0.8135 Freq:60.00Hz Lamp Flux:1757.54x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

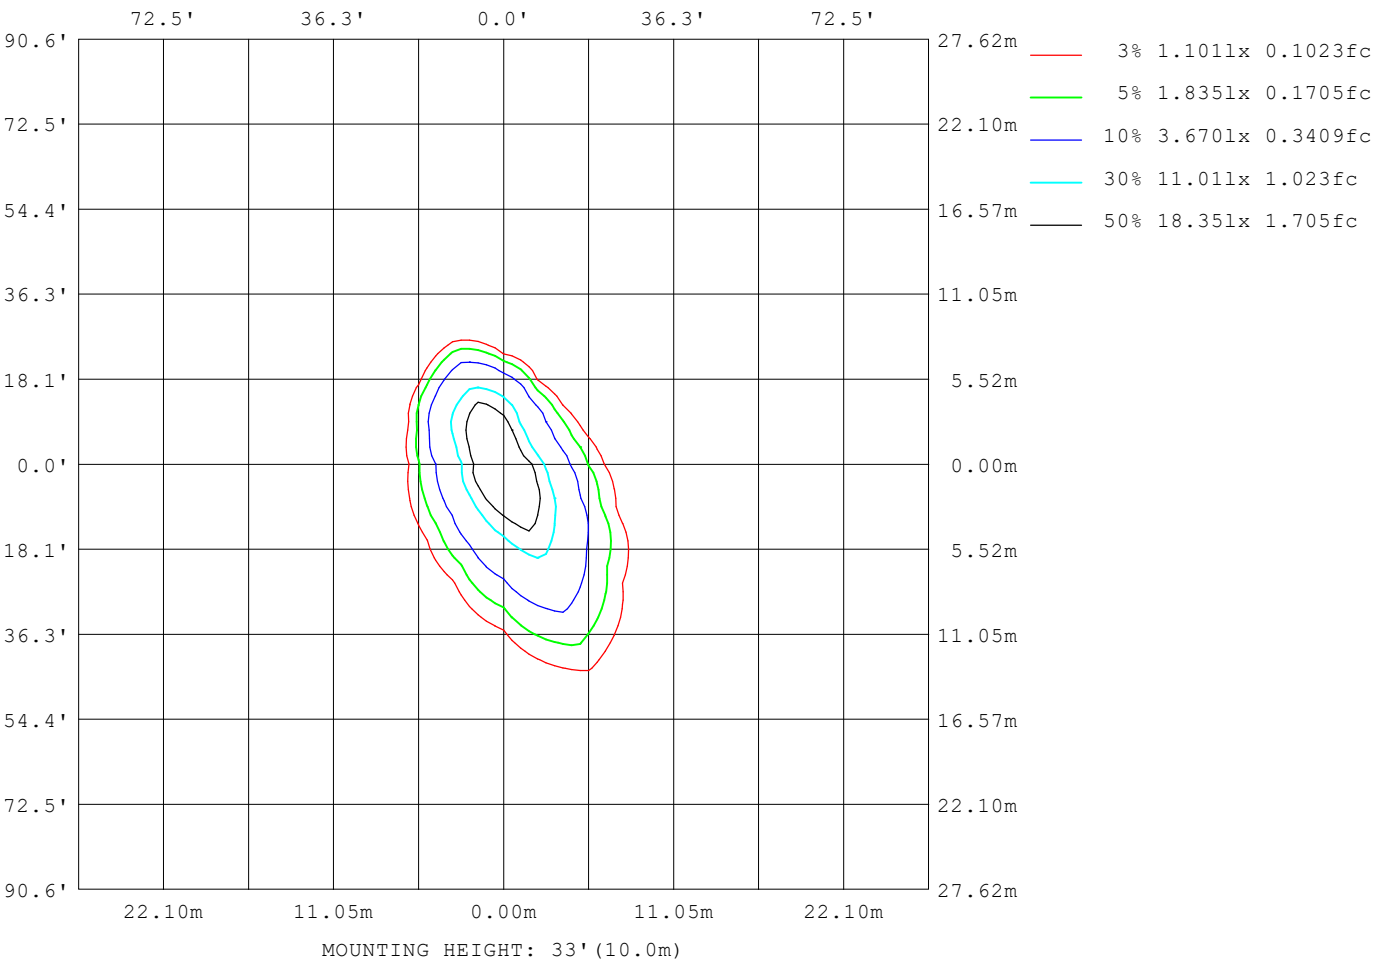

C Range: 0 - 360DEG C Interval: 22.5DEG Test Speed: HIGH Temperature:25.3℃ Operators:Allen Test Date:2026-01-27	γ Range: 0 - 180DEG γ Interval: 1.0DEG Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459 Humidity:45% Test Distance:2.900m [K=0.8783] Remarks:
--	---

Planar Illuminance Curve

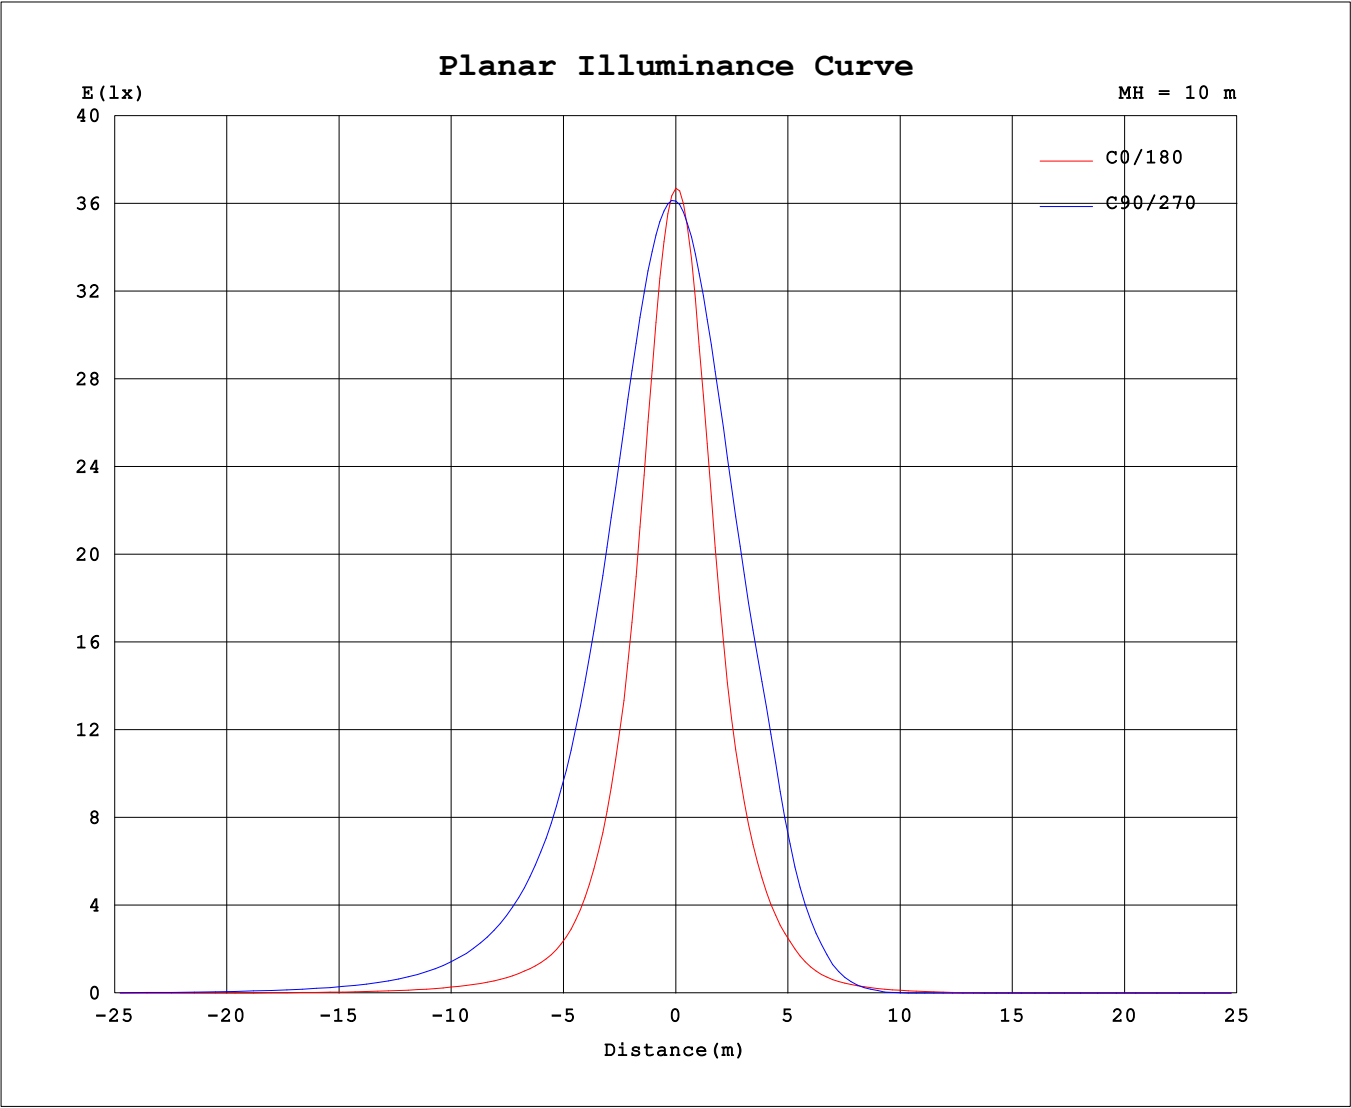

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.000V I:2.6818A P:27.000W PF:0.8135 Freq:60.00Hz Lamp Flux:1757.54x1 lm																	
NAME:									TYPE:						WEIGHT:		
SPEC.:									DIM.:						SERIAL No.:		
MFR.:									SUR.:						Shielding Angle:		

Table--1

UNIT: cd

γ (DEG)	C (DEG)																
	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5	
0	3670	3650	3633	3621	3611	3526	3491	3478	3670	3650	3633	3621	3611	3526	3491	3478	
5	3093	3275	3478	3570	3496	3510	3436	3401	3204	3341	3483	3519	3409	2897	2624	2524	
10	1988	2444	3068	3388	3102	2861	2498	2367	2127	2568	3102	3310	2966	2024	1573	1452	
15	1183	1621	2538	3132	2556	1968	1479	1362	1232	1718	2609	3041	2410	1298	921	825	
20	684	1061	2004	2844	1990	1278	870	757	721	1106	2086	2753	1853	834	525	454	
25	393	693	1528	2527	1489	829	506	423	417	698	1482	2190	1235	430	277	261	
30	241	448	1137	2184	1089	534	302	250	220	352	816	1388	623	178	133	152	
35	163	293	833	1835	792	347	198	159	114	143	366	754	237	65.2	73.6	100	
40	112	199	603	1493	571	233	143	106	65.9	53.4	106	310	57.6	25.5	40.7	64.5	
45	79.8	139	429	1176	406	164	104	72.4	37.2	19.6	8.24	39.8	5.61	5.41	19.7	42.0	
50	53.7	92.4	298	884	282	119	75.8	47.7	17.9	4.16	0.21	0.02	0.04	0.28	4.91	22.6	
55	35.1	63.5	201	627	191	83.4	51.9	27.9	5.17	0.41	0.07	0.00	0.00	0.13	0.78	7.51	
60	18.2	40.4	118	416	126	58.2	33.6	12.2	1.12	0.32	0.00	0.00	0.00	0.03	0.45	2.70	
65	6.76	24.1	61.3	249	68.0	36.7	17.4	4.10	0.71	0.15	0.00	0.00	0.00	0.00	0.27	1.05	
70	3.19	12.1	27.3	124	32.3	20.7	6.63	1.38	0.49	0.00	0.00	0.00	0.00	0.00	0.00	0.76	
75	1.90	5.63	12.6	36.8	14.1	9.43	2.91	0.97	0.19	0.00	0.00	0.00	0.00	0.00	0.00	0.44	
80	1.39	3.92	6.41	7.88	6.23	4.22	1.69	0.67	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.10	
85	0.88	3.11	5.20	5.51	4.66	3.03	1.25	0.35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.41	2.24	4.34	4.88	3.94	2.34	0.83	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
95	0.04	1.39	3.21	3.88	2.99	1.63	0.45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
100	0.00	0.69	2.12	2.70	2.01	1.02	0.14	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
105	0.00	0.16	1.14	1.65	1.18	0.52	0.00	0.00	0.00	0.00	0.00	0.01	0.00	0.00	0.00	0.00	
110	0.00	0.00	0.40	0.77	0.52	0.13	0.00	0.00	0.00	0.00	0.00	0.04	0.00	0.00	0.00	0.00	
115	0.00	0.00	0.00	0.17	0.04	0.00	0.00	0.00	0.00	0.00	0.03	0.07	0.00	0.00	0.00	0.00	
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.12	0.05	0.00	0.00	0.00	
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.23	0.23	0.15	0.02	0.00	0.00	
130	0.00	0.00	0.03	0.08	0.09	0.00	0.00	0.00	0.01	0.18	0.46	0.44	0.34	0.23	0.03	0.00	
135	0.02	0.09	0.15	0.21	0.27	0.09	0.00	0.00	0.21	0.48	0.78	0.73	0.63	0.57	0.27	0.20	
140	0.24	0.30	0.34	0.40	0.49	0.33	0.16	0.12	0.57	0.91	1.18	1.09	1.00	1.04	0.72	0.59	
145	0.49	0.48	0.48	0.53	0.67	0.65	0.48	0.41	1.13	1.40	1.59	1.46	1.38	1.51	1.29	1.17	
150	0.69	0.61	0.57	0.62	0.76	0.85	0.77	0.69	1.77	1.90	1.97	1.78	1.69	1.91	1.89	1.83	
155	0.94	0.82	0.75	0.78	0.93	1.00	1.02	0.99	2.38	2.40	2.34	2.07	1.96	2.15	2.35	2.39	
160	1.14	0.98	0.89	0.90	1.06	1.16	1.22	1.27	2.81	2.79	2.63	2.28	2.10	2.16	2.44	2.65	
165	1.27	1.08	0.97	0.96	1.10	1.19	1.27	1.39	2.93	2.89	2.70	2.32	2.08	2.07	2.28	2.59	
170	1.38	1.24	1.16	1.11	1.18	1.29	1.39	1.52	2.80	2.78	2.61	2.30	2.07	2.02	2.14	2.35	
175	1.60	1.58	1.53	1.46	1.42	1.37	1.48	1.57	2.46	2.45	2.37	2.16	2.00	1.87	1.91	1.99	
180	1.97	1.97	1.88	1.77	1.79	1.65	1.70	1.69	1.98	1.97	1.96	1.87	1.77	1.63	1.64	1.70	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Allen
Test Date:2026-01-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:45%
Test Distance:2.900m [K=0.8783]
Remarks: