BALL GORE - 1:1 - PRINT AT 100 %

sew equator-outwards to each pole; never pole-to-pole

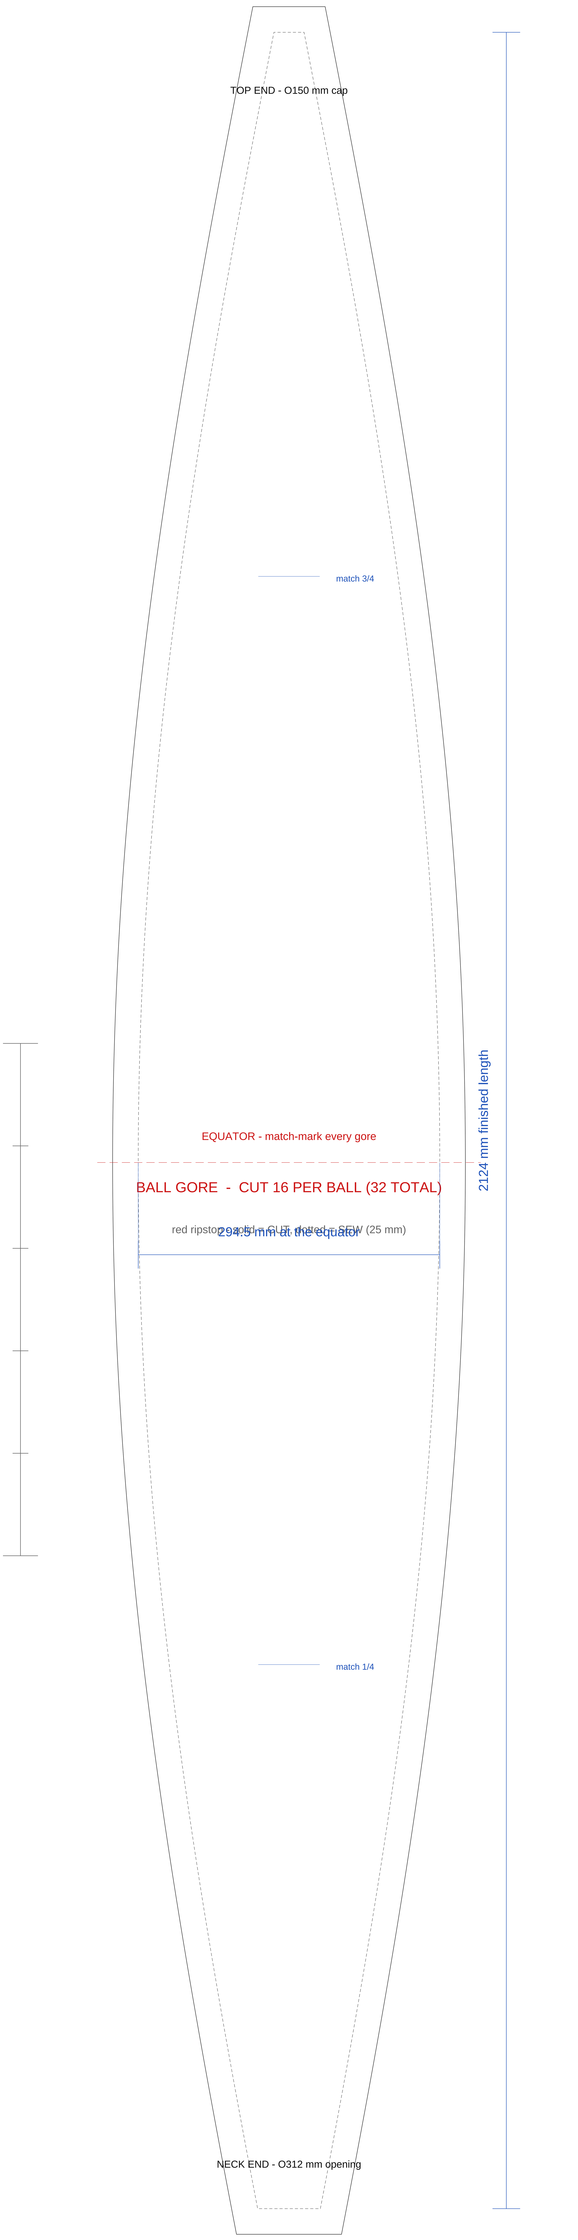

CONE PANEL (half of the cone) - 1:1 - PRINT AT 100 %

neck arc R1257 mm - base edge R3240 to 3863 mm - cut panel 1335 x 2784 mm (fits a 60 in roll)

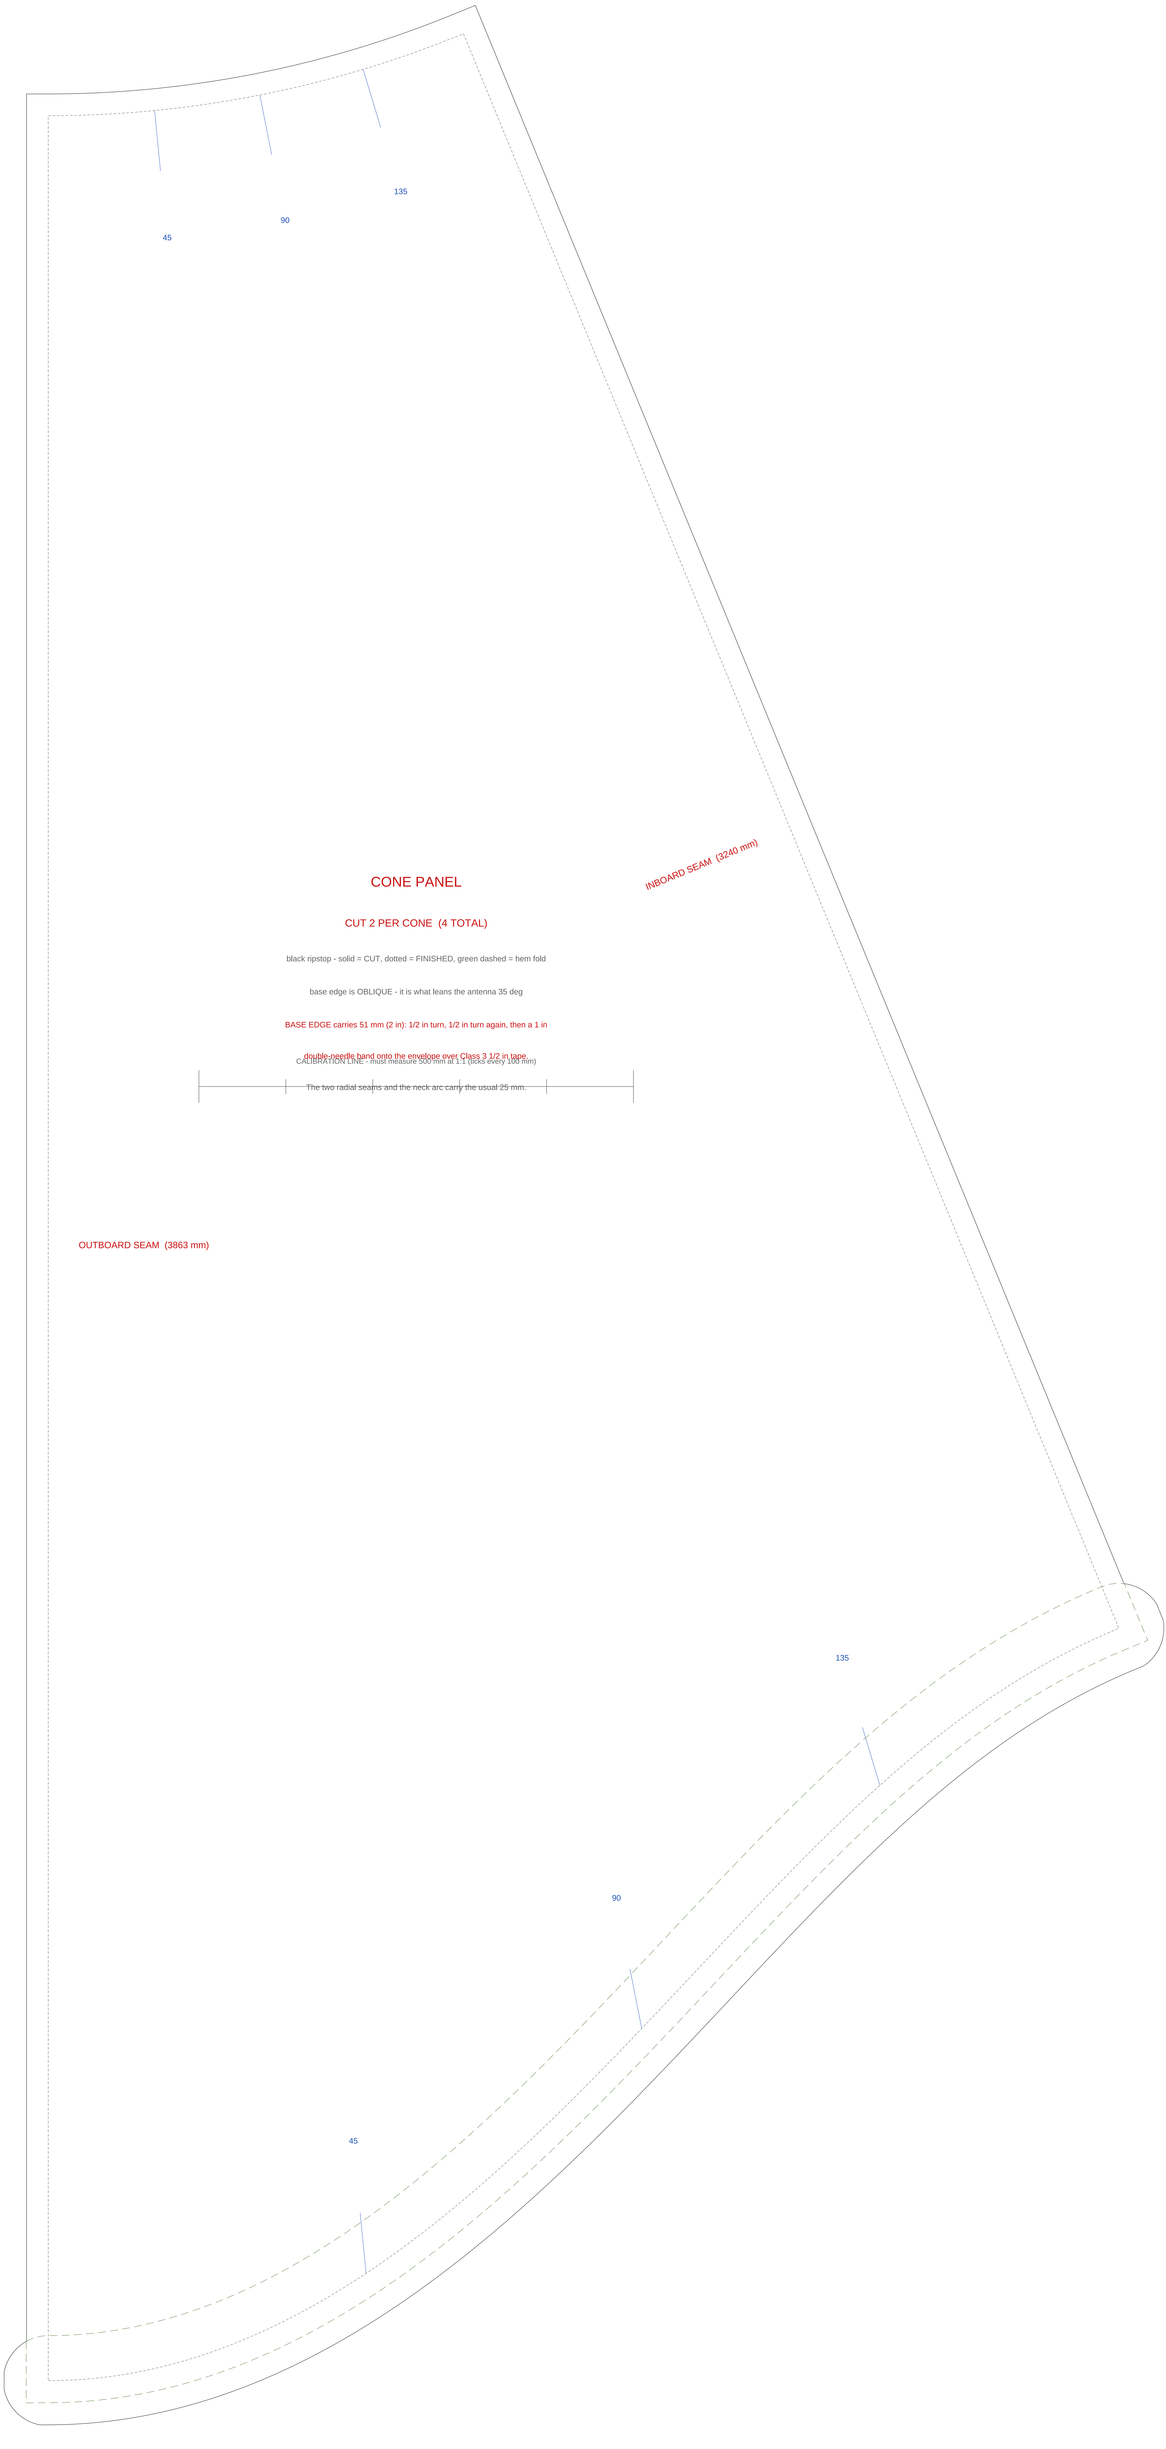

BASE OPENING, TOP CAP AND NECK GAUGE - 1:1 - PRINT AT 100 %

the ellipse is the cone/envelope intersection for a 35 deg lean - orientation matters

ANTENNA BASE OPENING - MARKING TEMPLATE, NOTHING IS CUT TO THIS OUTLINE

lay this on the DOUBLED panel N (panel + its second ply) and mark through

RED = cone base ellipse 1076 x 878 mm (dashed = 25 mm sew line)

BLUE = feed hole, O575 cut / O625 finished - through BOTH plies, hemmed over Class 3 1/2 in tape

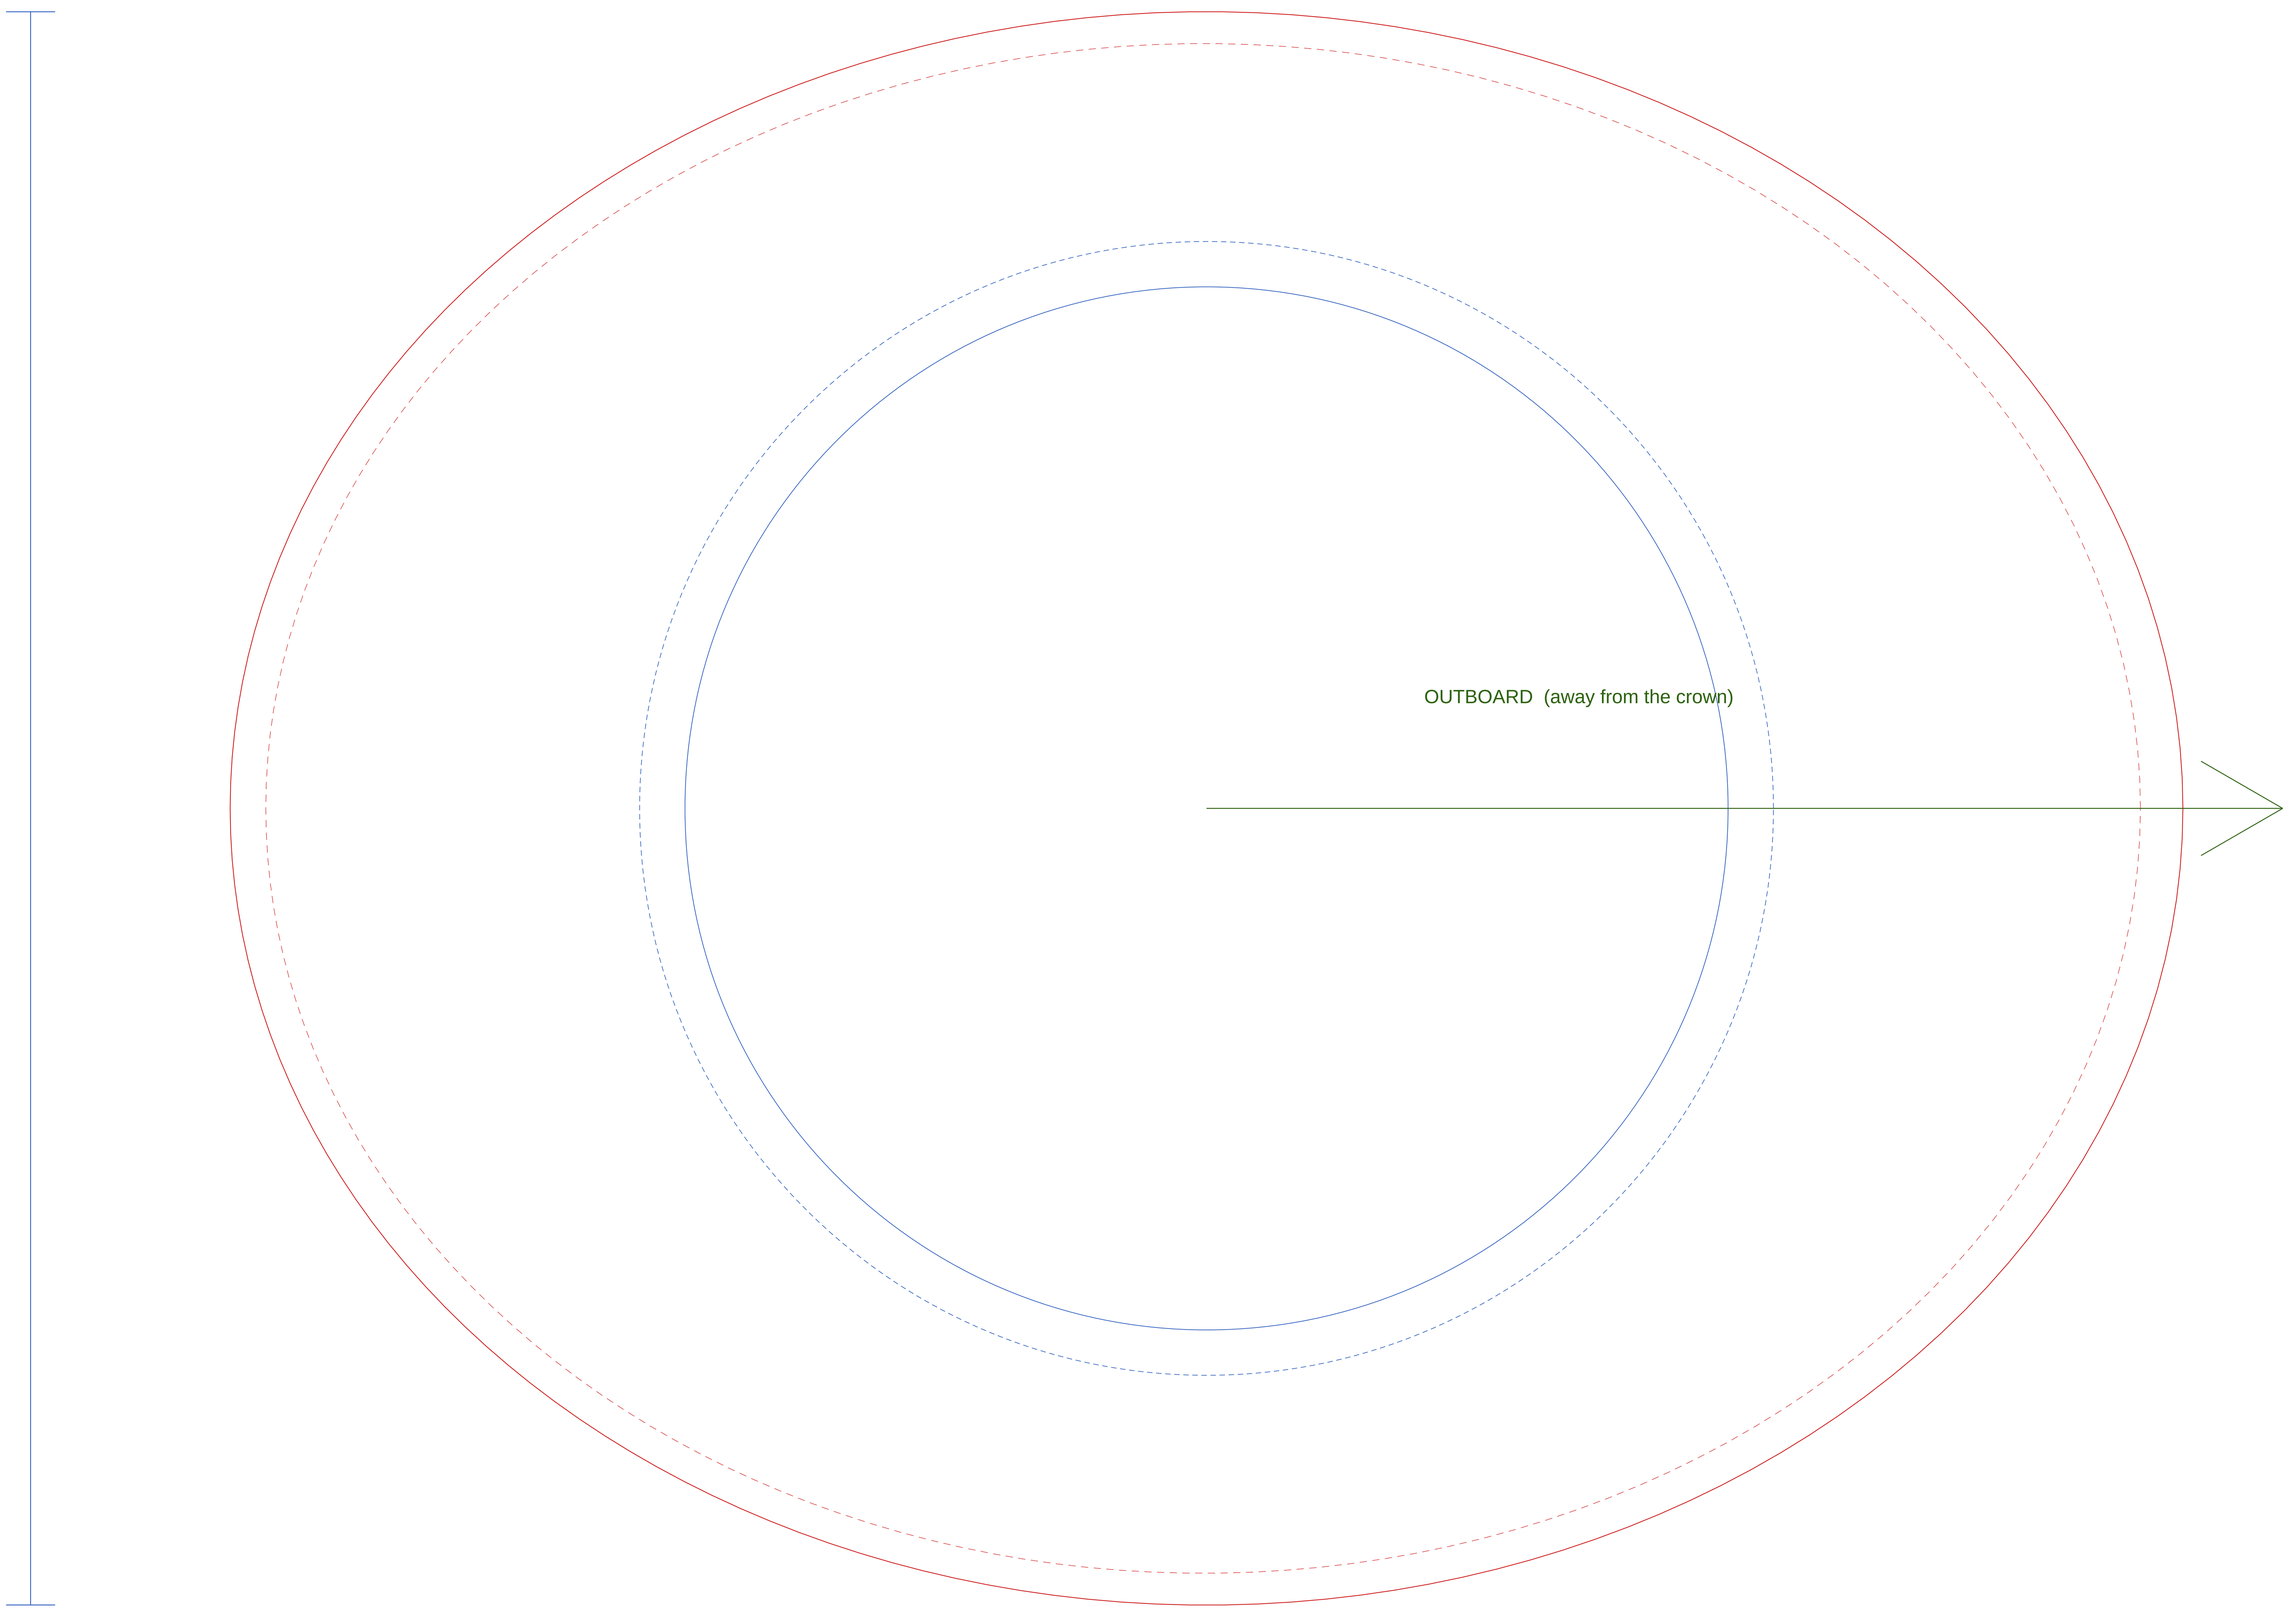

THERE IS NO SEPARATE BASE PATCH. The reinforcement is a second panel N,

cut from the normal panel template and caught into all four seams.

CALIBRATION LINE - 1000 mm at 1:1

BALL TOP CAP - CUT 2 - O150 mm

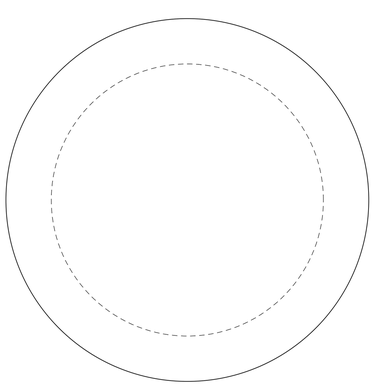

red ripstop

NECK GAUGE - O312 mm

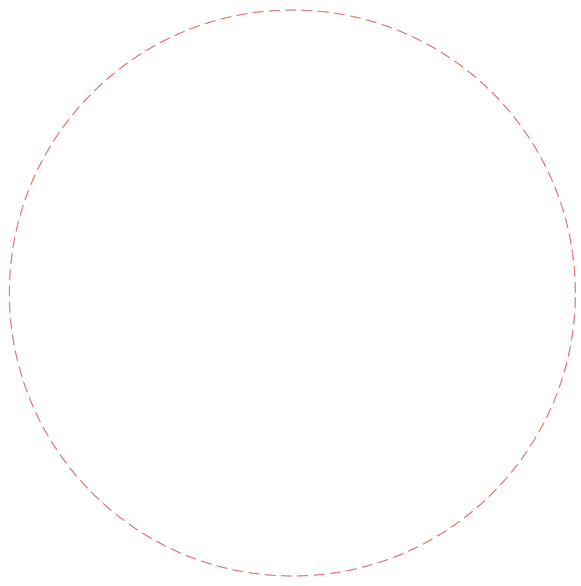

cone neck = ball neck

CALIBRATION LINE - must measure 1000 mm at 1:1 (ticks every 100 mm)