MATCH 15

RIM EDGES carry 51 mm (2 in): 1/2 in turn, 1/2 in turn again, then a 1 in double-needle band onto the envelope over Class 3 1/2 in tape. STRIP SEAMS carry the usual 25 mm.

SEAM 25 mm - joins S2-1 & S2-2

CALIBRATION LINE - must measure 250 mm at 1:1 (ticks every 100 mm)

S1-1

OUTER SKIN - CUT 1 as printed (LEFT pod) + 1 MIRRORED (RIGHT pod)

cut 2012 x 1229 mm - strip 1, section 1

curved edge = POD RIM - 2 in allowance for hem + 1 in stitch band

black ripstop - 2,610 m3 build

SEAM 25 mm - joins S1-2

CALIBRATION LINE - 300 mm at 1:1

MATCH 14

RIM EDGES carry 51 mm (2 in) -1/2 in turn, 1/2 in turn again, then a 1 in double-needle band onto the envelope over Class 3 1/2 in tape. STRIP SEAMS carry the usual 25 mm.

SEAM 25 mm - joins S2-2 & S2-3

SEAM 25 mm - joins S1-1

CALIBRATION LINE - 1000 mm at 1:1

CUT LINE - cut here

FOLD LINE - 1 in inside the rim cut edge

FINISHED RIM - 51 mm (2 in) inside the cut edge

SEAM EDGE - joins another piece

RED - match points / feed holes

SEAM 25 mm - joins S1-3

S1-2

OUTER SKIN - CUT 1 as printed (LEFT pod) + 1 MIRRORED (RIGHT pod)

cut 3450 x 1413 mm - strip 1, section 2

curved edge = POD RIM - 2 in allowance for hem + 1 in stitch band

black ripstop · 2,610 m3 build

CALIBRATION LINE - must measure 1000 mm at 1:1 (ticks every 100 mm)

MATCH 12

MATCH 13

EYE POD - OUTER SKIN - piece S1-3 of 14 - PRINT AT 100 %, check the calibration lines before cutting

RIM EDGES carry 51 mm (2 in): 1/2 in turn, 1/2 in turn again, then a 1 in double-needle band onto the envelope over Class 3 1/2 in tape. STRIP SEAMS carry the usual 25 mm.

SEAM 25 mm - joins S2-3 & S2-4

SEAM 25 mm - joins S1-2

CUT LINE - cut here

FOLD LINE - 1 in inside the rim cut edge

FINISHED RIM - 51 mm (2 in) inside the cut edge

SEAM EDGE - joins another piece

RED - match points / feed holes

MATCH 11

CALIBRATION LINE - 500 mm at 1:1

S1-3 cut 1586 x 968 mm - OUTER SKIN

CALIBRATION LINE - must measure 500 mm at 1:1 (ticks every 100 mm)

EYE POD - OUTER SKIN - piece S2-1 of 14 - PRINT AT 100 %, check the calibration lines before cutting

RIM EDGES carry 51 mm (2 in): 1/2 in turn, 1/2 in turn again, then a 1 in double-needle band onto the envelope over Class 3 1/2 in tape. STRIP SEAMS carry the usual 25 mm.

SEAM 25 mm - joins S3-1

MATCH 16



CALIBRATION LINE - must measure 600 mm at 1:1 (ticks every 100 mm)

CUT LINE - cut here

FOLD LINE - 1 in inside the rim cut edge

FINISHED RIM - 51 mm (2 in) inside the cut edge

SEAM EDGE - joins another piece

RED - match points / feed holes



CALIBRATION LINE - 600 mm at 1:1

SEAM 25 mm - joins S2-2

SEAM 25 mm - joins S1-1

S2-1 cut 1279 x 1450 mm - OUTER SKIN

RIM EDGES carry 51 mm (2 in). 1/2 in turn, 1/2 in turn again, then a 1 in double-needle band onto the envelope over Class 3 1/2 in tape. STRIP SEAMS carry the usual 25 mm.

SEAM 25 mm - joins S3-1 & S3-2

CALIBRATION LINE - must measure 1000 mm at 1:1 (ticks every 100 mm)

SEAM 25 mm - joins S2-1

S2-2

OUTER SKIN - CUT 1 as printed (LEFT pod) + 1 MIRRORED (RIGHT pod)

cut 3450 x 1450 mm - strip 2, section 2

plain rectangle

black ripstop - 2,610 m3 build

CALIBRATION LINE - 800 mm at 1:1

SEAM 25 mm - joins S2-3

CUT LINE - cut here

FOLD LINE - 1 in inside the rim cut edge

FINISHED RIM - 51 mm (2 in) inside the cut edge

SEAM EDGE - joins another piece

RED - match points / feed holes

SEAM 25 mm - joins S1-1 & S1-2

RIM EDGES carry 51 mm (2 in): 1/2 in turn, 1/2 in turn again, then a 1 in double-needle band onto the envelope over Class 3 1/2 in tape. STRIP SEAMS carry the usual 25 mm.

SEAM 25 mm - joins S3-2 & S3-3

CALIBRATION LINE - must measure 1000 mm at 1:1 (ticks every 100 mm)

S2-3

OUTER SKIN - CUT 1 as printed (LEFT pod) + 1 MIRRORED (RIGHT pod)

cut 3450 x 1450 mm · strip 2, section 3

curved edge = POD RIM - 2 in allowance for hem + 1 in stitch band

black ripstop · 2,610 m3 build

SEAM 25 mm - joins S2-2

CALIBRATION LINE - 800 mm at 1:1

SEAM 25 mm - joins S2-4

CUT LINE - cut here

FOLD LINE - 1 in inside the rim cut edge

FINISHED RIM - 51 mm (2 in) inside the cut edge

SEAM EDGE - joins another piece

RED - match points / feed holes

MATCH 10

SEAM 25 mm - joins S1-2 & S1-3

EYE POD - OUTER SKIN - piece S2-4 of 14 - PRINT AT 100 %, check the calibration lines before cutting

RIM EDGES carry 51 mm (2 in): 1/2 in turn, 1/2 in turn again, then a 1 in double-needle band onto the envelope over Class 3 1/2 in tape. STRIP SEAMS carry the usual 25 mm.

SEAM 25 mm - joins S3-3

MATCH 9



CALIBRATION LINE - must measure 300 mm at 1:1 (ticks every 100 mm)

CALIBRATION LINE - 500 mm at 1:1

SEAM 25 mm - joins S2-3

S2-4 cut 1083 x 1333 mm - OUTER SKIN

EYE POD - OUTER SKIN - piece S3-1 of 14 - PRINT AT 100 %, check the calibration lines before cutting

RIM EDGES carry 51 mm (2 in): 1/2 in turn, 1/2 in turn again, then a 1 in double-needle band onto the envelope over Class 3 1/2 in tape. STRIP SEAMS carry the usual 25 mm.

SEAM 25 mm - joins S4-1 & S4-2

MATCH 1

CALIBRATION LINE - must measure 1000 mm at 1:1 (ticks every 100 mm)

CALIBRATION LINE - 800 mm at 1:1

S3-1

OUTER SKIN - CUT 1 as printed (LEFT pod) + 1 MIRRORED (RIGHT pod)

cut 3424 x 1450 mm - strip 3, section 1

curved edge = POD RIM - 2 in allowance for hem + 1 in stitch band

black ripstop - 2,610 m3 build

SEAM 25 mm - joins S3-2

CUT LINE - cut here

FOLD LINE - 1 in inside the rim cut edge

FINISHED RIM - 51 mm (2 in) inside the cut edge

SEAM EDGE - joins another piece

RED - match points / feed holes

SEAM 25 mm - joins S2-1 & S2-2

RIM EDGES carry 51 mm (2 in). 1/2 in turn, 1/2 in turn again, then a 1 in double-needle band onto the envelope over Class 3 1/2 in tape. STRIP SEAMS carry the usual 25 mm.

SEAM 25 mm - joins S4-2 & S4-3

CALIBRATION LINE - must measure 1000 mm at 1:1 (ticks every 100 mm)

SEAM 25 mm - joins S3-1

S3-2

OUTER SKIN - CUT 1 as printed (LEFT pod) + 1 MIRRORED (RIGHT pod)

cut 3450 x 1450 mm - strip 3, section 2

plain rectangle

black ripstop - 2,610 m3 build

CALIBRATION LINE - 800 mm at 1:1

SEAM 25 mm - joins S3-3

CUT LINE - cut here

FOLD LINE - 1 in inside the rim cut edge

FINISHED RIM - 51 mm (2 in) inside the cut edge

SEAM EDGE - joins another piece

RED - match points / feed holes

SEAM 25 mm - joins S2-2 & S2-3

RIM EDGES carry 51 mm (2 in). 1/2 in turn, 1/2 in turn again, then a 1 in double-needle band onto the envelope over Class 3 1/2 in tape. STRIP SEAMS carry the usual 25 mm.

MATCH 8

SEAM 25 mm - joins S4-3 & S4-4

CALIBRATION LINE - must measure 1000 mm at 1:1 (ticks every 100 mm)

SEAM 25 mm - joins S3-2

CALIBRATION LINE - 800 mm at 1:1

S3-3

OUTER SKIN - CUT 1 as printed (LEFT pod) + 1 MIRRORED (RIGHT pod)

cut 3129 x 1450 mm - strip 3, section 3

curved edge = POD RIM - 2 in allowance for hem + 1 in stitch band

black ripstop - 2,610 m3 build

CUT LINE - cut here

FOLD LINE - 1 in inside the rim cut edge

FINISHED RIM - 51 mm (2 in) inside the cut edge

SEAM EDGE - joins another piece

RED - match points / feed holes

SEAM 25 mm - joins S2-3 & S2-4

EYE POD - OUTER SKIN - piece S4-1 of 14 - PRINT AT 100 %, check the calibration lines before cutting

RIM EDGES carry 51 mm (2 in): 1/2 in turn, 1/2 in turn again, then a 1 in double-needle band onto the envelope over Class 3 1/2 in tape. STRIP SEAMS carry the usual 25 mm.

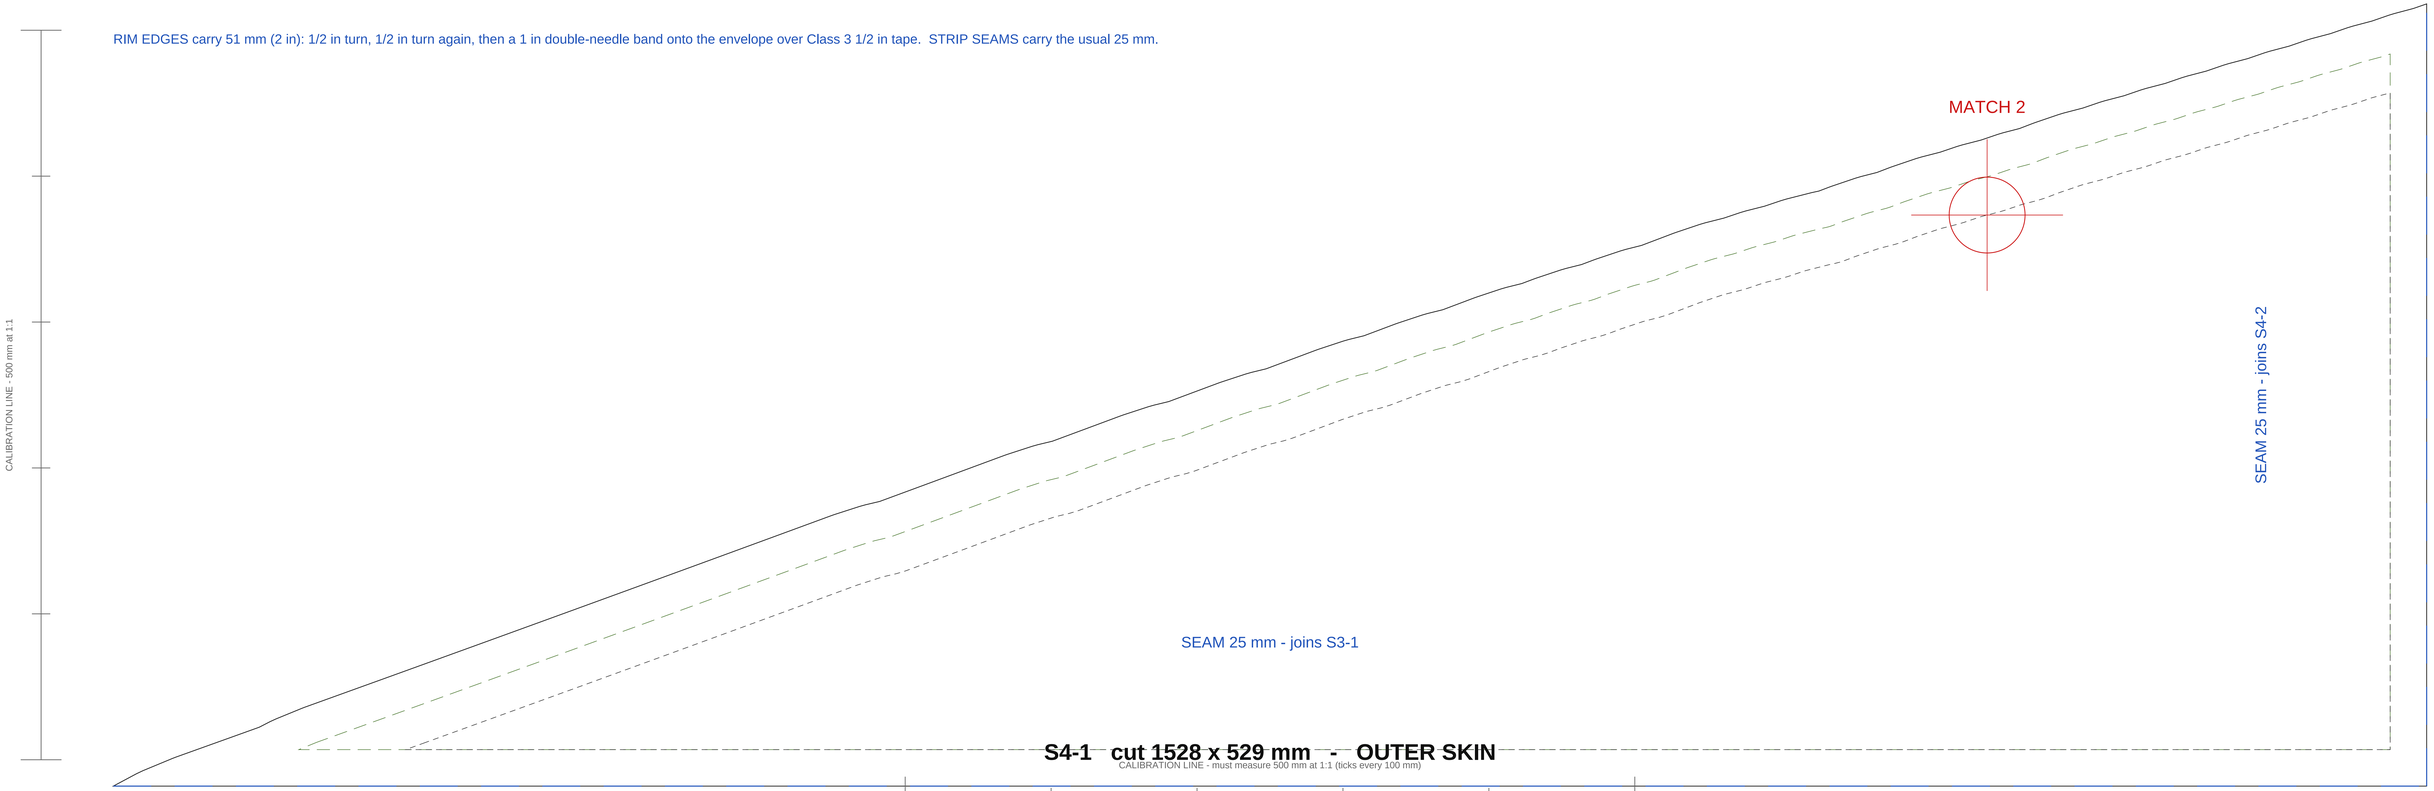

S4-1 cut 1528 x 529 mm - OUTER SKIN

CALIBRATION LINE - must measure 500 mm at 1:1 (ticks every 100 mm)

EYE POD · OUTER SKIN · piece S4-2 of 14 · PRINT AT 100 %, check the calibration lines before cutting

RIM EDGES carry 51 mm (2 in): 1/2 in turn, 1/2 in turn again, then a 1 in double-needle band onto the envelope over Class 3 1/2 in tape. STRIP SEAMS carry the usual 25 mm.

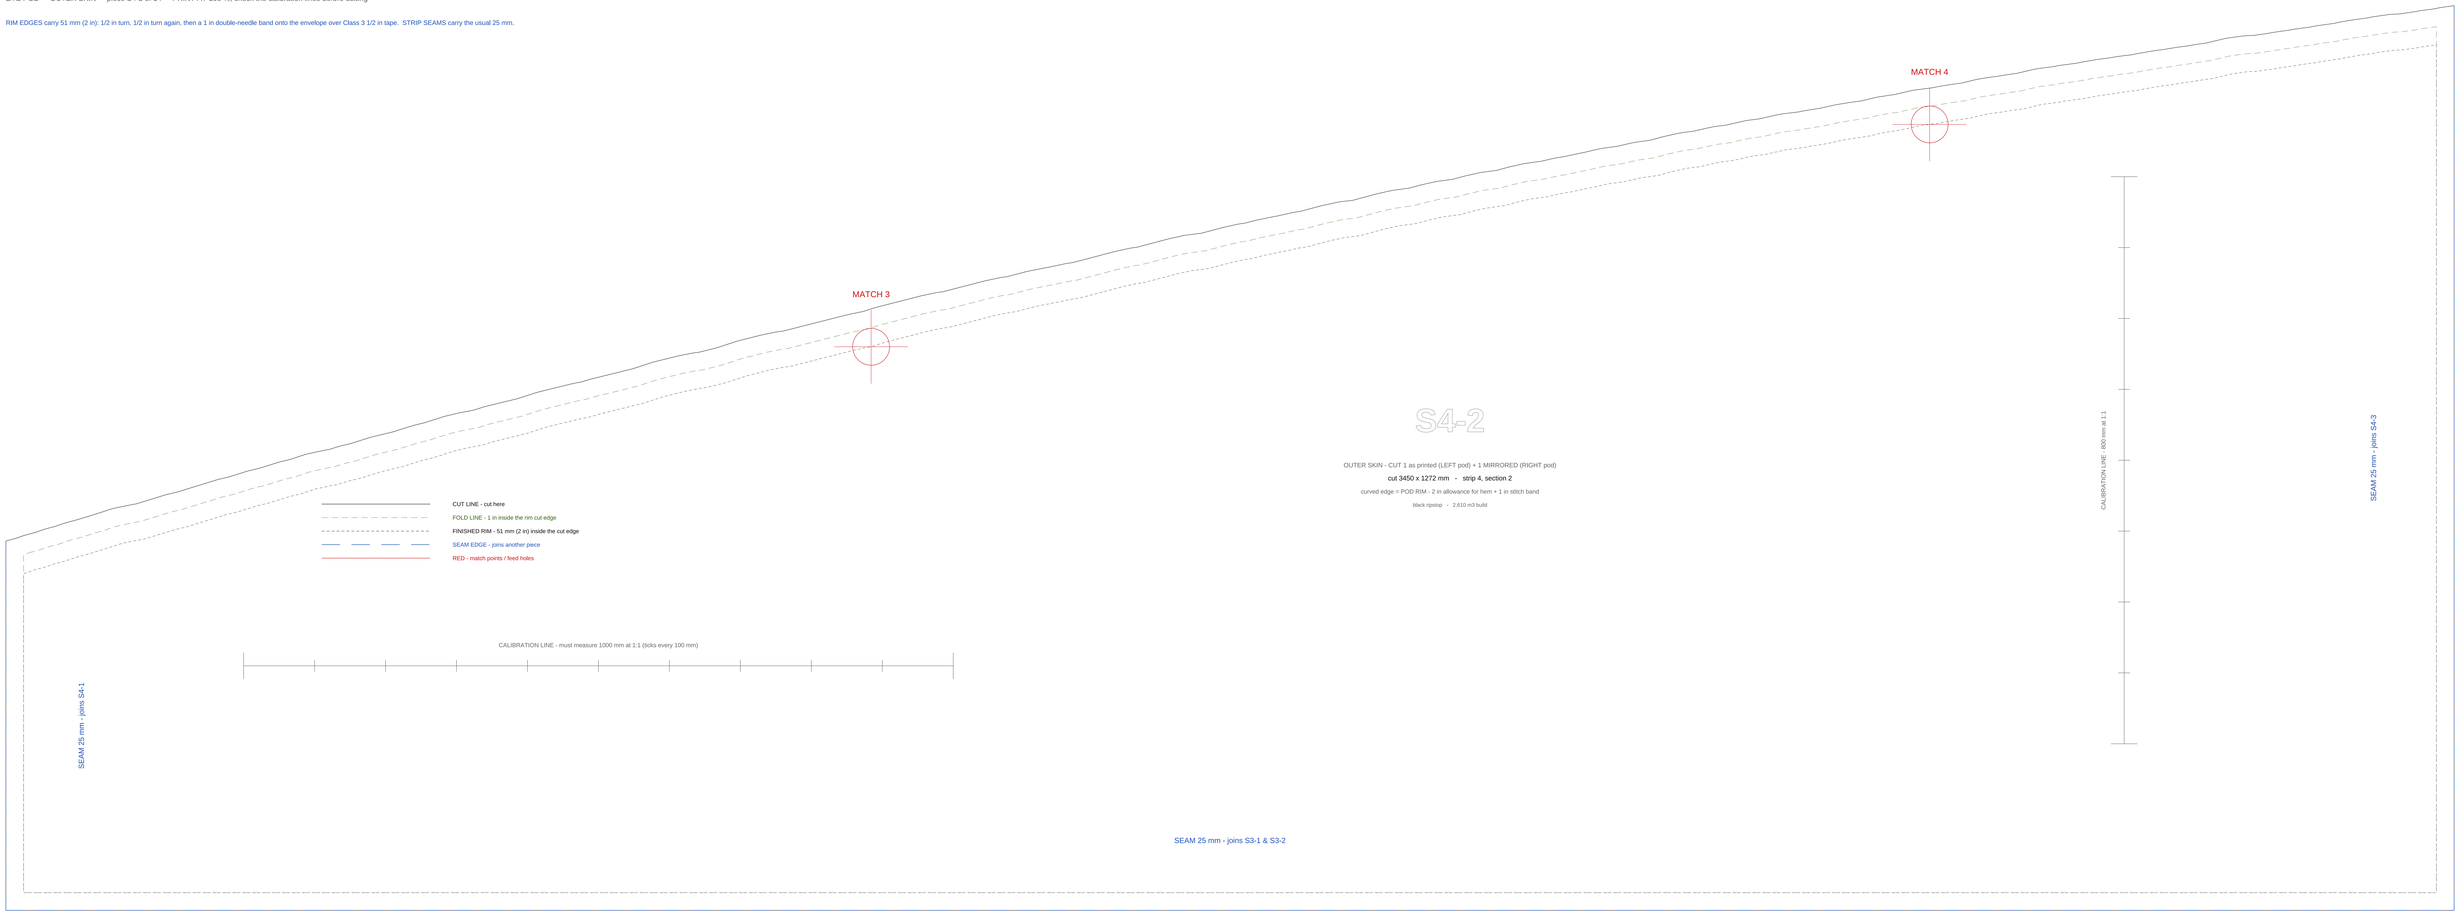

S4-2

OUTER SKIN - CUT 1 as printed (LEFT pod) + 1 MIRRORED (RIGHT pod)

cut 3450 x 1272 mm - strip 4, section 2

curved edge = POD RIM - 2 in allowance for hem + 1 in stitch band

black ripstop - 2,610 m3 build

EYE POD · OUTER SKIN · piece S4-3 of 14 · PRINT AT 100 %, check the calibration lines before cutting

RIM EDGES carry 51 mm (2 in): 1/2 in turn, 1/2 in turn again, then a 1 in double-needle band onto the envelope over Class 3 1/2 in tape. STRIP SEAMS carry the usual 25 mm.

MATCH 5

MATCH 6

CALIBRATION LINE - must measure 1000 mm at 1:1 (ticks every 100 mm)

S4-3

OUTER SKIN - CUT 1 as printed (LEFT pod) + 1 MIRRORED (RIGHT pod)

cut 3450 x 1413 mm - strip 4, section 3

curved edge = POD RIM - 2 in allowance for hem + 1 in stitch band

black ripstop - 2,610 m3 build

CALIBRATION LINE - 1000 mm at 1:1

SEAM 25 mm - joins S4-2

SEAM 25 mm - joins S4-4

CUT LINE - cut here

FOLD LINE - 1 in inside the rim cut edge

FINISHED RIM - 51 mm (2 in) inside the cut edge

SEAM EDGE - joins another piece

RED - match points / feed holes

SEAM 25 mm - joins S3-2 & S3-3

EYE POD - OUTER SKIN - piece S4-4 of 14 - PRINT AT 100 %, check the calibration lines before cutting

RIM EDGES carry 51 mm (2 in): 1/2 in turn, 1/2 in turn again, then a 1 in double-needle band onto the envelope over Class 3 1/2 in tape. STRIP SEAMS carry the usual 25 mm.

MATCH 7

SEAM 25 mm - joins S4-3

S4-4

OUTER SKIN - CUT 1 as printed (LEFT pod) + 1 MIRRORED (RIGHT pod)

cut 1411 x 1244 mm - strip 4, section 4

curved edge = POD RIM - 2 in allowance for hem + 1 in stitch band

black ripstop - 2,610 m3 build

CUT LINE - cut here

FOLD LINE - 1 in inside the rim cut edge

FINISHED RIM - 51 mm (2 in) inside the cut edge

SEAM EDGE - joins another piece

RED - match points / feed holes

SEAM 25 mm - joins S3-3

CALIBRATION LINE - must measure 500 mm at 1:1 (ticks every 100 mm)

CALIBRATION LINE - 500 mm at 1:1