

## DS-K1T320MFWX Face Recognition Terminal



Face recognition terminal adopts deep learning algorithm, which helps to recognize the face faster with higher accuracy. It also supports multiple authentication modes: face/card/fingerprint/PIN authentication, etc. It can be applied in multiple scenarios, such as buildings, enterprises, financial industries, and other important areas.

- 2.4-inch LCD screen, 2 MP lens
- Multiple authentication methods, including face, fingerprint, card, and PIN, etc.
- Supports Mifare card
- Max. 500 faces, 1,000 cards, 1,000 fingerprints and 100,000 events
- Face recognition duration < 0.2 s/User
- Supports ISAPI and ISUP 5.0 protocols
- Configuration via the web client



## Specification

| System                     |                                 |
|----------------------------|---------------------------------|
| Operating system           | Linux                           |
| Display                    |                                 |
| Screen size                | 2.4 inch                        |
| Туре                       | Display screen                  |
| Resolution                 | 320 × 240                       |
| Video                      |                                 |
| Lens                       | 1                               |
| Video compression standard | PAL (Default) and NTSC          |
| Resolution                 | 2 MP (video stream: 720P)       |
| FOV                        | HFOV = 43°; VFOV = 25°          |
| Audio                      |                                 |
| Audio output               | Built-in buzzer                 |
| Network                    |                                 |
| Wired network              | 10 M/100 M self-adaptive        |
| Wi-Fi                      | Support                         |
| Interface                  |                                 |
| Network interface          | 1                               |
| Lock control               | 1                               |
| Exit button                | 1                               |
| Door contact input         | 1                               |
| TAMPER                     | 1                               |
| USB                        | 1                               |
| Capacity                   |                                 |
| Face capacity              | 500                             |
| Fingerprint capacity       | 1,000                           |
| Card capacity              | 1,000                           |
| Event capacity             | 100,000                         |
| Authentication             |                                 |
| Face recognition distance  | 0.3 m ~ 1.5 m                   |
| Face recognition duration  | < 0.2 s                         |
| Card type                  | Mifare 1 card                   |
| Card reading distance      | 0 ~ 5 cm                        |
| Function                   |                                 |
| Face anti-spoofing         | Support                         |
| General                    |                                 |
| Built-in access controller | Yes                             |
| Supplement light           | White light                     |
| Power supply               | DC 12 V                         |
| Power consumption          | ≤ 6 W                           |
| Working temperature        | -10 °C ~ 55 °C (14 °F ~ 131 °F) |
| Working humidity           | 0% ~90%                         |




| Language | English, Spanish (South America), Arabic, Thai, Indonesian, Russian, Vietnamese, |
|----------|----------------------------------------------------------------------------------|
|          | Portuguese (Brazil), Korean, Japanese                                            |

## Available Model

DS-K1T320MFWX

## Dimension

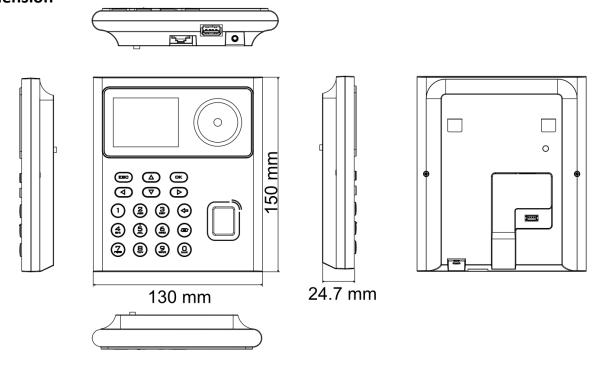





Headquarters No.555 Qianmo Road, Binjiang District, Hangzhou 310051, China T +86-571-8807-5998 www.hikvision.com

Follow us on social media to get the latest product and solution information.





HikvisionHQ



HikvisionHQ



Hikvision\_Global





