

Yuru Mobilya Project Report

Report Time: 2026-02-24

CONTENTS

CONTENTS



Basic Info

- Introduction



Device

- Device List
- Device Information (excluding APs)



Topology

- Network Topology
- Uplink/Downlink Device



Configuration

- Factory/WarehouseService Configuration
- Device Configuration
- Inspection Result

1. Basic Info

1.1 Introduction

2. Device

2.1 Device List


No.	Type	Model	Description	Quantity
1	Switch	ES209GC-P	9-Port Gigabit Smart POE Switch, 9 Gigabit RJ45 Ports including 8 PoE/POE+ Ports, 120W PoE power budget, Desktop Steel Case	3
2	Switch	NBS3200-24GT4XS-P	24-Port L2 Managed POE 10G Switch, 24 Gigabit RJ45 POE /POE+ Ports, 4 *10G SFP+ Slots, 370W PoE power budget, 19-inch Rack-mountable Steel Case	2
3	Switch	NBS3200-48GT4XS	48-Port L2 Managed 10G Switch, 48 Gigabit RJ45 Ports, 4 *10G SFP+ Slots, 19-inch Rack-mountable Steel Case	1
4	Fire wall	Z3200-S	NG Firewall, 1-3Gbps, IPS, Anti-Virus, RTI, APP/URL Filter, Log	1
5	Bridge	EST350-V2	5GHz wireless bridge, max 867Mbps wireless rate, 15dBi high gain directional antenna, Support 5KM+ long distance data transmission with 2GE ports, IP54 weatherproof. 2 devices paired in the package. Support eWeb and Ruijie Cloud management, 2 24V PoE adapter included	6
6	AP	AP820-L (V2)	Indoor, Wi-Fi 6, IEEE802.11ax 2400M, 1 GE LAN, Cloud, PoE, Recommended 64 clients	10

2.2 Device Information (excluding APs)

No.	Alias	SN	Model	MAC	IP
1	Anten4	G1RP7JY014737	EST350-V2	28:D0:F5:C4:24:B7	192.168.4.250
2	Anten3	G1RP7JY029276	EST350-V2	28:D0:F5:C4:35:C1	192.168.4.251
3	MainKabinetSW-1	G1SP3B2003506	NBS3200-48GT4XS	10:82:3D:54:CA:74	192.168.2.139
4	MainKabinetSW-2	G1SP3B8000063	NBS3200-24GT4XS-P	10:82:3D:59:30:9D	192.168.2.40
5	KarsiDepo	G1SP4B8001949	NBS3200-24GT4XS-P	10:82:3D:66:C0:13	192.168.2.174
6	Anten2	G1SU4FB00451C	EST350-V2	F0:74:8D:62:5B:10	192.168.2.238
7	Anten6	G1SU4FB009664	EST350-V2	F0:74:8D:62:61:19	192.168.2.105
8	Anten1	G1SU4FB013057	EST350-V2	F0:74:8D:62:65:12	192.168.2.239
9	Anten5	G1SU4FB017283	EST350-V2	F0:74:8D:62:6A:07	192.168.2.104
10	Firewall	H1SRB4Y000378	Z3200-S	D4:31:27:D2:83:73	213.74.147.230
11	EkDepo8P	ZAS91AQ000333	ES209GC-P	D4:31:27:04:6D:83	192.168.3.4
12	Guvenlik	ZAS91AQ001131	ES209GC-P	D4:31:27:04:6D:A5	192.168.2.34
13	FormenOdasi	ZAS91AQ004606	ES209GC-P	D4:31:27:04:6E:82	192.168.2.33

3 Topology

3.1 Network Topology

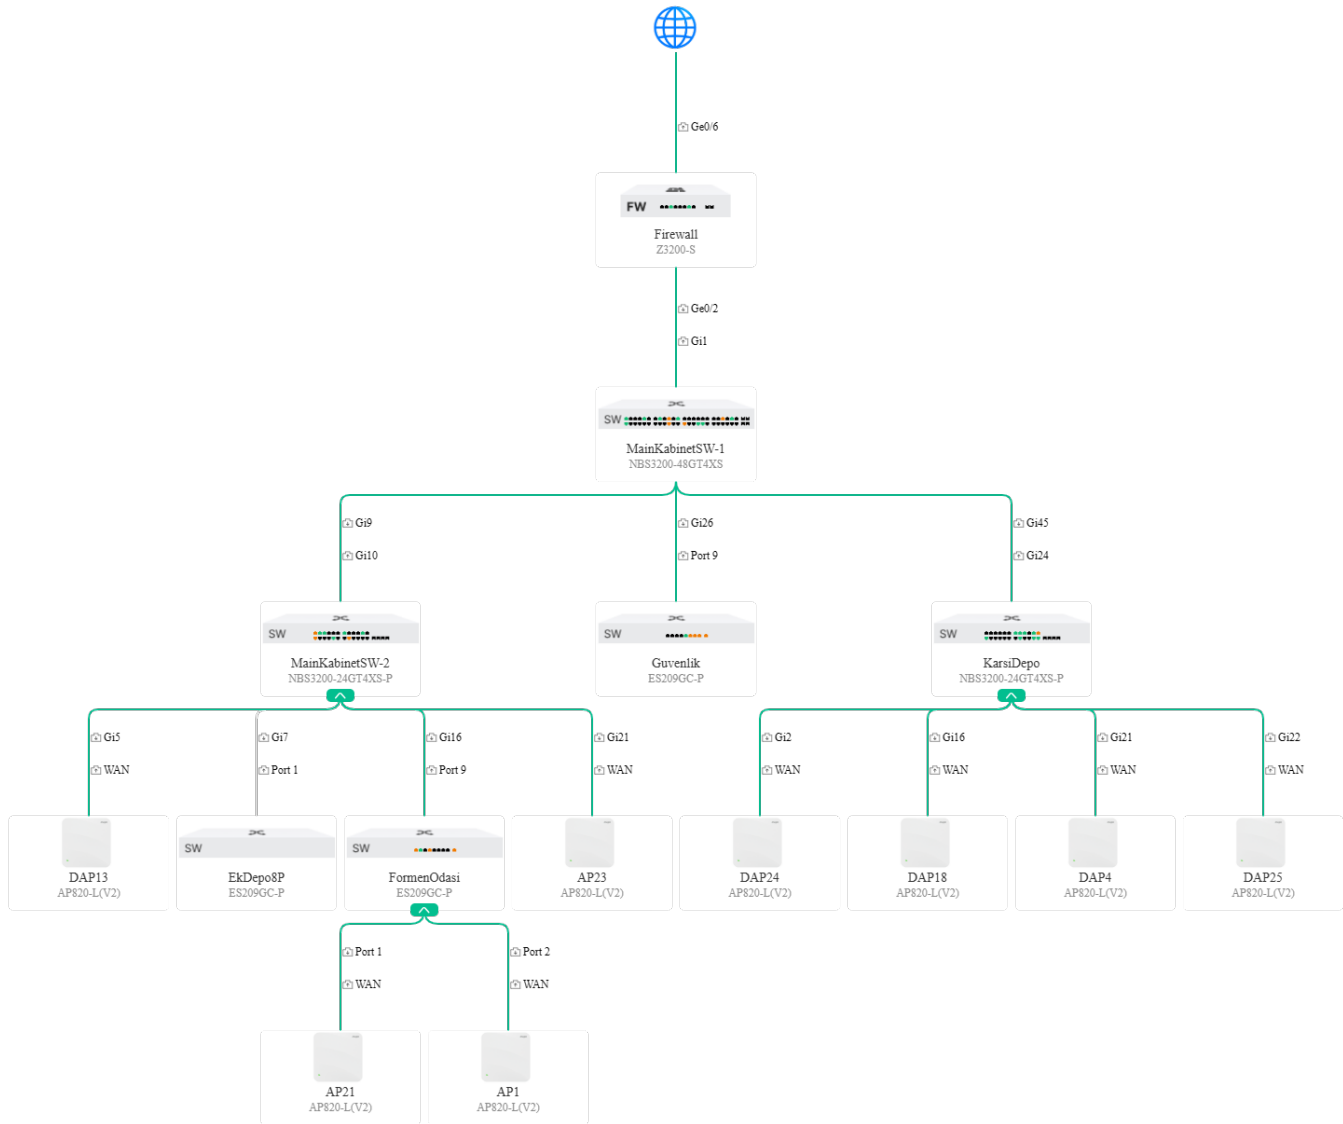

3.2 Uplink/Downlink Device

3.2.1 Uplink/Downlink Devices of Firewall H1SRB4Y000378

 Alias: Firewall SN: H1SRB4Y000378 Model: Z3200-S  Egress Firewall 1 + Device(s)				
Downlink Port	Management IP	Alias	SN	Model
Ge0/2	192.168.2.139	MainKabinetSW-1	G1SP3B2003506	NBS3200-48GT4XS

3.2.2 Uplink/Downlink Devices of MainKabinetSW-1 G1SP3B2003506

 Alias: MainKabinetSW-1 SN: G1SP3B2003506 Model: NBS3200-48GT4XS  Firewall MainKabinetSW-1 3 + Device(s)				
Downlink Port	Management IP	Alias	SN	Model
Gi9	192.168.2.40	MainKabinetSW-2	G1SP3B8000063	NBS3200-24GT4XS-P
Gi26	192.168.2.34	Guvenlik	ZAS91AQ001131	ES209GC-P
Gi45	192.168.2.174	KarsiDepo	G1SP4B8001949	NBS3200-24GT4XS-P

3.2.3 Uplink/Downlink Devices of MainKabinetSW-2 G1SP3B8000063


 Alias: MainKabinetSW-2 SN: G1SP3B8000063 Model: NBS3200-24GT4XS-P    Gi9 Gi10				
MainKabinetSW-1 MainKabinetSW-2 4 + Device(s)				
Downlink Port	Management IP	Alias	SN	Model
Gi5	192.168.2.76	DAP13	G1RUB3Y053749	AP820-L(V2)
Gi7	192.168.3.4	EkDepo8P	ZAS91AQ000333	ES209GC-P
Gi16	192.168.2.33	FormenOdasi	ZAS91AQ004606	ES209GC-P
Gi21	192.168.2.103	AP23	G1RUB3Y047038	AP820-L(V2)

3.2.4 Uplink/Downlink Devices of KarsiDepo G1SP4B8001949

 Alias: KarsiDepo SN: G1SP4B8001949 Model: NBS3200-24GT4XS-P    Gi45 Gi24				
MainKabinetSW-1 KarsiDepo 4 + Device(s)				

Downlink Port	Management IP	Alias	SN	Model
Gi2	192.168.2.6	DAP24	G1RUB3Y03152C	AP820-L(V2)
Gi16	192.168.2.92	DAP18	G1RUB3Y044061	AP820-L(V2)
Gi21	192.168.2.50	DAP4	G1RUB3Y026796	AP820-L(V2)
Gi22	192.168.2.232	DAP25	G1RUB3Y050042	AP820-L(V2)

3.2.5 Uplink/Downlink Devices of FormenOdasi ZAS91AQ004606

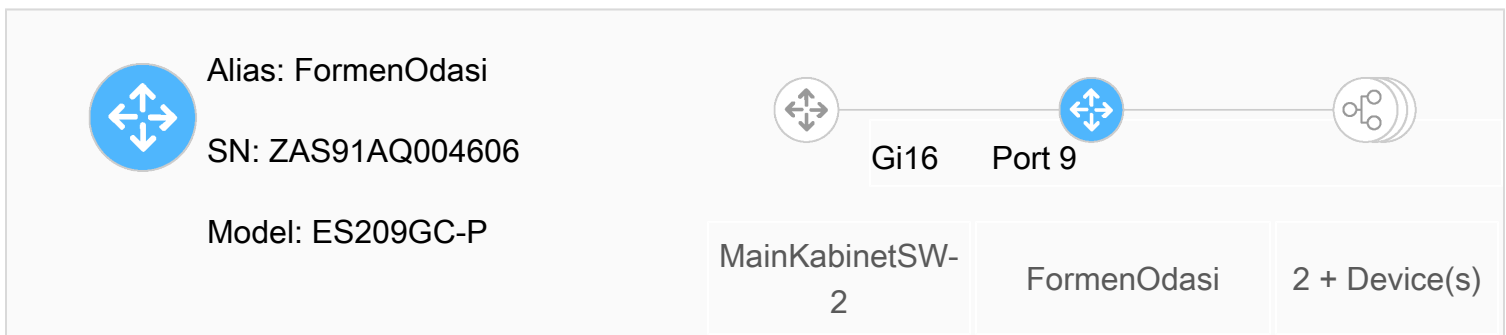

Downlink Port	Management IP	Alias	SN	Model
Port 1	192.168.2.99	AP21	G1RUB3Y03149C	AP820-L(V2)
Port 2	192.168.2.4	AP1	G1RUB3Y049858	AP820-L(V2)

4. Configuration

4.1 Factory/Warehouse Service Configuration

4.1.1 Wired Network Planning

Wired Network Planning	IP Range	VLAN	IP Assignment
Default VLAN	192.168.2.0/24	1	Mode : DHCP Source : H1SRB4Y000378 Address : 192.168.2.2~192.168.2.253 Default Gateway : 192.168.2.1 Dns1 : 8.8.8.8 8.8.4.4 Dns2 :
VLAN30	192.168.3.0/24	30	Mode : DHCP Source : H1SRB4Y000378 Address : 192.168.3.50~192.168.3.200 Default Gateway : 192.168.3.254 Dns1 : 8.8.8.8 Dns2 :
VLAN40	192.168.4.0/24	40	Mode : DHCP Source : H1SRB4Y000378 Address : 192.168.4.50~192.168.4.200 Default Gateway : 192.168.4.254 Dns1 : 8.8.8.8 Dns2 :
VLAN50	192.168.5.0/24	50	Mode : DHCP Source : H1SRB4Y000378 Address : 192.168.5.200~192.168.5.220 Default Gateway : 192.168.5.1 Dns1 : 8.8.8.8 Dns2 :

4.1.2 Wireless Network Planning

Wireless Network Planning	SSID	Password	IP Range	VLAN	IP Assignment
Default VLAN	YuruDizayn	YuruNet@2024!	192.168.2.0/24	1	DHCP
VLAN50	Yuru_Guest	Yuru@2423!	192.168.5.0/24	50	DHCP
VLAN60	Yuru_Uretim	zHRW87@6	192.168.6.0/24	60	DHCP
VLAN150	YURUNET	YuruNet@2025!!	192.168.150.0 /24	150	DHCP

4.2 Device Configuration

4.2.1 Switching Configuration

1) Layer 3 Interface Configuration

2) Port

SN:ZAS91AQ004606 Model:ES209GC-P Alias:FormenOdasi

Port	Status	Duplex Mode	Port Type	VLAN	PoE Status	Remarks
Port 1	Up(10M)	Full-duplex	Trunk	Native Id : 1 Allowed Vlan : 1,30,40,50,60,150	On	
Port 2	Up (1000M)	Full-duplex	Trunk	Native Id : 1 Allowed Vlan : 1,30,40,50,60,150	On	
Port 3	Down	Half-duplex	Trunk	Native Id : 1 Allowed Vlan : 1,30,40,50,60,150	Off	
Port 4	Up(100M)	Full-duplex	Trunk	Native Id : 1 Allowed Vlan : 1,30,40,50,60,150	On	
Port 5	Down	Half-duplex	Trunk	Native Id : 1 Allowed Vlan : 1,30,40,50,60,150	Off	
Port 6	Down	Half-duplex	Trunk	Native Id : 1 Allowed Vlan : 1,30,40,50,60,150	Off	
Port 7	Down	Half-duplex	Trunk	Native Id : 1 Allowed Vlan : 1,30,40,50,60,150	Off	
Port 8	Down	Half-duplex	Trunk	Native Id : 1 Allowed Vlan : 1,30,40,50,60,150	Off	
Port 9	Up(100M)	Full-duplex	Trunk	Native Id : 1 Allowed Vlan : 1,30,40,50,60,150	Unsupport	

SN:G1SP4B8001949 Model:NBS3200-24GT4XS-P Alias:KarsiDepo

Port	Status	Duplex Mode	Port Type	VLAN	PoE Status	Remarks
------	--------	-------------	-----------	------	------------	---------

Gi1	Down	Not connected	Trunk	Native Id : 1 Allowed Vlan : 1-4094	Off	
Gi2	Up(1000M)	Full-duplex	Trunk	Native Id : 1 Allowed Vlan : 1-4094	On	
Gi3	Down	Not connected	Trunk	Native Id : 1 Allowed Vlan : 1-4094	Off	
Gi4	Down	Not connected	Trunk	Native Id : 1 Allowed Vlan : 1-4094	Off	
Gi5	Down	Not connected	Trunk	Native Id : 1 Allowed Vlan : 1-4094	Off	
Gi6	Down	Not connected	Trunk	Native Id : 1 Allowed Vlan : 1-4094	Off	
Gi7	Down	Not connected	Trunk	Native Id : 1 Allowed Vlan : 1-4094	Off	
Gi8	Down	Not connected	Trunk	Native Id : 1 Allowed Vlan : 1-4094	Off	
Gi9	Down	Full-duplex	Trunk	Native Id : 1 Allowed Vlan : 1-4094	Off	
Gi10	Down	Not connected	Trunk	Native Id : 1 Allowed Vlan : 1-4094	Off	
Gi11	Down	Not connected	Trunk	Native Id : 1 Allowed Vlan : 1-4094	Off	
Gi12	Down	Not connected	Trunk	Native Id : 1 Allowed Vlan : 1-4094	Off	
Gi13	Up(1000M)	Full-duplex	Access	Native Id : 30 Allowed Vlan :	Off	
Gi14	Down	Not connected	Trunk	Native Id : 1 Allowed Vlan : 1-4094	Off	
Gi15	Up(1000M)	Full-duplex	Trunk	Native Id : 1 Allowed Vlan : 1-4094	On	

Gi16	Up(1000M)	Full-duplex	Trunk	Native Id : 1 Allowed Vlan : 1-4094	On	
Gi17	Up(1000M)	Full-duplex	Access	Native Id : 30 Allowed Vlan :	Off	
Gi18	Down	Not connected	Trunk	Native Id : 1 Allowed Vlan : 1-4094	Off	
Gi19	Down	Not connected	Trunk	Native Id : 1 Allowed Vlan : 1-4094	Off	
Gi20	Down	Not connected	Trunk	Native Id : 1 Allowed Vlan : 1-4094	Off	
Gi21	Up(1000M)	Full-duplex	Trunk	Native Id : 1 Allowed Vlan : 1-4094	On	
Gi22	Up(1000M)	Full-duplex	Trunk	Native Id : 1 Allowed Vlan : 1-4094	On	
Gi23	Up(100M)	Full-duplex	Trunk	Native Id : 1 Allowed Vlan : 1-4094	On	
Gi24	Up(1000M)	Full-duplex	Trunk	Native Id : 1 Allowed Vlan : 1-4094	Off	
Te25	Down	Not connected	Trunk	Native Id : 1 Allowed Vlan : 1-4094	Unsupport	
Te26	Down	Not connected	Trunk	Native Id : 1 Allowed Vlan : 1-4094	Unsupport	
Te27	Down	Not connected	Trunk	Native Id : 1 Allowed Vlan : 1-4094	Unsupport	
Te28	Down	Not connected	Trunk	Native Id : 1 Allowed Vlan : 1-4094	Unsupport	

SN:G1SP3B2003506 Model:NBS3200-48GT4XS Alias:MainKabinetSW-1

Port	Status	Duplex Mode	Port Type	VLAN	PoE Status	Remarks
------	--------	-------------	-----------	------	------------	---------

Gi1	Up (1000M)	Full-duplex	Trunk	Native Id : 1 Allowed Vlan : 1,30,40,50,60,98,150	Unsupport	Firewall- Uplink
Gi2	Up (1000M)	Full-duplex	Access	Native Id : 30 Allowed Vlan :	Unsupport	
Gi3	Down	Not connected	Access	Native Id : 1 Allowed Vlan :	Unsupport	
Gi4	Down	Half-duplex	Access	Native Id : 1 Allowed Vlan :	Unsupport	
Gi5	Down	Not connected	Access	Native Id : 1 Allowed Vlan :	Unsupport	
Gi6	Down	Full-duplex	Access	Native Id : 98 Allowed Vlan :	Unsupport	
Gi7	Down	Half-duplex	Access	Native Id : 1 Allowed Vlan :	Unsupport	
Gi8	Down	Not connected	Access	Native Id : 1 Allowed Vlan :	Unsupport	
Gi9	Up (1000M)	Full-duplex	Trunk	Native Id : 1 Allowed Vlan : 1,30,40,50,60,98,150	Unsupport	
Gi10	Down	Not connected	Access	Native Id : 1 Allowed Vlan :	Unsupport	
Gi11	Down	Not connected	Access	Native Id : 1 Allowed Vlan :	Unsupport	
Gi12	Down	Not connected	Access	Native Id : 1 Allowed Vlan :	Unsupport	
Gi13	Down	Not connected	Access	Native Id : 1 Allowed Vlan :	Unsupport	
Gi14	Down	Not connected	Access	Native Id : 1 Allowed Vlan :	Unsupport	

Gi15	Up (1000M)	Full-duplex	Access	Native Id : 98 Allowed Vlan :	Unsupport	
Gi16	Down	Half-duplex	Access	Native Id : 1 Allowed Vlan :	Unsupport	
Gi17	Down	Half-duplex	Access	Native Id : 1 Allowed Vlan :	Unsupport	
Gi18	Down	Full-duplex	Access	Native Id : 1 Allowed Vlan :	Unsupport	
Gi19	Up (100M)	Full-duplex	Trunk	Native Id : 1 Allowed Vlan : 1-4094	Unsupport	
Gi20	Up (100M)	Full-duplex	Access	Native Id : 1 Allowed Vlan :	Unsupport	
Gi21	Down	Half-duplex	Access	Native Id : 1 Allowed Vlan :	Unsupport	
Gi22	Down	Full-duplex	Access	Native Id : 1 Allowed Vlan :	Unsupport	
Gi23	Up (1000M)	Full-duplex	Access	Native Id : 1 Allowed Vlan :	Unsupport	
Gi24	Down	Half-duplex	Access	Native Id : 1 Allowed Vlan :	Unsupport	
Gi25	Down	Half-duplex	Trunk	Native Id : 1 Allowed Vlan : 1-4094	Unsupport	arge switch
Gi26	Up(10M)	Full-duplex	Trunk	Native Id : 1 Allowed Vlan : 1,30,40,50,60,150	Unsupport	
Gi27	Down	Half-duplex	Access	Native Id : 1 Allowed Vlan :	Unsupport	
Gi28	Down	Full-duplex	Access	Native Id : 1 Allowed Vlan :	Unsupport	
Gi29	Down	Not connected	Access	Native Id : 1 Allowed Vlan :	Unsupport	

Gi30	Down	Full-duplex	Access	Native Id : 1 Allowed Vlan :	Unsupport	
Gi31	Down	Full-duplex	Access	Native Id : 1 Allowed Vlan :	Unsupport	Kayıt cihazı
Gi32	Up (1000M)	Full-duplex	Access	Native Id : 1 Allowed Vlan :	Unsupport	
Gi33	Down	Not connected	Access	Native Id : 1 Allowed Vlan :	Unsupport	
Gi34	Up (1000M)	Full-duplex	Access	Native Id : 1 Allowed Vlan :	Unsupport	
Gi35	Down	Not connected	Access	Native Id : 1 Allowed Vlan :	Unsupport	
Gi36	Down	Not connected	Access	Native Id : 1 Allowed Vlan :	Unsupport	
Gi37	Down	Not connected	Access	Native Id : 1 Allowed Vlan :	Unsupport	
Gi38	Down	Not connected	Access	Native Id : 1 Allowed Vlan :	Unsupport	
Gi39	Down	Half-duplex	Access	Native Id : 1 Allowed Vlan :	Unsupport	
Gi40	Down	Not connected	Access	Native Id : 1 Allowed Vlan :	Unsupport	
Gi41	Up (100M)	Full-duplex	Access	Native Id : 1 Allowed Vlan :	Unsupport	
Gi42	Down	Not connected	Access	Native Id : 1 Allowed Vlan :	Unsupport	
Gi43	Down	Half-duplex	Access	Native Id : 1 Allowed Vlan :	Unsupport	
Gi44	Down	Not connected	Access	Native Id : 1 Allowed Vlan :	Unsupport	

Gi45	Up (1000M)	Full-duplex	Trunk	Native Id : 1 Allowed Vlan : 1-4094	Unsupport	
Gi46	Down	Half-duplex	Access	Native Id : 50 Allowed Vlan :	Unsupport	
Gi47	Down	Full-duplex	Access	Native Id : 40 Allowed Vlan :	Unsupport	
Gi48	Down	Full-duplex	Access	Native Id : 30 Allowed Vlan :	Unsupport	
Te49	Down	Not connected	Access	Native Id : 1 Allowed Vlan :	Unsupport	
Te50	Down	Not connected	Access	Native Id : 1 Allowed Vlan :	Unsupport	
Te51	Down	Not connected	Access	Native Id : 1 Allowed Vlan :	Unsupport	
Te52	Down	Not connected	Access	Native Id : 1 Allowed Vlan :	Unsupport	

SN:ZAS91AQ000333 Model:ES209GC-P Alias:EkDepo8P

Port	Status	Duplex Mode	Port Type	VLAN	PoE Status	Remarks
Port 1	Down	Half-duplex	Trunk	Native Id : 1 Allowed Vlan : 1,30,40,50,60,150	Off	
Port 2	Down	Half-duplex	Trunk	Native Id : 1 Allowed Vlan : 1,30,40,50,60,150	Off	
Port 3	Down	Half-duplex	Trunk	Native Id : 1 Allowed Vlan : 1,30,40,50,60,150	Off	
Port 4	Down	Half-duplex	Trunk	Native Id : 1 Allowed Vlan : 1,30,40,50,60,150	Off	
Port 5	Down	Half-duplex	Access	Native Id : 30 Allowed Vlan :	Off	
Port 6	Up(100M)	Full-duplex	Access	Native Id : 30 Allowed Vlan :	On	
Port 7	Up(100M)	Full-duplex	Access	Native Id : 30 Allowed Vlan :	On	
Port 8	Up(100M)	Full-duplex	Access	Native Id : 30 Allowed Vlan :	On	
Port 9	Up (1000M)	Full-duplex	Trunk	Native Id : 1 Allowed Vlan : 1,30,40,50,60,150	Unsupport	

SN:ZAS91AQ001131 Model:ES209GC-P Alias:Guvenlik

Port	Status	Duplex Mode	Port Type	VLAN	PoE Status	Remarks
Port 1	Down	Half-duplex	Trunk	Native Id : 1 Allowed Vlan : 1,30,40,50,60,150	Off	
Port 2	Down	Half-duplex	Trunk	Native Id : 1 Allowed Vlan : 1,30,40,50,60,150	Off	
Port 3	Down	Half-duplex	Trunk	Native Id : 1 Allowed Vlan : 1,30,40,50,60,150	Off	
Port 4	Down	Half-duplex	Trunk	Native Id : 1 Allowed Vlan : 1,30,40,50,60,150	Off	
Port 5	Up (1000M)	Full-duplex	Trunk	Native Id : 1 Allowed Vlan : 1,30,40,50,60,150	Off	
Port 6	Up(100M)	Full-duplex	Access	Native Id : 30 Allowed Vlan :	On	
Port 7	Up(100M)	Full-duplex	Trunk	Native Id : 1 Allowed Vlan : 1,30,40,50,60,150	On	
Port 8	Up(100M)	Full-duplex	Trunk	Native Id : 1 Allowed Vlan : 1,30,40,50,60,150	On	
Port 9	Up(100M)	Full-duplex	Trunk	Native Id : 1 Allowed Vlan : 1,30,40,50,60,150	Unsupport	

SN:G1SP3B8000063 Model:NBS3200-24GT4XS-P Alias:MainKabinetSW-2

Port	Status	Duplex Mode	Port Type	VLAN	PoE Status	Remarks
------	--------	-------------	-----------	------	------------	---------

Gi1	Up(100M)	Full-duplex	Trunk	Native Id : 1 Allowed Vlan : 1-4094	On	
Gi2	Up(100M)	Full-duplex	Trunk	Native Id : 1 Allowed Vlan : 1-4094	On	
Gi3	Up (1000M)	Full-duplex	Trunk	Native Id : 1 Allowed Vlan : 1-4094	On	
Gi4	Down	Half-duplex	Trunk	Native Id : 1 Allowed Vlan : 1-4094	Off	
Gi5	Up (1000M)	Full-duplex	Trunk	Native Id : 1 Allowed Vlan : 1-4094	On	
Gi6	Down	Half-duplex	Trunk	Native Id : 1 Allowed Vlan : 1-4094	Off	
Gi7	Down	Half-duplex	Trunk	Native Id : 1 Allowed Vlan : 1-4094	Off	
Gi8	Down	Half-duplex	Trunk	Native Id : 1 Allowed Vlan : 1-4094	Off	
Gi9	Down	Half-duplex	Trunk	Native Id : 1 Allowed Vlan : 1-4094	Off	
Gi10	Up (1000M)	Full-duplex	Trunk	Native Id : 1 Allowed Vlan : 1-4094	Off	
Gi11	Down	Half-duplex	Trunk	Native Id : 1 Allowed Vlan : 1-4094	Off	
Gi12	Down	Not connected	Trunk	Native Id : 1 Allowed Vlan : 1-4094	Off	
Gi13	Up (1000M)	Full-duplex	Trunk	Native Id : 1 Allowed Vlan : 1-4094	On	
Gi14	Down	Half-duplex	Trunk	Native Id : 1 Allowed Vlan : 1-4094	Off	
Gi15	Down	Half-duplex	Trunk	Native Id : 1 Allowed Vlan : 1-4094	Off	

Gi16	Up(100M)	Full-duplex	Trunk	Native Id : 1 Allowed Vlan : 1-4094	Off	
Gi17	Down	Half-duplex	Trunk	Native Id : 1 Allowed Vlan : 1-4094	Off	
Gi18	Down	Half-duplex	Trunk	Native Id : 1 Allowed Vlan : 1-4094	Off	
Gi19	Down	Half-duplex	Trunk	Native Id : 1 Allowed Vlan : 1-4094	Off	
Gi20	Down	Half-duplex	Trunk	Native Id : 1 Allowed Vlan : 1-4094	Off	
Gi21	Up (1000M)	Full-duplex	Trunk	Native Id : 1 Allowed Vlan : 1-4094	On	
Gi22	Down	Half-duplex	Trunk	Native Id : 1 Allowed Vlan : 1-4094	Off	
Gi23	Down	Half-duplex	Trunk	Native Id : 1 Allowed Vlan : 1-4094	Off	
Gi24	Down	Half-duplex	Trunk	Native Id : 1 Allowed Vlan : 1-4094	Off	
Te25	Down	Not connected	Access	Native Id : 1 Allowed Vlan :	Unsupport	
Te26	Down	Not connected	Access	Native Id : 1 Allowed Vlan :	Unsupport	
Te27	Down	Not connected	Access	Native Id : 1 Allowed Vlan :	Unsupport	
Te28	Down	Half-duplex	Trunk	Native Id : 1 Allowed Vlan : 1,30,40,50,60,98,150	Unsupport	

4.2.2 WIRELESS

1) Wireless Management Mode

Managed Mode	Master Device	IP Range for AP
Managed by Ruijie Cloud Web	G1SP4B8001949	192.168.2.1/24

2) WIRELESS

SSID	Frequency Band	Encryption Method	Forward Mode	VLAN	IP Range
YURUNET	2.4G/5G	wpa_wpa2-psk	bridge	150	192.168.150.1/24
YuruDizayn	2.4G/5G	wpa_wpa2-psk	bridge	1	192.168.2.1/24
Yuru_Guest	2.4G/5G	wpa2-psk	bridge	50	192.168.5.1/24
Yuru_Uretim	2.4G/5G	wpa_wpa2-psk	bridge	60	192.168.6.1/24

4.2 Inspection Result

Type	Description	Result
Layer 2 and 3 Connectivity	Address pool and VLAN test	Pass