

input clip a: "seven"

waveform + calibrated noise

input clip b: "three"


waveform + calibrated noise

frozen oscillator field

parameters randomized at initialization, never trained

$K, \omega \sim \text{fixed random draws (seed-pinned)}$

$$d\theta_i/dt = \omega_i + \sum_j K_{ij} \sin(\theta_j - \theta_i) + g \cdot A_r(t) - \lambda \cdot \sin \theta_i$$



feature vector $\Phi(a)$




masked pooled statistics of
($\sin \theta$, $\cos \theta$) trajectories, per window

feature vector $\Phi(b)$



masked pooled statistics of
($\sin \theta$, $\cos \theta$) trajectories, per window

feature space R^d — one point per clip

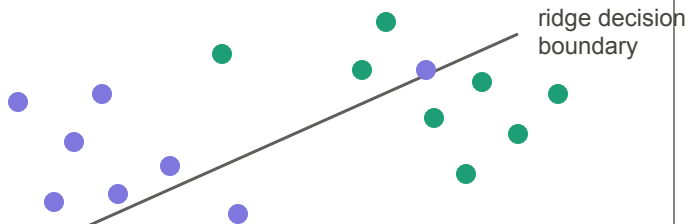

ridge classifier (the probe)

$$W = (\Phi^T \Phi + \lambda I)^{-1} \Phi^T Y$$

linear & closed-form: separation must
pre-exist in Φ — the dynamics wrote it

no-dynamics control (the floor)

identical ridge on frontend features
directly, field bypassed;
cell – floor = dynamics' contribution