


Structure IEEE 754 simple précision : -13.625 = 0XC15A0000

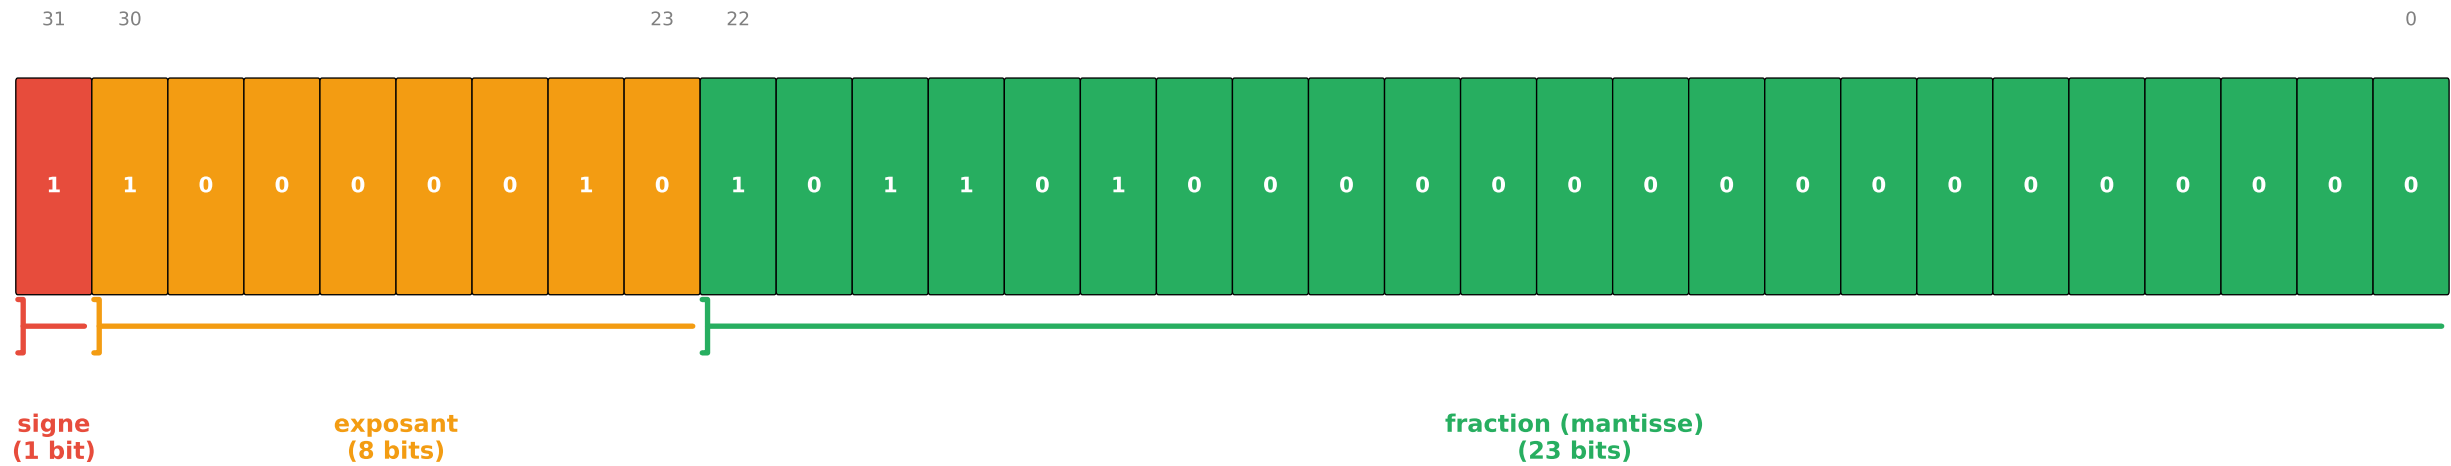

Décodage étape par étape :

1. Signe $s = 1 \rightarrow (-1)^1 = -1 \rightarrow$ négatif
2. Exposant $\text{exp} = 10000010_2 = 130_{10}$
 $E = \text{exp} - \text{Bias} = 130 - 127 = 3$
3. Fraction $\text{frac} = 0.10110100000000000000000_2$
 $M = 1 + \text{frac} = 1 + 0.7031250000 = 1.703125$

Formule IEEE 754 : $V = (-1)^s \times M \times 2^E$

Application : $V = (-1)^1 \times 1.703125 \times 2^3$
 $V = -1 \times 1.703125 \times 8$
 $V = -13.625 \quad \checkmark$

