

Oscillogram No.: **HPL3-77438** OCV = **244 V**
Date of Test: 10/5/2023 Time of Test: 9:47:54 AM

AVAILABLE CIRCUIT CHARACTERISTICS:
Osc. No: 57423 Calibration Date: 10/20/2022
OCV = 244 V Rms Sym Current = 25.5 kA
Power Factor = 15%



High Power Laboratory, HPL3 Facility
Cedar Rapids, Iowa, USA

ANALYSIS RESULTS TABLE

Closing Angle	6 Deg.
Closing time (V0)+	268.3 μ Sec
Peak Current (Ip)	12.08 k Amps
Time to Ip	4.218 m Sec
I ² T	549.0 k Amp ² sec
I Duration	7.576 m Sec

Project No.: 6000001332 TestFlow No.: TESLA
Test Device: Eaton 10kA MAIN w/ Eaton 125
Sample No.: 3B

Performance Observations

Was the Breaker Tripped after the test?	Yes
Could the Breaker be Reset?	Yes
Did it have continuity in all poles?	Yes
Was the Enclosure Fuse Opened?	No


Comment Section

Main & Branch Breaker Tripped


GRID ON, NEW DOOR

INVESTIGATION

Analysis results are based on this data

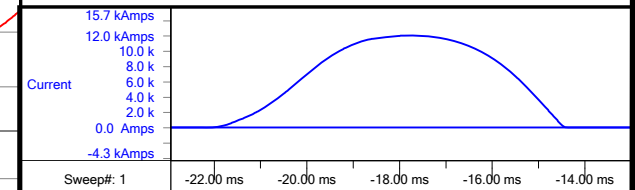

TOTAL VIEW

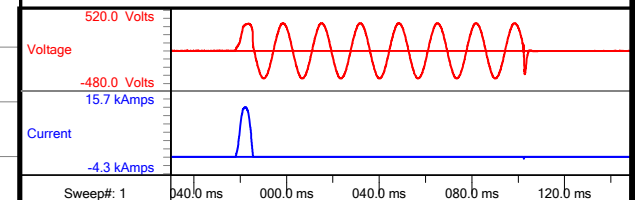

INSTRUMENTATION DATA

Data Recording System: HBM GENST C/N 063-163

Voltage "A": 100X Scope Probe, C/N 131-554, 1%

PLOT FILE HPL3 CR_1_M

Current "A": Rogowski CT Coil, C/N 045-444

NOTE: Channel offset removed for analysis,
but not for display.

OSC. NO.: HPL3-77438

