


PAGE	DESCRIPTION
1 ROOT PAGE	Block Diagram of the project
2 PSU	ATX PSU connector and filters
3 SOC Power	A secondary power supply for SOC
4 MCU	MCU
5 Clock Generator	Clocks for SOC and SYZYGY, external master sync
6 UART	UART peripherals
7 SOC_B0_JTAG	SOC JTAG
8 SOC Power Bypass	SOC bypass capacitors
9 SOC_B500 POR QSPI	Power on reset, QSPI, SOC boot config
10 SOC_B501	Peripheral resets, ULPi and RGMII buses
11 PS DDR3	DDR3 RAM for SOC PS subsystem
12 SDIO	SDIO and EMMC shared bus
13 SOC_B35	A redundant clock for SOC PS
14 Ethernet PS	RGMII Ethernet peripheral
15 USB Hub	USB, ULPi transceiver and hub
16 USB SATA	USB SATA converter and SATA SSD socket
17 VIO Power	Variable IO power for SYZYGY slots
18 SYZYGY34	SYZYGY slots
19 SOC_I2C	SOC I2C
20 Ethernet MCU	10/100 RMII Ethernet for MCU

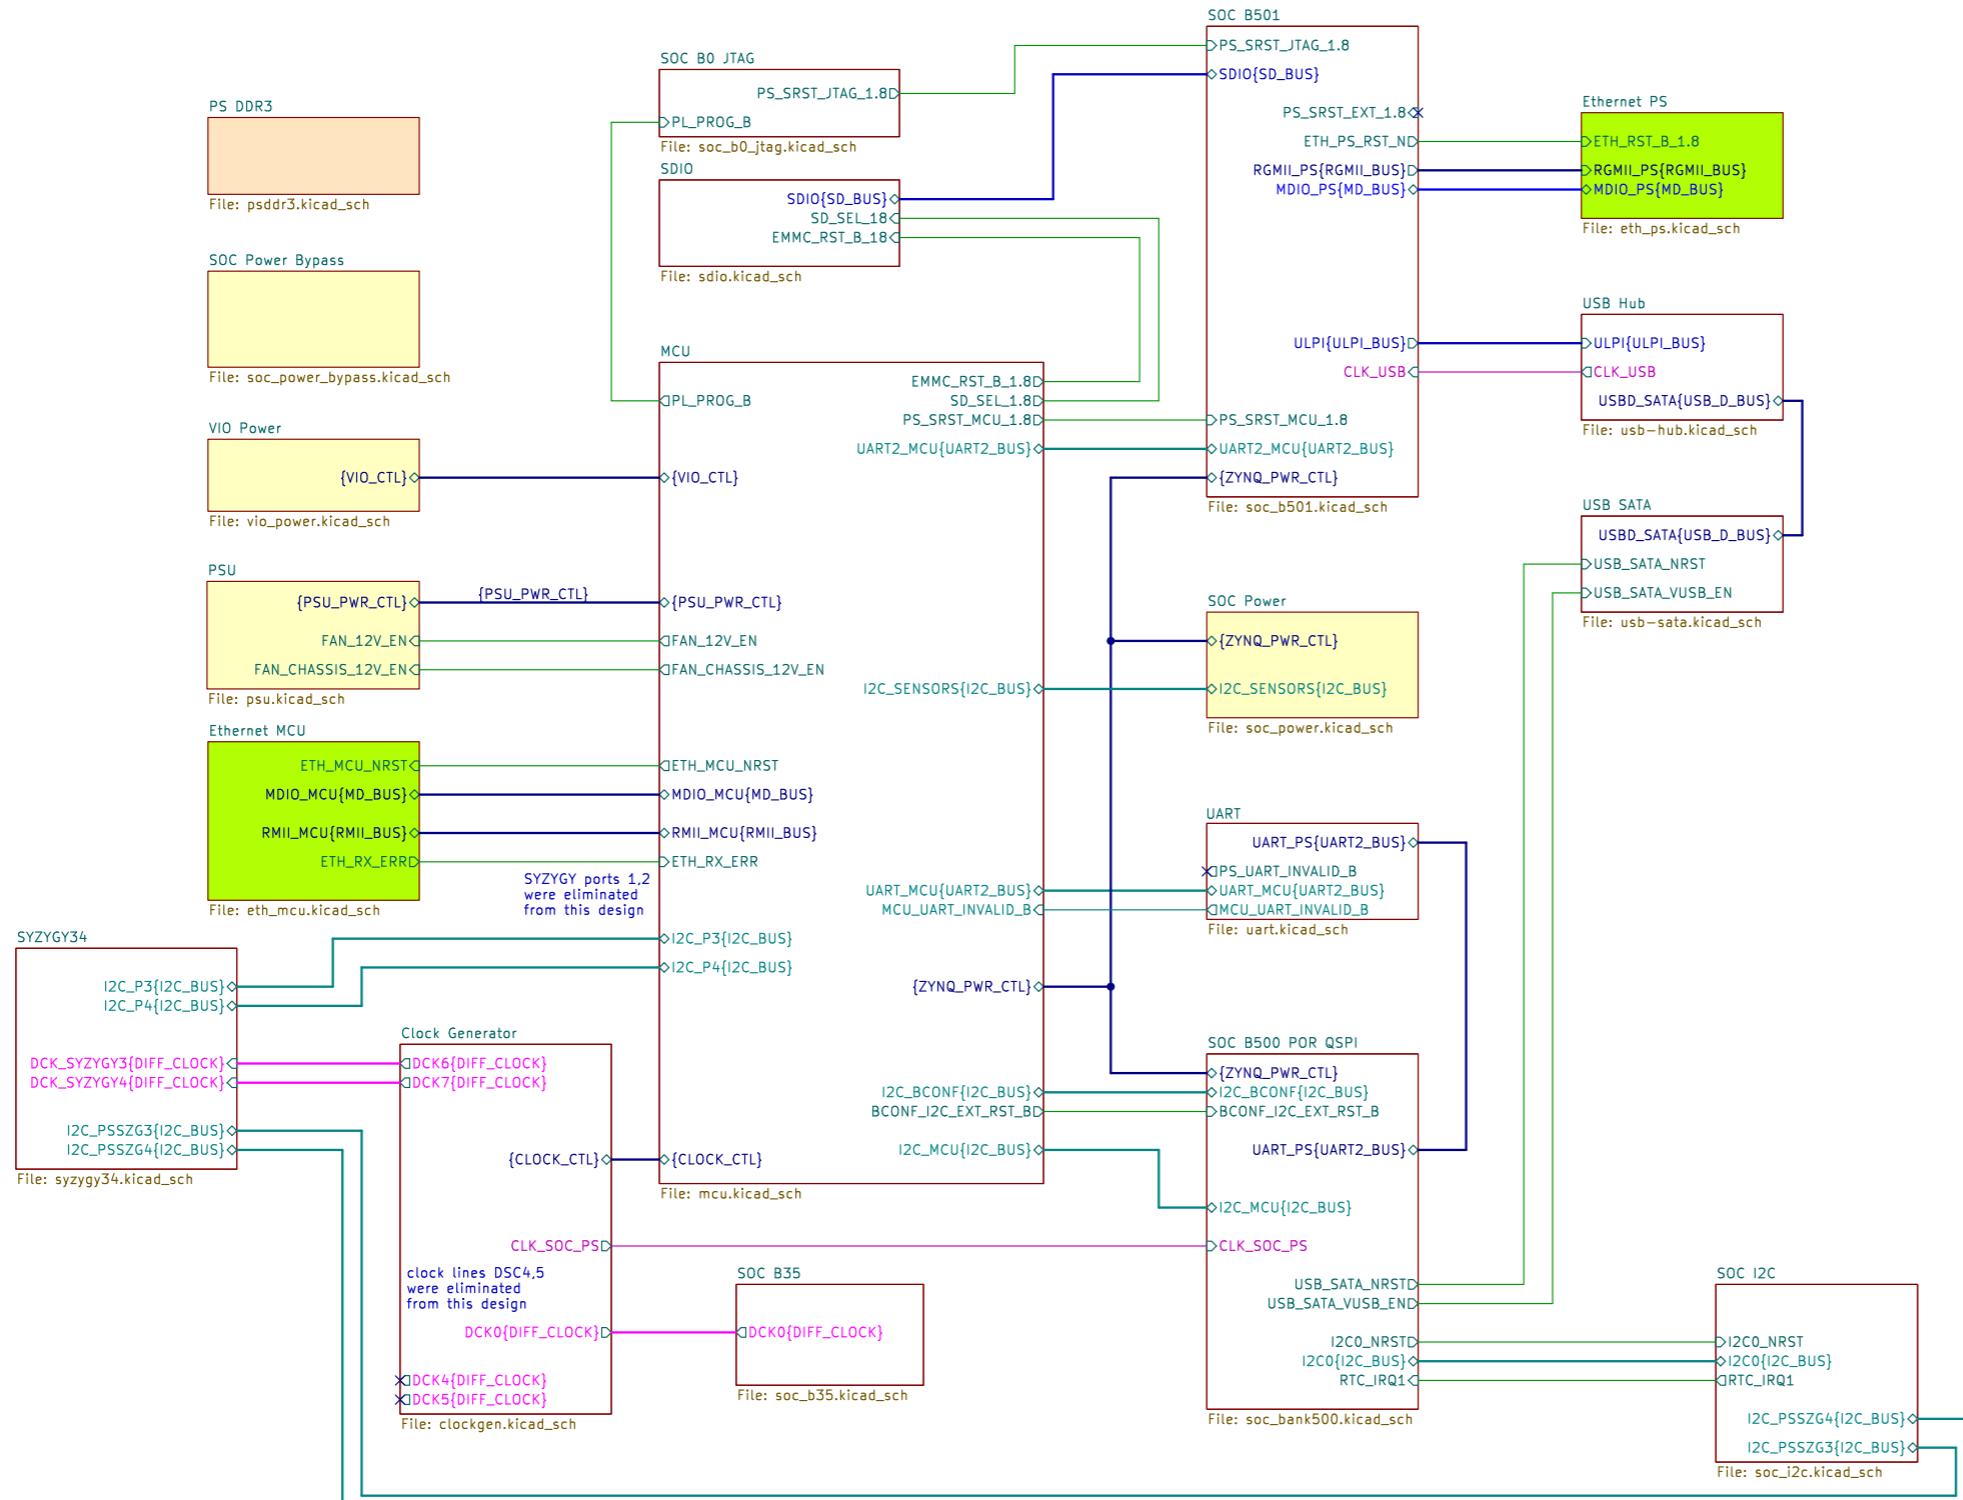

NOTE:
SYZYGY ports 1,2
were eliminated
from this design

Stackup JLC10161H-2116(1.57mm±10%)
F_Cu, B_Cu:
diff 800hm track / spacing: 8.28/6 mil; 0.2103/0.1524 mm
single 400hm: 11.23 mil; 0.2852 mm
diff 1000hm track / spacing: 5.58/8 mil; 0.1417/0.2032 mm
single 500hm: 7.36mil; 0.1869 mm


In3, In5, In7 internal layers:
diff 800hm: 6.44/8 mil; 0.1636/0.2032 mm
single 400hm: 7.03mil; 0.1786 mm
diff 1000hm: 4.29/11 mil; 0.1090/0.2794 mm
single 500hm: 4.54mil; 0.1153 mm




SYZYGY Carrier Mainboard
Author: Nazim Aghabayov
(c) Nazim 2025
Top Level Schema
electrodyssey.net


electrodyssey.net

Sheet: /	File: NASR.kicad_sch
Title: NASR-M	rel: Fletched Bustard
Size: A3	Date: 2025-09-26
KiCad E.D.A. 9.0.4	Rev: D 0.9.4




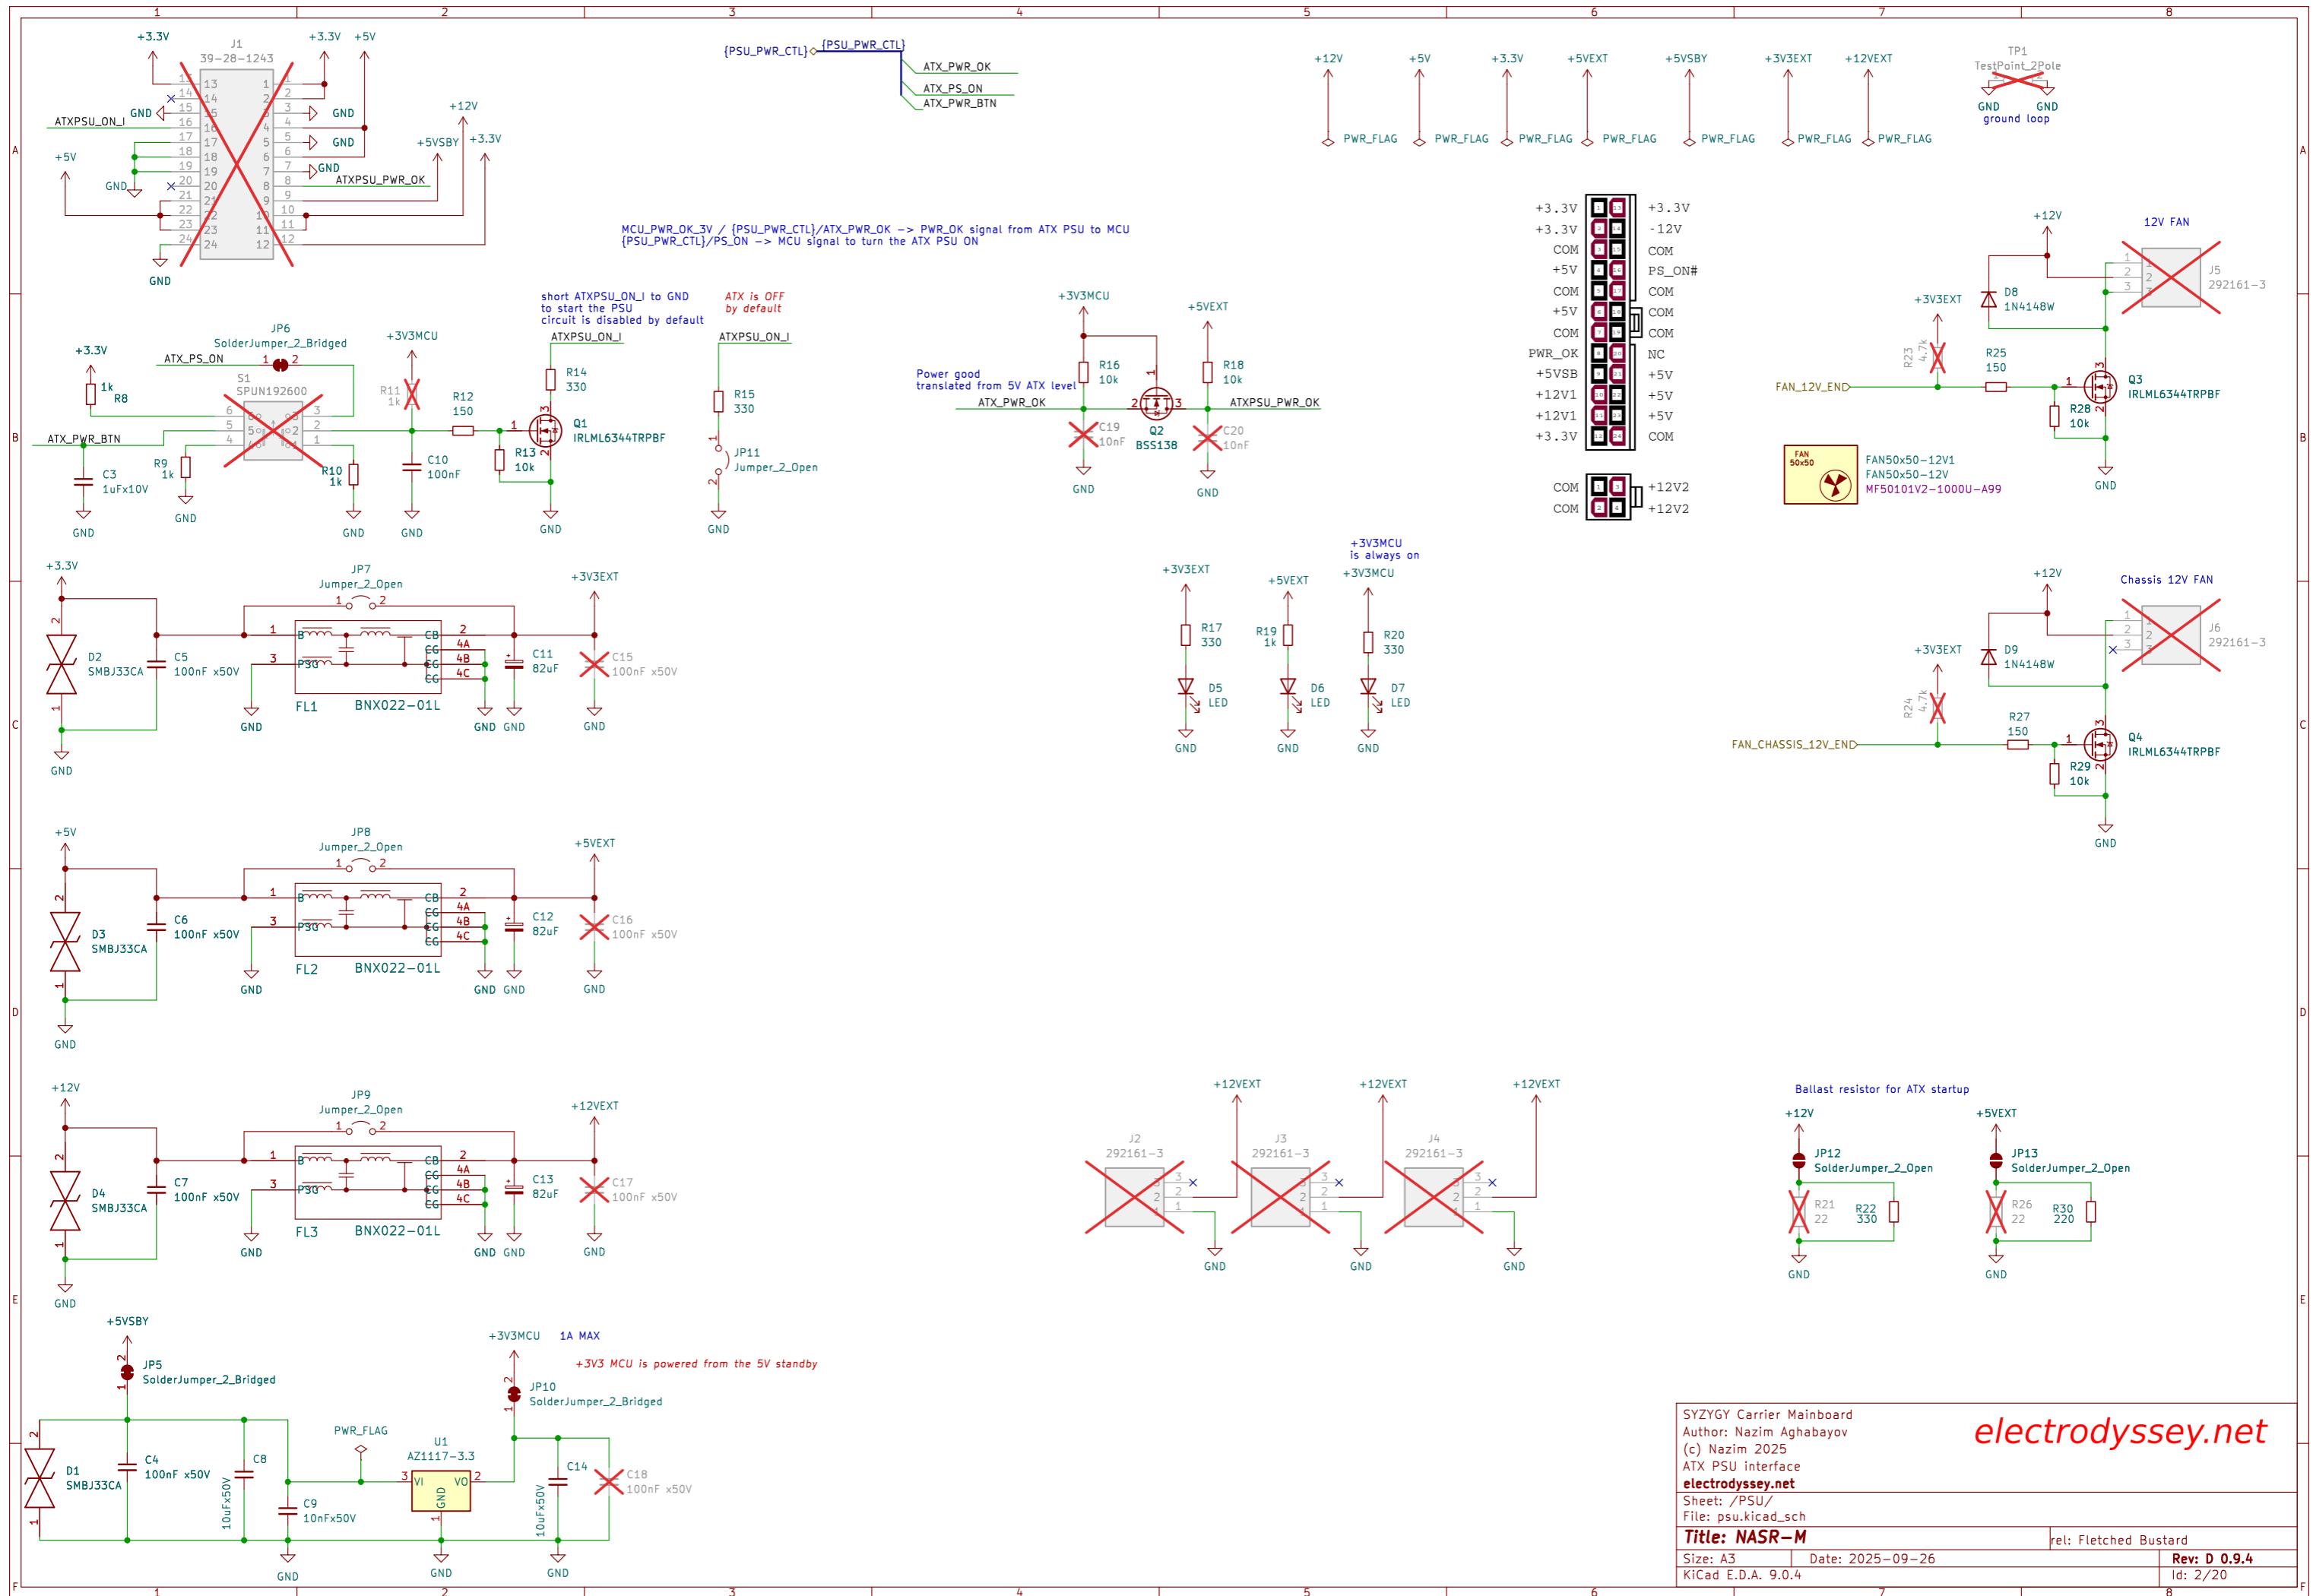



electrodyssey.net

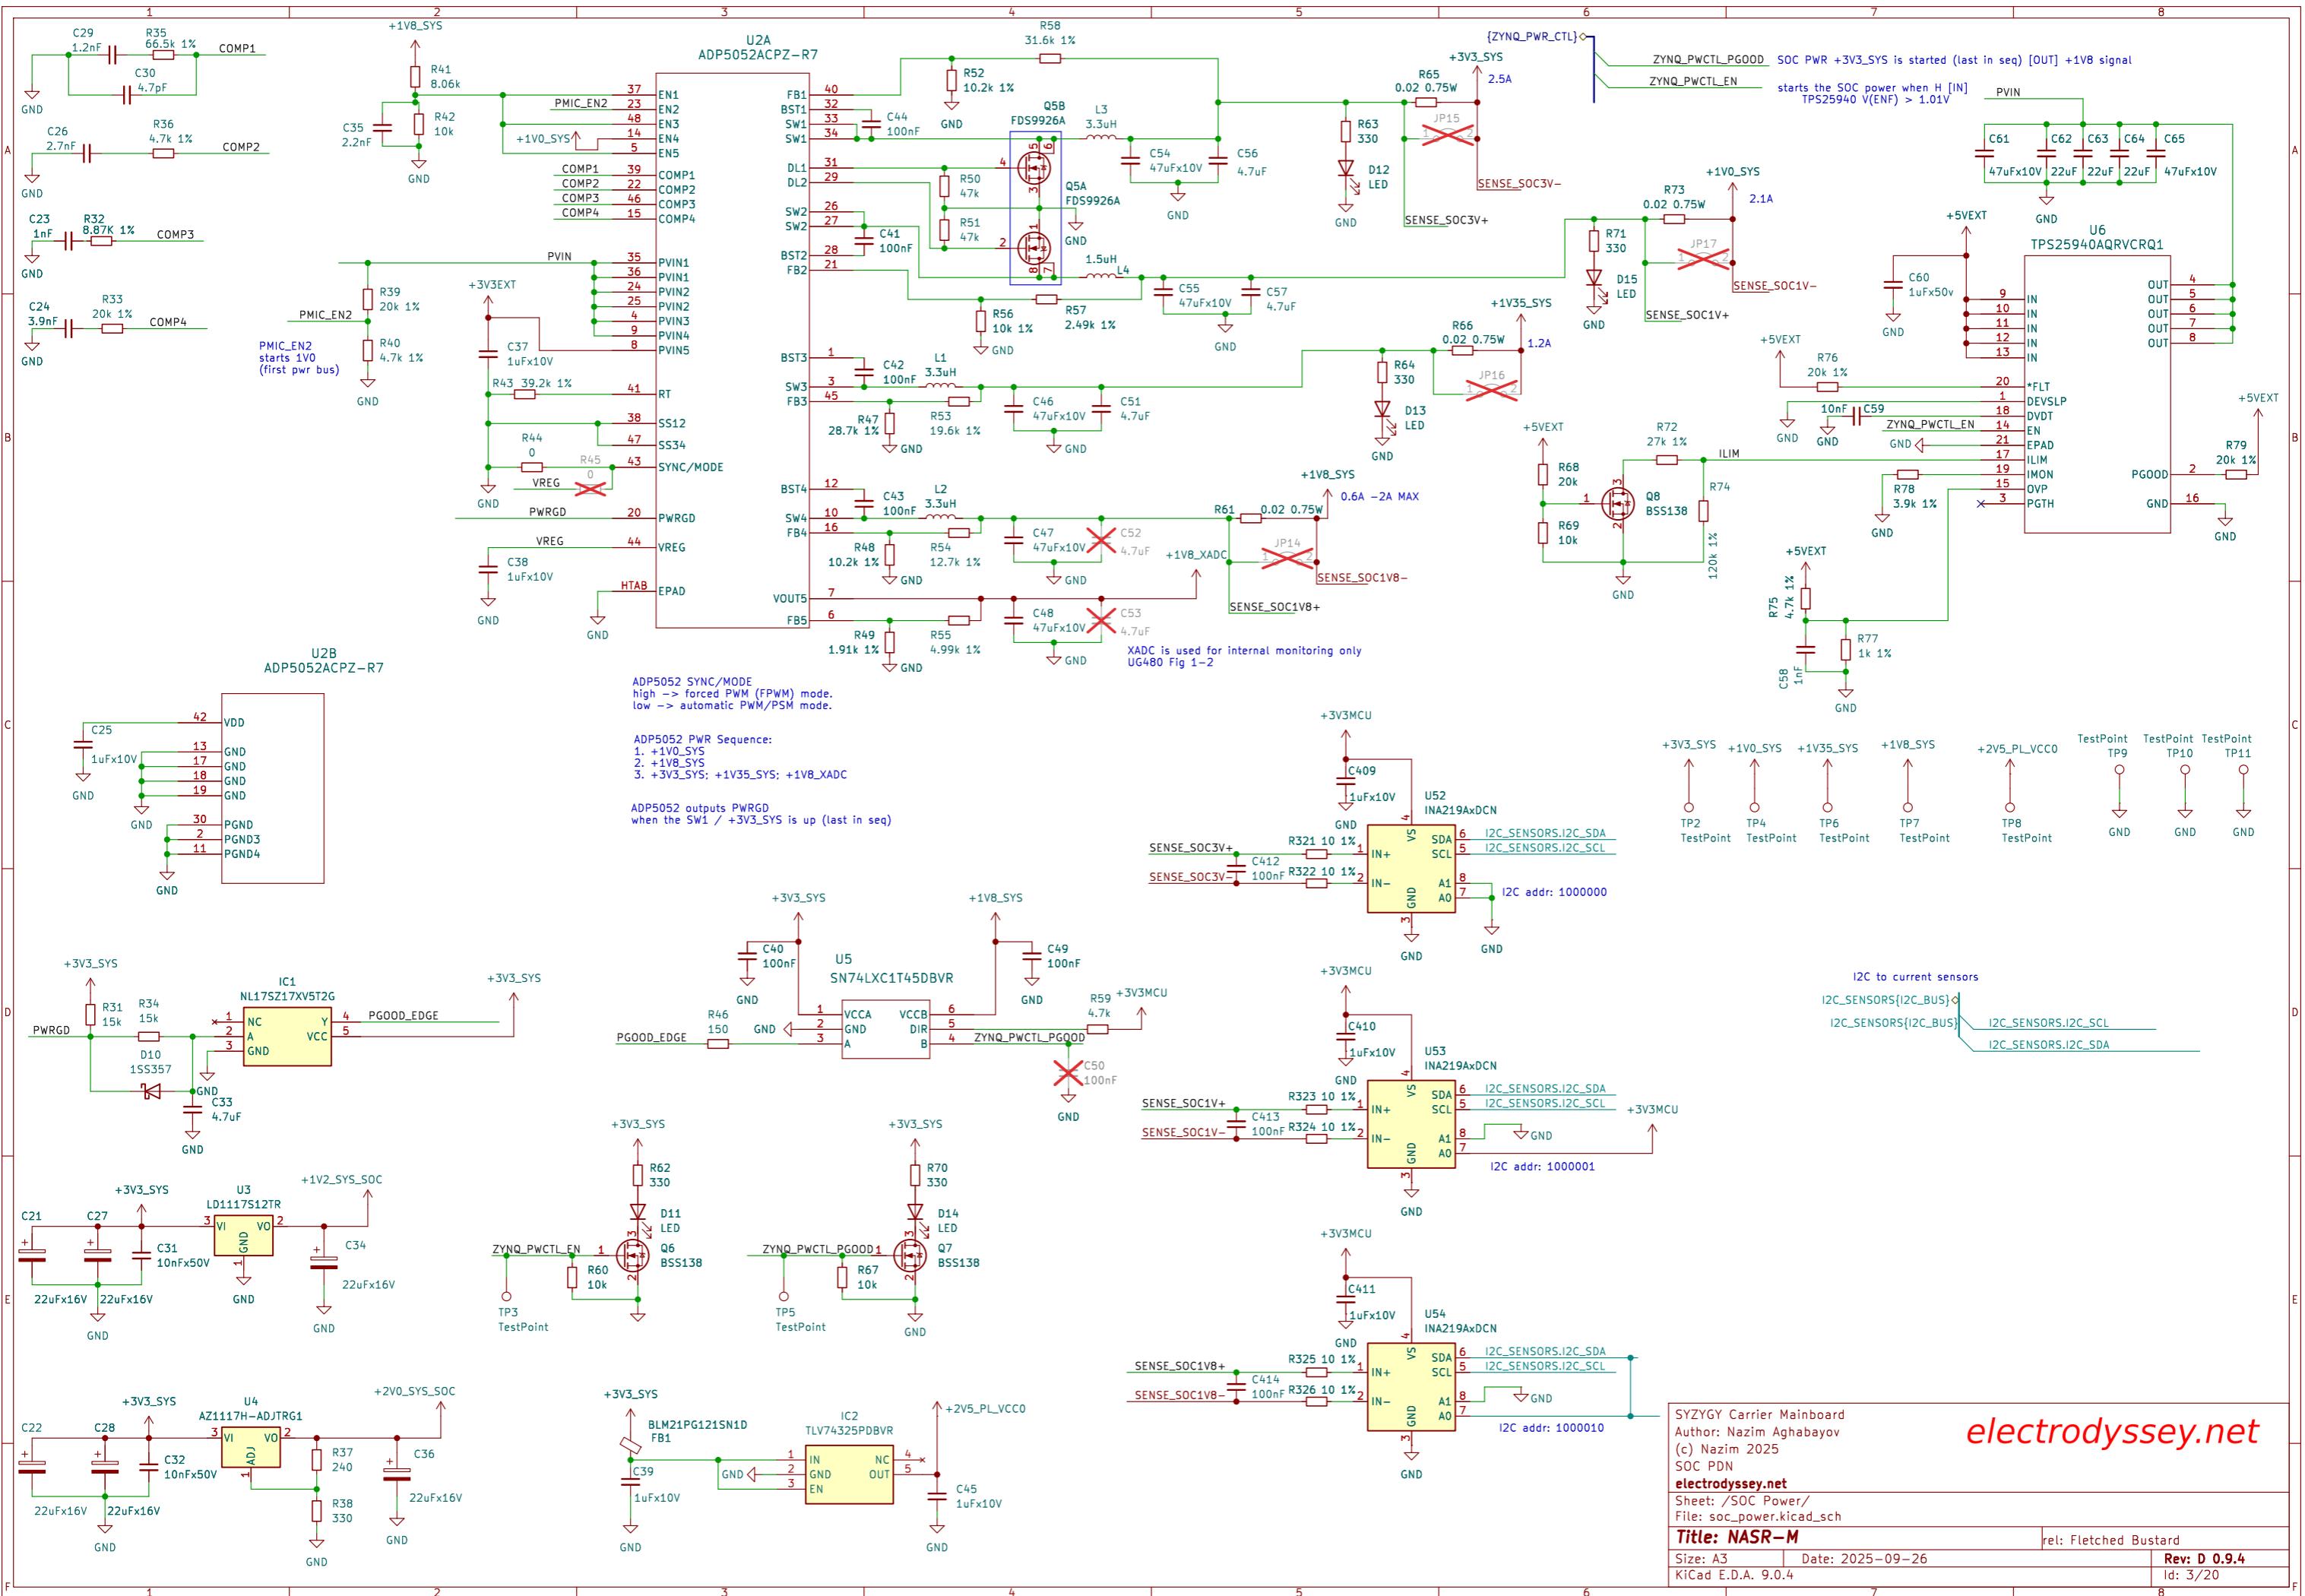


electrodyssey.net

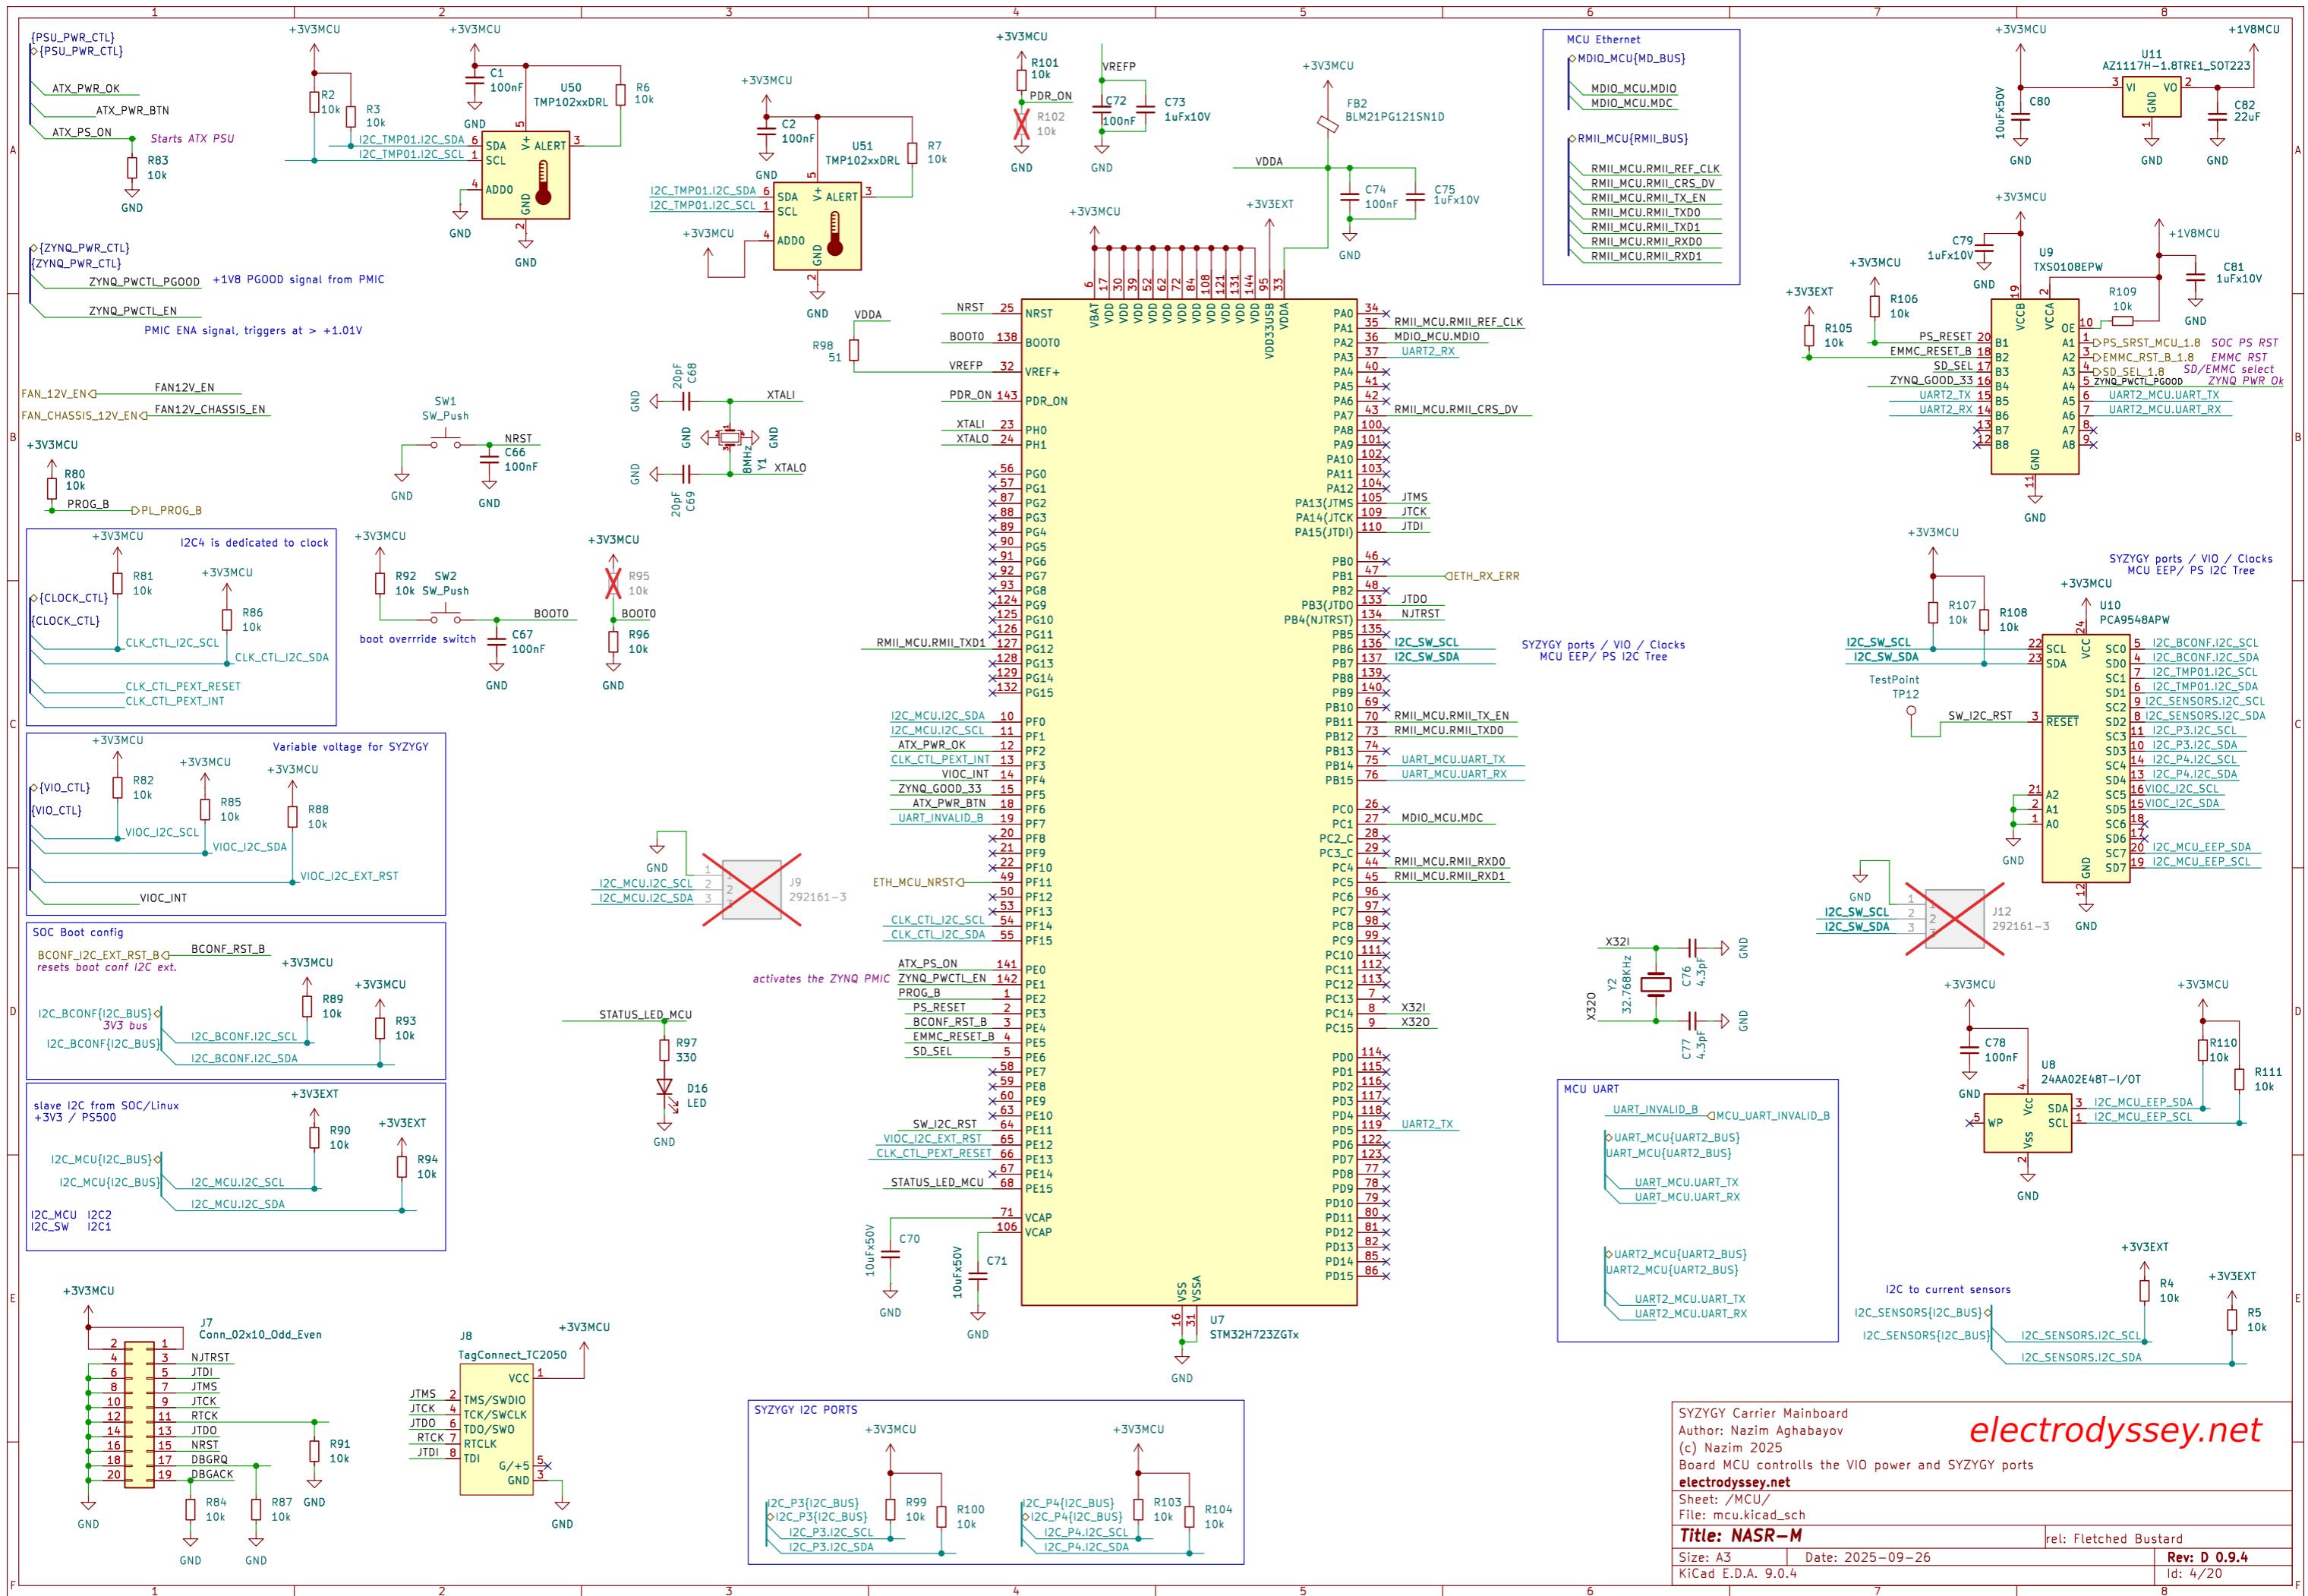


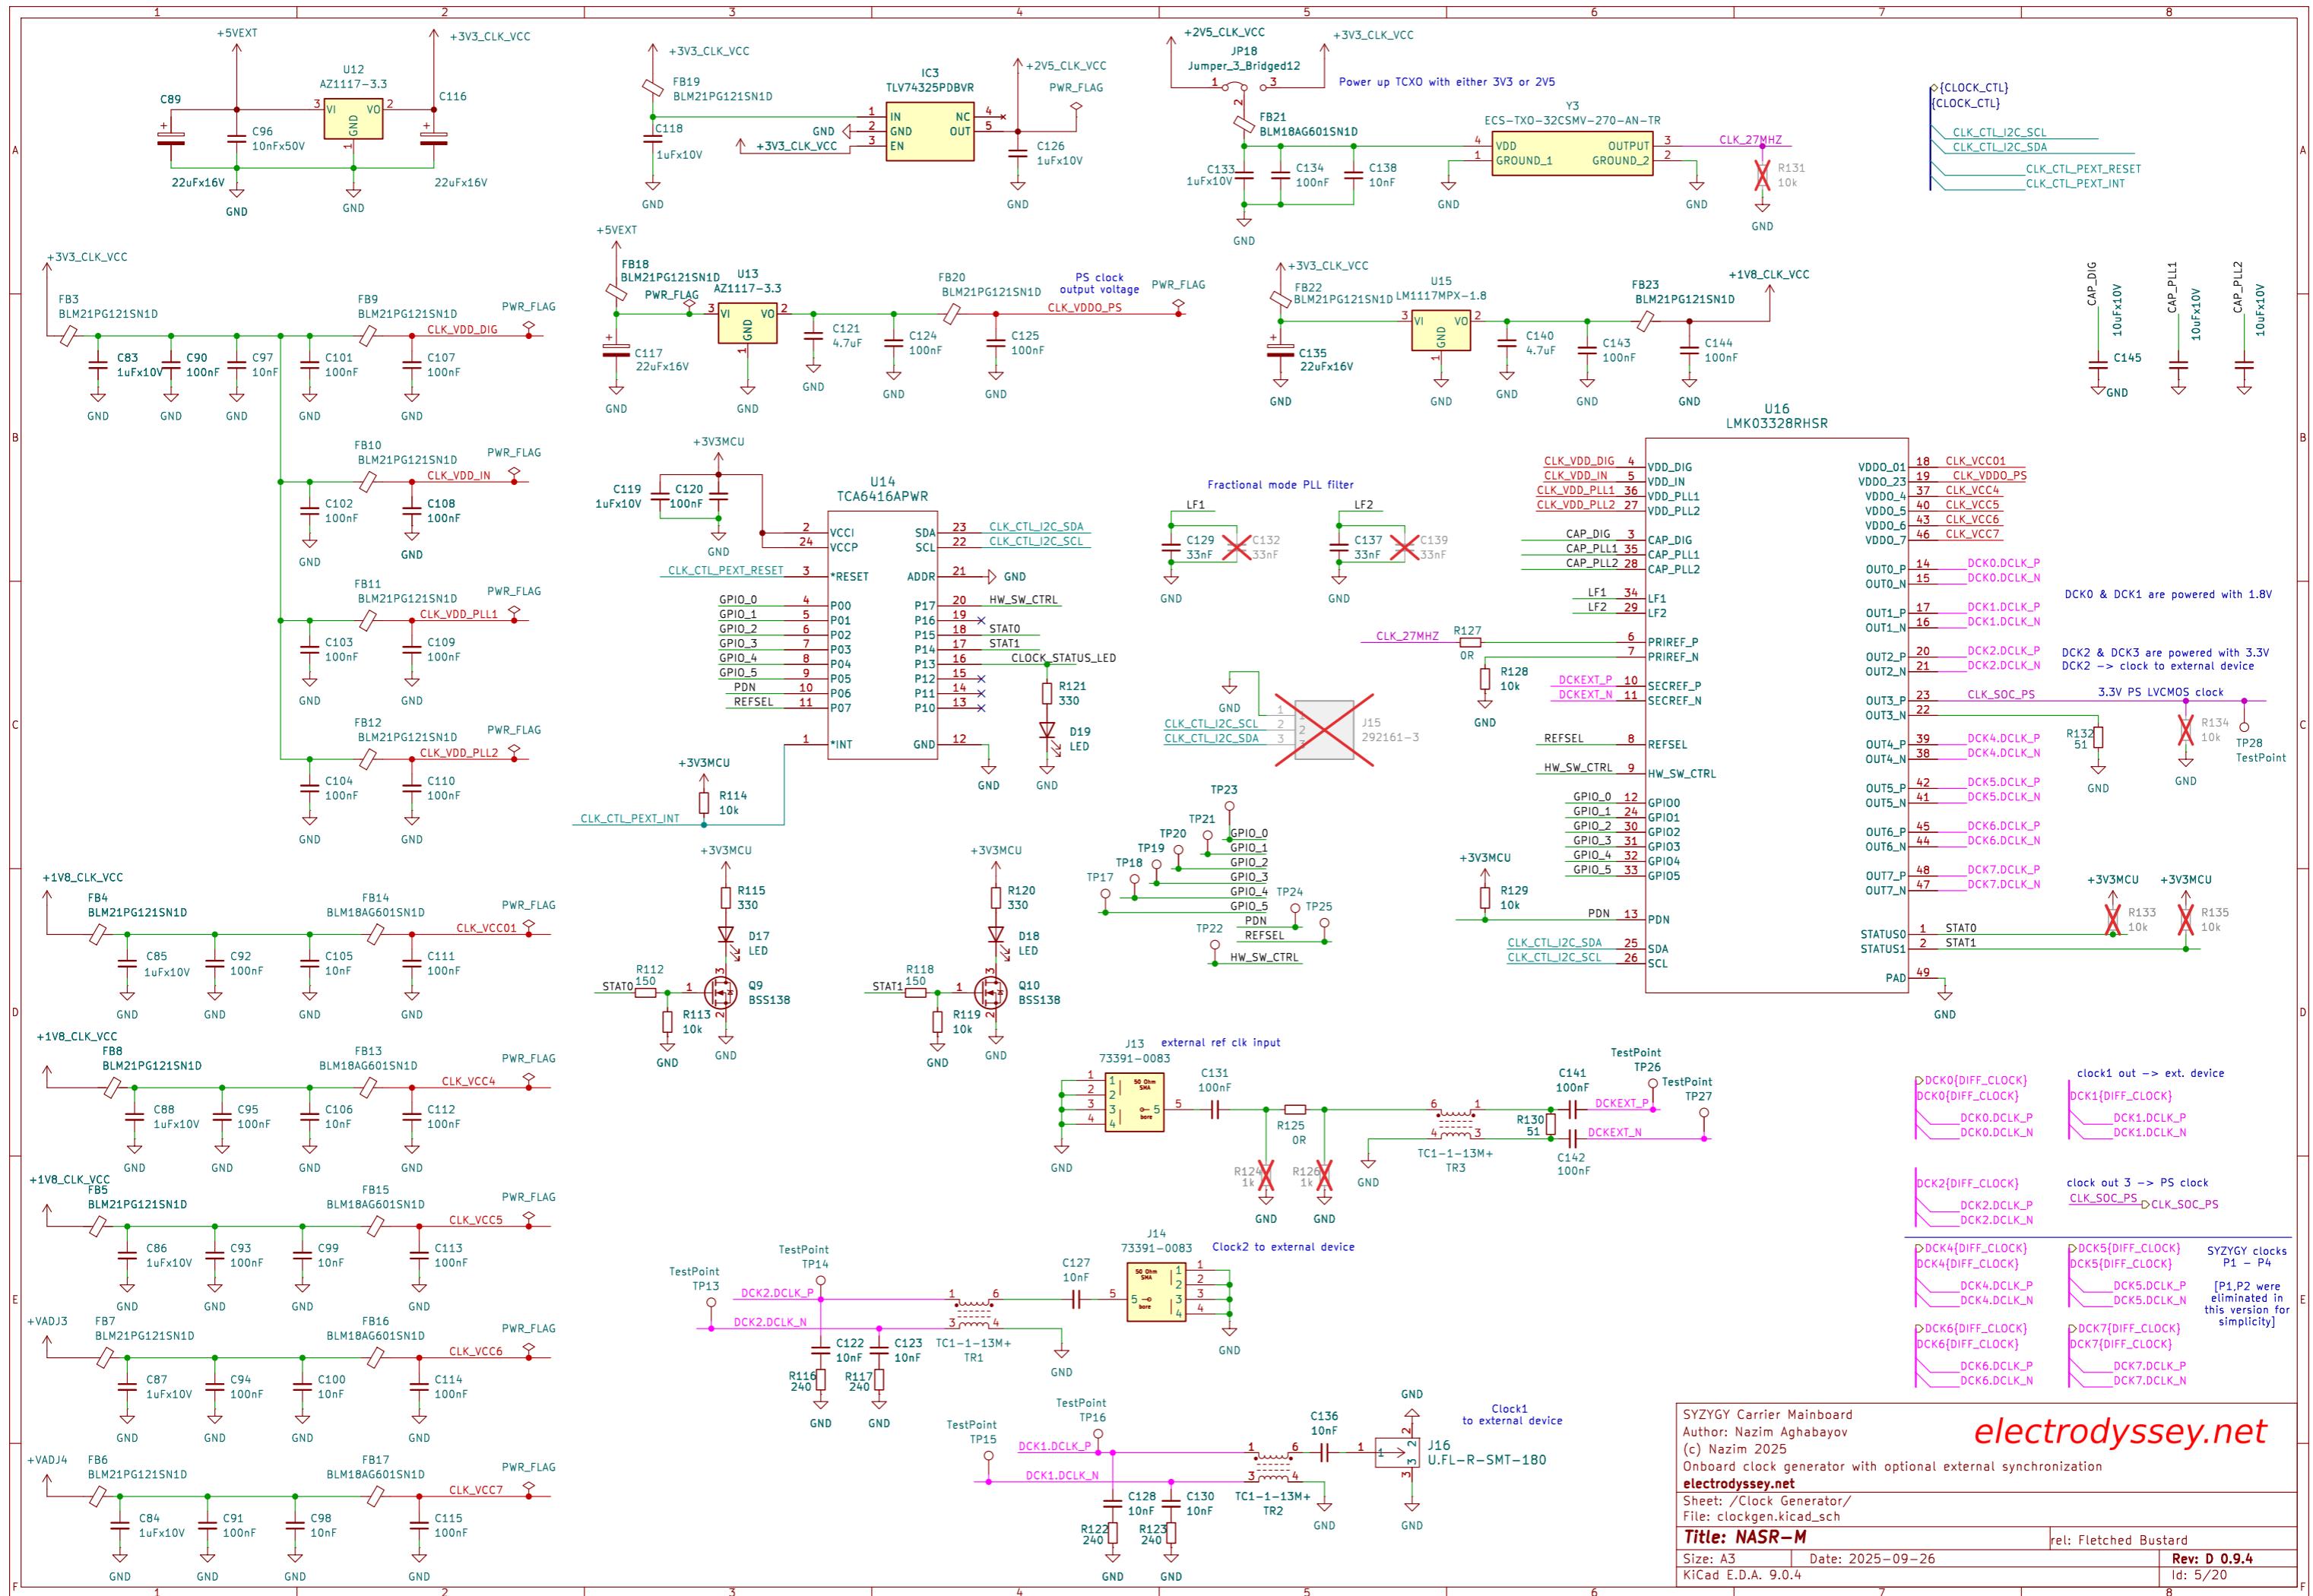


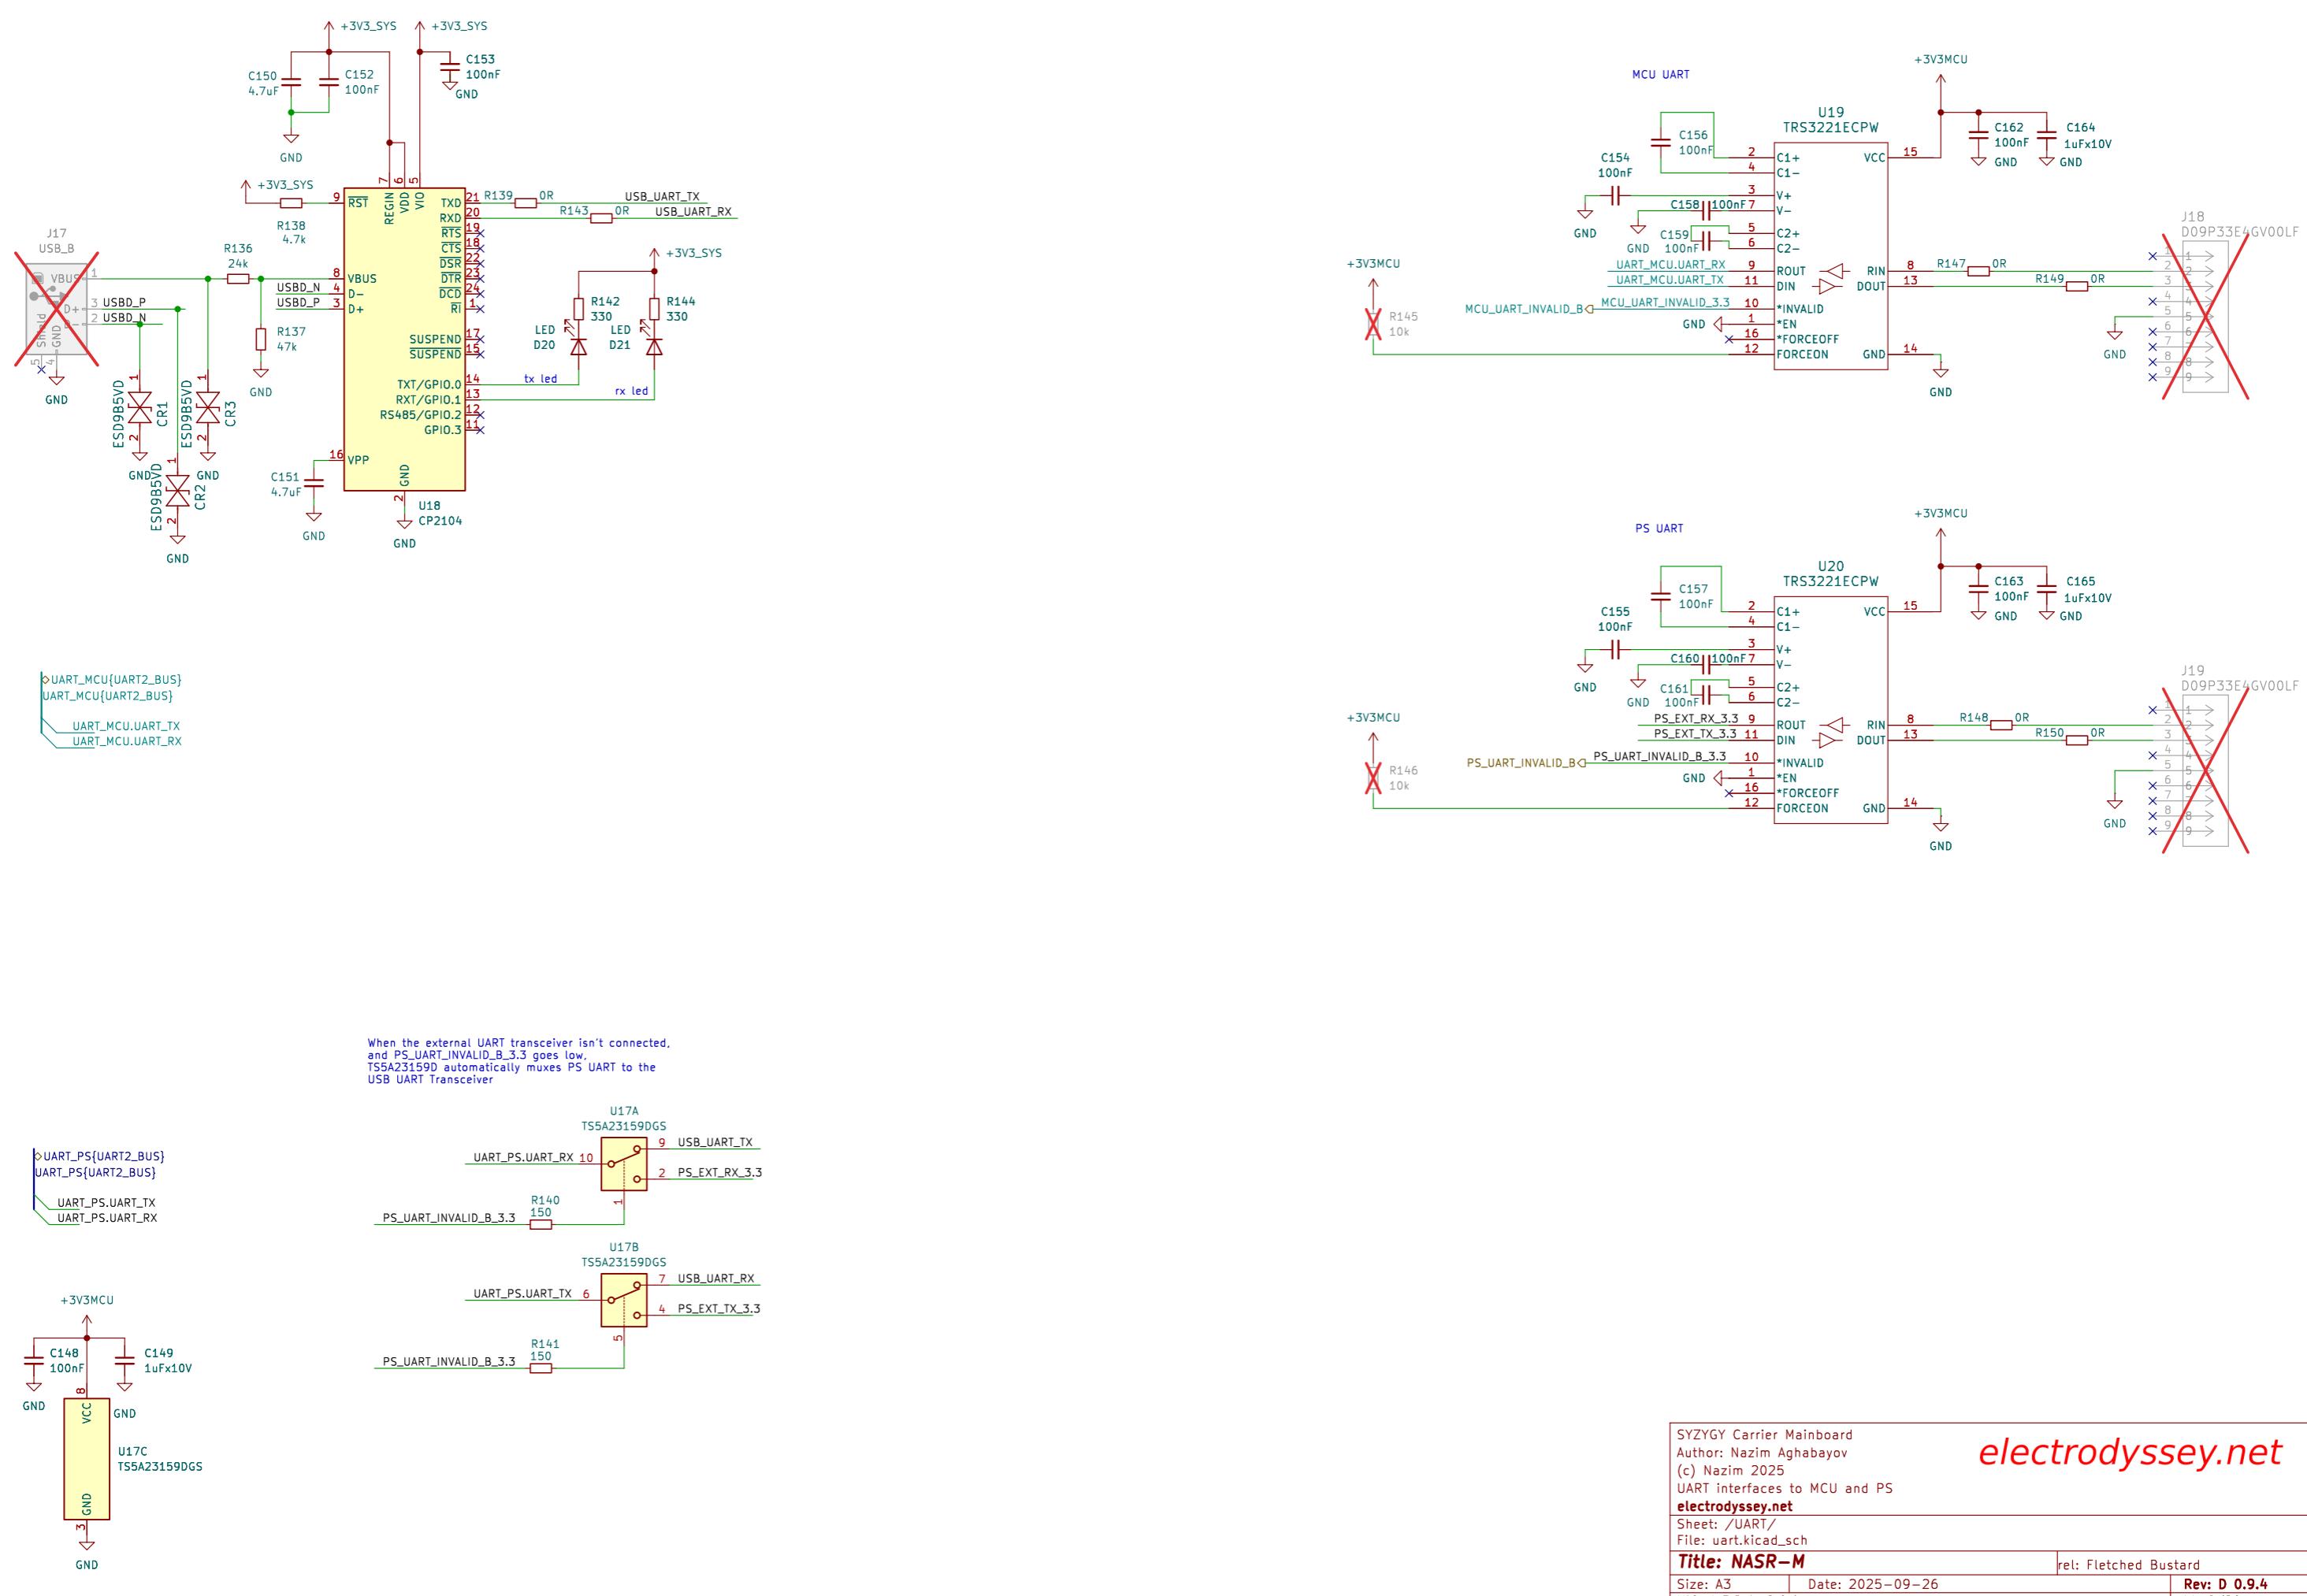


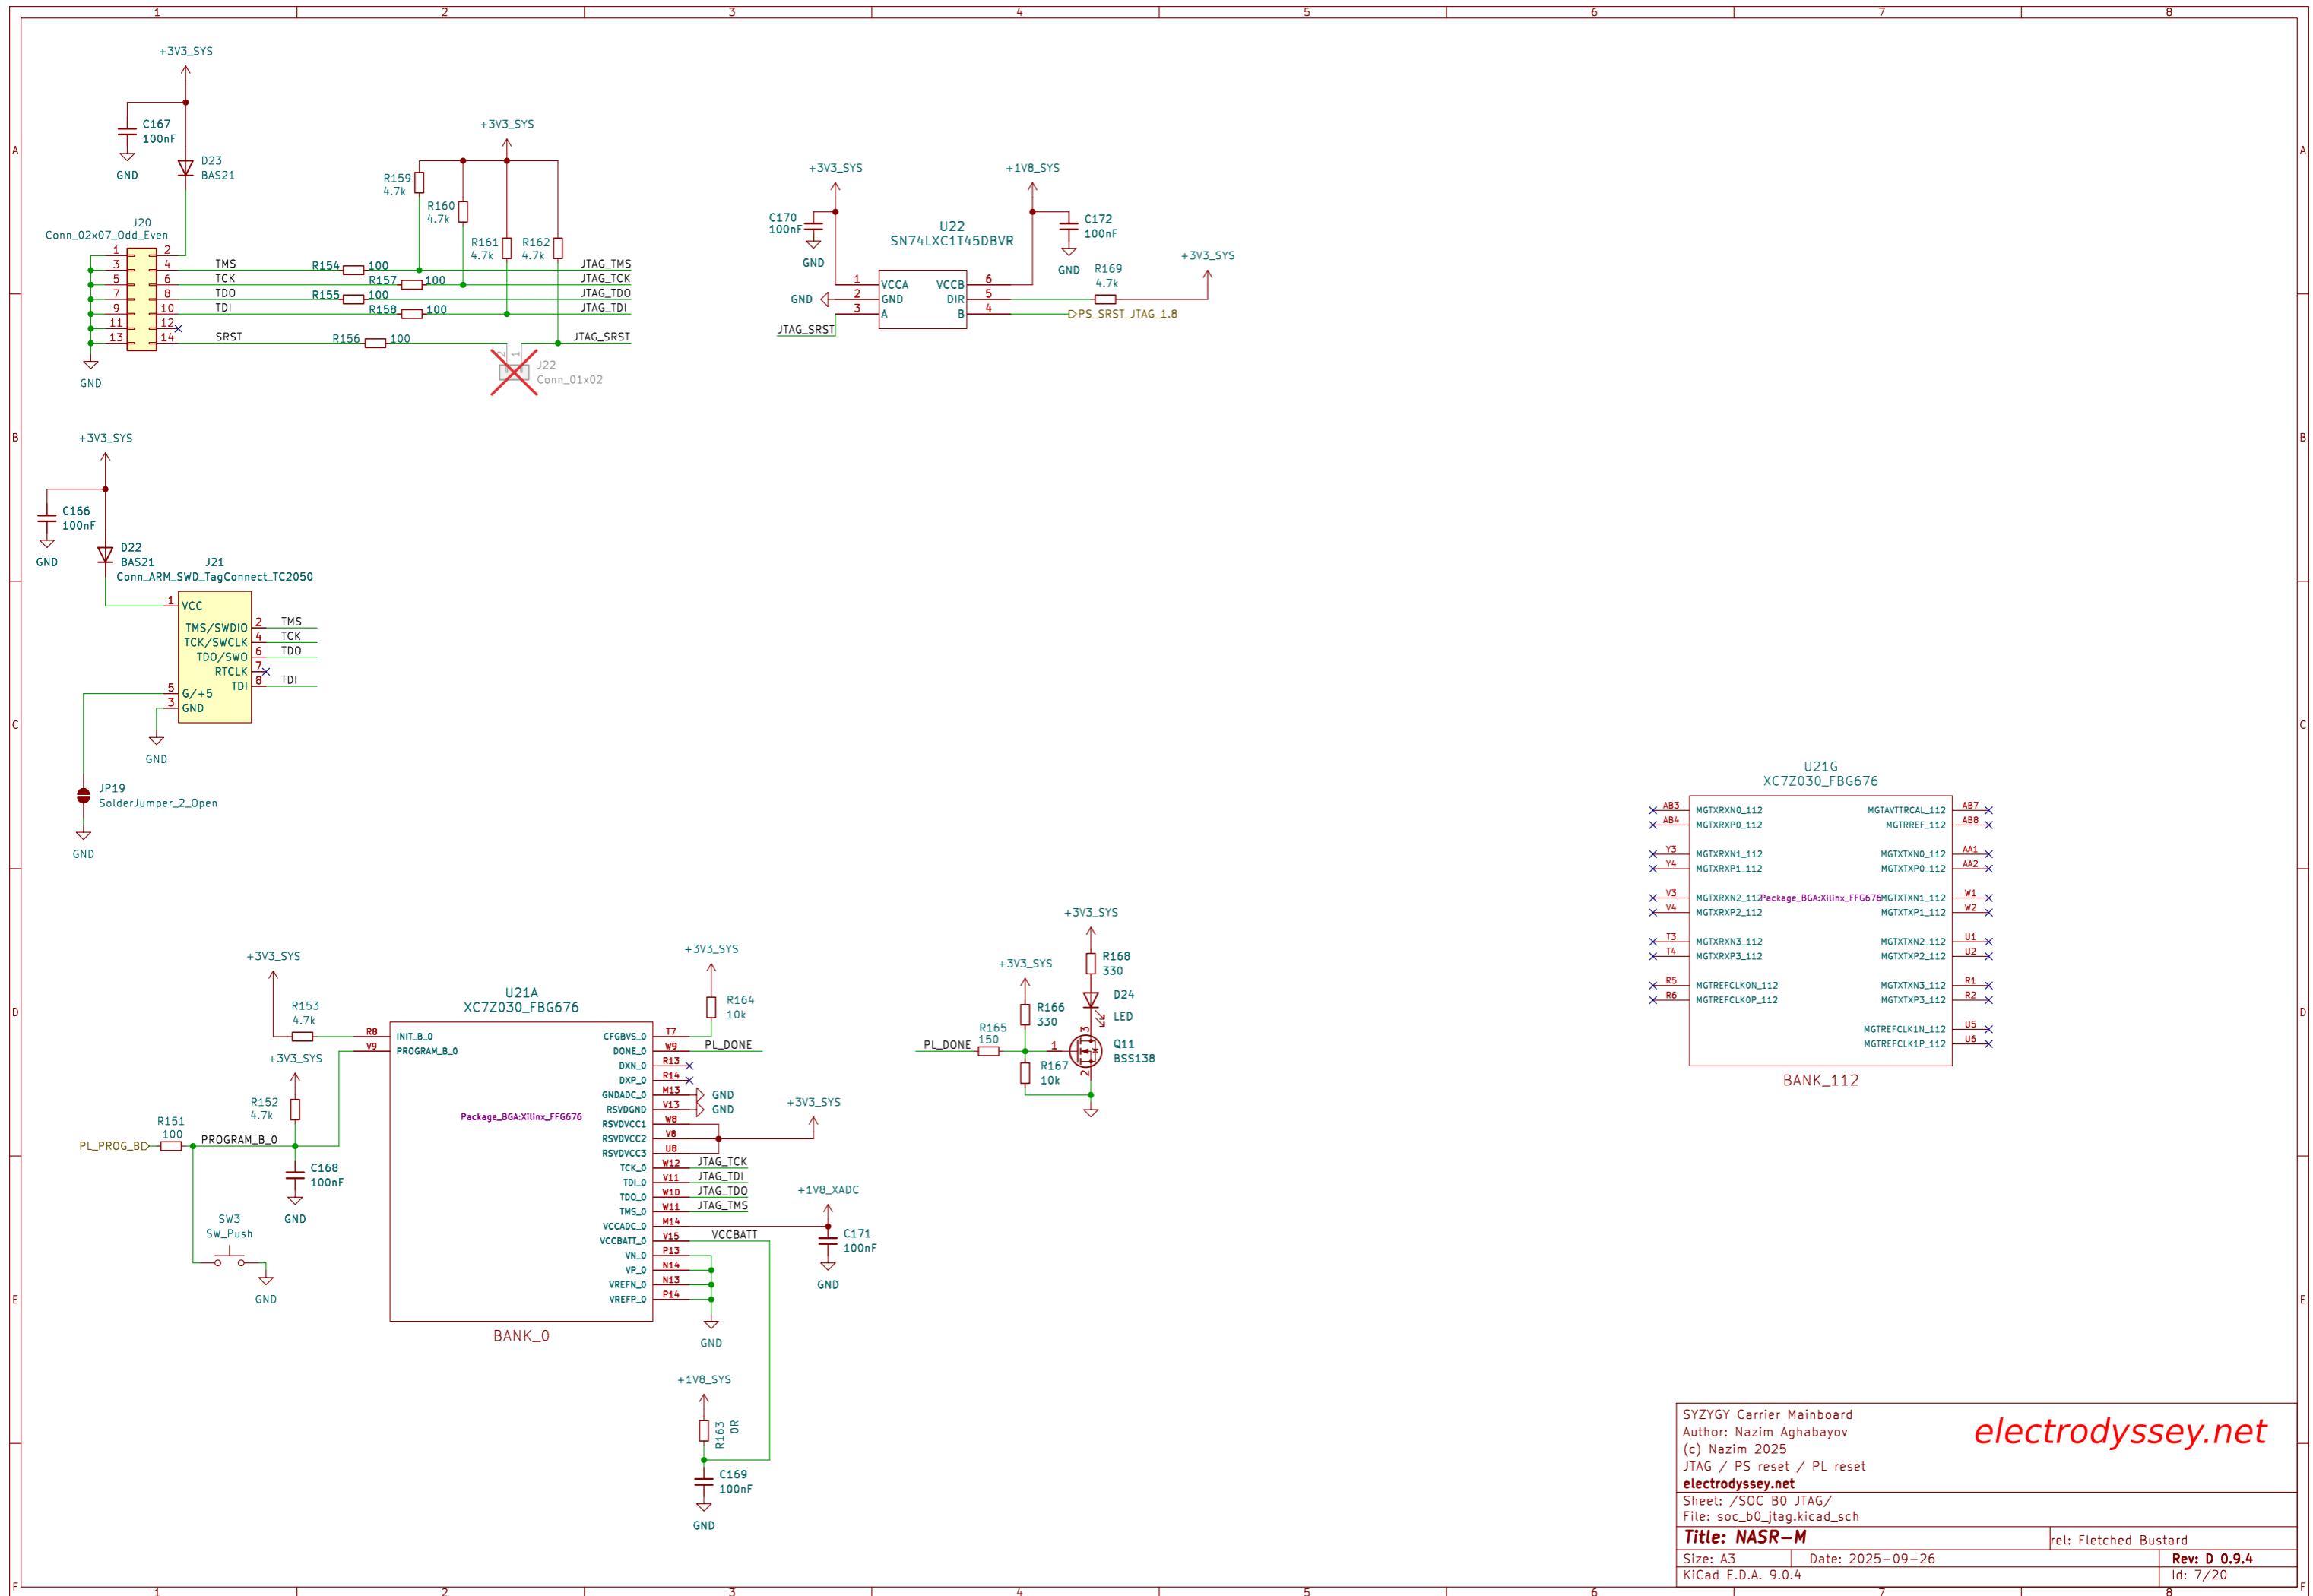



electrodyssey.net

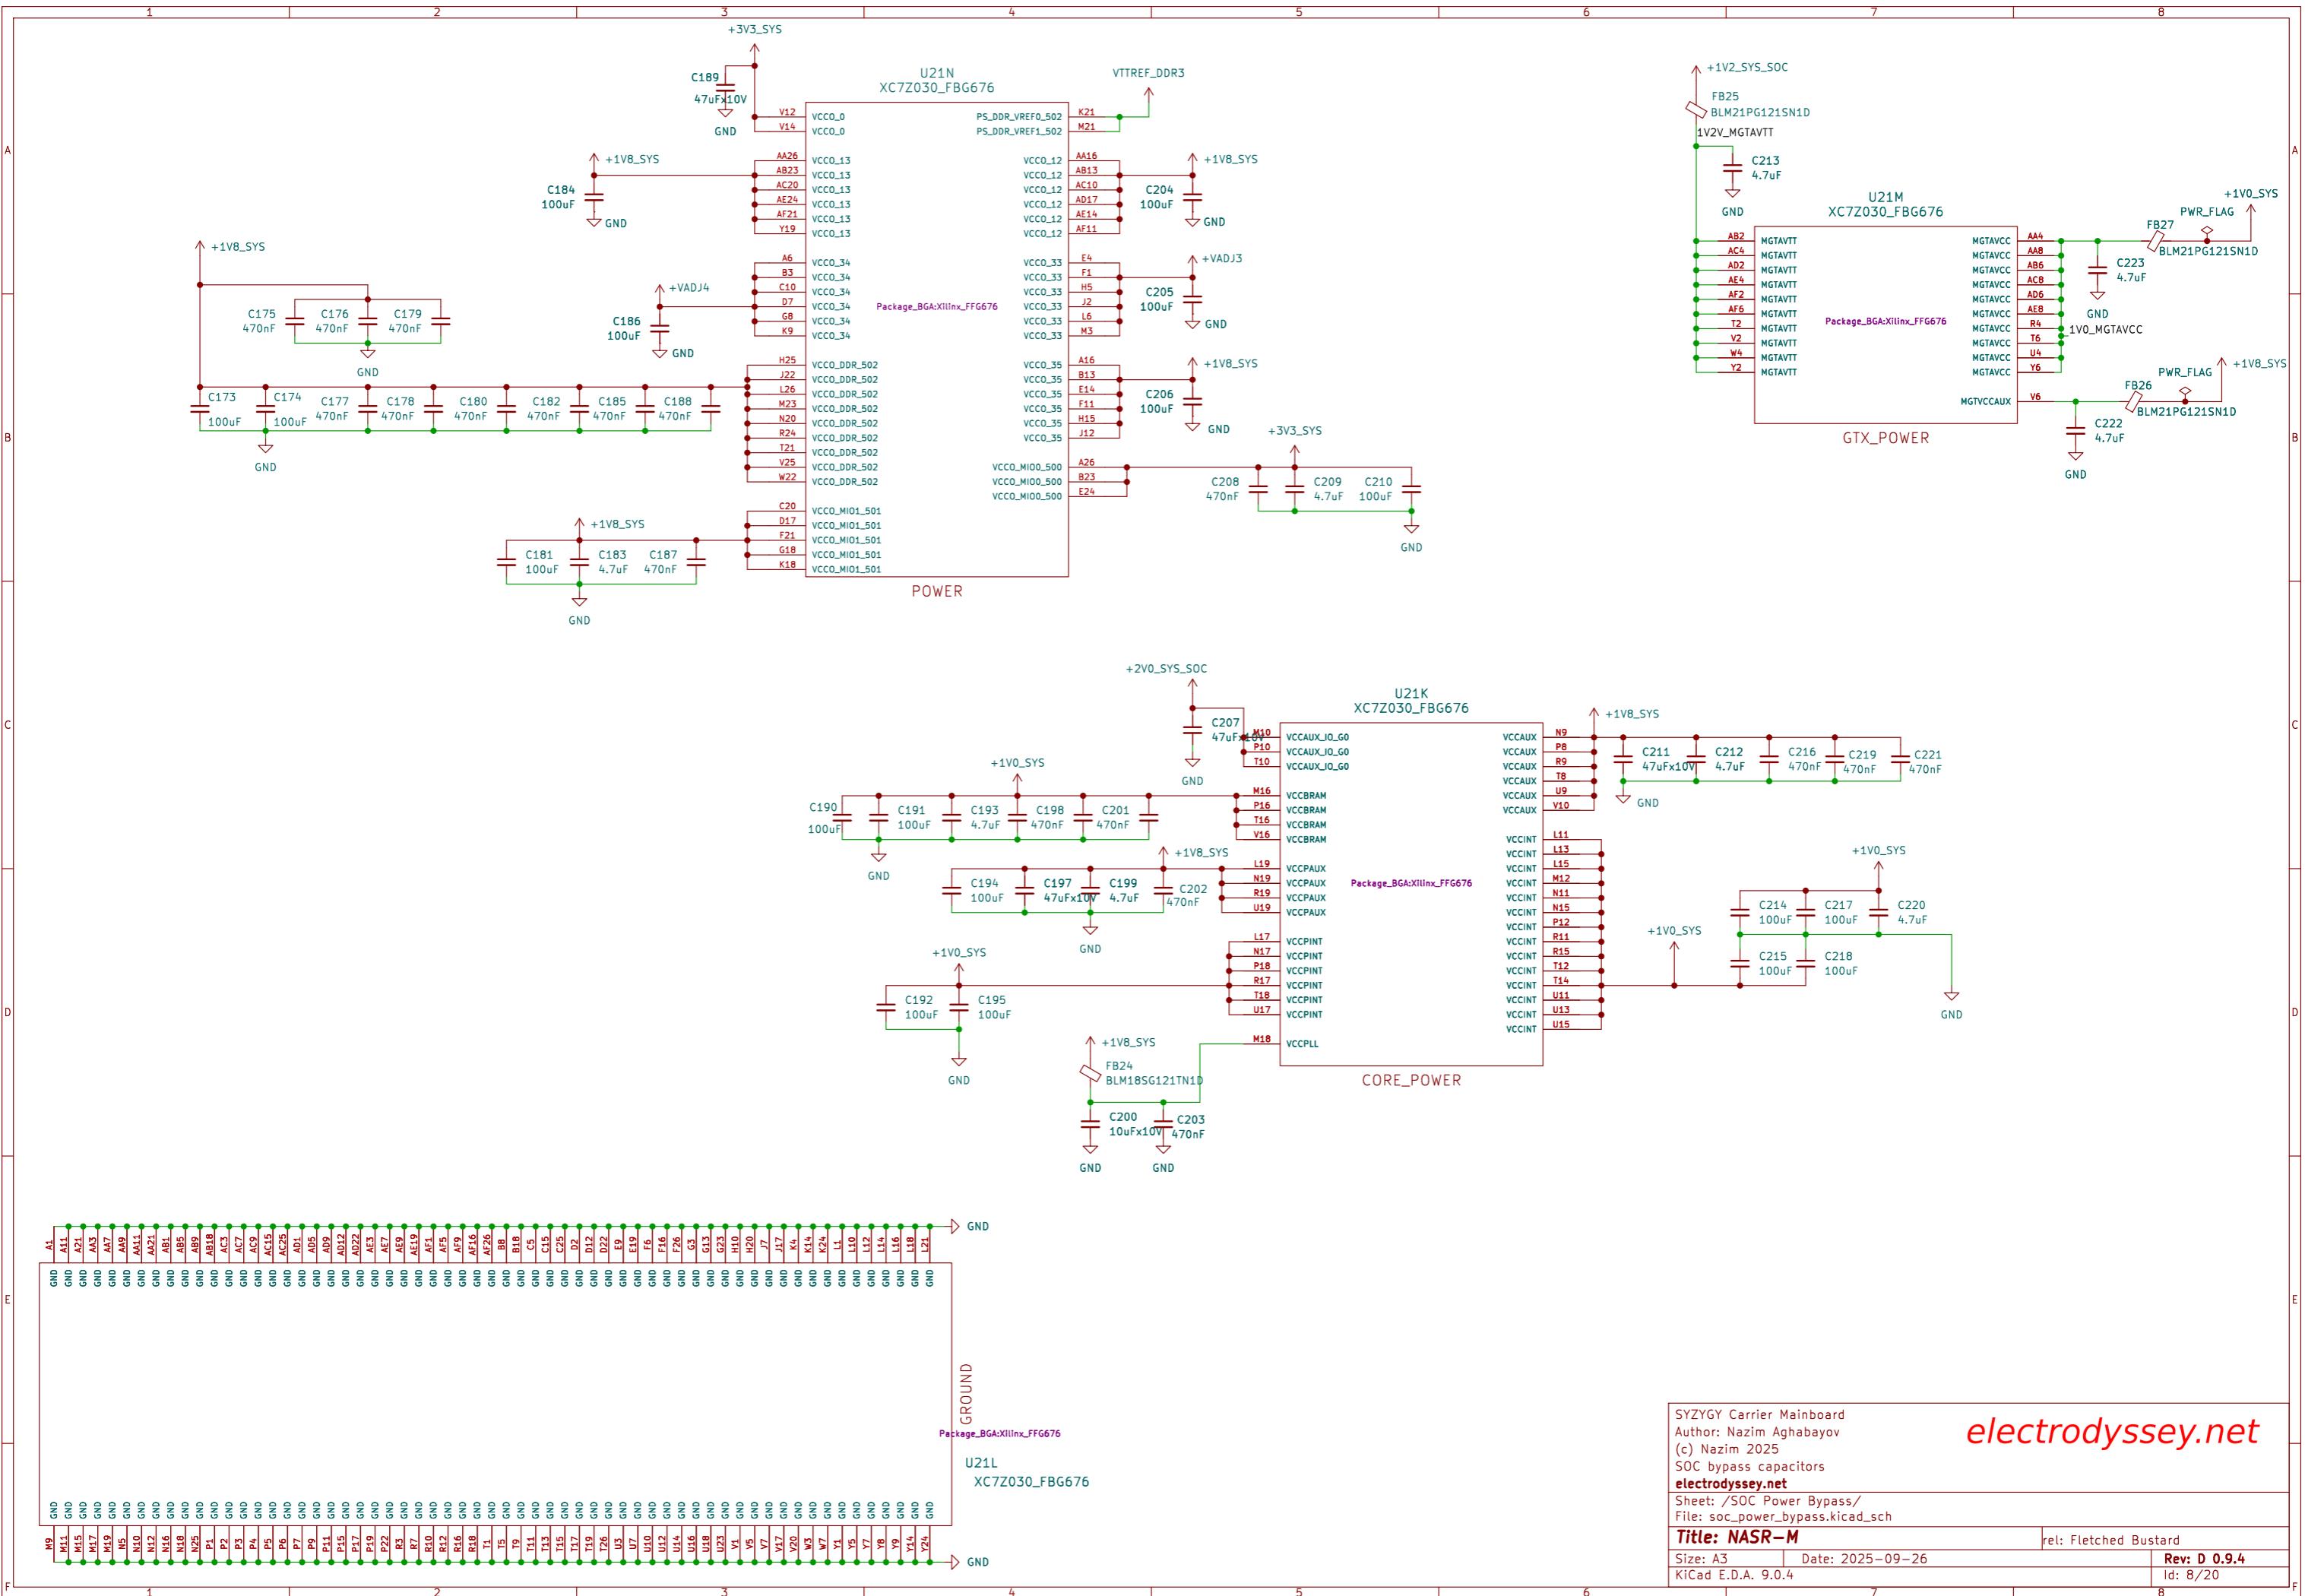

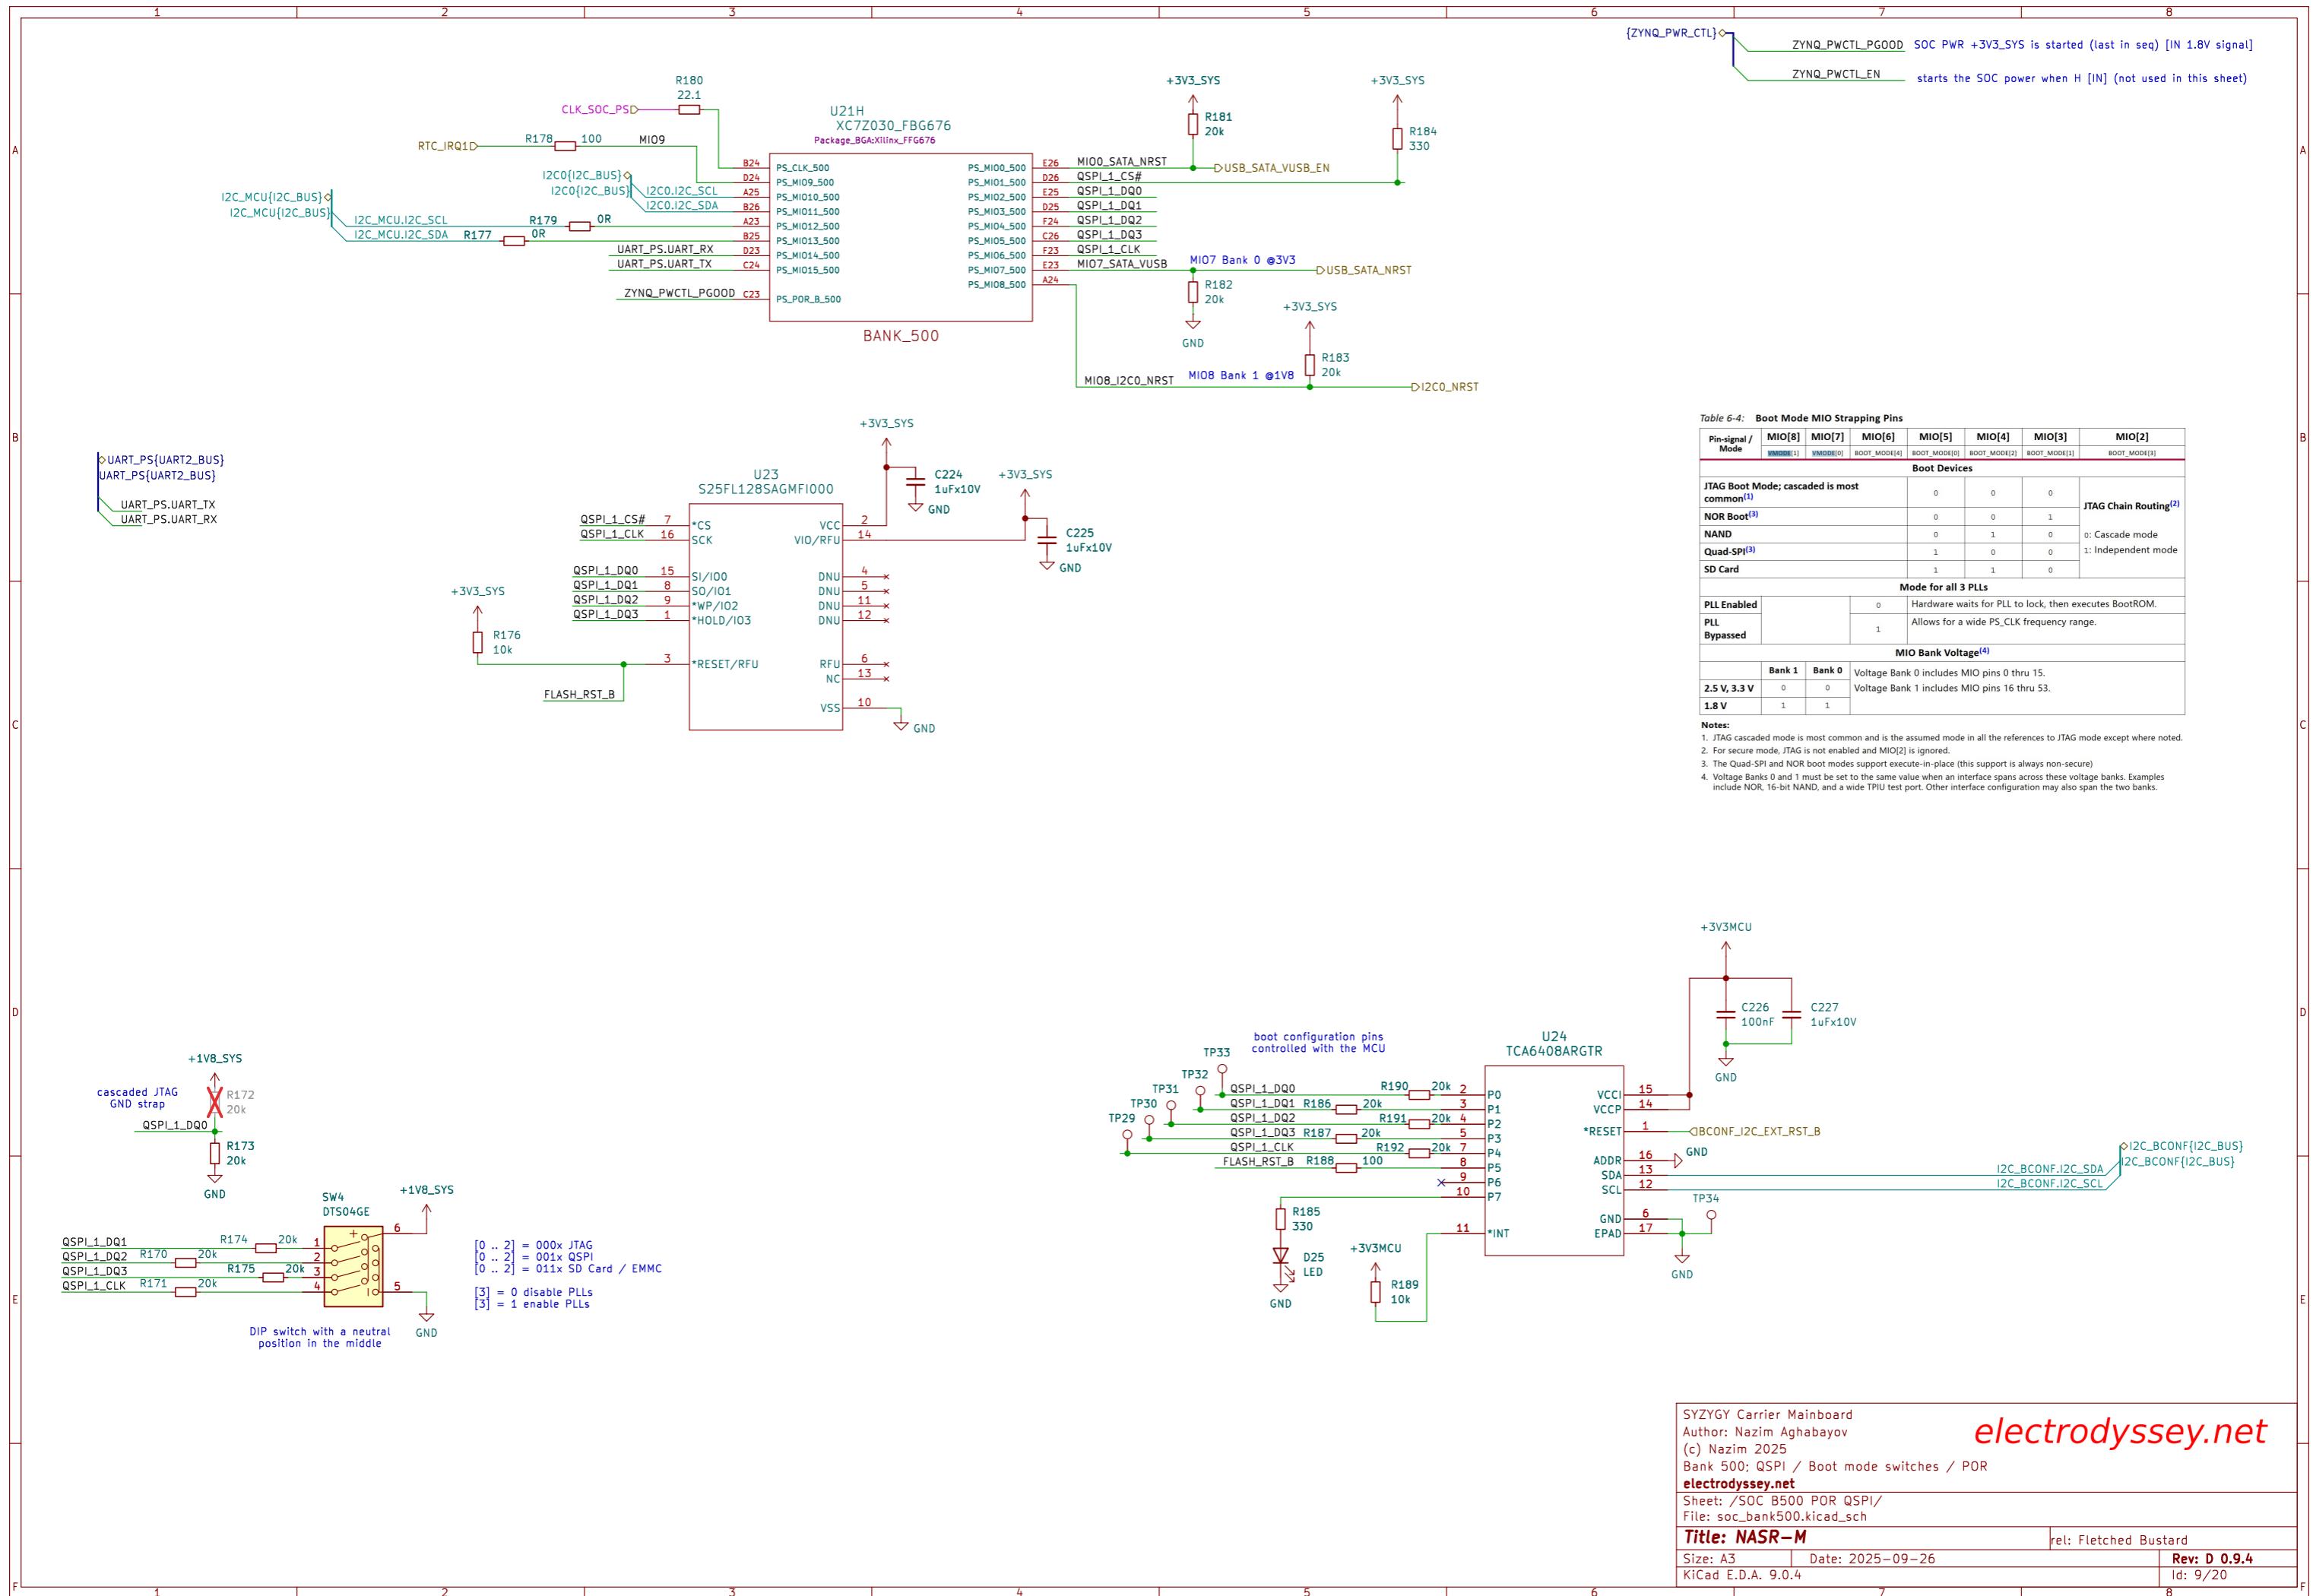

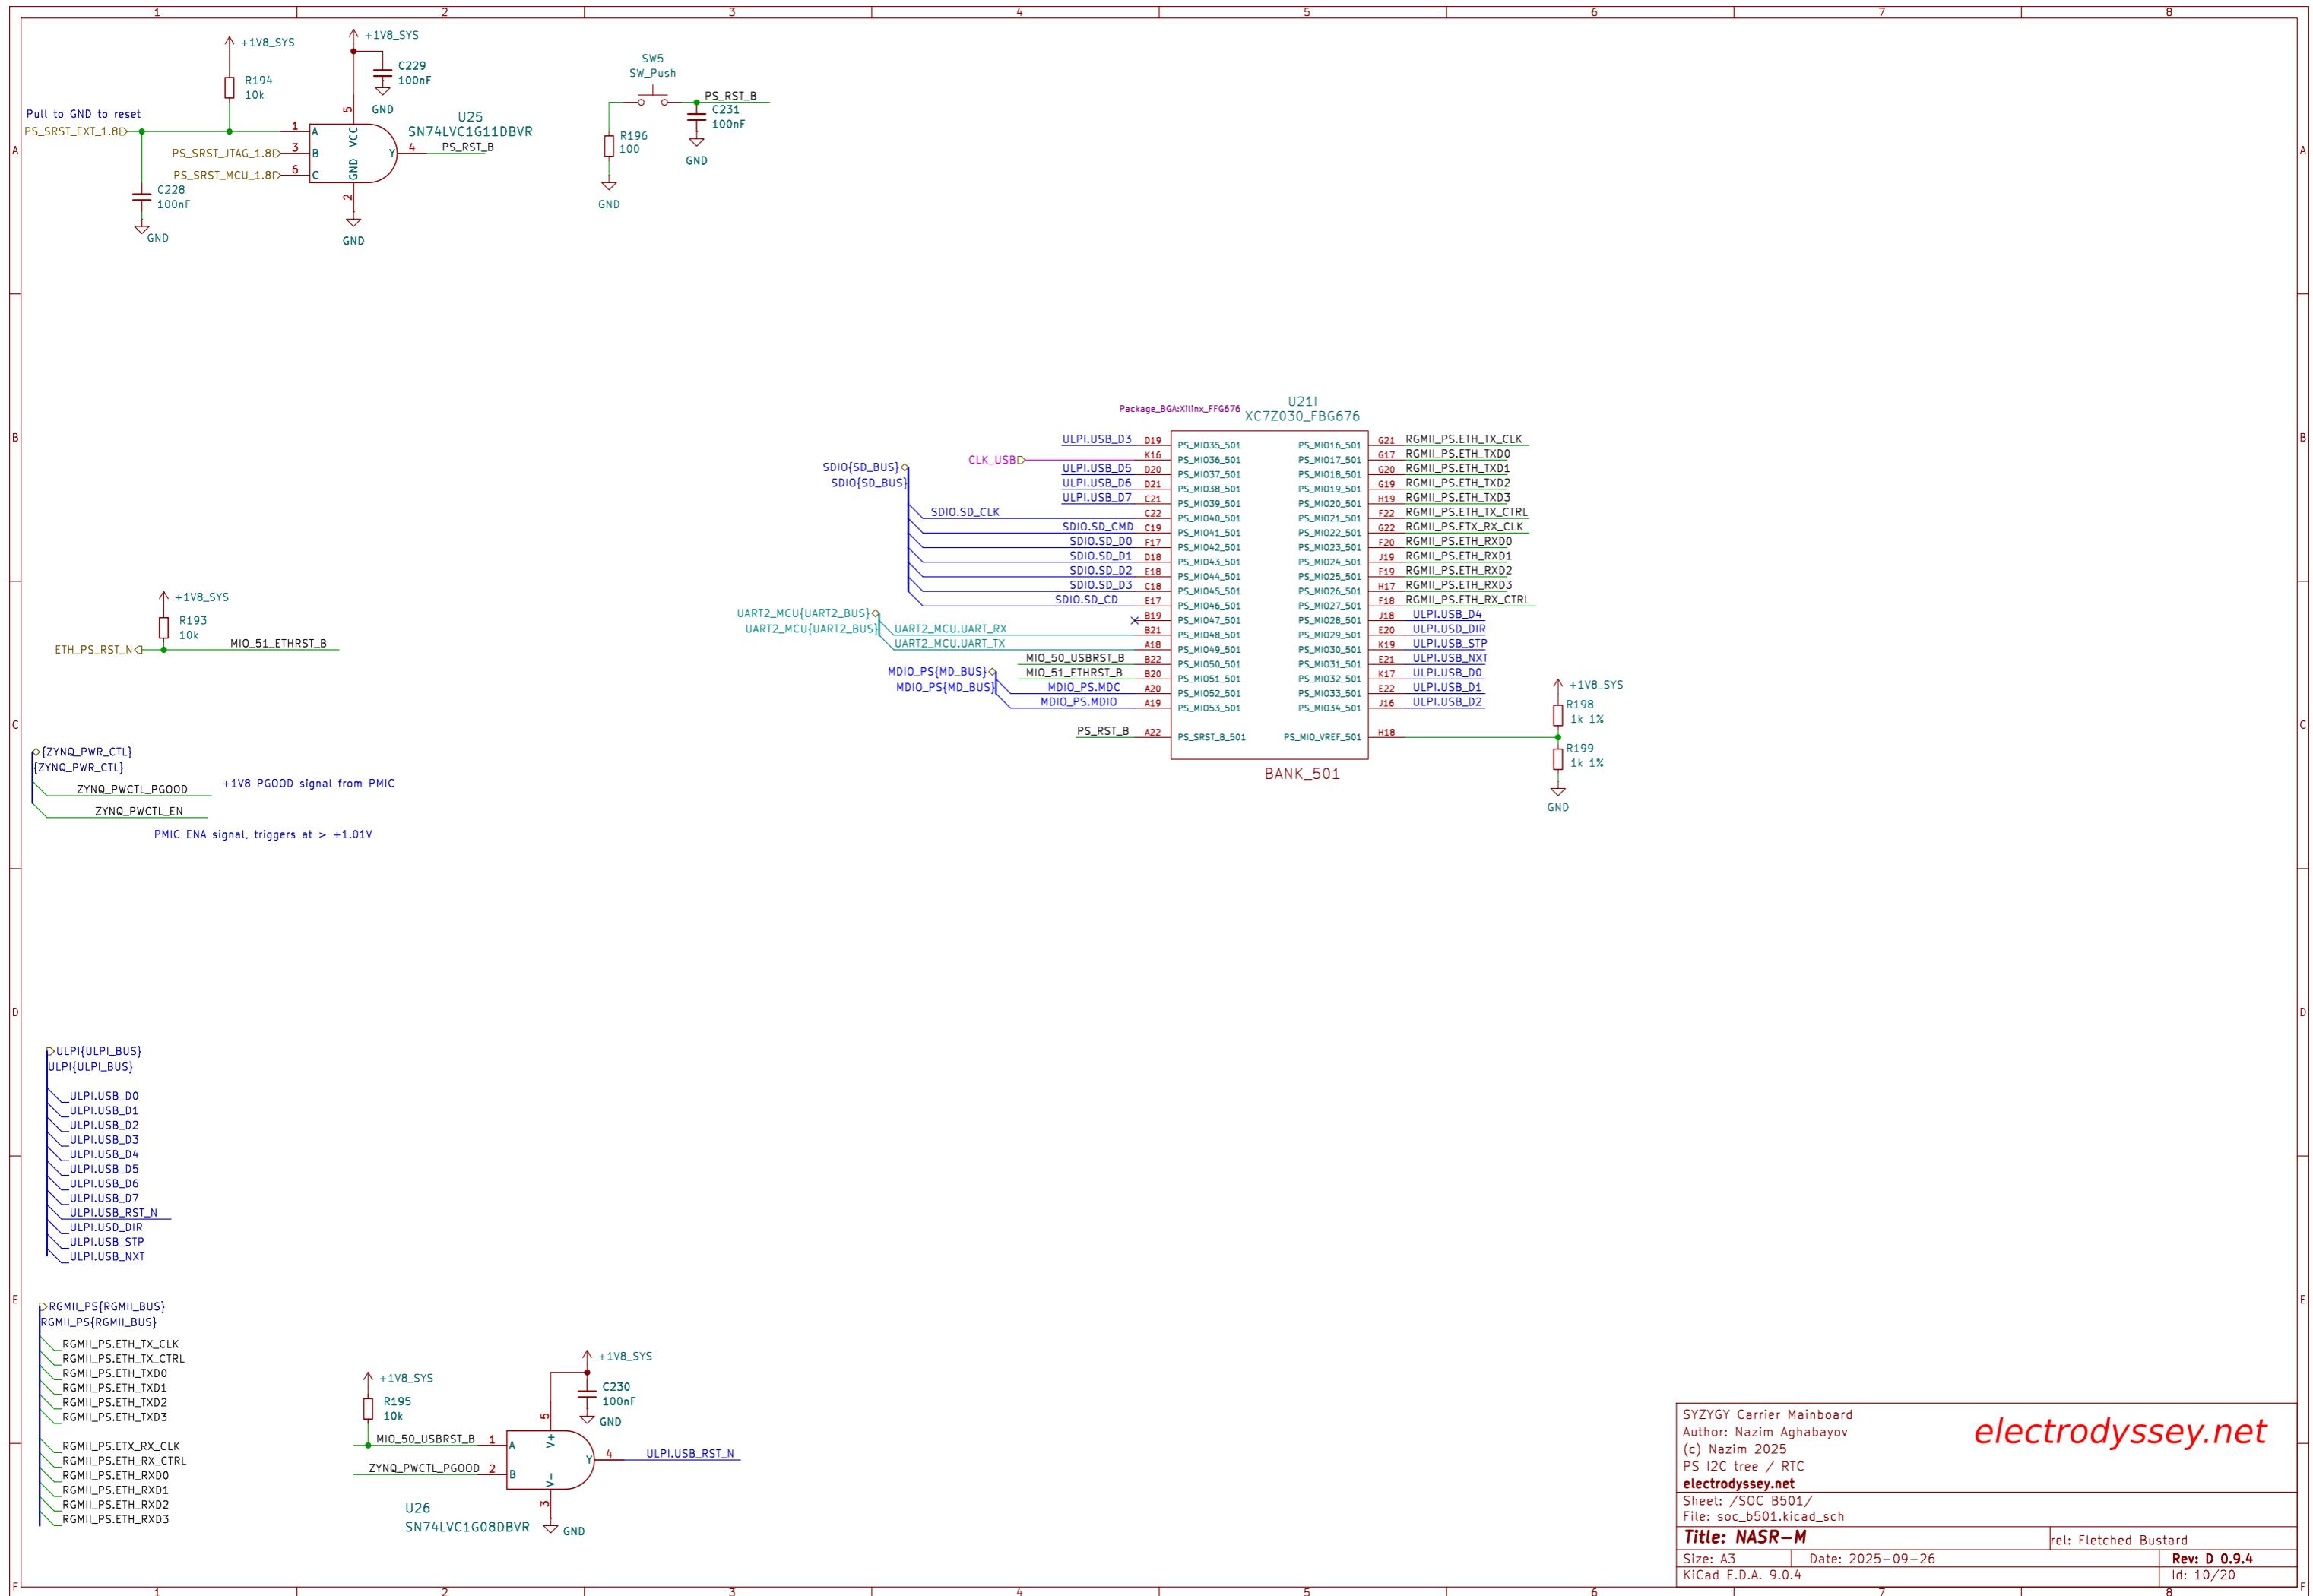


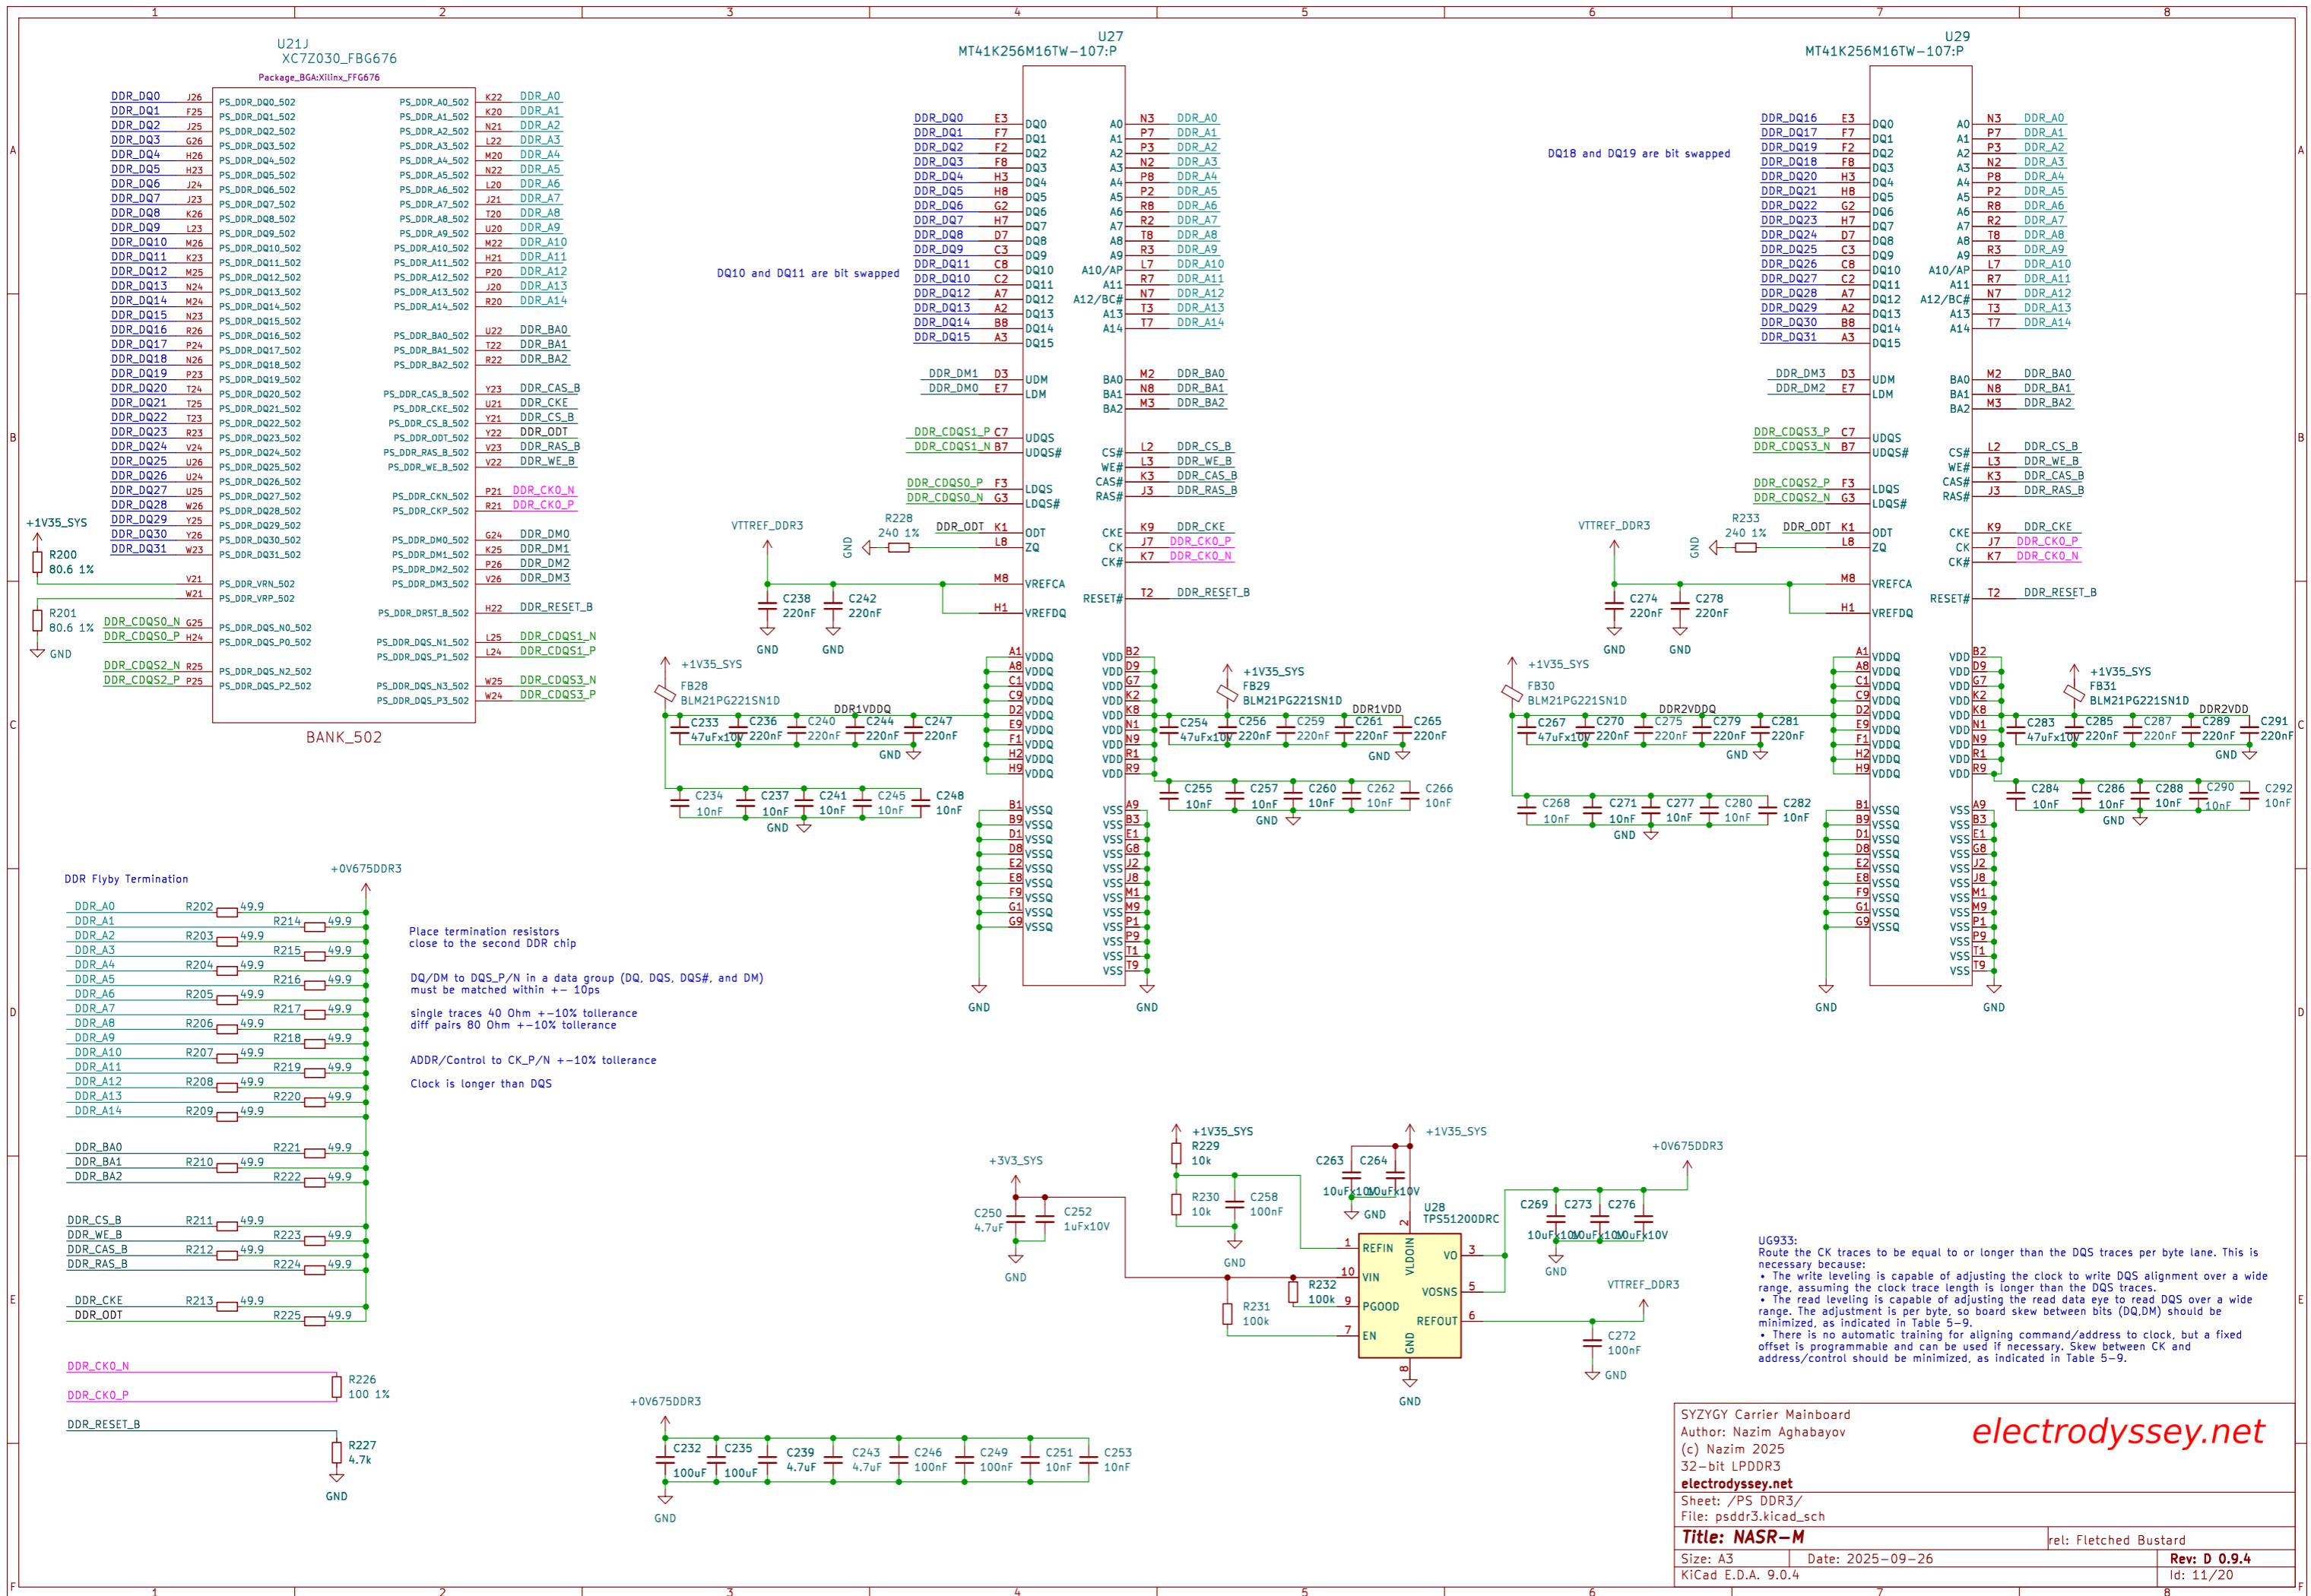

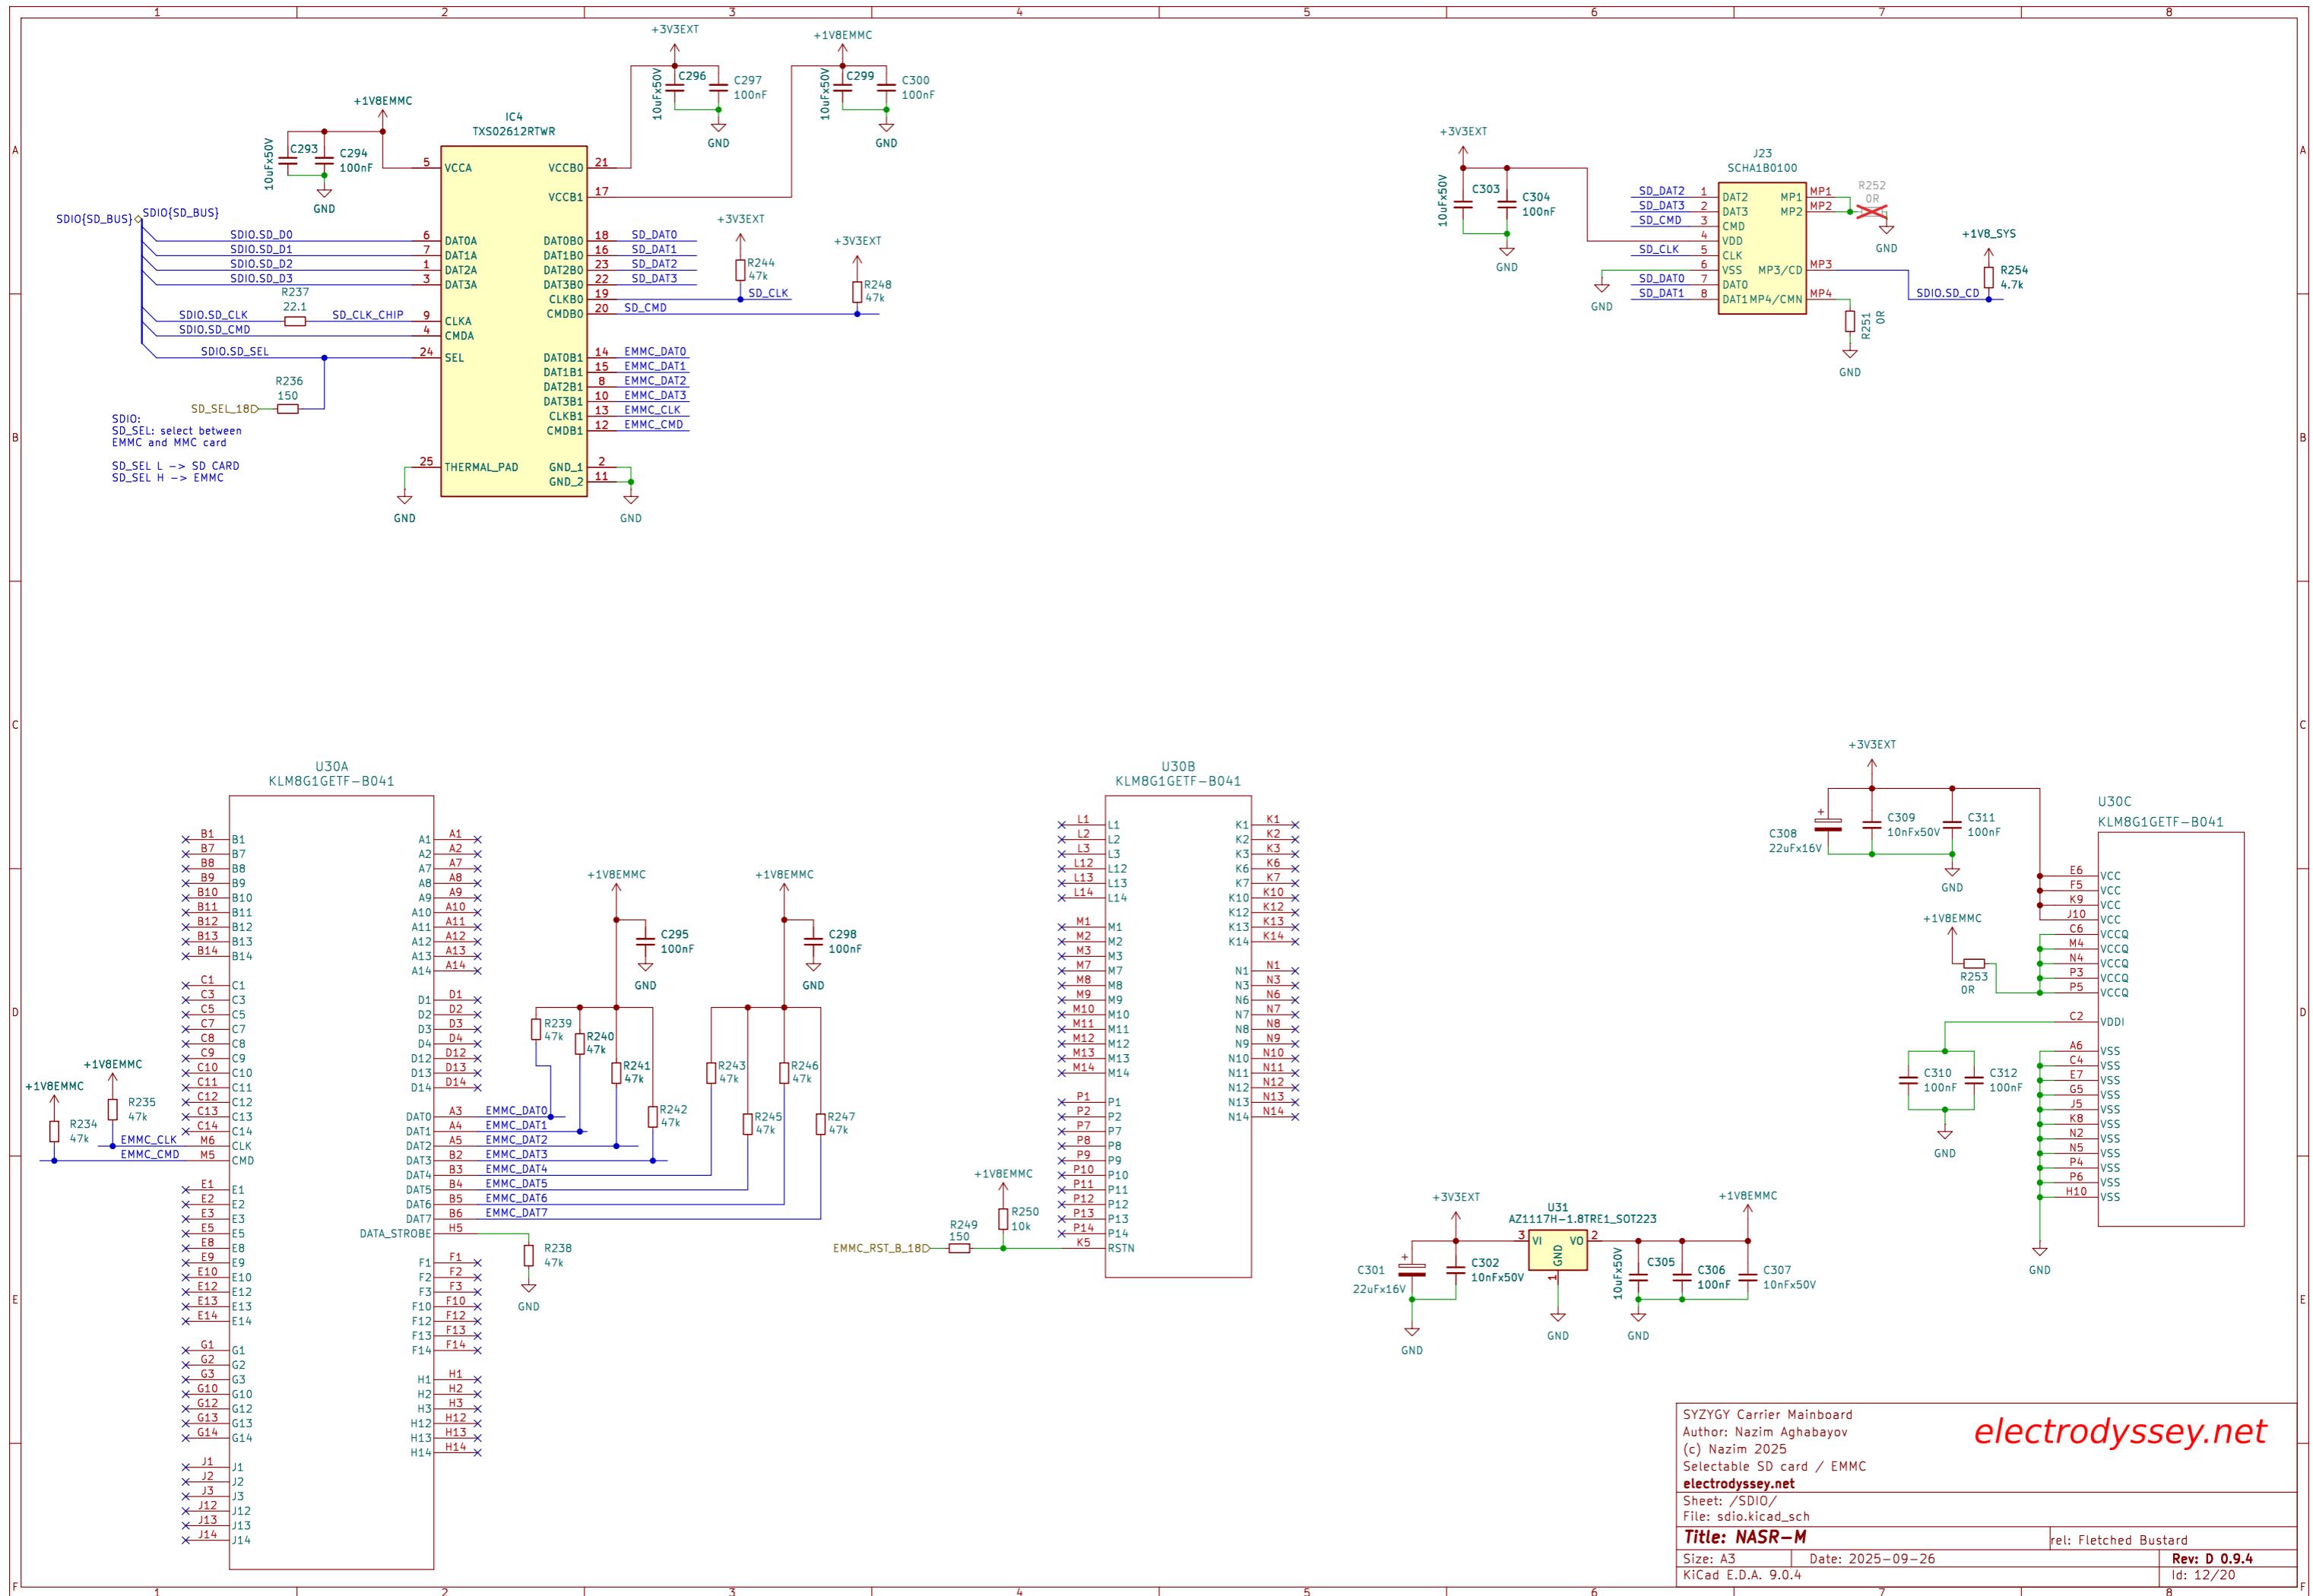

SYZYGY Carrier Mainboard
Author: Nazim Aghabayov
(c) Nazim 2025
Selectable SD card / EMMC
electrodyssey.net
Sheet: /SDIO/
File: sdio.kicad_sch
Title: NASR-M
Size: A3 Date: 2025-09-26
KiCad E.D.A. 9.0.4 Rev: D 0.9.4
rel: Fletched Bustard
Id: 12/20

electrodyssey.net

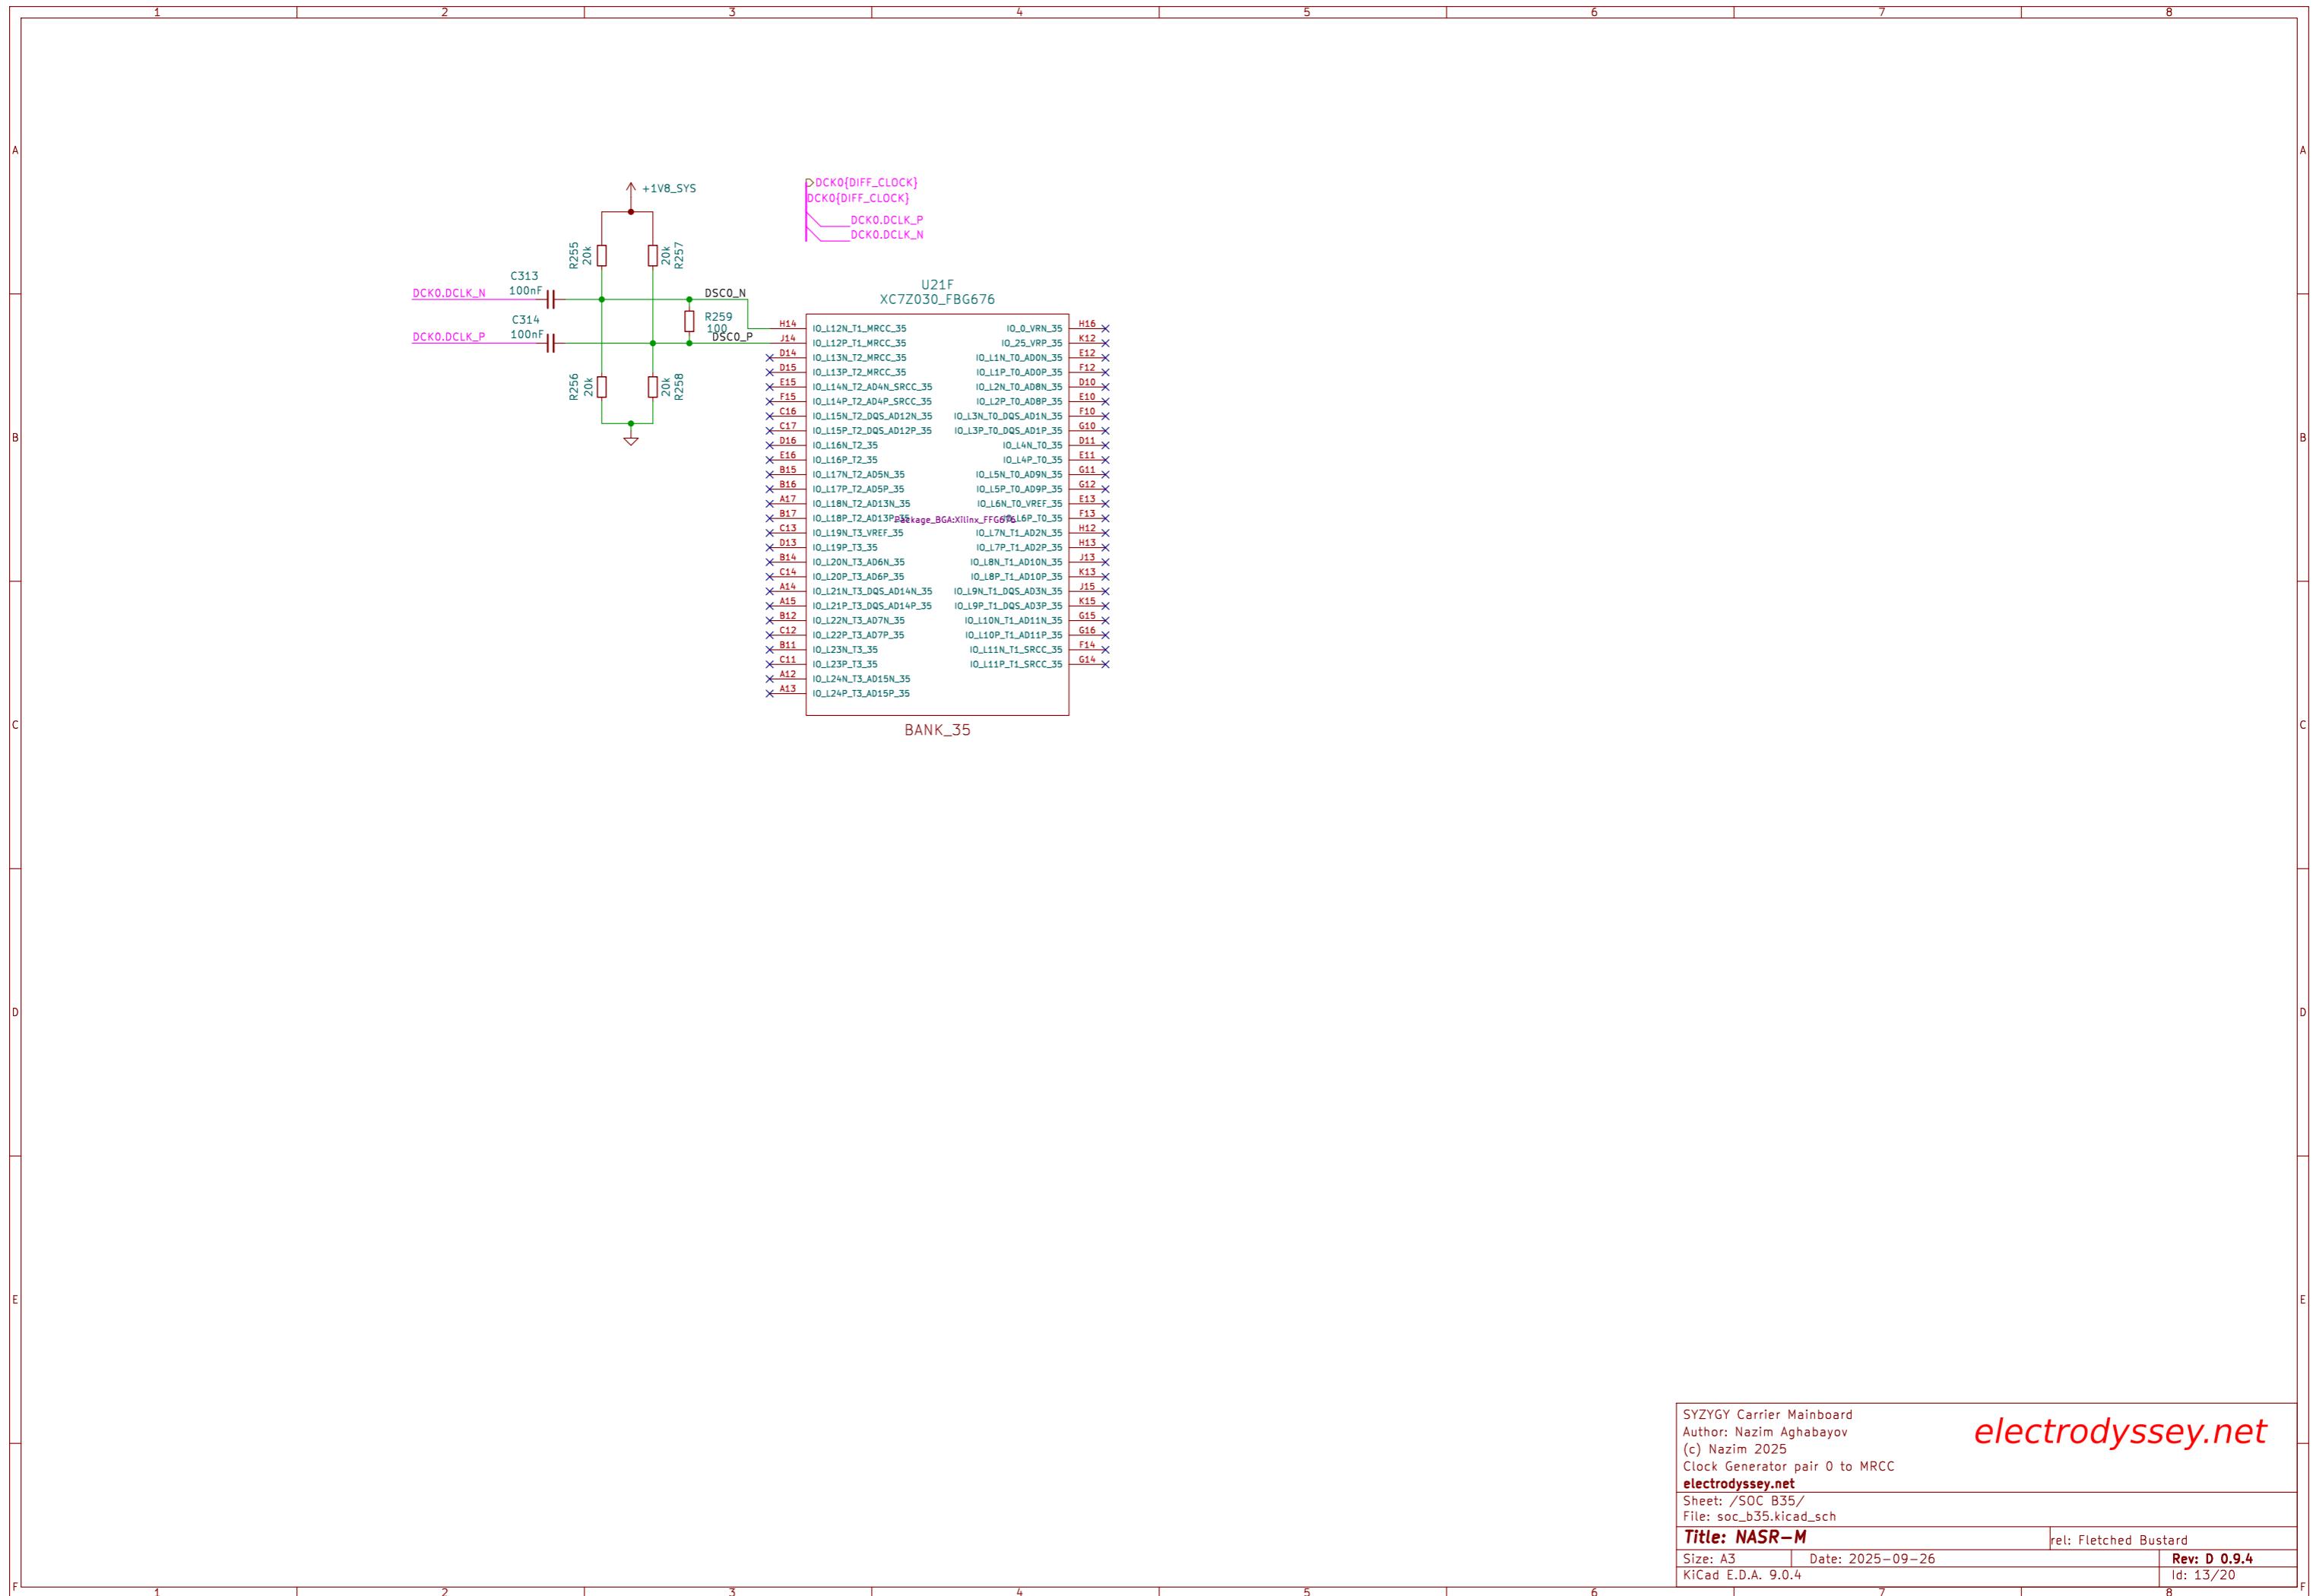

SYZYGY Carrier Mainboard
Author: Nazim Aghabayov
(c) Nazim 2025
Clock Generator pair 0 to MRCC
electrodyssey.net

electrodyssey.net

Sheet: /SOC B35/
File: soc_b35.kicad_sch
Title: NASR-M
Size: A3 Date: 2025-09-26
KiCad E.D.A. 9.0.4

rel: Fletched Bustard

Rev: D 0.9.4

Id: 13/20

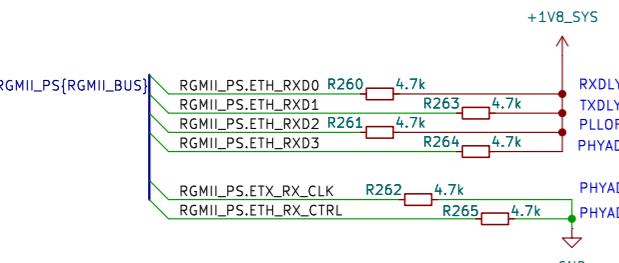
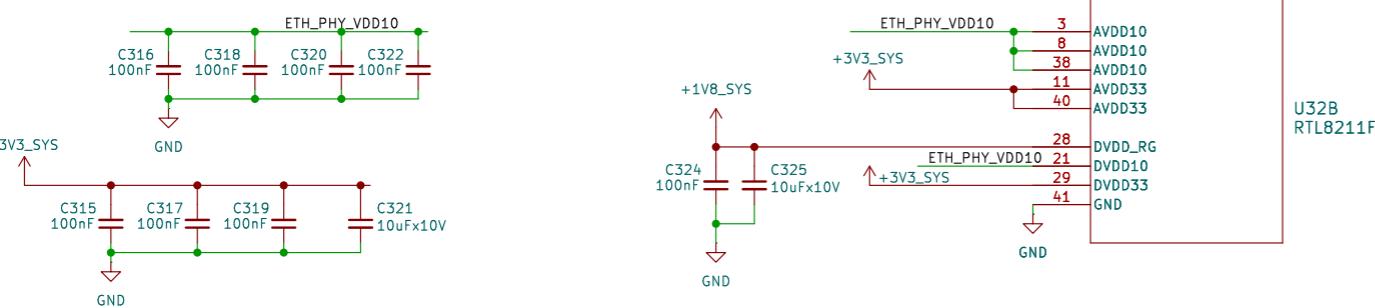
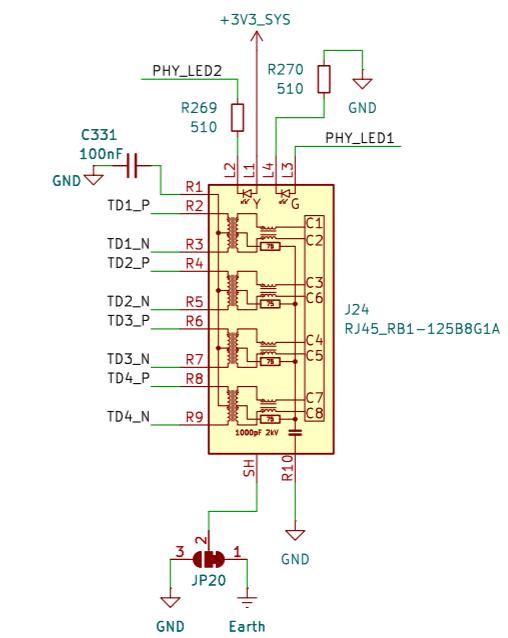
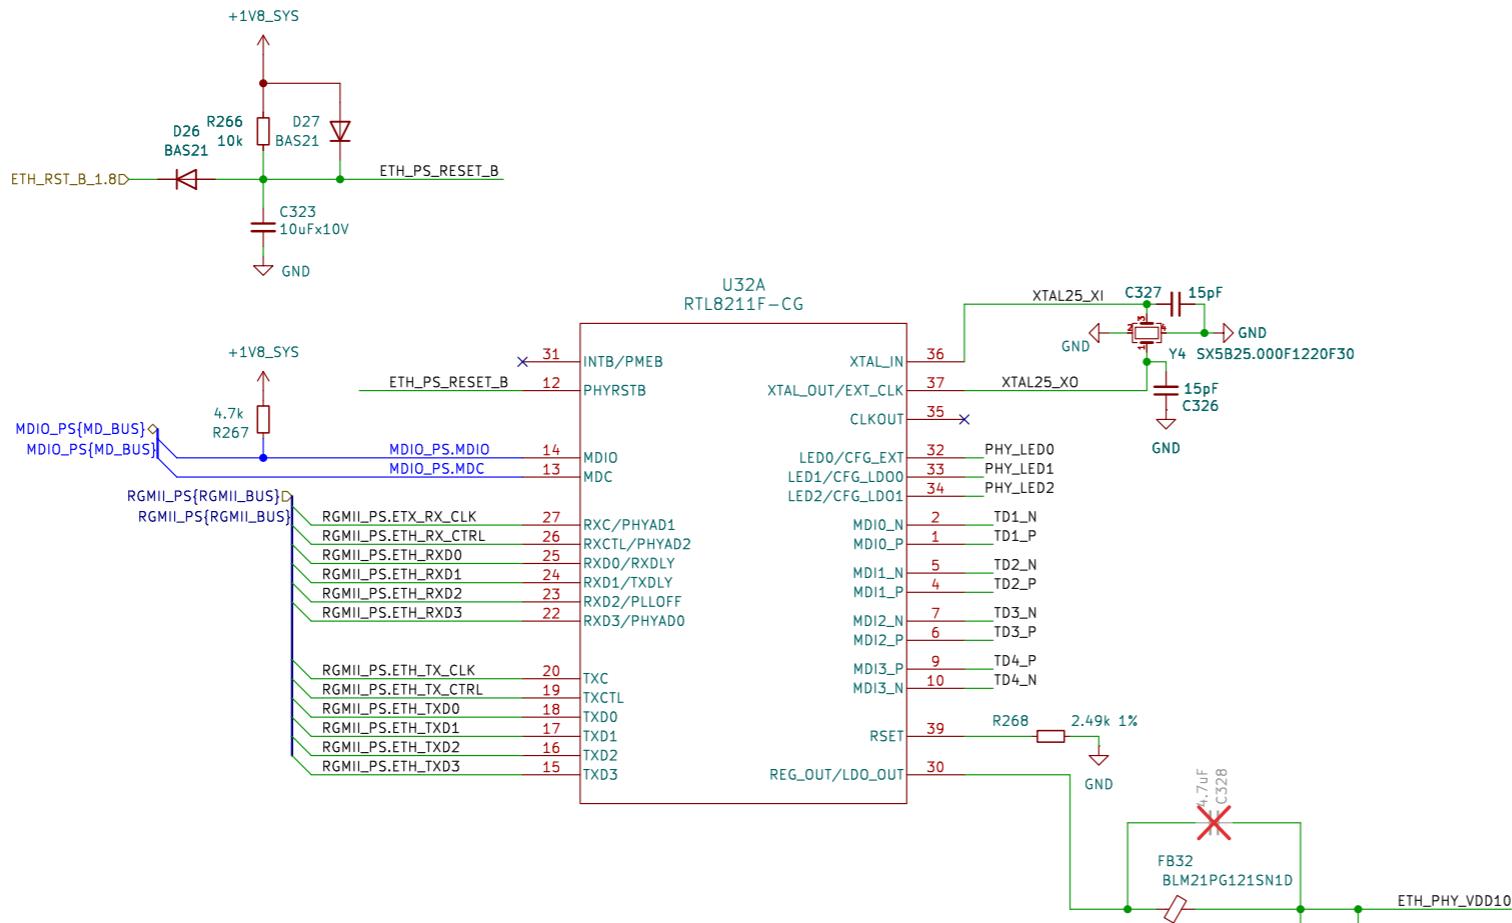


Table 10. CONFIG Pins vs. Configuration Register	
CONFIG Pin	Configuration
RXD3	PHYAD[0]
RXC	PHYAD[1]
RXCTL	PHYAD[2]
RXD2	PLLOFF
RXD1	TXDLY
RXD0	RXDLY
LED0	CFG_EXT
LED1	CFG_LDO[0]
LED2	CFG_LDO[1]

Table 11. Configuration Register Definitions	
Configuration	Description
PHYAD[2:0]	PHY Address. PHYAD sets the PHY address for the device. The RTL8211F(I)/RTL8211FD(I) supports PHY addresses from 00001 to 00111. Note 1: An MDIO command with PHY address=0 is a broadcast from the MAC; each PHY device should respond. This function can be disabled by setting Reg24.13=0 (See Table 37). Note 2: The RTL8211F(I)/RTL8211FD(I) with PHYAD[2:0]=000 can automatically remember the first non-zero PHY address. This function can be enabled by setting Reg24.6 = 1 (See Table 37).
PLLOFF	ALDPS Mode PLL Off Configuration. 1: Stop PLL when entering ALDPS mode (via 4.7k-ohm to DVDD_RG) 0: PLL continue toggling when entering ALDPS mode (via 4.7k-ohm to GND)
TXDLY	RGMII Transmit Clock Timing Control. 1: Add 2ns delay to RXC for RXD latching (via 4.7k-ohm to DVDD_RG) 0: No delay (via 4.7k-ohm to GND)
RXDLY	RGMII Receive Clock Timing Control. 1: Add 2ns delay to RXC for RXD latching (via 4.7k-ohm to DVDD_RG) 0: No delay (via 4.7k-ohm to GND)
CFG_EXT	I/O Pad External Power Source Mode Configuration. 1: Use the external power source for the IO pad (via 4.7k-ohm to 3.3V) 0: Use the integrated LDO to transform the desired voltage for the IO pad (via 4.7k-ohm to GND)

32	CFG_EXT	O/LI/PD	IO Pad External Power Source Mode Configuration. Pull up to use the external power source for the IO pad. Pull down to use the integrated LDO to transform the desired voltage for the IO pad.
33	CFG_LDO0	O/LI/PU	LDO Output Voltage Selection for I/O Pad/ External Power Source Voltage Selection for I/O Pad. When pulling down CFG_EXT pin, CFG_LDO[1:0] represent LDO output voltage setting for IO pad: 2'b00: Reserved. 2'b01: 2.5V. 2'b10: 1.8V. 2'b11: 1.5V.
34	CFG_LDO1	O/LI/PD	When pulling up CFG_EXT pin, CFG_LDO[1:0] stand for input voltage selection of the external power for IO pad: 2'b00: 3.3V. 2'b01: 2.5V. 2'b10: 1.8V. 2'b11: 1.5V.

Author: Nazim Aghabayov
(c) Nazim 2025


electrodyssey.net

electrodyssey.net
Sheet: /Ethernet PS/
File: eth_ps.kicad_sch


Title: NASR-M

Size: A3 Date: 2025-09-26
KiCad E.D.A. 9.0.4

Rev: D 0.9.4
Id: 14/20

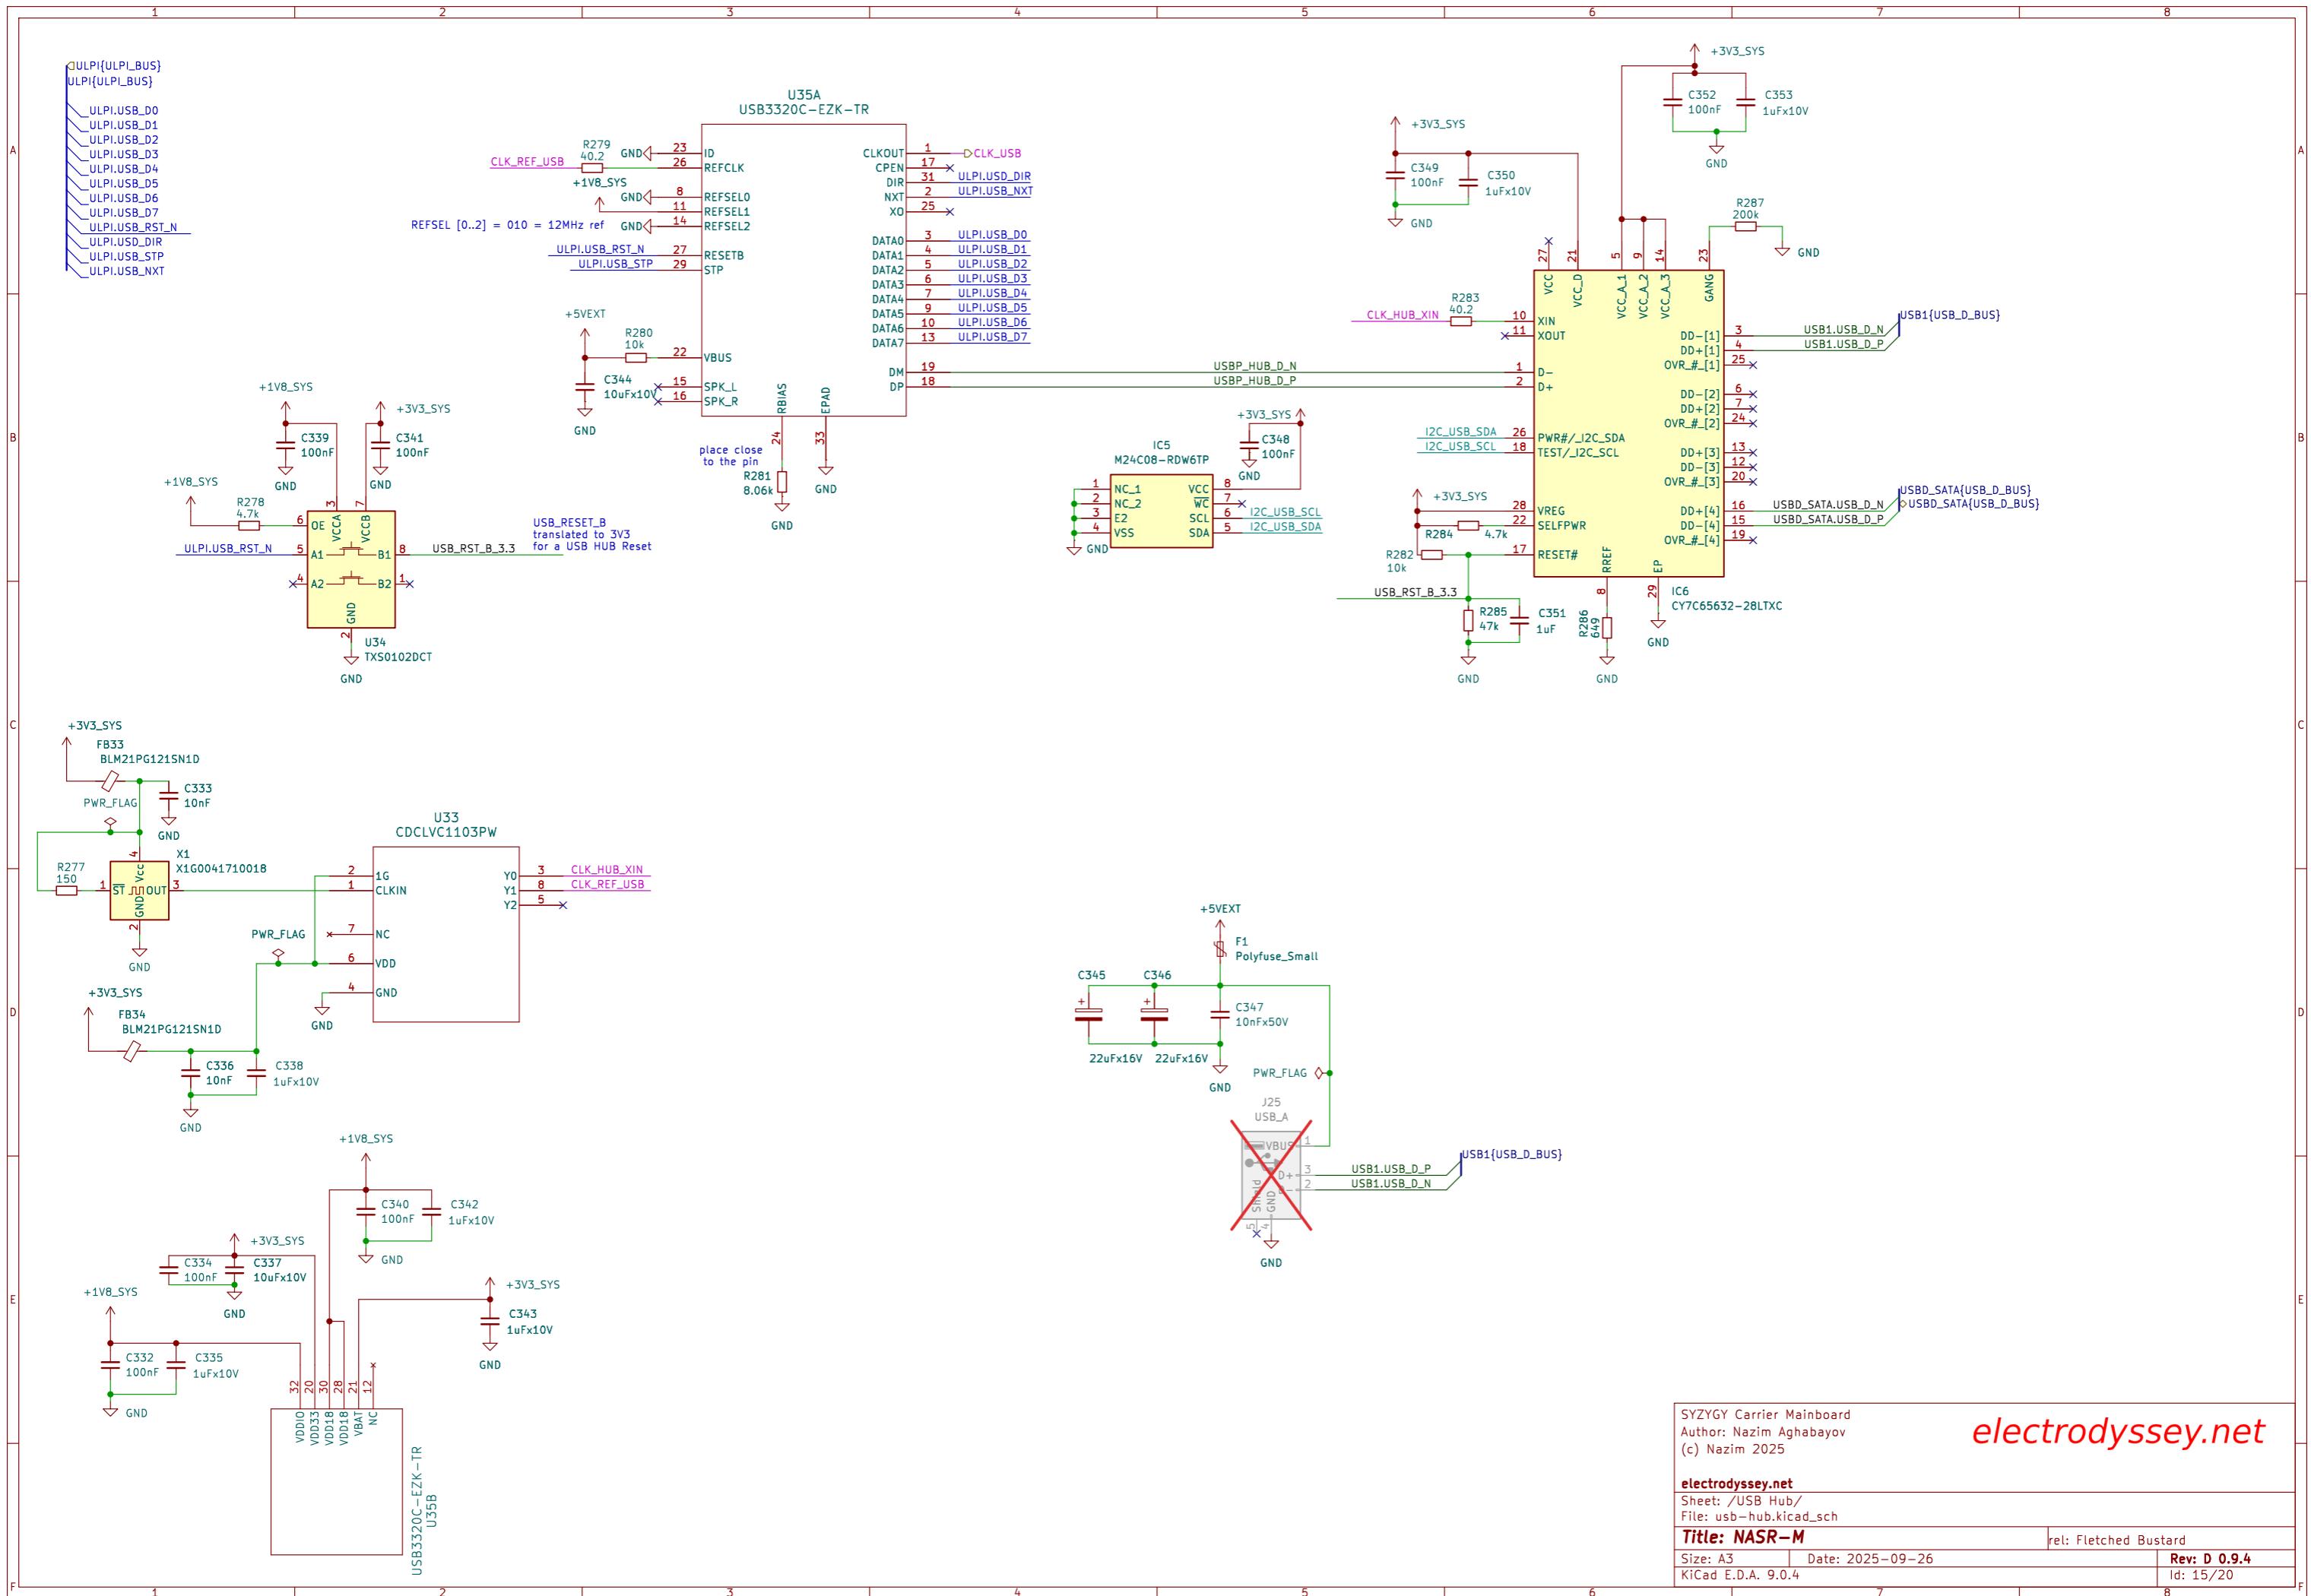


electrodyssey.net

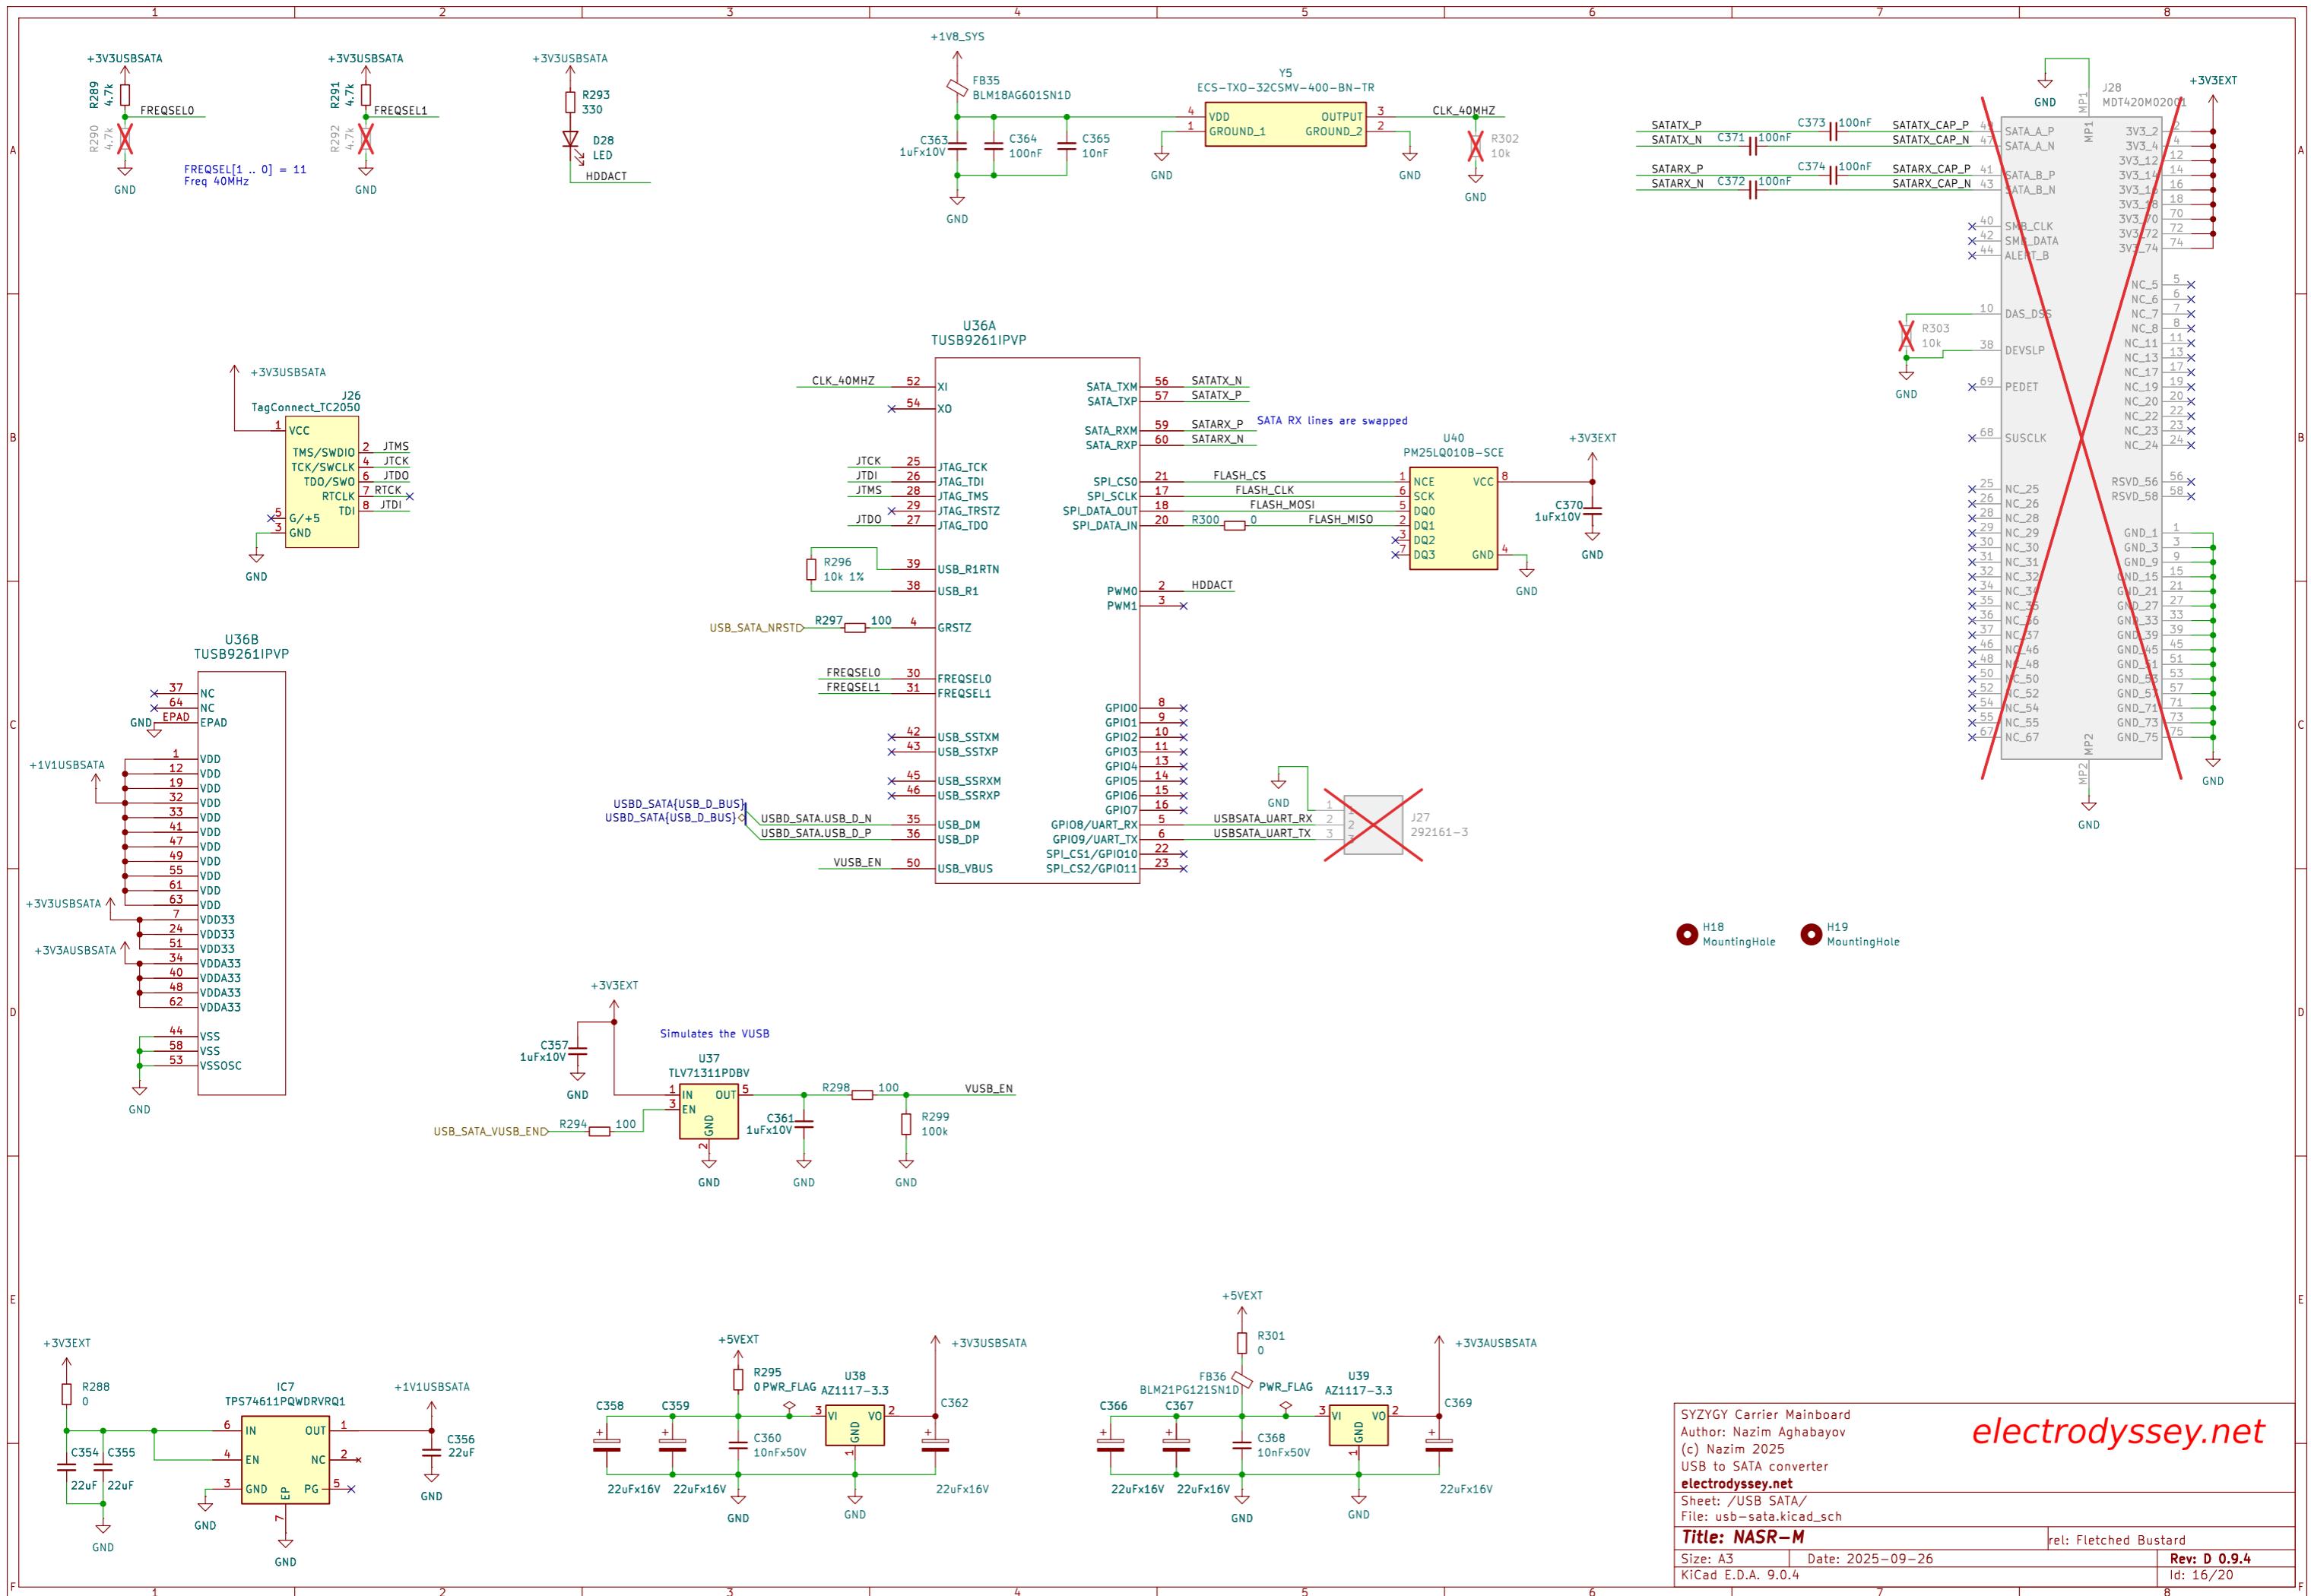


SYZYGY Carrier Mainboard
Author: Nazim Aghabayov
(c) Nazim 2025
USB to SATA converter
electrodyssey.net
Sheet: /USB SATA/
File: usb-sata.kicad_sch
Title: NASR-M
Size: A3 Date: 2025-09-26
KiCad E.D.A. 9.0.4

electrodyssey.net


rel: Fletched Bustard
Rev: D 0.9.4
Id: 16/20

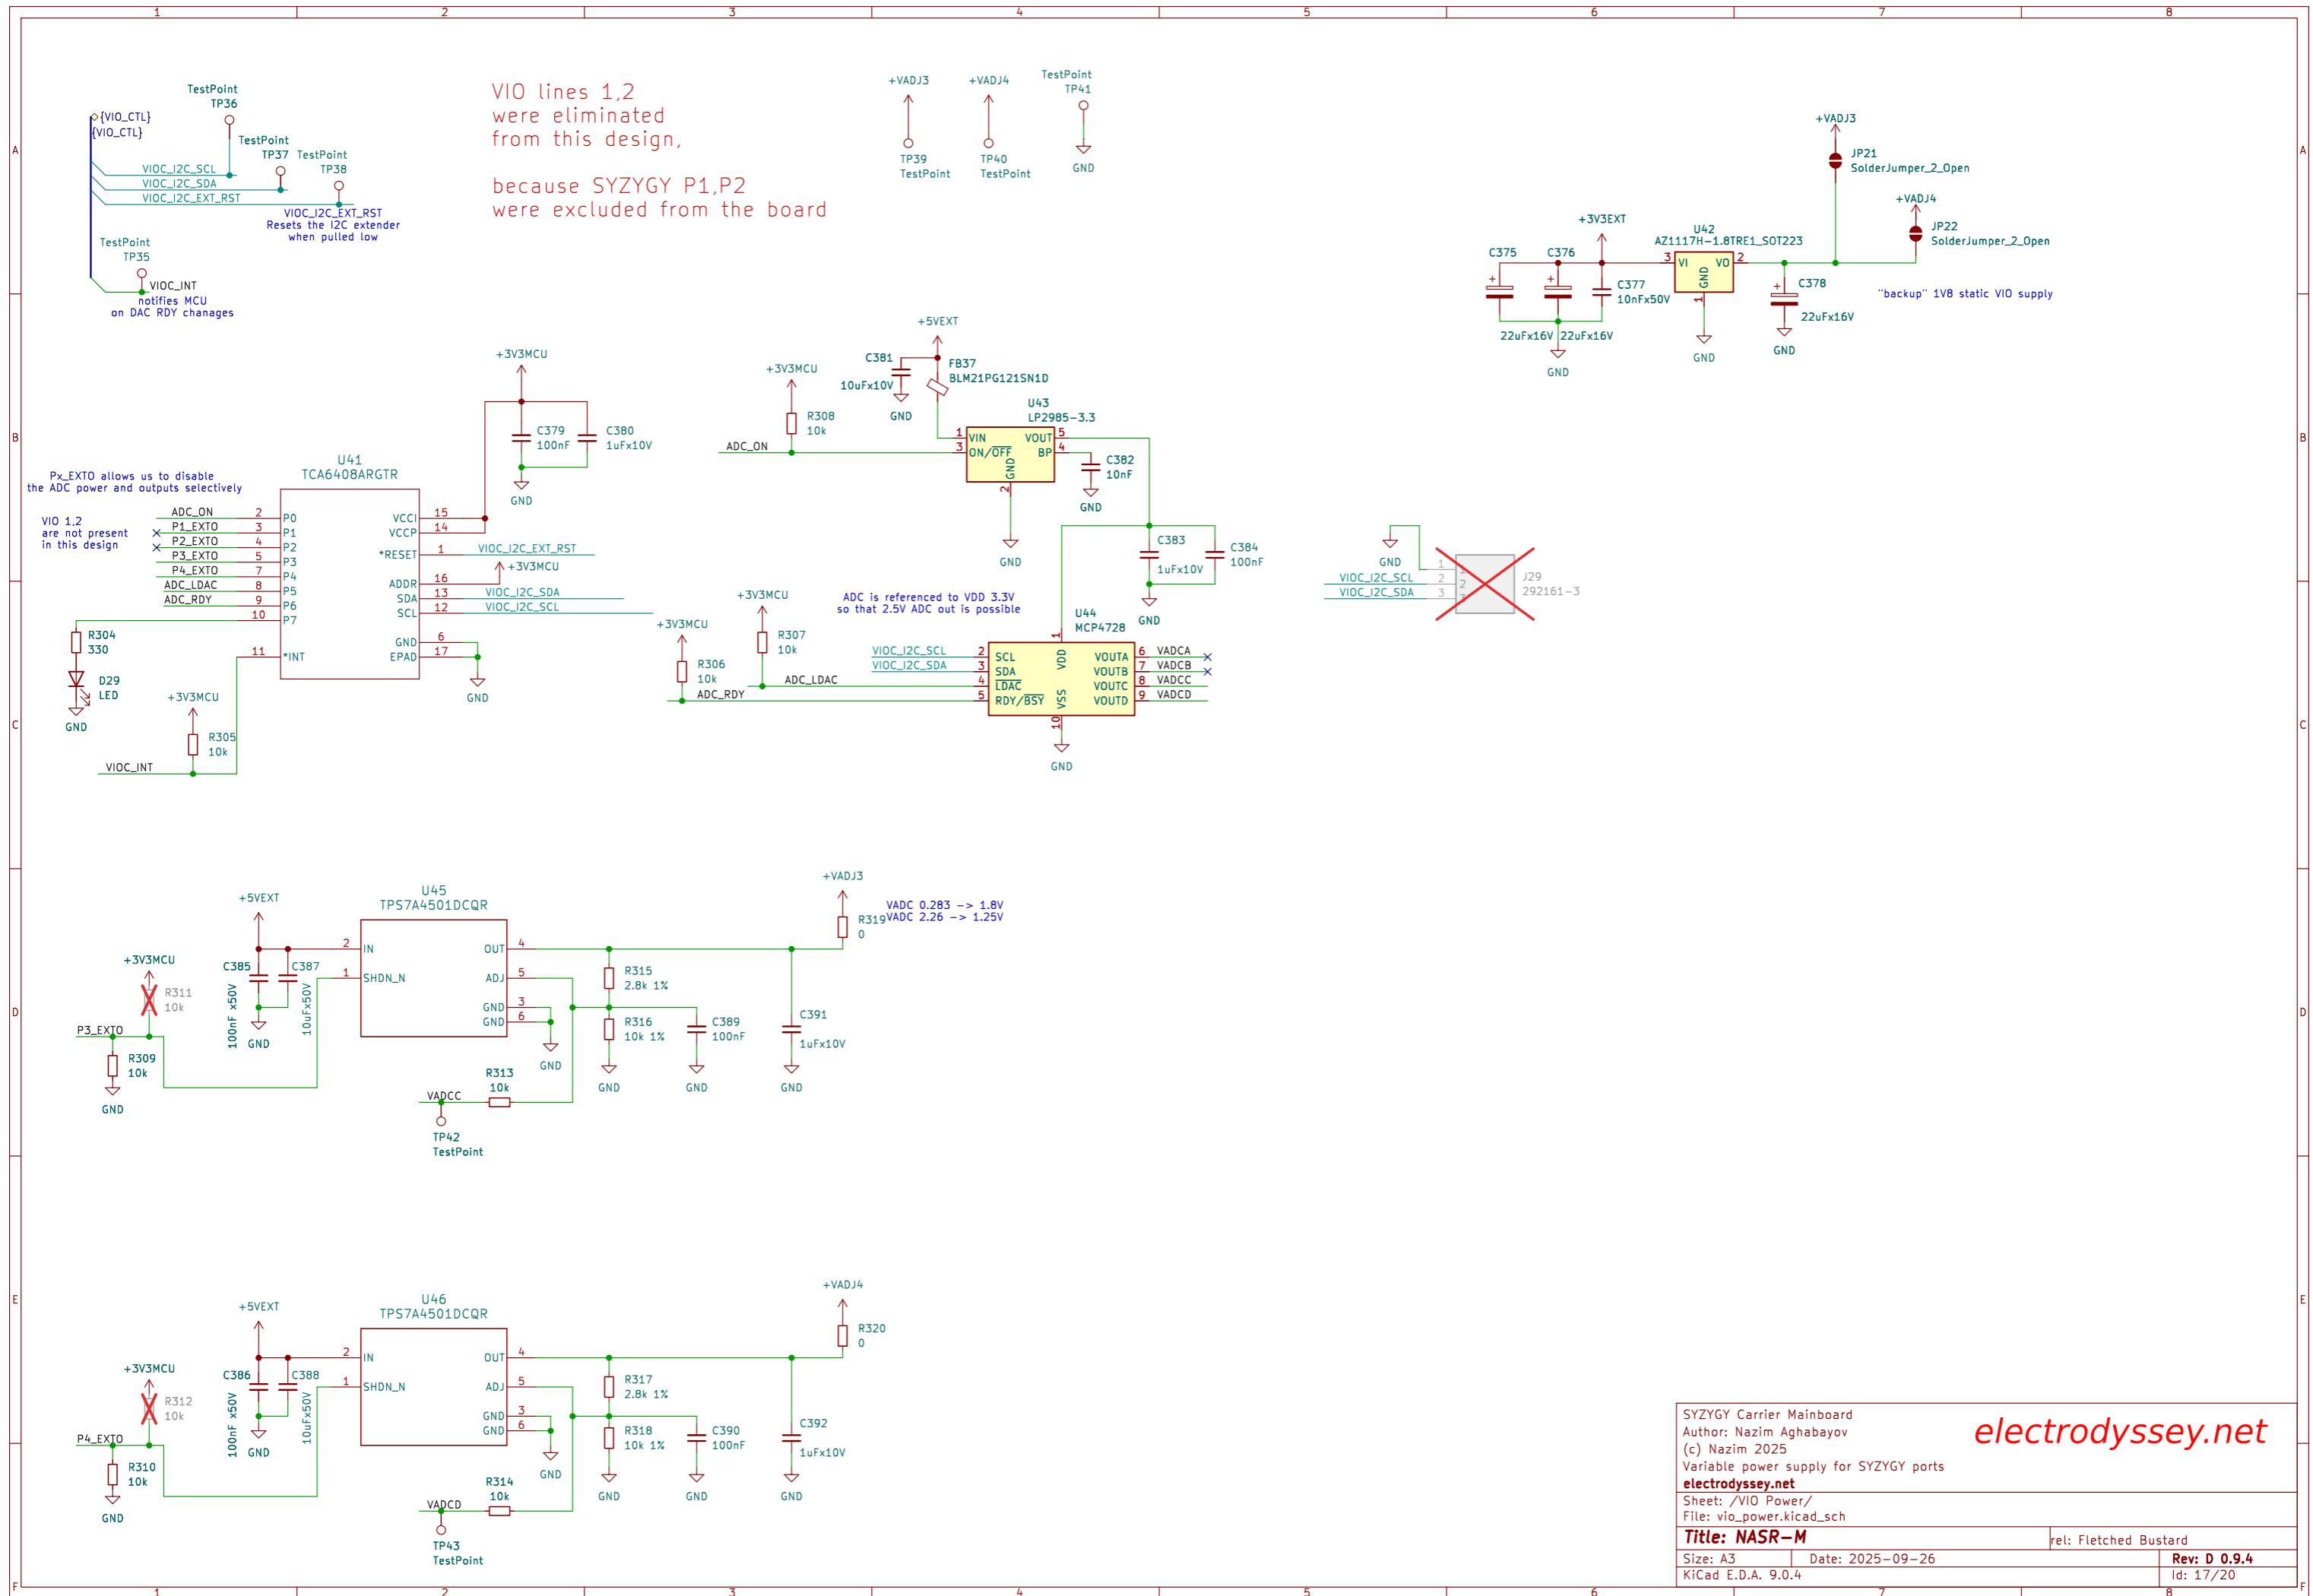

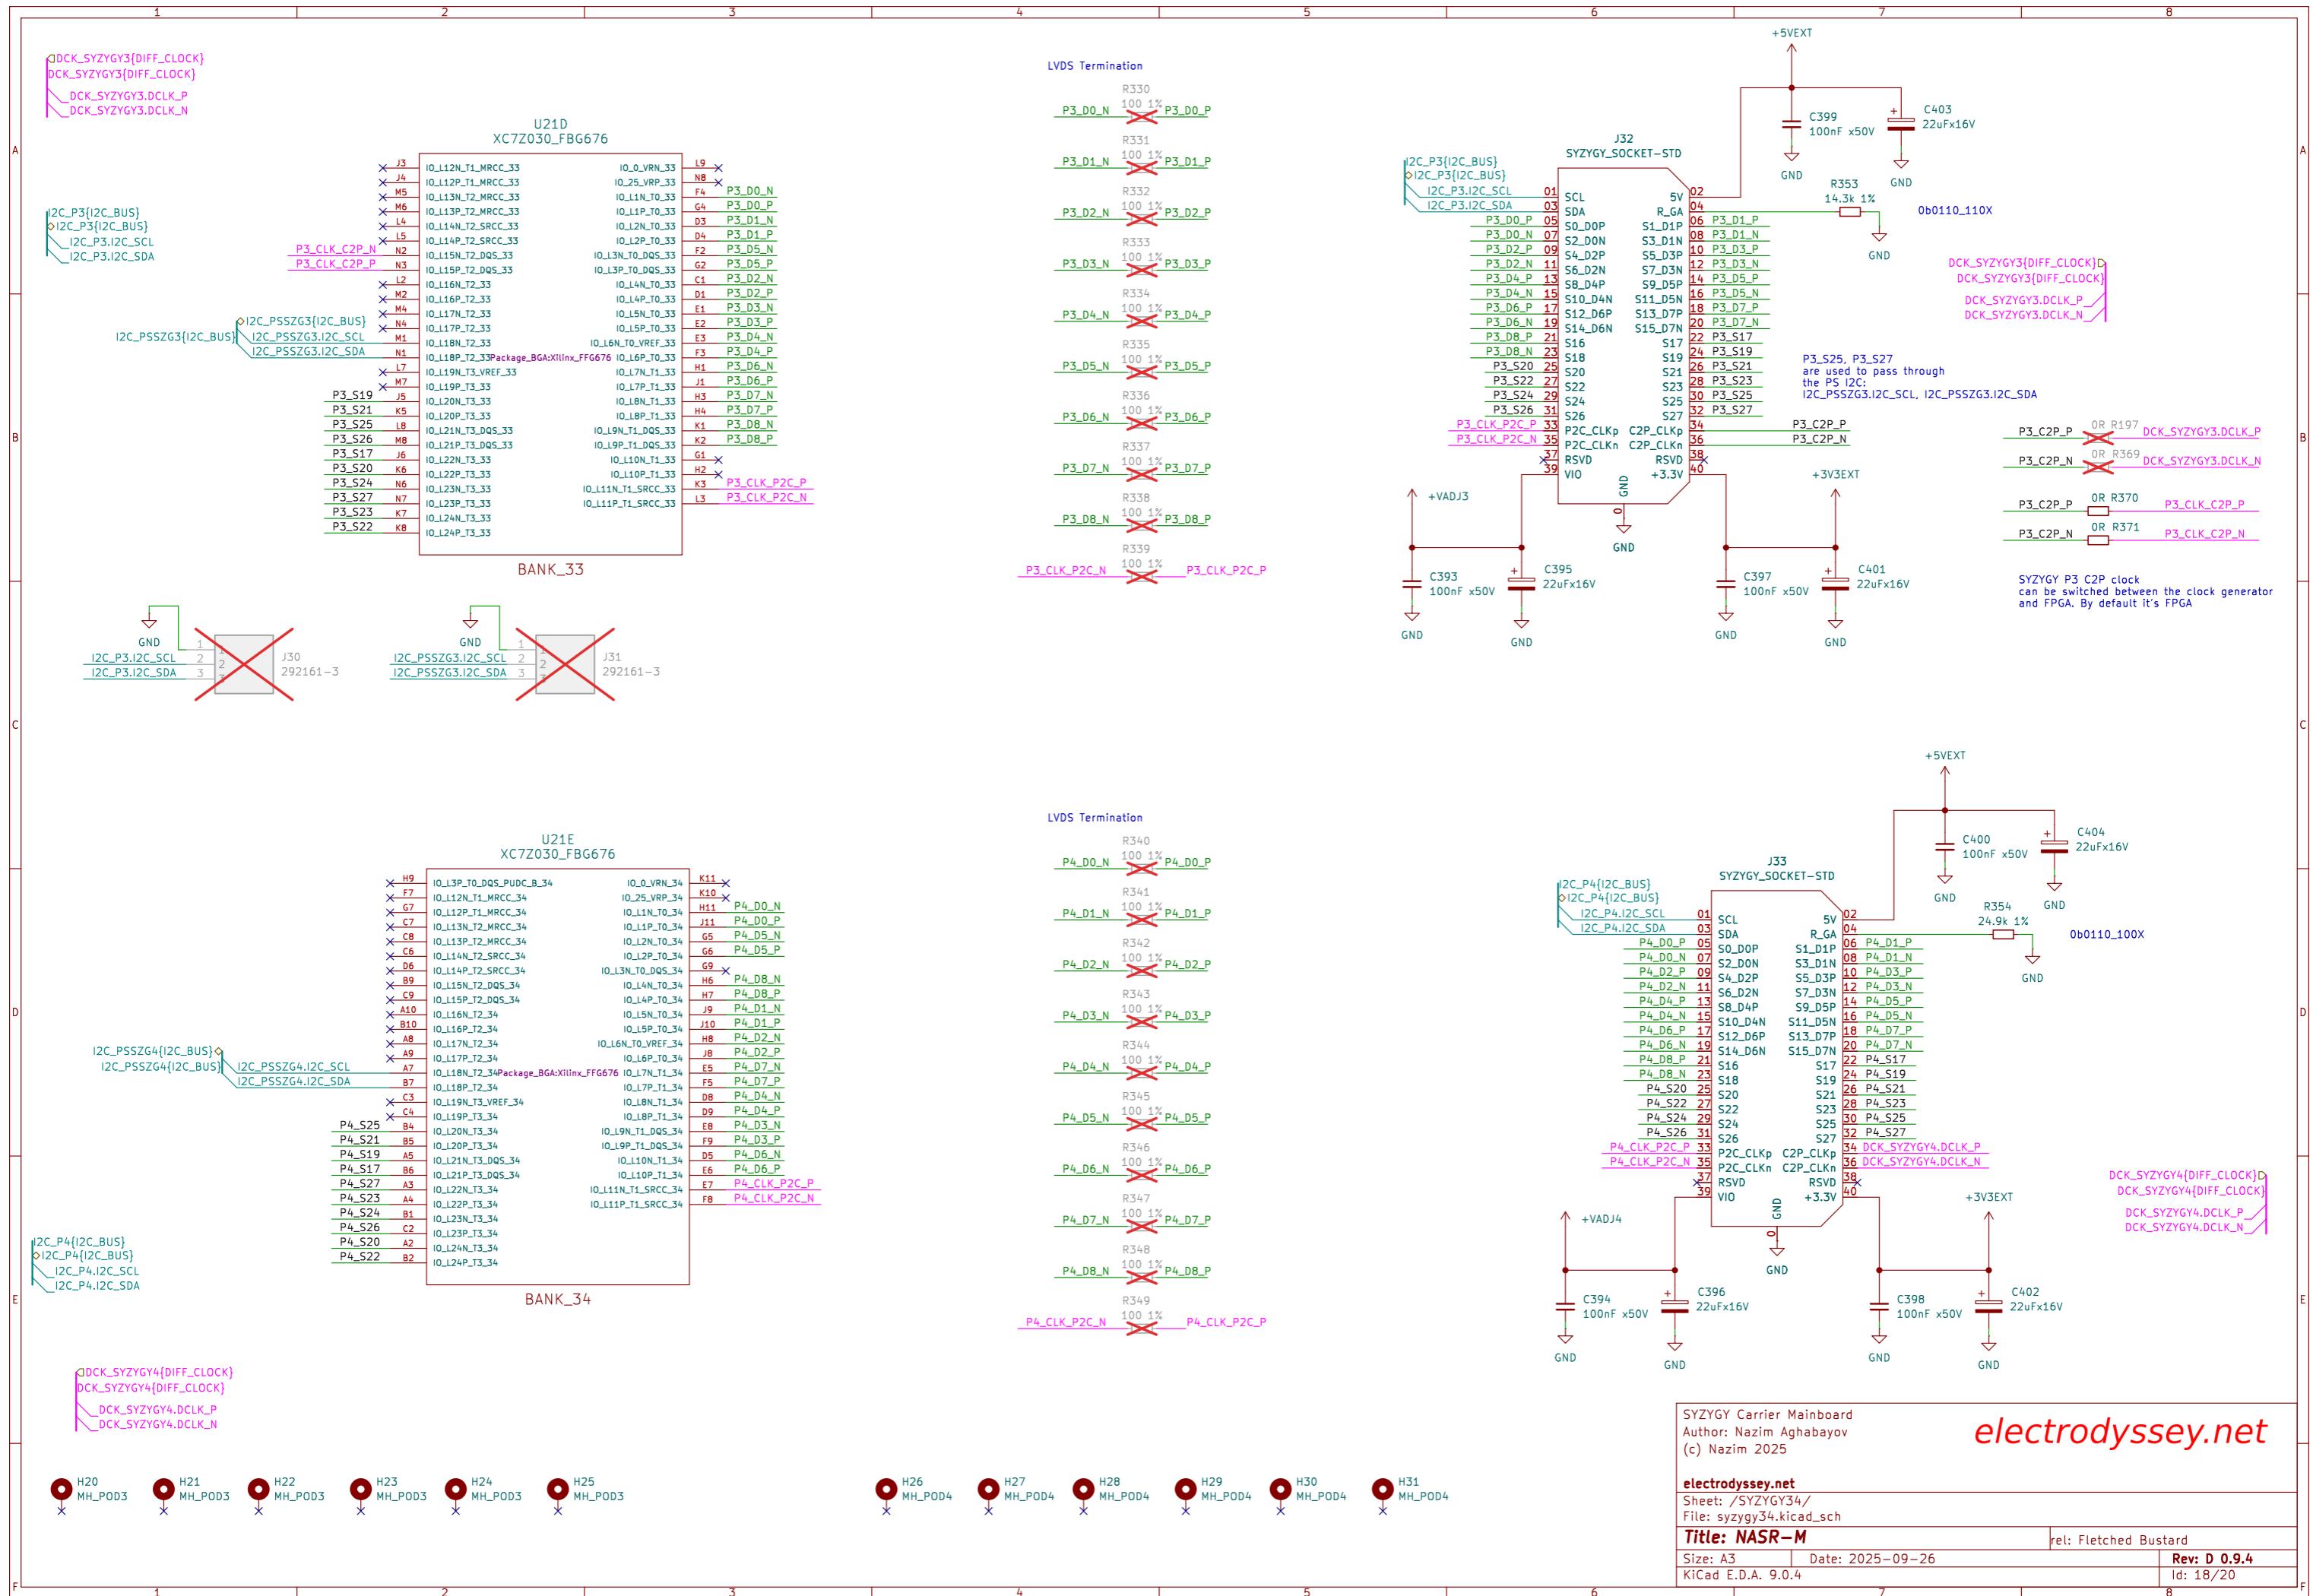


TestPoint
TP44
I2C0.I2C_SCL

TestPoint
TP45
I2C0.I2C_SDA

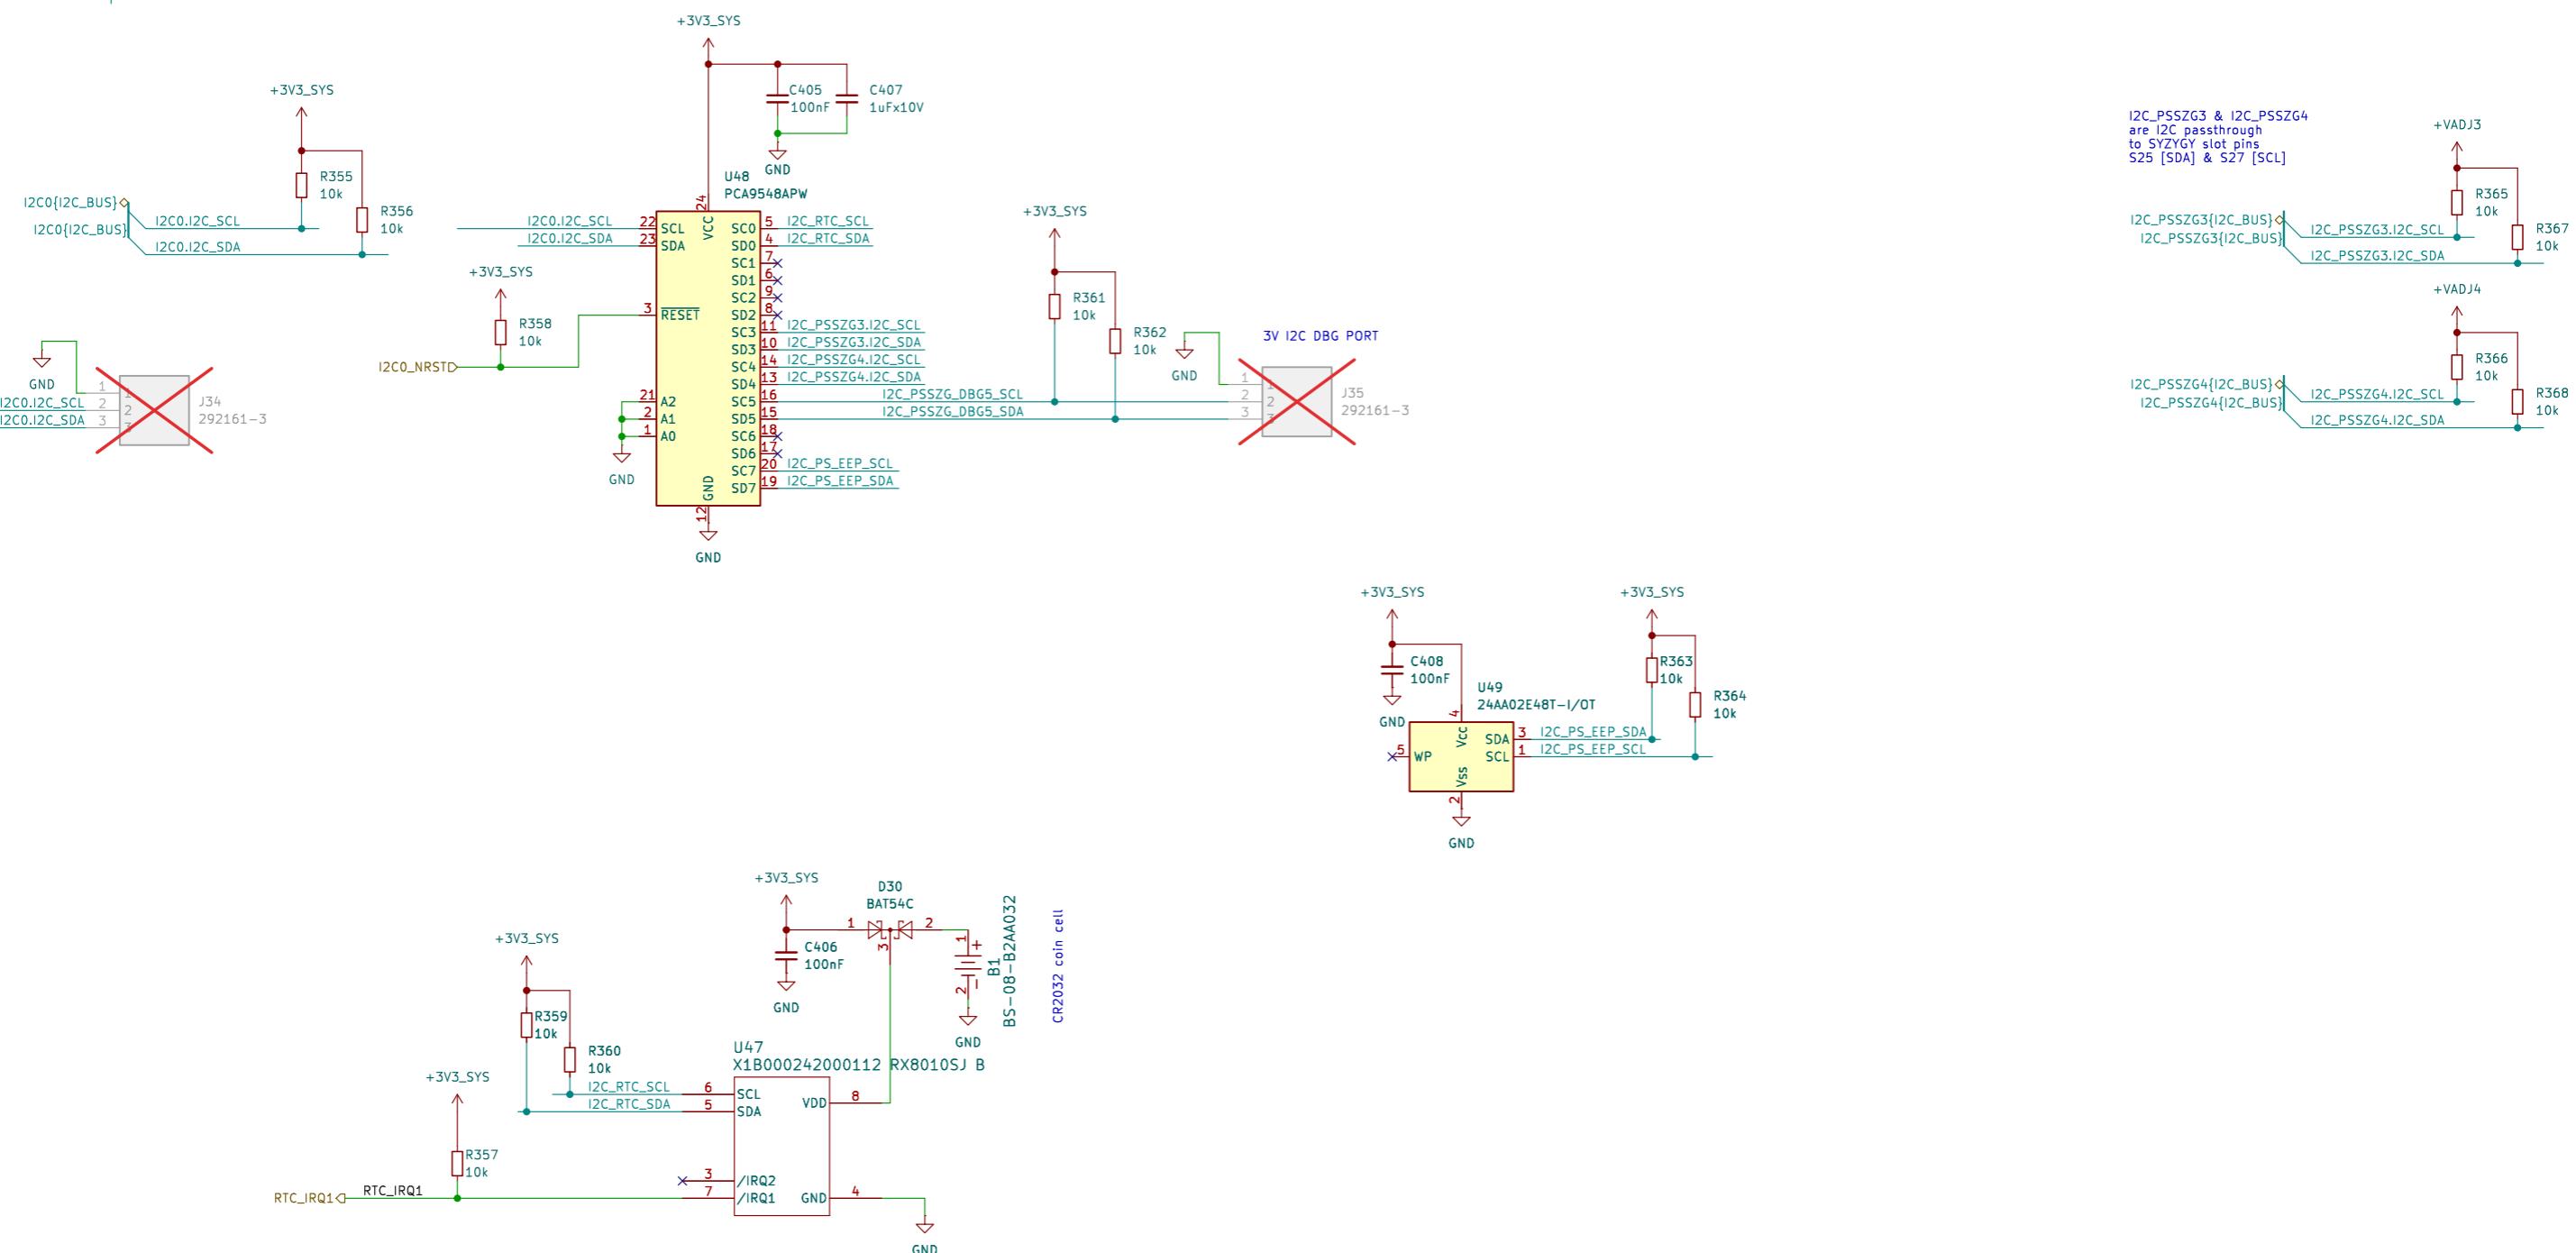

I2C_PSSZG3 & I2C_PSSZG4
are I2C passthrough
to SYZYGY slot pins.
S25 [SDA] & S27 [SCL]

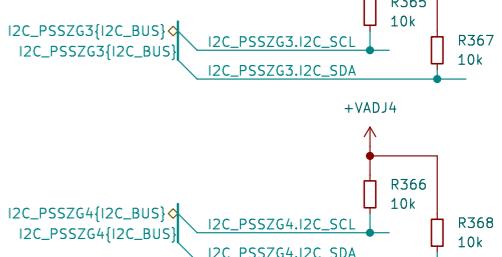



SYZYGY Carrier Mainboard
Author: Nazim Aghabayov
(c) Nazim 2025

electrodyssy.net
Sheet: /SOC I2C/
File: soc_i2c.kicad_sch


electrodyssy.net

Title: NASR-M
Size: A3 Date: 2025-09-26
KiCad E.D.A. 9.0.4


rel: Fletched Bustard
Rev: D 0.9.4
Id: 19/20





ETH_RX_ERR ↗ RXER

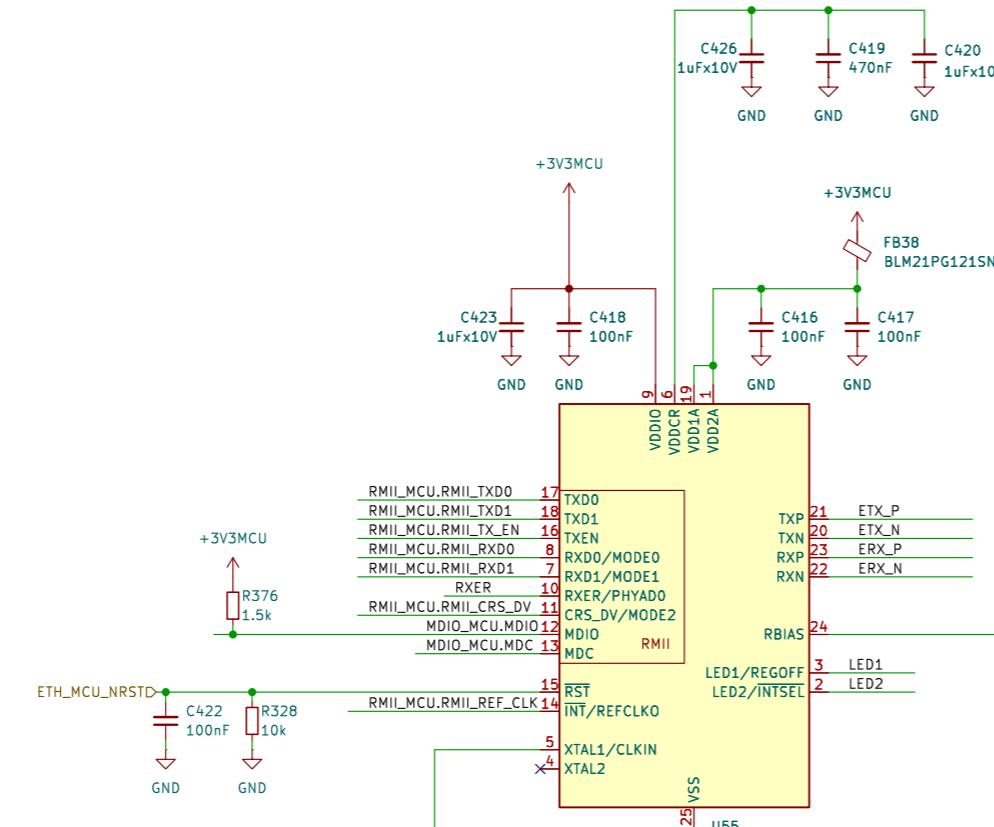

Pulling LED1/REGOFF low
will enable internal +1V2 regulator



Configuration strap

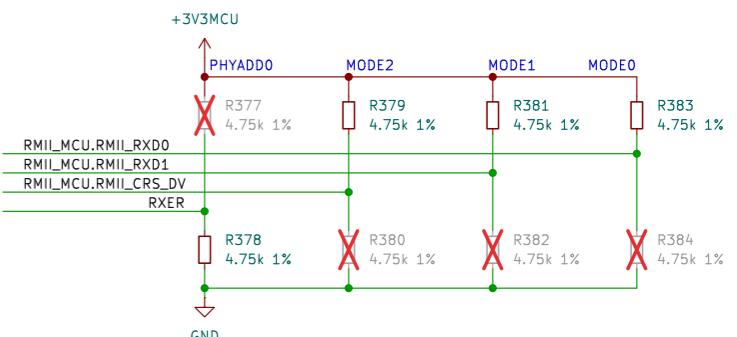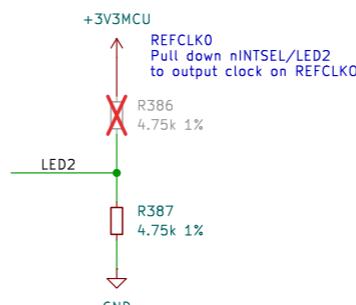

Author: Nazim Aghabayov
(c) Nazim 2025

electrodyssey.net

Sheet: /Ethernet MCU/
File: eth_mcu.kicad_sch

Title: NASR-M

Size: A3 Date: 2025-09-26
KiCad E.D.A. 9.0.4

Digitized by srujanika@gmail.com

electrodyssey.net

10 of 10

10

1

100

Page 1