PN Series Alternate & Momentary Action Pushbutton Switches

Features/Benefits

- Momentary or locking action
- Different actuation forces for customized feel
- Low cost, reliable contact design
- Single and double pole options
- RoHS compliant

Typical Applications

- Computers and peripherals
- Instrumentation and measurement equipment
- Non-power, on-off switch applications





Specifications

CONTACT RATING: 0.2 AMP @ 30 V DC max.

ELECTRICAL LIFE: 10,000 make-and-break cycles at full load.

MECHANICAL LIFE: 10,000 on/off cycles. CONTACT RESISTANCE: 30 mΩ max. initial INSULATION RESISTANCE: 100 MΩ min. DIELECTRIC STRENGTH: 500 V AC min.

OPERATING/STORAGE TEMPERATURES: -10°C to 60°C. PACKAGING: Switches are supplied in anti-static trays.

Materials

FRAME: Tin plated steel. ACTUATOR: PA 66 black. BASE: Phenolic resin.

TERMINALS: Silver plated brass.

MOVABLE CONTACTS: Silver plated phosphor bronze.

RETURN SPRING: SWC


DETENT SPRING: Phosphor bronze. DETENT SPRING PLATE: Phosphor bronze.

RETURN SPRING RETAINER RING: Nickel plated steel.

TERMINAL SEAL: Epoxy.

Build-A-Switch

To order, simply select desired option from each category and place in the appropriate box. For additional options not shown in catalog, consult Customer Service Center.

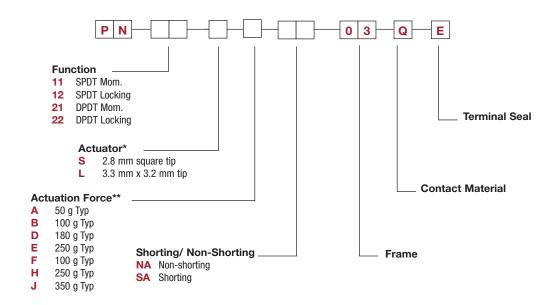

- * Note The switch body style dimenions differ for each of these 3 groupings
- "S" actuator available for PN 11 & PN 12 options
- "S" actuator available for PN 21 & PN 22 options
- "L" actuator available for PN 21 & PN 22 options


- ** Actuation Force "A" only available with PN11 with "S" actuator
- PN 11 & PN 21 available with Acuation Force "B", "D", "E", "F", "H", "J"
- PN 12 & PN 22 available with Actuation Force "D", "E", "H", "J"


Full travel




PN Series Alternate & Momentary Action Pushbutton Switches


PN 11 SPDT Mom. PN 12 SPDT Locking









PN 21 DPDT Mom. with "S" Actuator PN 22 DPDT Locking with "S" Actuator










Dimensions are shown: mm Specifications and dimensions subject to change



PN Series Alternate & Momentary Action Pushbutton Switches

PN 21 DPDT Mom. with "L" Actuator PN 22 DPDT Locking with "L" Actuator

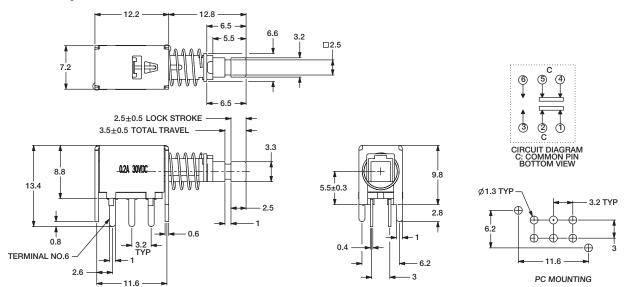


BUTTONS MUST BE ORDERED SEPARATELY. SHIPPED IN BULK.

White








PE and PV buttons fit "L" actuators

PV






Indexed

G001A Black G001G Gray G001I Ivory G001R Red

WH








.040 (1,02)

Rectangular

G002A Black G002G Gray G002I Ivory G002R Red





Round

G003A Black G003G Gray G003I Ivory G003R Red




G001, G002, G003 and G004 buttons fit "S" actuators

Square

G004A Black G004G Gray G004I Ivory G004R Red









Third Angle Projection

Dimensions are shown: Inches (mm) Specifications and dimensions subject to change

