



SONG HUEI ELECTRIC CO.,LTD

16mm Rotary Remote Control Potentiometer

RC-1601(Dual Units)







Part Number

RC-1601 - B 50K, L - 20 KC

↓ Taper ↓ Resistance Value ↓ Shaft Length ↓ Shaft Type


★ This item is also available with 4-ganged (RC-1602) and 6-ganged (RC-1603).

Dimensions

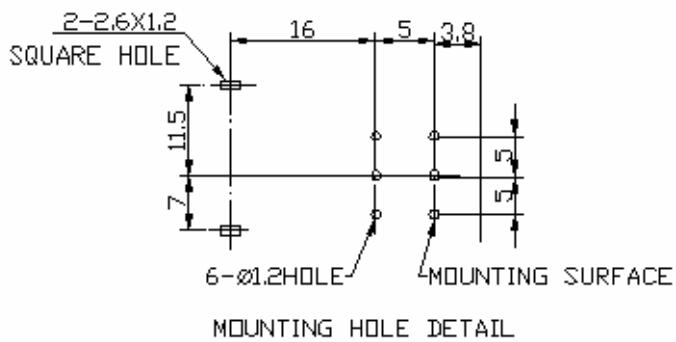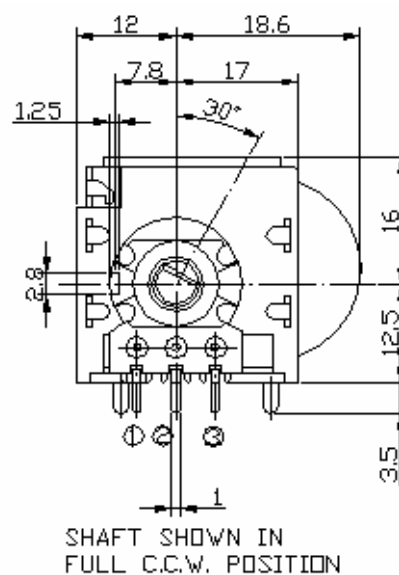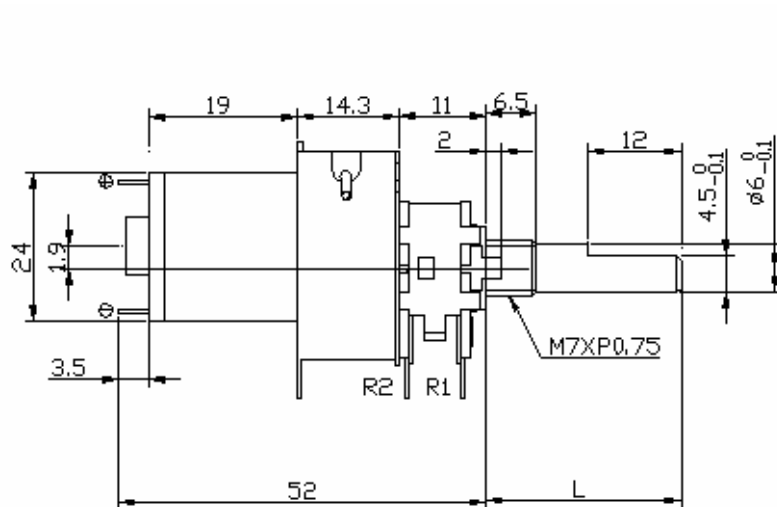

16mm Rotary Remote Control Potentiometer

Shaft Type

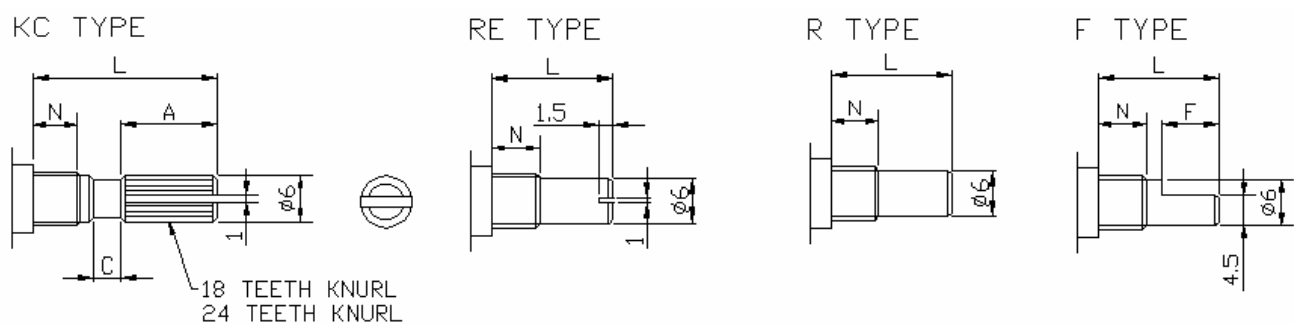

N:5m/m

SHAFT-TYPE	L	10	15	20	25	30	35	40
KC	A	3.2	6	10	12	12	12	12
	C	0.5	1	2	2	4	4	4
F	F	4	7	12	12	12	12	12
R,RE	L	10	15	20	25	30	35	40

N:6.5m/m

SHAFT-TYPE	L	10	15	20	25	30	35	40
KC	A	2.2	6	10	12	12	12	12
	C	0.5	1	2	2	4	4	4
F	F	2.5	7	12	12	12	12	12
R,RE	L	10	15	20	25	30	35	40

16mm Rotary Remote Control Potentiometer

Electrical Characteristics

All Resistance	500Ω ~ 2MΩ				
All Resistance Tolerance	± 20%				
Resistance Taper	A. B. C. D. W. Taper				
Resistance Taper Characteristics	A50%	B50%	C50%	D50%	W50%
	15-25%	40-60%	75-85%	2-15%	45-55%
Rated Power	0.063 W				
Max. Operating Voltage	B Taper :AC150V, Other Taper: AC 200V				
Residual Resistance	R ≧ 250KΩ 0.1%				
	250KΩ> R > 10KΩ		10ΩMax. (between Term. 1, 2)		
	10KΩ≧ R		10ΩMax. (between Term. 1, 2)		
Gang Error	-40 ~ 0db ≦ 3 db				
Noise	47 mV max.				
Insulation Resistance	Potentiometer Section: DC 250V 100MΩ				
	Motor Section: DC 100V 1MΩ				
Withstand Voltage	1 minute AC 300V				
Motor Voltage	4~6 VDC				
Operating current	100mA Max (at rotation)				
	150mA Max (at end slip)				
Sliding Life	10,000 Cycles				

Mechanical Characteristics

Total Rotational Angle	300° ± 5°
Stopper Strength	8kgf.cm max./3 minute.
Rotational Torque	100~450gf.cm (Hand operation)
Rotational Speed	12 ±3 sec. (at 4.5VDC applied to motor)
Solder Heat	300°C,3S. (Only For Hand-Soldering)
Remark	Shaft: Aluminum Zinc; Bushing Material: Cast Iron