




| RANGE          |        | COMMON TOLERANCE |       |       |  |  |
|----------------|--------|------------------|-------|-------|--|--|
|                | A      | В                | С     | D     |  |  |
| < 8            | ±0.01  | ±0.1             | ±0.2  | ±0.4  |  |  |
| 8~25           | ±0.05  | ±0.15            | ±0.3  | ±0.6  |  |  |
| 25~80          | ±0.10  | ±0.25            | ±0.5  | ±1.0  |  |  |
| 80~250         | ±0.15  | ±0.4             | ±0.8  | ±1.5  |  |  |
| 250~800        | ±0.2   | ±0.8             | ±1.5  | ±3.0  |  |  |
| 800~2500       | ±1.0   | ±1.5             | ±3.0  | ±6.0  |  |  |
| ANGULAR        | ±0.15° | ±0.3°            | ±0.5° | ±0.8° |  |  |
| APPLY STANDARD |        |                  |       |       |  |  |




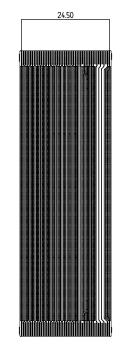





80±0.1



25.50

| MARS 3 |           |     |     |        |       | 深圳市智能派科技有限公司<br>SHENZHEN ZHINENGPAI TECHNOLOGY CO., LTD |             |                          |
|--------|-----------|-----|-----|--------|-------|---|-------------|--------------------------|
|        |           |     |     |        |       | MATE  | RIAL        |                          |
|        | STAGE TAG |     | G   | WEIGHT | SCALE | PART  | NAME        | MARS 3 -LCD screen cable |
|        |           |     |     |        | 1:1   |   | VING<br>BER |                          |
|        | l         | JNI | T : | MM     |       | QT  | Ϋ́          | 1                        |