
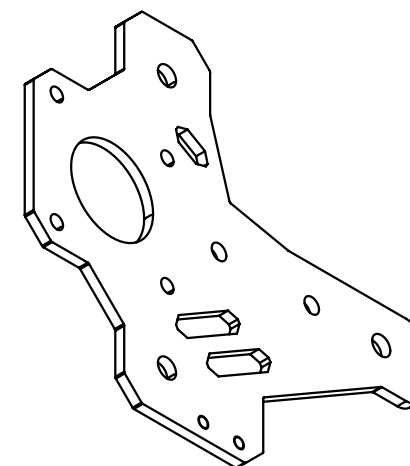



△

RMN 3.2

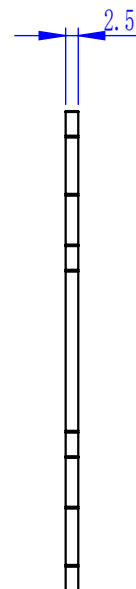

1. Appearance: smooth and flat, remove burrs, sharp edges, nodeformation;
- 2.The color of the surface powder is consistent with the drawing requirements or samples and color plates;
3. Before spraying, it must be pickled and phosphated, without hanging drops, stripes, blistering,orange peel, peeling, scratches and other defects;
4. The adhesion performance is reliable, and the marking test is not more than 1 grade. In general, coating The thickness is between 39~120um;
5. Meet ROHS standard
- 6.Surface finish: Black powder spraying

APPROVALS		DATE		 深圳市智能派科技有限公司 Shenzhen Elegoo Technology Co.,Ltd	
DRAWN					
CHECKED					
ISSUED					
General Tolerance Reference  GB/T 1804-m		PART NAME		MATERIAL	
		Fixing Plate_X-axis Motor		SPCC t=2.5	
		DRAWING NO.		REV.	
		Neptune 2-BJ-002		SIZE A4	SCALE 1:1.5
				UNIT: MM	B  SHEET 1 OF 1