
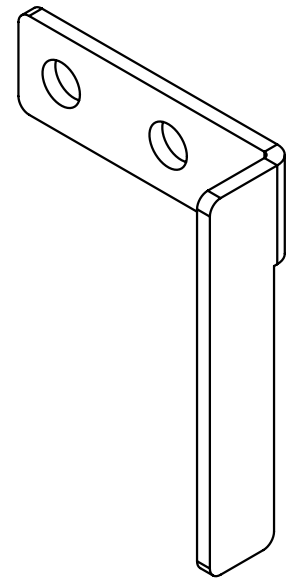
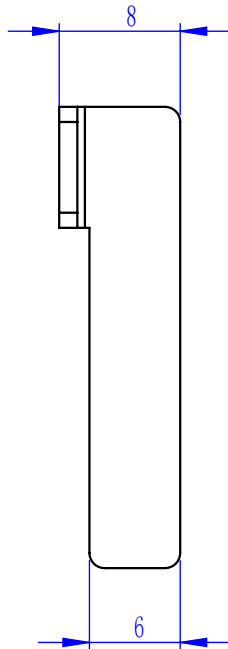


b

a

RMN 3.2

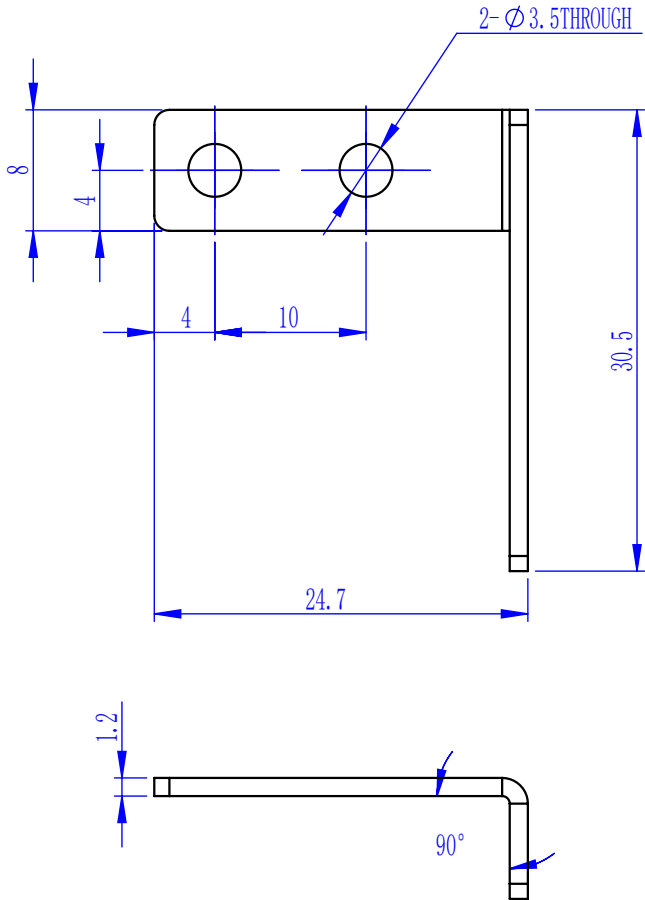

Notes:

1. Appearance: smooth and flat, remove burrs, sharp edges, no deformation;
2. The color of the surface powder is consistent with the drawing requirements or samples and color plates;
3. Before spraying, it must be pickled and phosphated, without hanging drops, stripes, blistering, orange peel, peeling, scratches and other defects;
4. The adhesion performance is reliable, and the marking test is not more than 1 grade. In general, coating thickness is between 39~120um;
5. Meet ROHS standard
6. Surface finish: Black powder spraying

REV.	DATE	REVISION ORIGINOR	SIGN	ISSUED
(A)				
(B)				

APPROVALS		DATE		ELEGOO 深圳市智能派科技有限公司	
DRAWN				Shenzhen Elegoo Technology Co., Ltd	
CHECKED				PART NAME	
ISSUED				Trigger_Photoelectric Switch	
General Tolerance Reference		DRAWING NO.		MATERIAL	
				SPCC T=1.2	
GB/T 1804-m		Neptune 3-BJ-005		SIZE	
				A4	
				SCALE	
				2:1	
				REV.	
				A	
				UNIT: MM	
				SHEET 1 OF 1	