


b

a

RMN 3.2/

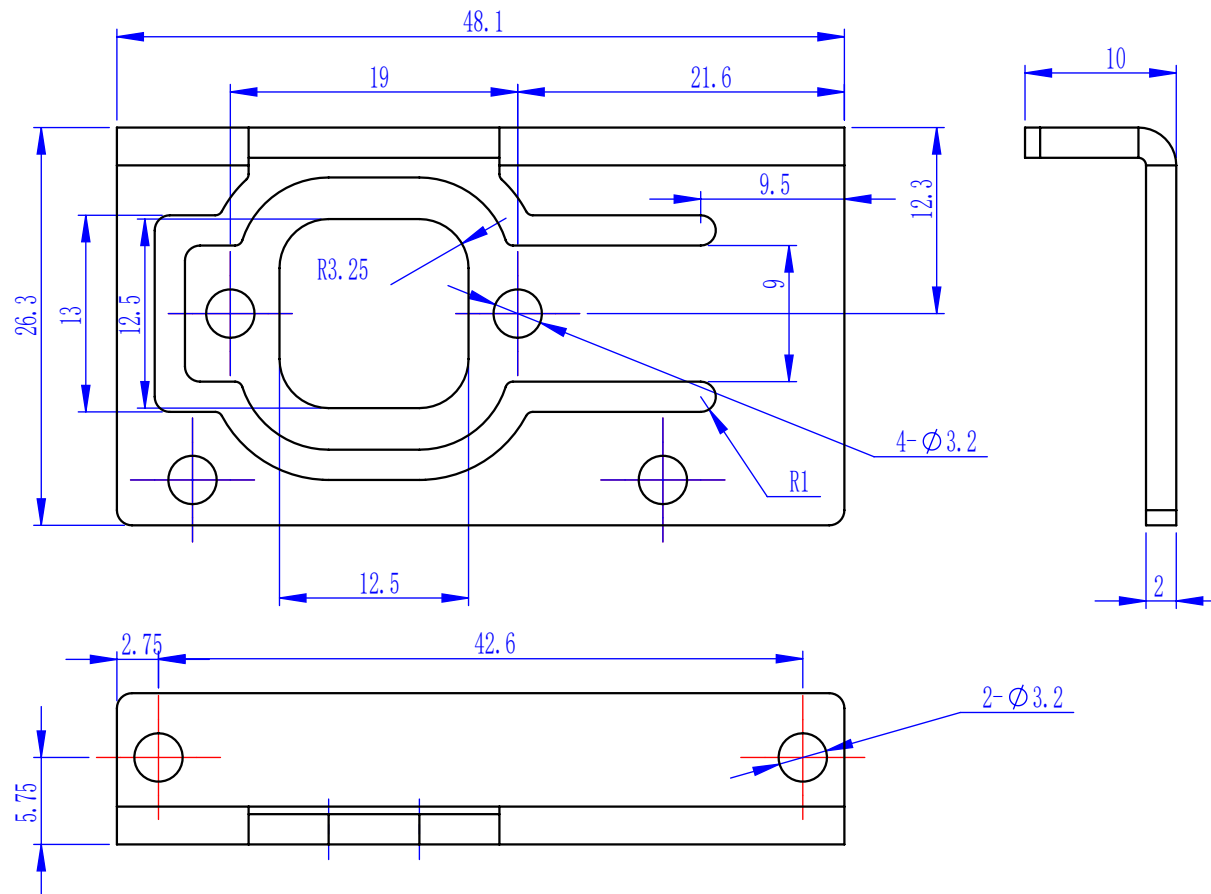

Notes:

1. Appearance: smooth and flat, remove burrs, sharp edges, nodeformation;
2. The color of the surface powder is consistent with the drawing requirements or samples and color plates;
3. Before spraying, it must be pickled and phosphated, without hanging drops, stripes, blistering, orange peel, peeling, scratches and other defects;
4. The adhesion performance is reliable, and the marking test is not more than 1 grade. In general, coating The thickness is between 39~120um;
5. Meet ROHS standard
6. Heat treatment hardness: 45HRC
7. Surface finish: Zinc surface-plating

REV.	DATE	REVISION ORIGINOR	SIGN	ISSUED
(A)				
(B)				

APPROVALS		DATE		ELEGOO 深圳市智能派科技有限公司	
DRAWN				Shenzhen Elegoo Technology Co.,Ltd	
CHECKED				PART NAME	
ISSUED				Bracket_Pressure Sensor	
General Tolerance Reference GB/T 1804-m		DRAWING NO. Neptune 3-BJ-006		MATERIAL 65Mn	
				SIZE A4	
				SCALE 2:1	
				REV. A	
				UNIT: MM	
				SHEET 1 OF 1	