
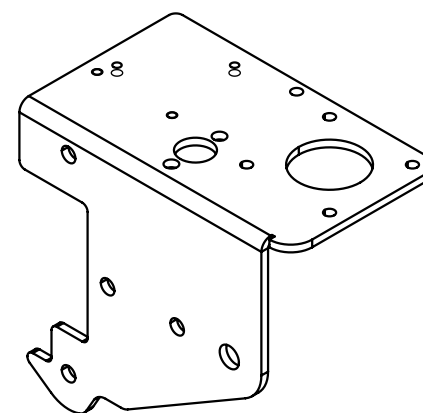
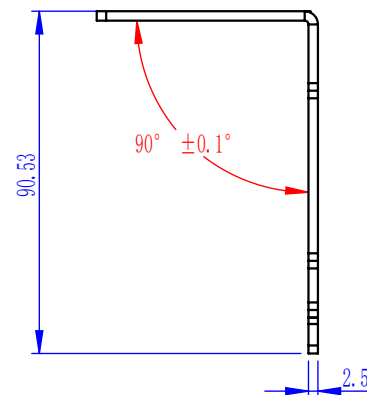


RMN 3.2/

REV.	DATE	REVISION ORIGINOR	SIGN	ISSUED
(A)				
(B)				

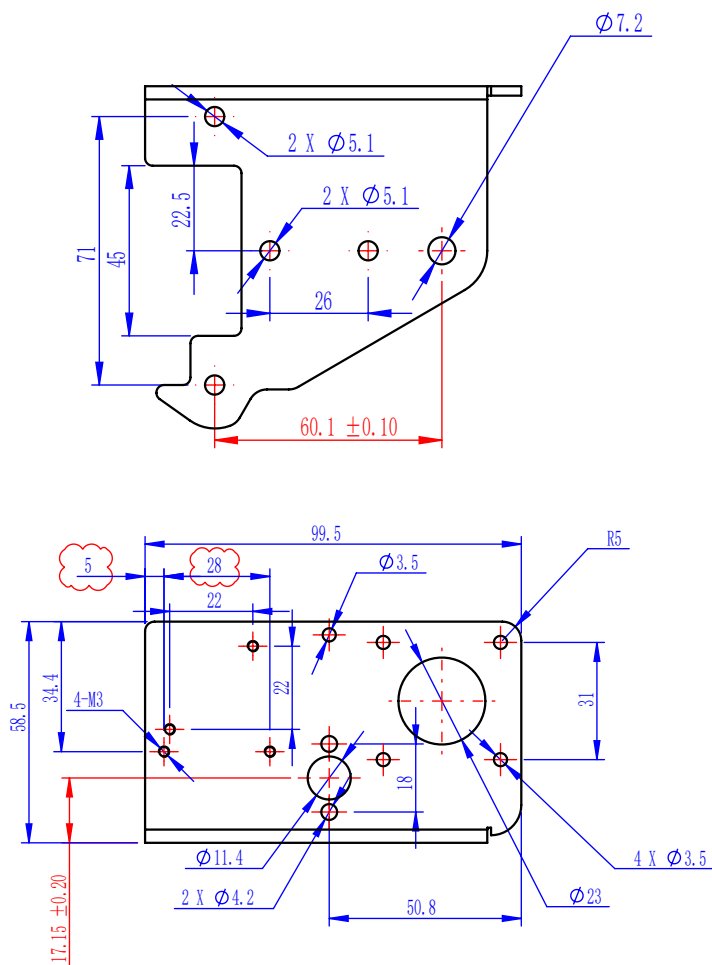

#### Notes:

- Appearance: smooth and flat, remove burrs, sharp edges, nodeformation;
- The color of the surface powder is consistent with the drawing requirements or samples and color plates;
- Before spraying, it must be pickled and phosphated, without hanging drops, stripes, blistering, orange peel, peeling, scratches and other defects;
- The adhesion performance is reliable, and the marking test is not more than 1 grade. In general, coating The thickness is between 39~120um;
- Meet ROHS standard
- Surface finish: Black powder spraying

APPROVALS		DATE		ELEGOO 深圳市智能派科技有限公司 Shenzhen Elegoo Technology Co.,Ltd	
DRAWN					
CHECKED					
ISSUED					
		PART NAME		MATERIAL	
		Fixing Plate_Extruder		AL5052	
		DRAWING NO.		REV.	
		Neptune 3-BJ-001		B	
		General Tolerance Reference		UNIT: MM	
		GB/T 1804-m		SHEET 1 OF 1	