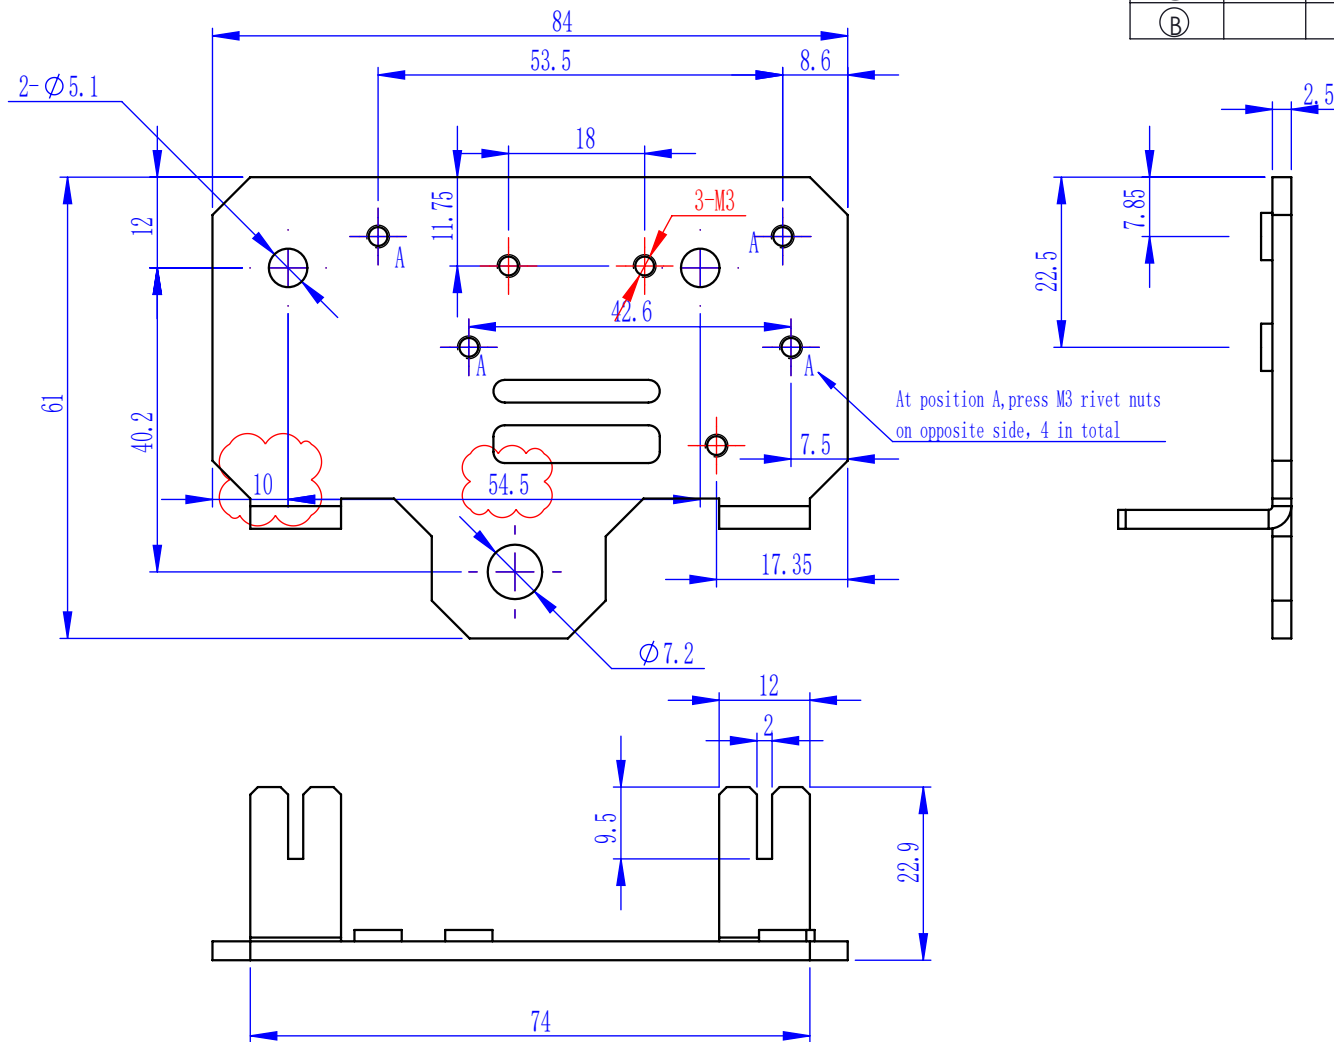


b

a

RMN  $\sqrt{3.2}$ 

## Notes:

1. Appearance: smooth and flat, remove burrs, sharp edges, no deformation;
2. The color of the surface powder is consistent with the drawing requirements or samples and color plates;
3. Before spraying, it must be pickled and phosphated, without hanging drops, stripes, blistering, orange peel, peeling, scratches and other defects;
4. The adhesion performance is reliable, and the marking test is not more than 1 grade. In general, coating thickness is between 39~120um;
5. Meet ROHS standard
6. Surface finish: Black powder spraying

REV.	DATE	REVISION ORIGINOR	SIGN	ISSUED
(A)				
(B)				

APPROVALS		DATE		ELEGOO 深圳市智能派科技有限公司 Shenzhen Elegoo Technology Co., Ltd	
DRAWN					
CHECKED					
ISSUED					
General Tolerance Reference GB/T 1804-m		PART NAME Fixing Plate_Nozzle Kit		MATERIAL SPCC t=2.5	
		DRAWING NO. Neptune 3-BJ-003		SIZE A4	SCALE 1:1
				REV. A	
				UNIT: MM	SHEET 1 OF 1